

R pour l'économétrie

Abdoul Oudouss Diakite

Contents

Bienvenue	5
Remerciements	5
 I Débuter avec R	 7
1 Introduction	9
1.1 A section	9
 2 Bases de R	 11
2.1 Interface	11
2.2 Premiers codes	11
2.3 Données sur R	13
2.4 Les boucles	13
2.5 Les fonctions	13
 3 Parts	 15
 4 Footnotes and citations	 17
4.1 Footnotes	17
4.2 Citations	17
 5 Blocks	 19
5.1 Equations	19
5.2 Theorems and proofs	19
5.3 Callout blocks	19

6	Sharing your book	21
6.1	Publishing	21
6.2	404 pages	21
6.3	Metadata for sharing	21

Bienvenue

This is a *sample* book written in **Markdown**. You can use anything that Pandoc's Markdown supports; for example, a math equation $a^2 + b^2 = c^2$.

Remerciements

Each **bookdown** chapter is an .Rmd file, and each .Rmd file can contain one (and only one) chapter. A chapter *must* start with a first-level heading: **# A good chapter**, and can contain one (and only one) first-level heading.

Use second-level and higher headings within chapters like: **## A short section** or **### An even shorter section**.

The **index.Rmd** file is required, and is also your first book chapter. It will be the homepage when you render the book.

Part I

Débuter avec R

Chapter 1

Introduction

All chapters start with a first-level heading followed by your chapter title, like the line above. There should be only one first-level heading (#) per .Rmd file.

1.1 A section

All chapter sections start with a second-level (##) or higher heading followed by your section title, like the sections above and below here. You can have as many as you want within a chapter.

An unnumbered section

Chapters and sections are numbered by default. To un-number a heading, add a `{.unnumbered}` or the shorter `{-}` at the end of the heading, like in this section.

Chapter 2

Bases de R

Cross-references make it easier for your readers to find and link to elements in your book.

2.1 Interface

There are two steps to cross-reference any heading:

1. Label the heading: `# Hello world {#nice-label}`.
 - Leave the label off if you like the automated heading generated based on your heading title: for example, `# Hello world = # Hello world {#hello-world}`.
 - To label an un-numbered heading, use: `# Hello world {-#nice-label}` or `{# Hello world .unnumbered}`.
2. Next, reference the labeled heading anywhere in the text using `\@ref(nice-label)`; for example, please see Chapter `??`.
 - If you prefer text as the link instead of a numbered reference use: any text you want can go here.

2.2 Premiers codes

Figures and tables *with captions* can also be cross-referenced from elsewhere in your book using `\@ref(fig:chunk-label)` and `\@ref(tab:chunk-label)`, respectively.

See Figure 2.1.

```
par(mar = c(4, 4, .1, .1))  
plot(pressure, type = 'b', pch = 19)
```

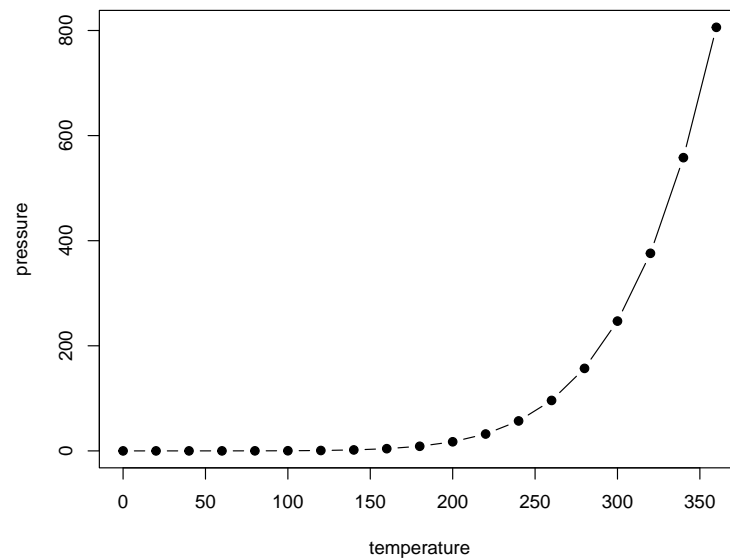


Figure 2.1: Here is a nice figure!

Don't miss Table 2.1.

```
knitr::kable(  
  head(pressure, 10), caption = 'Here is a nice table!',  
  booktabs = TRUE  
)
```

Table 2.1: Here is a nice table!

temperature	pressure
0	0.0002
20	0.0012
40	0.0060
60	0.0300
80	0.0900
100	0.2700
120	0.7500
140	1.8500
160	4.2000
180	8.8000

2.3 Données sur R

2.3.1 Vecteur

2.3.2 Facteur

2.3.3 Liste

2.3.4 Matrice

2.3.5 Tableau

2.3.6 Tableau de données ou Data frame

2.4 Les boucles

2.5 Les fonctions

Chapter 3

Parts

You can add parts to organize one or more book chapters together. Parts can be inserted at the top of an .Rmd file, before the first-level chapter heading in that same file.

Add a numbered part: `# (PART) Act one {-}` (followed by `# A chapter`)

Add an unnumbered part: `# (PART*) Act one {-}` (followed by `# A chapter`)

Add an appendix as a special kind of un-numbered part: `# (APPENDIX) Other stuff {-}` (followed by `# A chapter`). Chapters in an appendix are prepended with letters instead of numbers.

Chapter 4

Footnotes and citations

4.1 Footnotes

Footnotes are put inside the square brackets after a caret `^[]`. Like this one ¹.

4.2 Citations

Reference items in your bibliography file(s) using `@key`.

For example, we are using the **bookdown** package (Xie, 2022) (check out the last code chunk in `index.Rmd` to see how this citation key was added) in this sample book, which was built on top of R Markdown and **knitr** (Xie, 2015) (this citation was added manually in an external file `book.bib`). Note that the `.bib` files need to be listed in the `index.Rmd` with the YAML `bibliography` key.

The `bs4_book` theme makes footnotes appear inline when you click on them. In this example book, we added `csl: chicago-fullnote-bibliography.csl` to the `index.Rmd` YAML, and include the `.csl` file. To download a new style, we recommend: <https://www.zotero.org/styles/>

The RStudio Visual Markdown Editor can also make it easier to insert citations: <https://rstudio.github.io/visual-markdown-editing/#/citations>

¹This is a footnote.

Chapter 5

Blocks

5.1 Equations

Here is an equation.

$$f(k) = \binom{n}{k} p^k (1-p)^{n-k} \quad (5.1)$$

You may refer to using `\@ref{eq:binom}`, like see Equation (5.1).

5.2 Theorems and proofs

Labeled theorems can be referenced in text using `\@ref{thm:tri}`, for example, check out this smart theorem 5.1.

Theorem 5.1. *For a right triangle, if c denotes the length of the hypotenuse and a and b denote the lengths of the **other** two sides, we have*

$$a^2 + b^2 = c^2$$

Read more here <https://bookdown.org/yihui/bookdown/markdown-extensions-by-bookdown.html>.

5.3 Callout blocks

The `bs4_book` theme also includes special callout blocks, like this `.rmdnote`.

You can use **markdown** inside a block.

```
head(beaver1, n = 5)
#>   day time  temp activ
#> 1 346  840 36.33     0
#> 2 346  850 36.34     0
#> 3 346  900 36.35     0
#> 4 346  910 36.42     0
#> 5 346  920 36.55     0
```

It is up to the user to define the appearance of these blocks for LaTeX output.

You may also use: `.rmdcaution`, `.rmdimportant`, `.rmdtip`, or `.rmdwarning` as the block name.

The R Markdown Cookbook provides more help on how to use custom blocks to design your own callouts: <https://bookdown.org/yihui/rmarkdown-cookbook/custom-blocks.html>

Chapter 6

Sharing your book

6.1 Publishing

HTML books can be published online, see: <https://bookdown.org/yihui/bookdown/publishing.html>

6.2 404 pages

By default, users will be directed to a 404 page if they try to access a webpage that cannot be found. If you'd like to customize your 404 page instead of using the default, you may add either a `_404.Rmd` or `_404.md` file to your project root and use code and/or Markdown syntax.

6.3 Metadata for sharing

Bookdown HTML books will provide HTML metadata for social sharing on platforms like Twitter, Facebook, and LinkedIn, using information you provide in the `index.Rmd` YAML. To setup, set the `url` for your book and the path to your `cover-image` file. Your book's `title` and `description` are also used.

This `bs4_book` provides enhanced metadata for social sharing, so that each chapter shared will have a unique description, auto-generated based on the content.

Specify your book's source repository on GitHub as the `repo` in the `_output.yml` file, which allows users to view each chapter's source file or suggest an edit. Read more about the features of this output format here:

https://pkgs.rstudio.com/bookdown/reference/bs4_book.html

Or use:

```
?bookdown::bs4_book
```

Bibliography

Xie, Y. (2015). *Dynamic Documents with R and knitr*. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition. ISBN 978-1498716963.

Xie, Y. (2022). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.26.