Merchant Portal Guide


Updated 2026-09-17

This guide walks through the setup needed before integrating: signing in to the PWC Pay merchant portal, creating an app, getting your merchant number and app ID, setting the public key, configuring the IP and currency whitelists, and downloading the platform public key. Once these steps are done, continue with the Payout API Reference.

> The portal is available in English, Traditional Chinese, Vietnamese, Thai, and Russian. Switch languages with the globe icon in the top right. Screenshots in this guide use the English interface.


1. Sign In

1. Open the merchant portal in a browser: `https://pwc-pay-portal.chiachair.com/`.
2. Enter the username and password assigned by the platform.
3. Click **Sign in**.

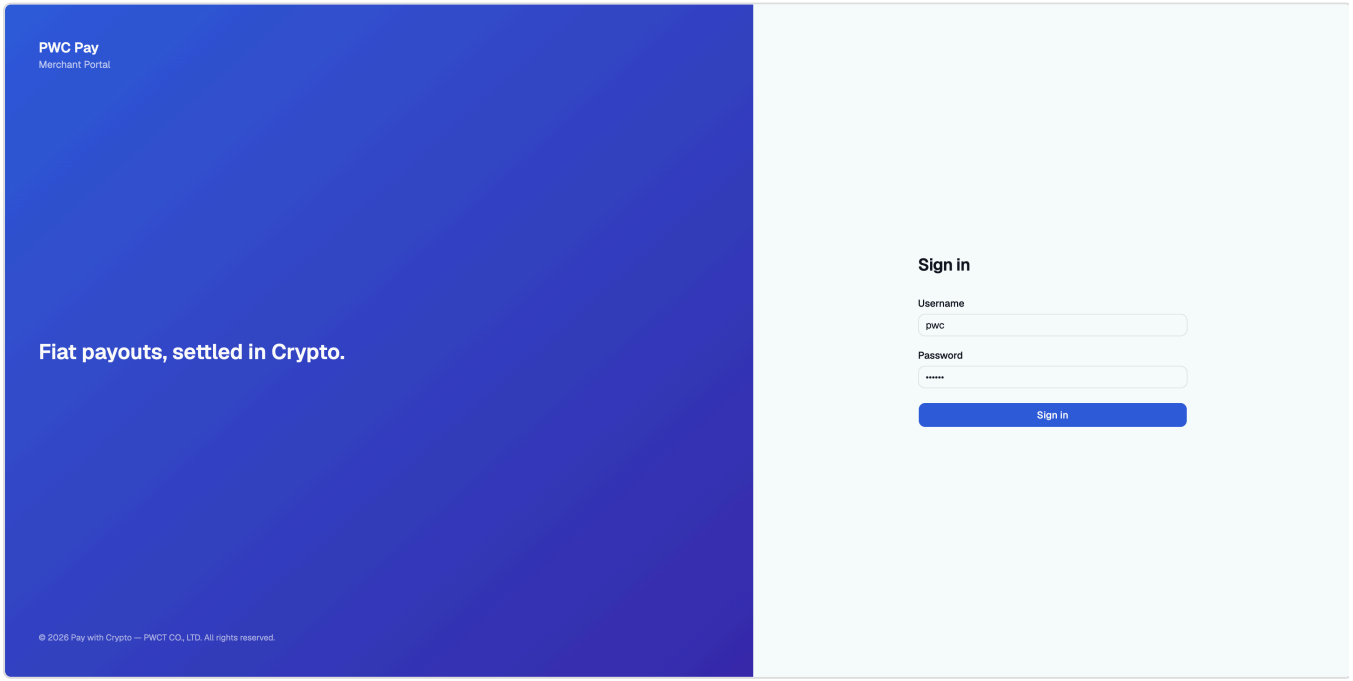

After signing in you land on the **Wallet** page. The left sidebar has four pages:

Page	Purpose
Wallet	USDT balances: usable, total, locked, pending, frozen.
Apps	Create and configure apps: public key, IP whitelist, currency whitelist.
Payouts	Browse payout orders and resend callbacks.
Account	Merchant number, currencies and fees, password change, platform public key.

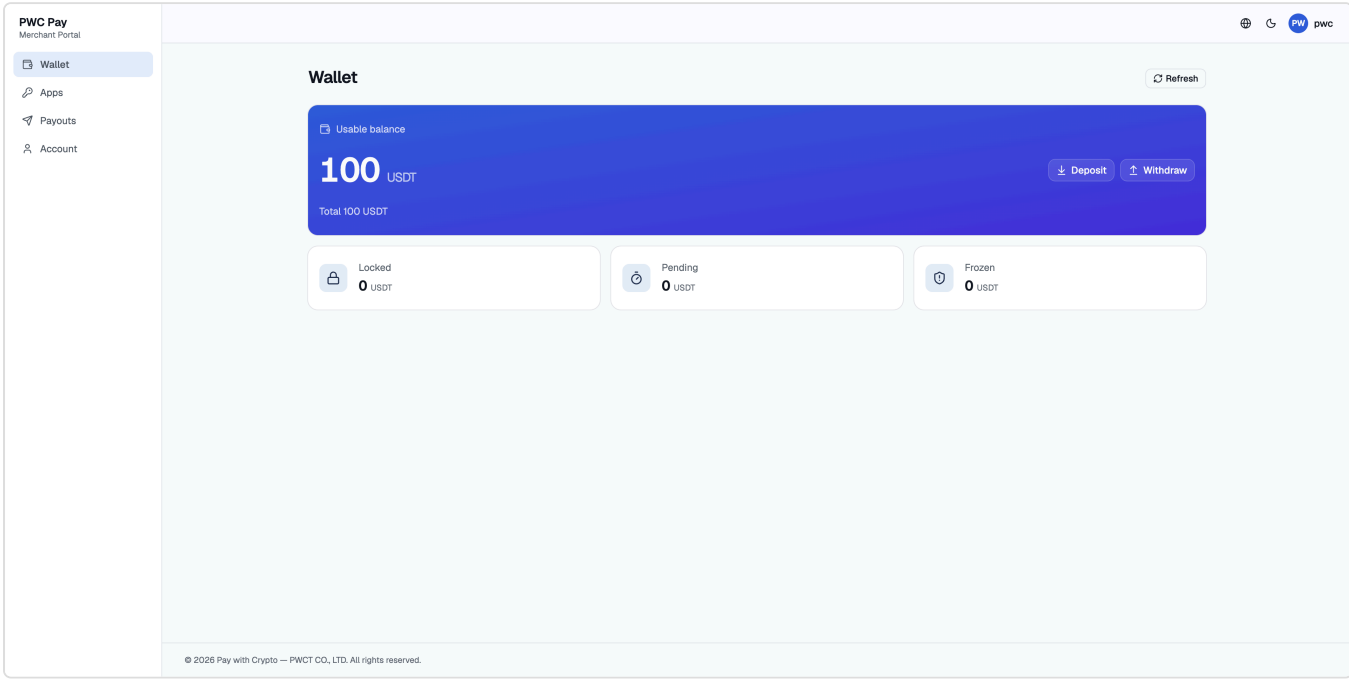


A session lasts 24 hours. After that you need to sign in again.

2. Get the Merchant Number

The merchant number (`mchNo`) is a required field in every API request.


1. Click **Account** in the sidebar, or click your avatar in the top right and choose **Account**.
2. In the **Profile** card, find **Merchant number**.
3. Click the copy icon next to it. The merchant number is now on your clipboard.

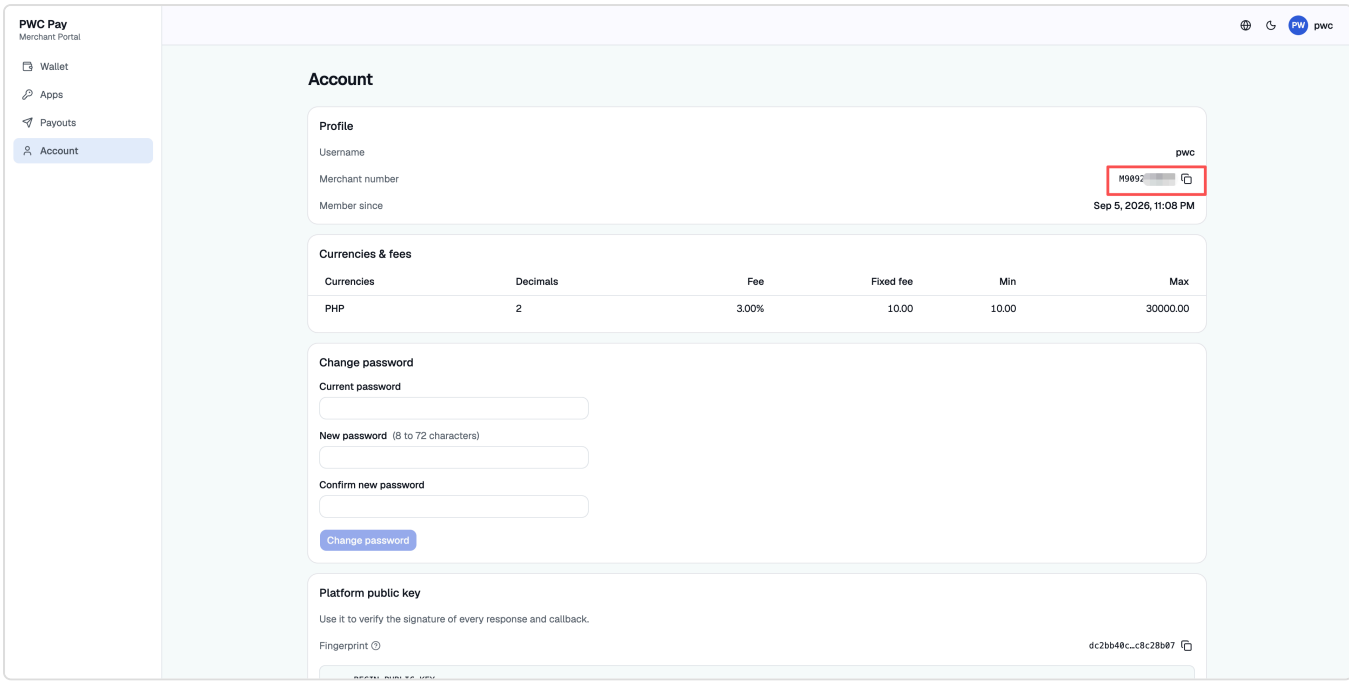


3. Create an App

A merchant can have several apps. Each app has its own app ID, public key, IP whitelist, and currency whitelist. Apps are usually split by environment or business line, for example `production`.

1. Click **Apps** in the sidebar.
2. Click **New app** in the top right.
3. In the dialog, enter a **Name**, for example `production`. Names are up to 128 characters.
4. Fill in **RSA public key**, **IP whitelist**, and **Currencies**. Sections 5, 6, and 7 explain each field. You can also leave them empty and add them later with **Configure**.
5. Click **Create**.

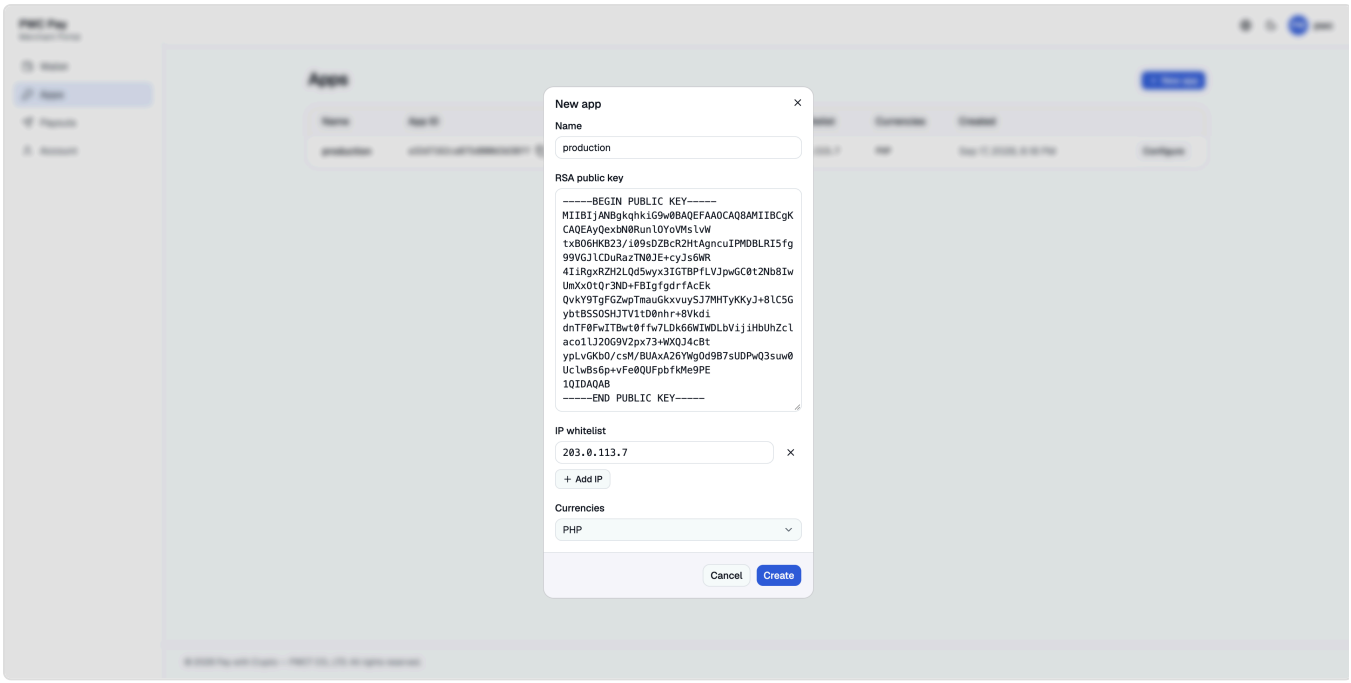

After creation, a new row appears in the app list showing the app ID, public key fingerprint, IP whitelist, and currencies.

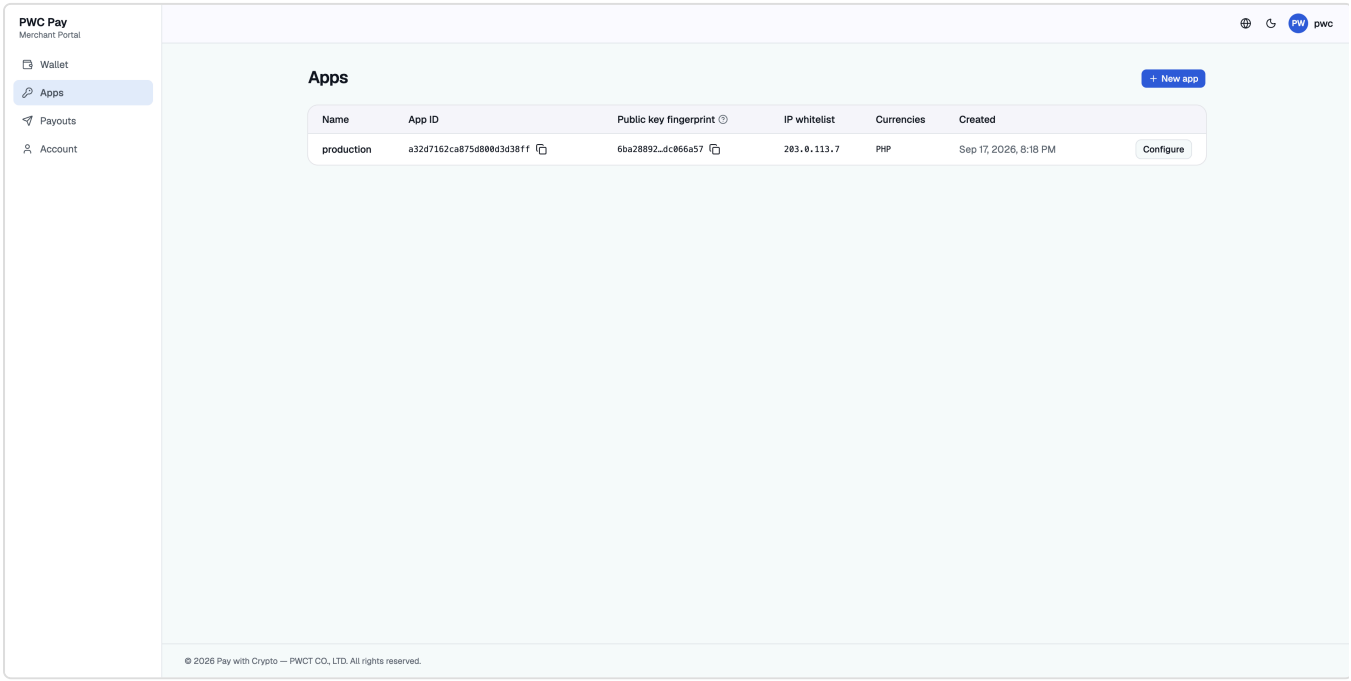


> Note: if the public key was left empty, the fingerprint column shows **not set**. If the IP whitelist or currencies were left empty, the column shows **none**. An app with an empty IP whitelist or empty currency list rejects every API request, so make sure both are filled in.

4. Copy the App ID

The app ID (`appId`) is a required field in every API request. It is a 24-character lowercase hex string.

1. Find the app in the list on the **Apps** page.
2. The **App ID** column shows the full ID. Click the copy icon next to it.

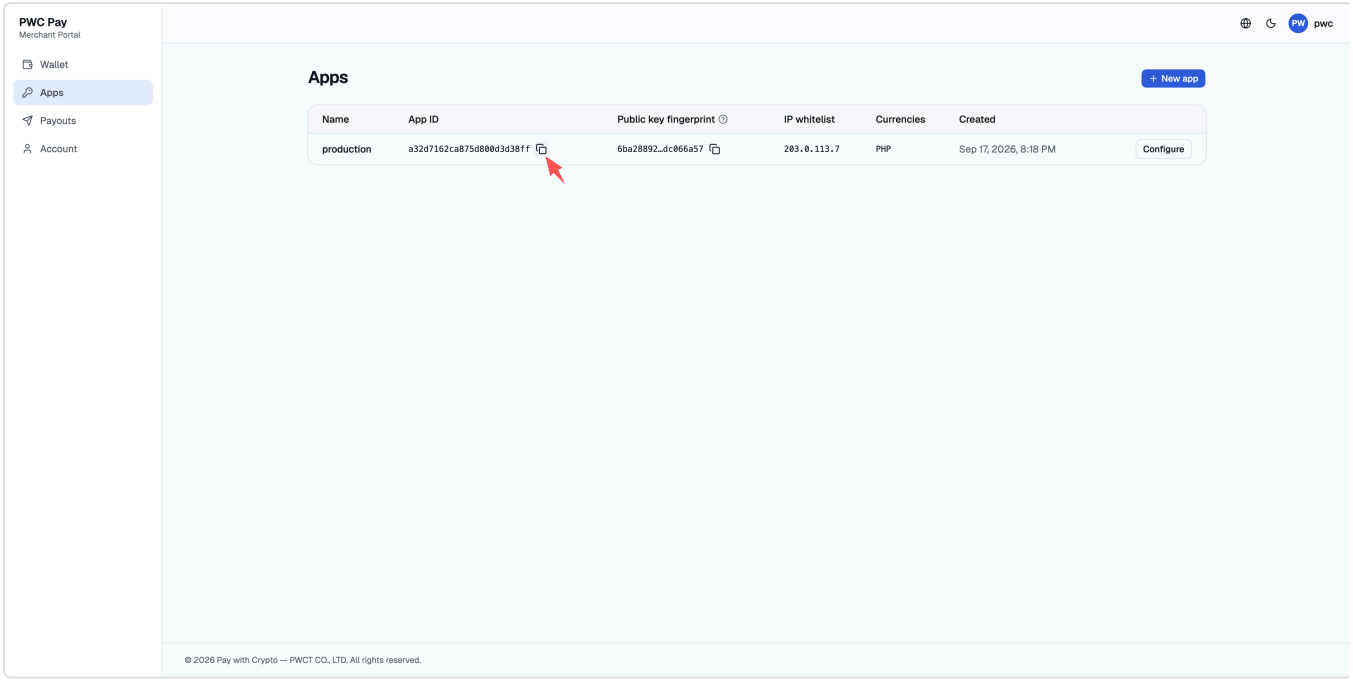

5. Set the Public Key

API requests are signed with your RSA private key, and the platform verifies them with the public key you upload. You generate the key pair yourself. **Upload only the public key. Keep the private key secret and never upload it anywhere.**

5.1 Generate a Key Pair

On your server, generate a 2048-bit RSA key pair with OpenSSL:

```
openssl genrsa -out private_key.pem 2048
openssl rsa -in private_key.pem -pubout -out public_key.pem
```

The resulting `public_key.pem` looks like this:


```
-----BEGIN PUBLIC KEY-----
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEA...
-----END PUBLIC KEY-----
```

The platform accepts only this PEM format starting with `BEGIN PUBLIC KEY` (PKIX / SubjectPublicKeyInfo). If your key starts with `BEGIN RSA PUBLIC KEY` (PKCS#1 format), convert it first:

```
openssl rsa -RSAPublicKey_in -in rsa_public_key.pem -pubout -out public_key.pem
```

5.2 Upload the Public Key

1. On the **Apps** page, click **Configure** on the app's row.
2. Paste the full content of `public_key.pem`, including the `-----BEGIN PUBLIC KEY-----` and `-----END PUBLIC KEY-----` lines, into the **RSA public key** box.
3. Click **Save**.

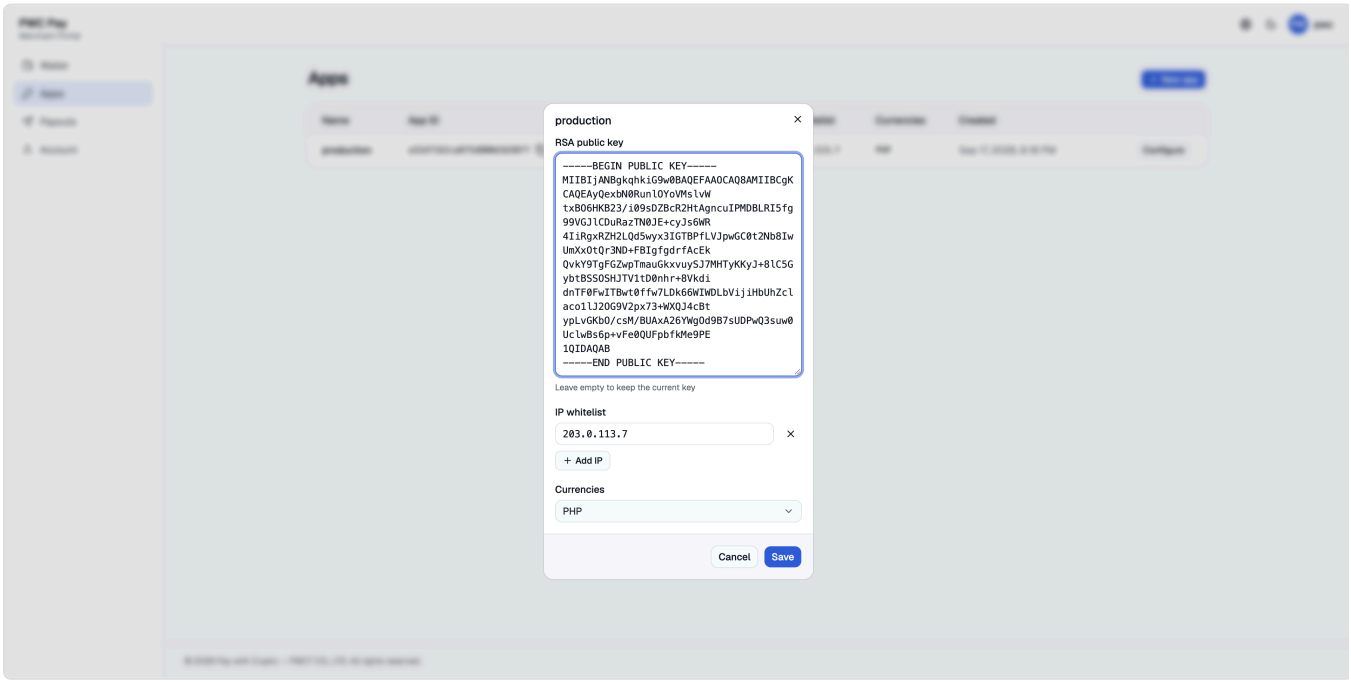


After saving, the **Public key fingerprint** column in the app list shows the SHA-256 fingerprint of the key.

5.3 Verify the Fingerprint

The fingerprint confirms that the key stored on the platform matches your local key. Run this command locally. The output should match the fingerprint shown in the portal:

```
openssl pkey -pubin -in public_key.pem -outform DER | openssl dgst -sha256
```

The same command is shown when you click the question mark icon next to the **Public key fingerprint** header.

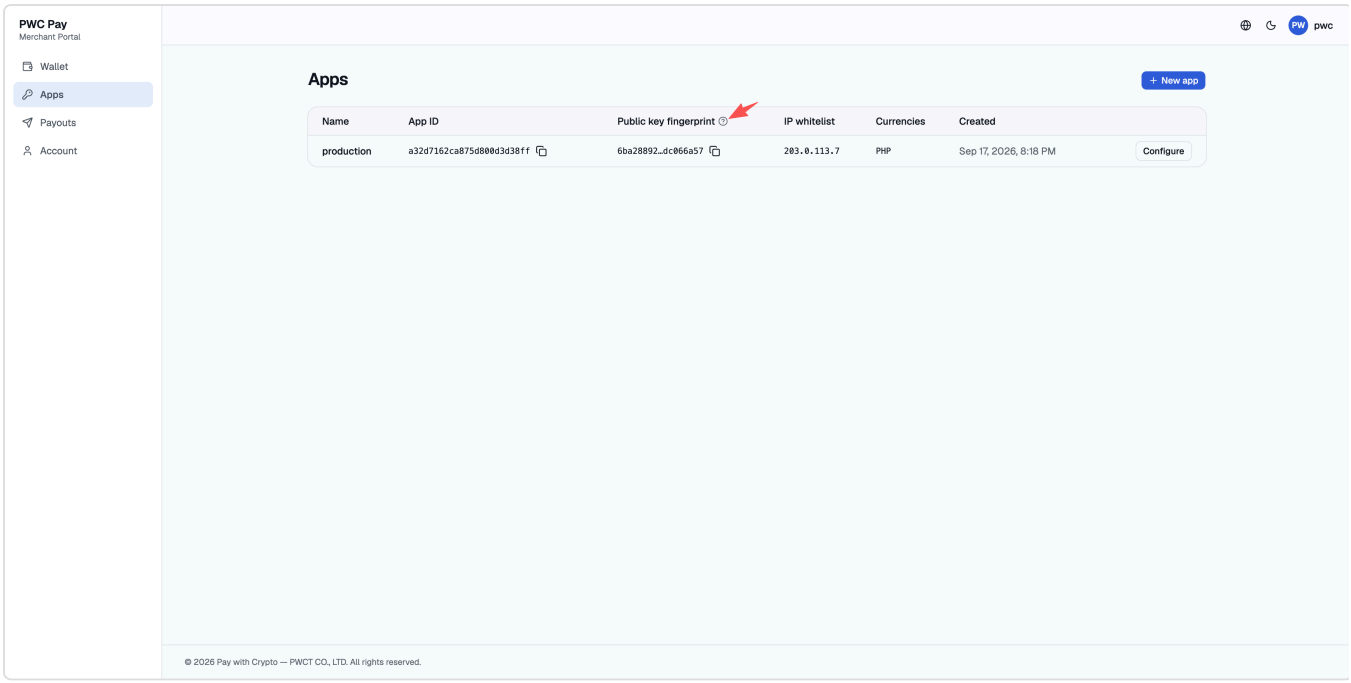

5.4 Replace the Public Key


Open the **Configure** dialog again, paste the new key, and save. Leaving **RSA public key** empty keeps the current key.

> A new key takes effect immediately. Requests signed with the old private key are refused with `1004`. Switch the private key on your server first, then update the public key in the portal, or schedule the change for a low-traffic period.

6. Configure the IP Whitelist

Only whitelisted server IPs can call the merchant API. Requests from other IPs are refused with `1002`.

1. On the **Apps** page, click **Configure** on the app's row.
2. Under **IP whitelist**, enter the public egress IP of your server, for example `203.0.113.7`.
3. For more IPs, click **Add IP** to add another input. One IP per input.
4. Click the × next to an input to remove that IP.
5. Click **Save**.

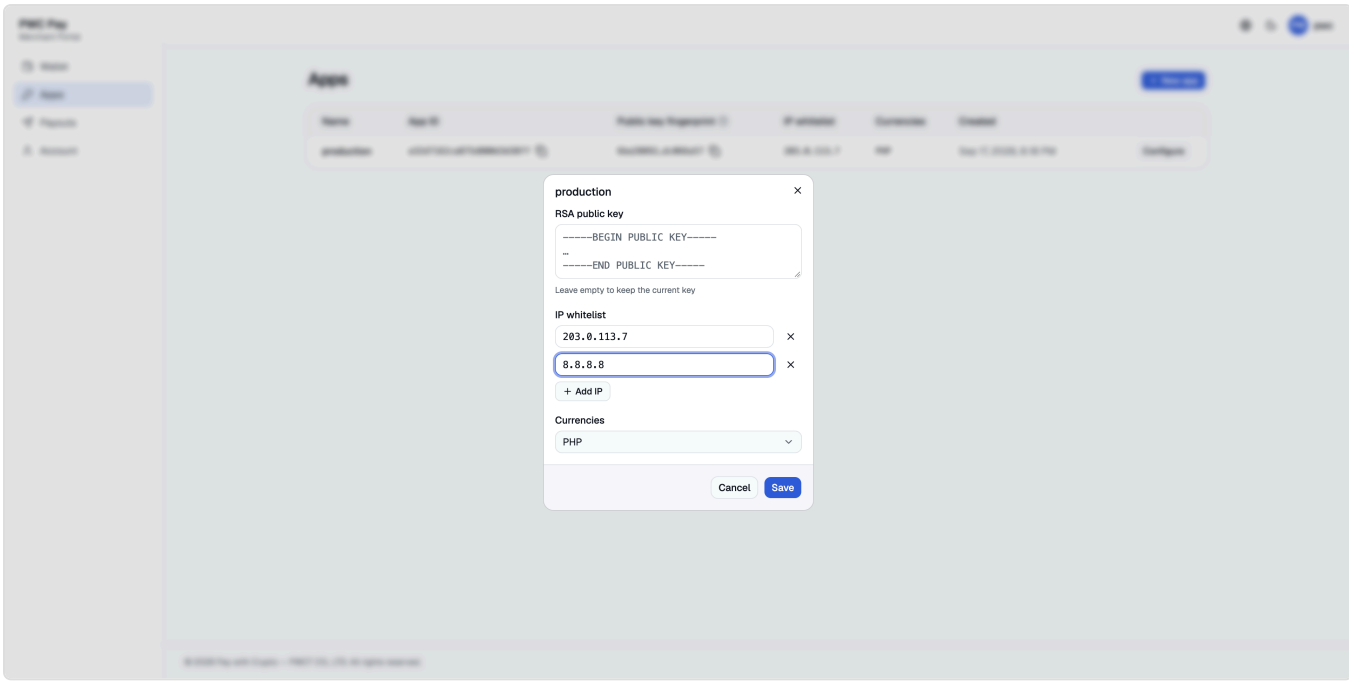


Notes:

- Only single IPv4 or IPv6 addresses are accepted. CIDR ranges and wildcards are not supported.
- Every save replaces the whole list. What you see in the dialog is the complete whitelist after saving.
- An empty list shows a red warning: **No IP: every request is refused**.
- Enter the IP your server uses when reaching the platform. If your server goes out through NAT or a proxy, enter the public IP of that egress point.


7. Configure the Currency Whitelist

An app can only create payouts in whitelisted fiat currencies. Other currencies are refused with `3003`.

1. On the **Apps** page, click **Configure** on the app's row.
2. In the **Currencies** dropdown, check the currencies you need, or check **All currencies**.
3. Click **Save**.

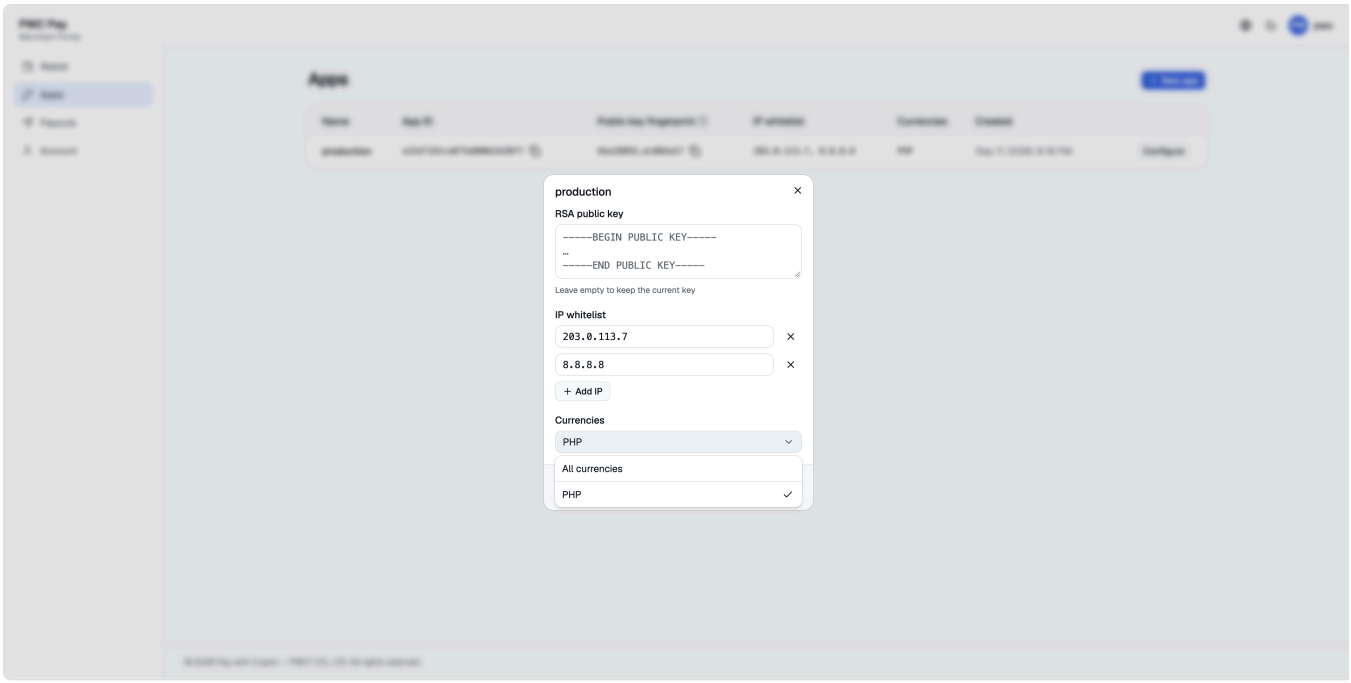

The dropdown lists only the currencies the platform has enabled for you. The fee rate, fixed fee, and per-order minimum and maximum for each currency are shown in the **Currencies & fees** card on the **Account** page.

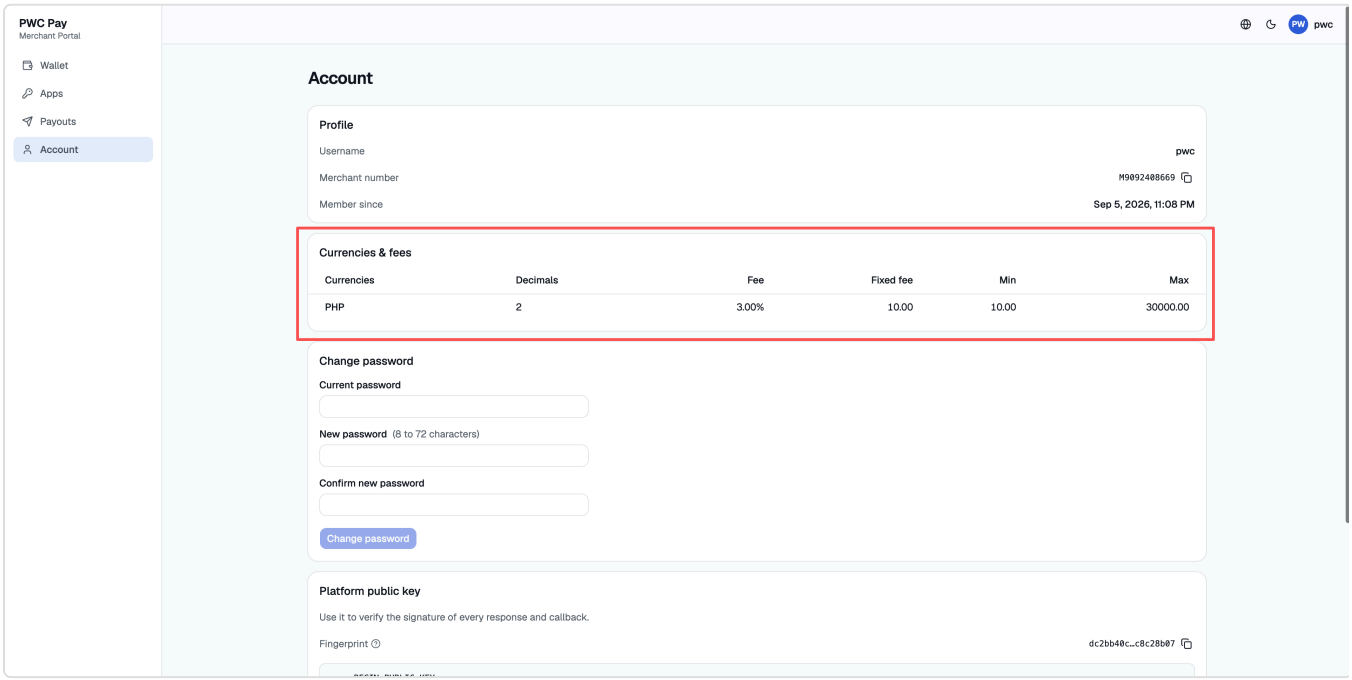


8. Download the Platform Public Key

The platform signs every successful response and every callback. You verify those signatures with the platform public key.

1. Click **Account** in the sidebar.
2. Find the **Platform public key** card.

3. Click **Download** to save it as `platform_public_key.pem`, or click **Copy** to copy the PEM content.

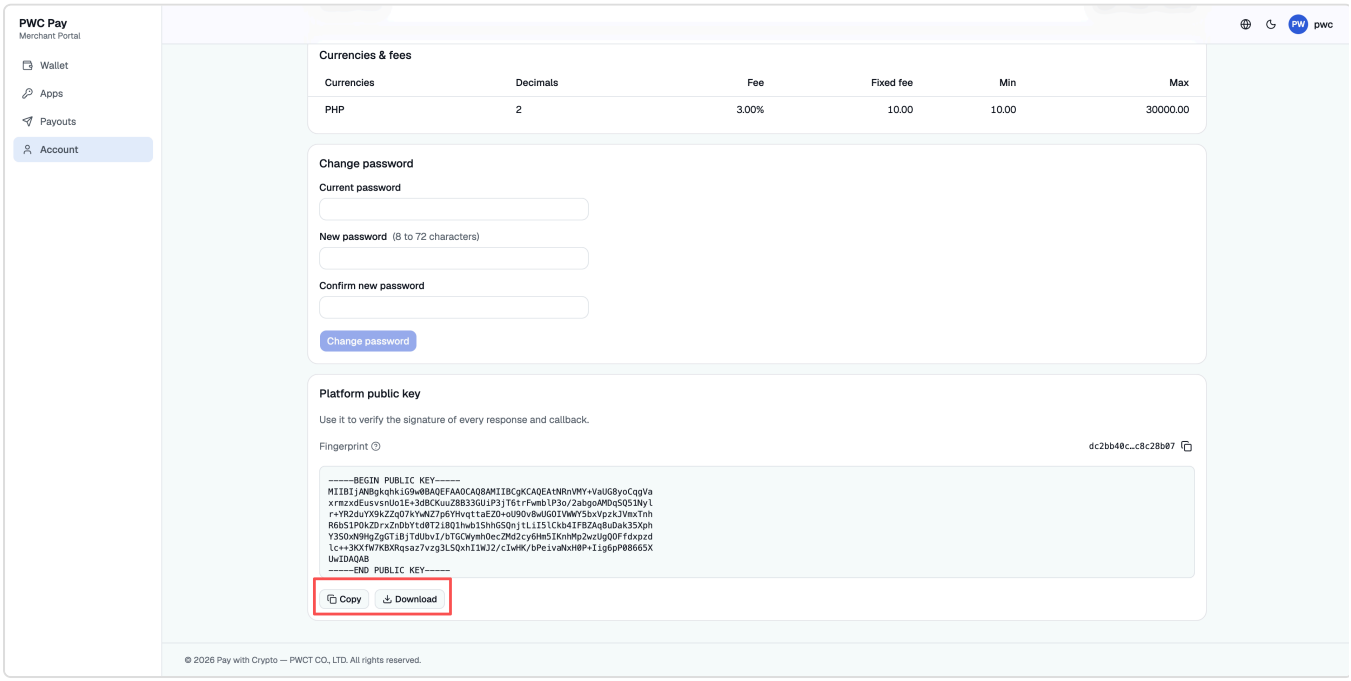


The card also shows the SHA-256 fingerprint of the platform key. Use the command from section 5.3 to verify the downloaded file.

9. Setup Checklist

Before integrating, confirm every column of the app's row on the **Apps** page is ready:

Column	Ready when
App ID	Copied into your configuration.
Public key fingerprint	Shows a fingerprint that matches your local key.
IP whitelist	Shows your server IPs, not **none**.
Currencies	Shows a currency list or `*`, not **none**.

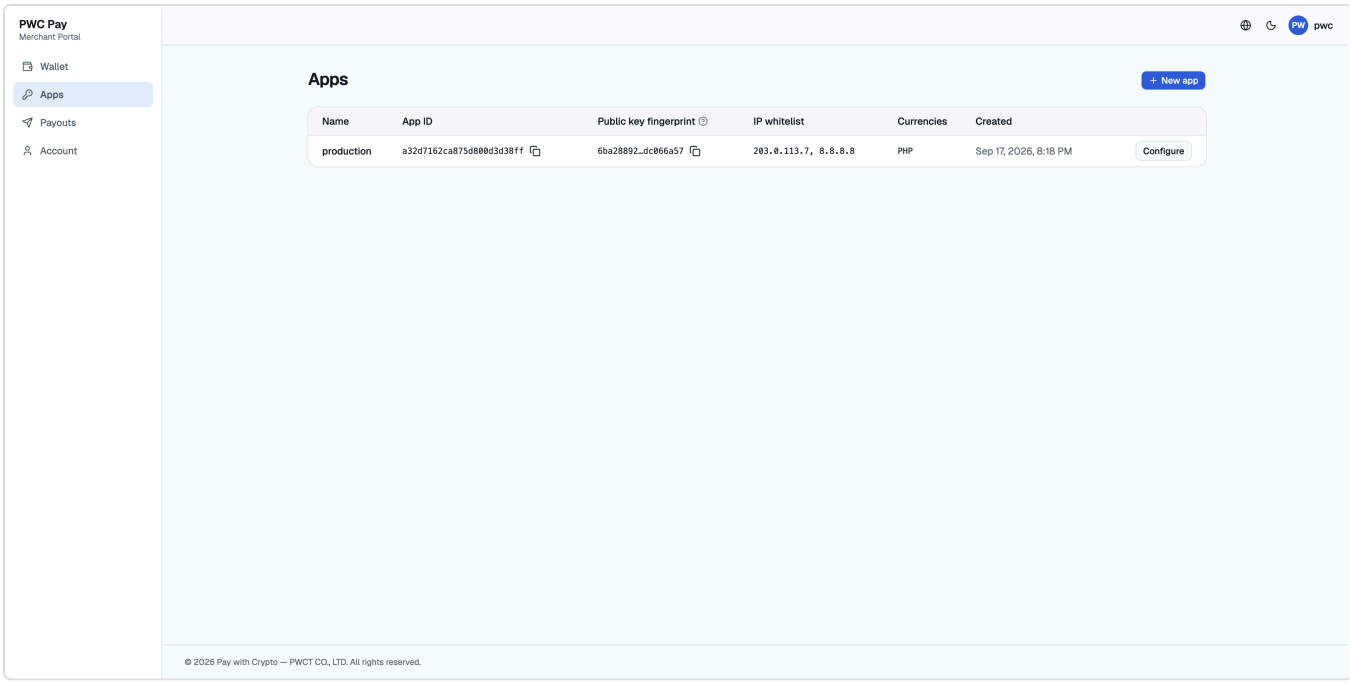


You should now have four things: the merchant number, the app ID, your private key file, and the platform public key file.

10. Other Features


10.1 View Payout Orders

Click **Payouts** in the sidebar to browse all payout orders page by page: order ID, merchant order number, amount, rate, fee, USDT cost, order status, and callback status. Click the copy icon next to an order ID to copy the platform order ID.

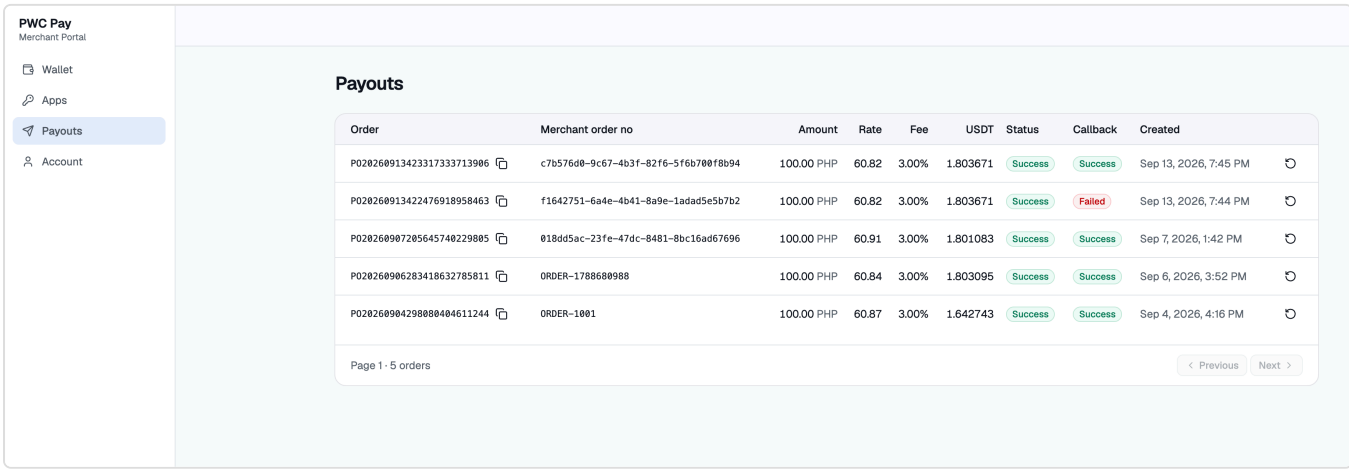


10.2 Resend a Callback

For orders in a final state (success or failed), if your server did not receive the callback, click the resend icon on the right of the row. The platform pushes the callback again immediately. Only orders that reached a final state within the last 15 days can be resent.

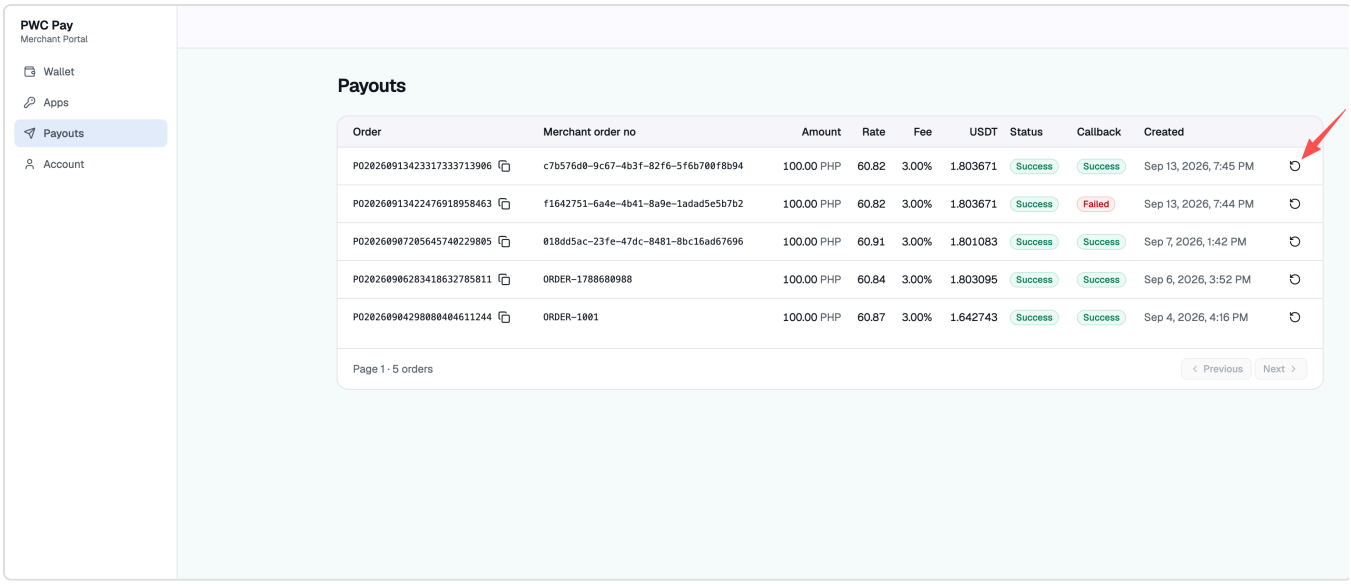

10.3 Change Password

In the **Change password** card on the **Account** page, enter your current password and a new one. The new password must be 8 to 72 characters. After a successful change, sessions on other devices are signed out.

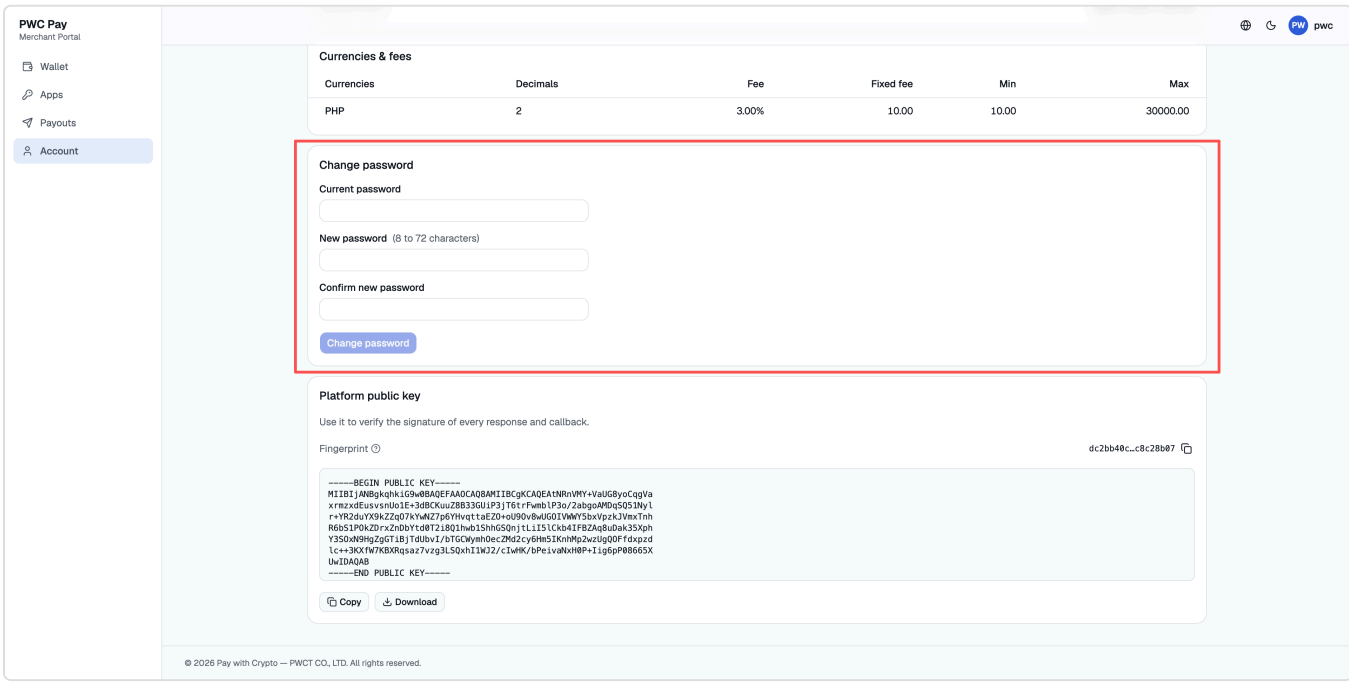

10.4 Deposit and Withdraw

Deposit and **Withdraw** on the **Wallet** page are currently handled by support. Clicking either button shows a notice to contact customer support.