



Figure 1. NOVUS Use Case Diagram

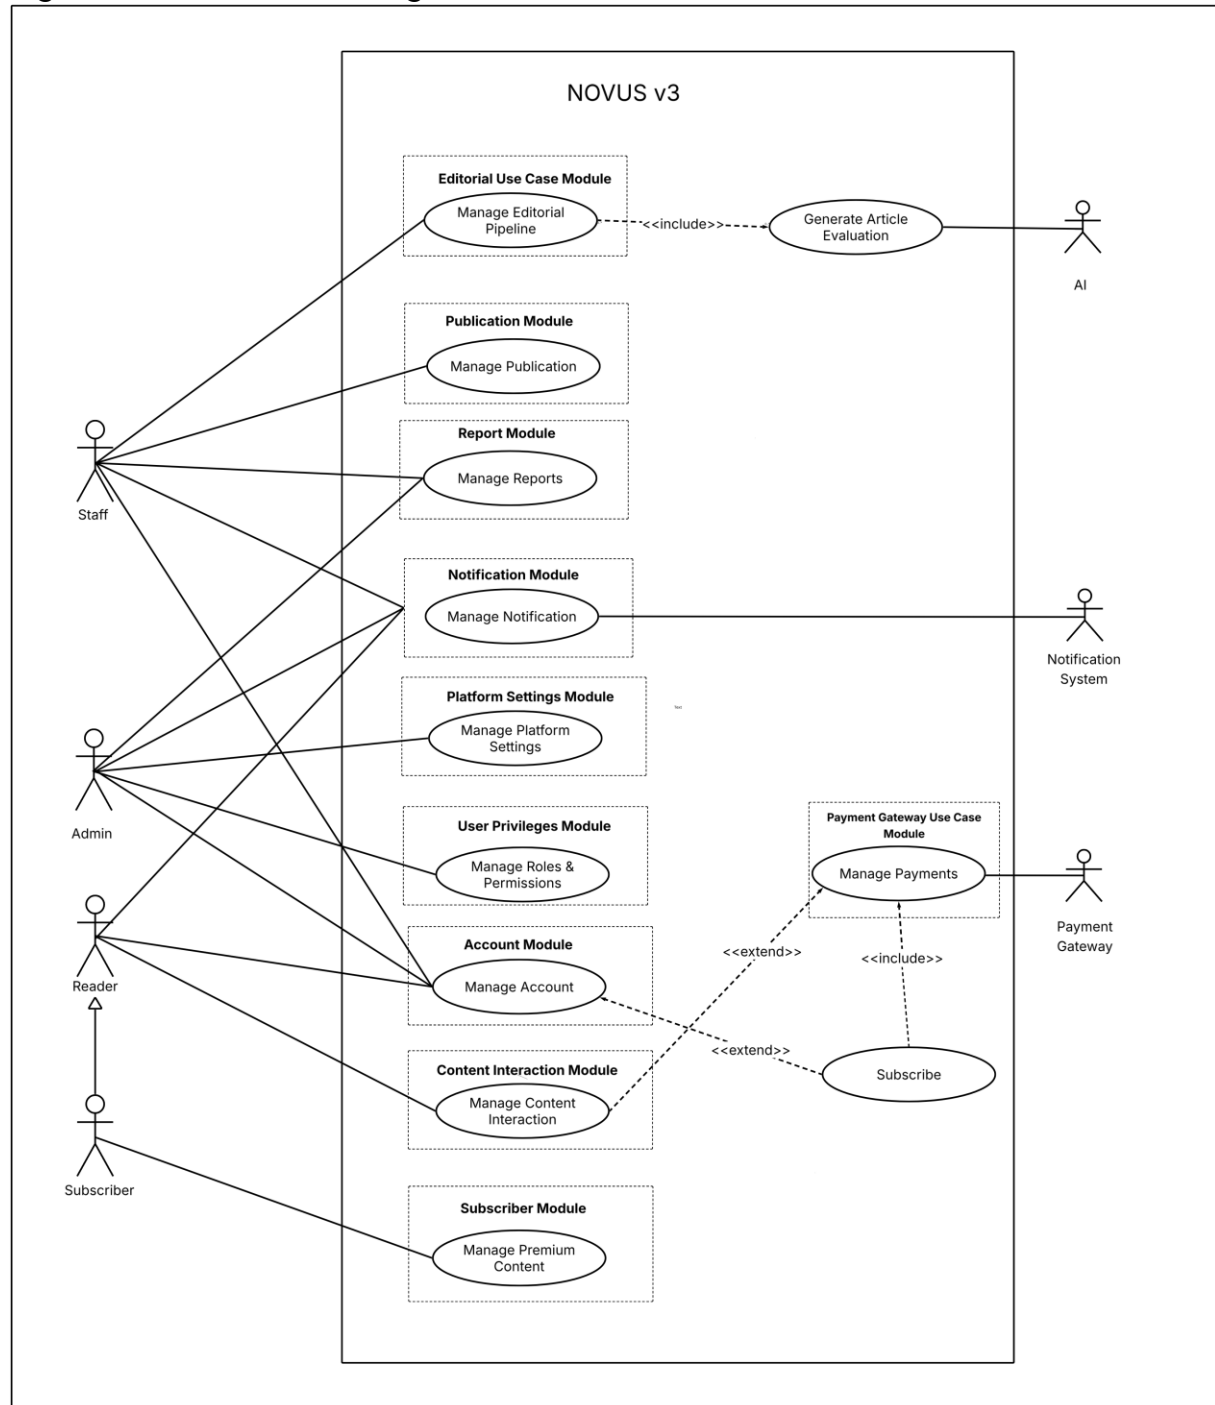

a. Fully Dressed Use Cases

Figure 2. Manage Editorial Pipeline Use Case Diagram

NOVUS v2

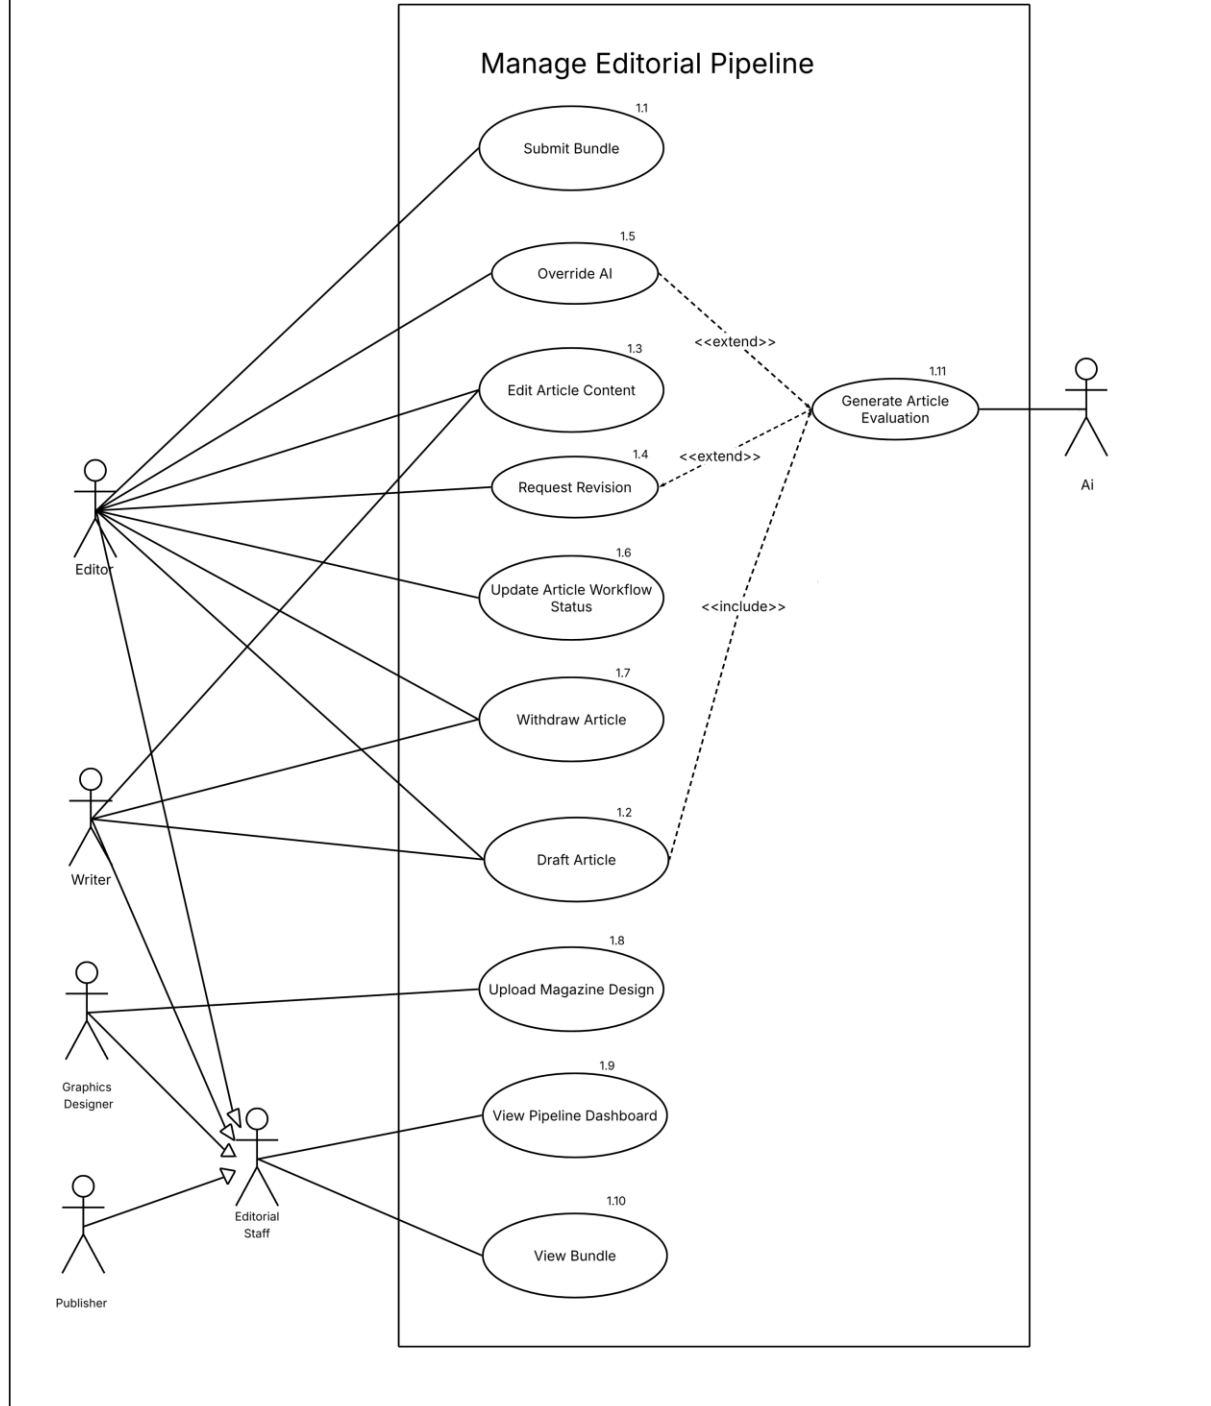

Use Case Name: Submit Bundle

Use Case ID:	UC-1.1
Author	Rei Khalil Galido

Purpose	Allow an Editor to formally submit a completed content bundle (article draft, images, metadata) into the editorial pipeline for tracking and review.
Related Use Case	Extends into: Update Article Workflow Status
Requirement Traceability	PR-EDT-01
Priority	High
Preconditions	• System is online • Editor is authenticated and logged in • A draft bundle exists and is marked ready by its Writer C Graphics Designer
Postconditions	• Bundle status changes to "Submitted" • Bundle appears on the Pipeline Dashboard
Actors	• Editor

Flow of Actions	<i>BASIC FLOW</i>
	1. Editor navigates to the Editorial Pipeline module. 2. Editor selects "Submit Bundle." 3. System displays draft bundles ready for submission. 4. Editor selects the target bundle and reviews its contents. 5. Editor clicks "Submit." 6. System validates that all required components (text, assets, metadata) are present. 7. System sets the bundle's workflow status to "Submitted" and timestamps the action. 8. System displays a confirmation notice to the Editor.
	<i>ALTERNATE FLOW</i>
	<i>A1 (Incomplete Bundle)</i>
	1. The user initiates the operation for the target record. 2. The system validates the required information and components. 3. The system detects that one or more required items are missing or incomplete. 4. The system identifies the missing items and displays corrective guidance. 5. The system prevents the incomplete operation from changing the workflow state. 6. The user supplies or corrects the missing information and retries. 7. The system revalidates the corrected record before continuing.

EXCEPTION FLOW**E1 (Save Failure)**

1. The user confirms the requested change.
2. The system validates the requested transition.
3. The system attempts to persist in the change to the authoritative data store.
4. The persistence operation fails or times out.
5. The system retains the last confirmed state and does not report success.
6. The system logs the failure and displays a controlled retry message.
7. The user retries after service recovery.

EXCEPTION FLOW**E-AUTH (Authorization or Session Failure)**

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

Use Case Name: Draft Article

Use Case ID:	UC-1.2
Author	Rei Khalil Galido
Purpose	Allow a Writer C Editor to create and save a new article draft within the pipeline.
Related Use Case	Includes: Generate Article Evaluation (UC-1.11)
Requirement Traceability	PR-EDT-02
Priority	High

Preconditions	• System is online • Writer or Editor is authenticated and logged in • Writer has an assigned topic or pitch
Postconditions	• A new article draft exists with status "Drafting" or "Awaiting Evaluation" • An AI evaluation has been generated for the draft
Actors	• Writer • Editor • AI (secondary, via include)
Flow of Actions	BASIC FLOW 1. Writer or Editor selects "Draft Article" from the Editorial Pipeline module. 2. System opens a blank article editor. 3. Writer or Editor enters the headline, body content, and relevant metadata (tags, category). 4. Writer or Editor saves the draft. 5. System stores the draft and assigns it a unique bundle reference. 6. System includes Generate Article Evaluation (UC-1.11) to automatically analyze the draft. 7. System displays the evaluation summary alongside the draft. ALTERNATE FLOW A1 (Save as Incomplete) 1. The user initiates the operation for the target record. 2. The system validates the required information and components. 3. The system detects that one or more required items are missing or incomplete. 4. The system identifies the missing items and displays corrective guidance. 5. The system prevents the incomplete operation from changing the workflow state. 6. The user supplies or corrects the missing information and retries. 7. The system revalidates the corrected record before continuing. EXCEPTION FLOW E1 (Evaluation Service Unavailable) 1. The workflow reaches the point where an AI result is expected.

	2. The system checks for a current result for the exact content version. 3. The system determines that the result is unavailable, incomplete, or delayed. 4. The system preserves the content and marks evaluation as pending/unavailable. 5. The system queues or retries the evaluation. 6. The system informs the Editor that manual review may be required. 7. When a valid result arrives, the system attaches it to the correct version. UC-1.3: Edit Article Content Use Case Name: Manage Editorial Pipeline_Edit Article Content
--	--

Use Case Name: Edit Article Content

Use Case ID:	UC-1.3
Author	Rei Khalil Galido
Purpose	Allow an Editor or Writer to modify the text content of an article already in the pipeline.
Related Use Case	None
Requirement Traceability	PR-EDT-03
Priority	High
Preconditions	• System is online • User is authenticated as Editor or Writer • Target article exists in the pipeline and is not locked/published
Postconditions	• Article content is updated • Edit history/version log is updated
Actors	• Editor • Writer
Flow of Actions	BASIC FLOW 1. User opens the target article bundle from the pipeline. 2. User selects "Edit Content." 3. System loads the article into an editable text editor. 4. User modifies headline, body text, or metadata.

5. User clicks "Save Changes."
6. System validates the content and stores the new version.
7. System logs the edit (author, timestamp) in the article's version history.

ALTERNATE FLOW

A1 (Discard Changes)

1. The user chooses to cancel, discard, or leave the operation.
2. The system checks for unsaved changes or a pending transaction.
3. The system requests confirmation when the action could lose work or affect billing.
4. The user confirms cancellation.
5. The system discards only uncommitted changes or safely terminates the pending operation.
6. The system restores the last confirmed state and returns the user to the appropriate screen.
7. The system does not create an unintended version, state change, or entitlement.

EXCEPTION FLOW

E1 (Concurrent Edit Conflict)

1. The user opens the target and begins the operation.
2. Another authorized session changes the same record.
3. The system compares the held version with the authoritative version.
4. The system detects stale data.
5. The system prevents silent overwrite.
6. The system displays the latest state or a comparison/merge option.
7. The user reviews the current version and retries.

UC-1.4: Request Revision

Use Case Name: Manage Editorial Pipeline_Request Revision

Use Case Name: Request Revision

Use Case ID:	UC-1.4
Author	Rei Khalil Galido

Purpose	Allow an Editor to request revisions for either a Writer-submitted article or a magazine design uploaded by a Graphics Designer, based on editorial or design review.
Related Use Case	Extends: Generate Article Evaluation (UC-1.11) for articles; may also be initiated directly from the magazine design review workflow.
Requirement Traceability	PR-EDT-04
Priority	High
Preconditions	• System is online • Editor is authenticated and logged in • Target article or magazine design exists and is in a reviewable state • Editor has permission to request revision
Postconditions	• Target status changes to "Revision Requested" • Current submitted version is preserved • Revision notes are recorded • Responsible Writer or Graphics Designer is notified
Actors	• Editor • Writer (for article revision requests) • Graphics Designer (for magazine-design revision requests)
Flow of Actions	BASIC FLOW 1. Editor opens the submitted article or uploaded magazine design requiring review. 2. System identifies the target type as either a Writer-submitted article or a Graphics Designer-uploaded magazine design. 3. System displays the latest version, responsible contributor, current workflow status, and revision history. 4. Editor selects "Request Revision." 5. System prompts the Editor for specific revision notes appropriate to the selected target type. 6. Editor enters actionable feedback. For articles, feedback may address content, structure, grammar, factual support, or editorial requirements. For magazine designs, feedback may address page layout, typography, imagery, branding, dimensions, or other design requirements. 7. Editor reviews and confirms the revision request.

8. System revalidates that the target remains reviewable and that the Editor still has permission.
9. System preserves the submitted version and records the revision request, Editor, timestamp, target type, and feedback.
10. System changes the target status to "Revision Requested."
11. System notifies the responsible Writer for an article or Graphics Designer for a magazine design.
12. System updates the pipeline/dashboard and makes the revision request visible to the responsible contributor.

ALTERNATE FLOW

A1 (No AI Feedback Available)

1. Editor opens an article for which the AI evaluation has not completed.
2. System confirms that the article is still in a reviewable state.
3. Editor performs manual editorial review without relying on an AI result.
4. Editor selects "Request Revision" and enters specific revision notes.
5. System records the request without requiring an AI evaluation reference.
6. System changes the article's status to "Revision Requested" and notifies the Writer.

ALTERNATE FLOW

A2 (Magazine Design Revision)

1. Editor opens a magazine design uploaded by a Graphics Designer.
2. System displays the latest design version, design status, Designer, and prior revision history.
3. Editor reviews the design against issue layout, branding, typography, imagery, dimensions, and other configured design requirements.
4. Editor selects "Request Revision" and enters design-specific corrections.
5. System validates that the design is still the current reviewable version.
6. System records the revision request and changes the design status to "Revision Requested."
7. System notifies the responsible Graphics Designer and exposes the revision notes in the design workspace.

EXCEPTION FLOW

E1 (Notification Failure)

1. The system successfully records the revision request and changes the target status.

	- The system creates a notification for the responsible Writer or Graphics Designer. - The notification service fails to deliver the message. - The system keeps the revision state and stored notes unchanged. - The system records the failed delivery and marks the notification for retry or follow-up. - The Editor can see the follow-up indicator on the dashboard. - The system retries delivery when the notification service becomes available. EXCEPTION FLOW E2 (Target State Changed Concurrently) - Editor opens an article or magazine design and begins writing revision notes. - Another authorized user submits a newer version or changes the target status. - Editor attempts to confirm the revision request. - System detects that the target version or workflow state has changed. - System prevents the Editor from attaching the revision request to a stale version. - System displays the latest version and current status. - Editor reviews the current version and submits a new revision request if it is still necessary. UC-1.5: Override AI Use Case Name: Manage Editorial Pipeline_Override AI
--	--

Use Case Name: Override AI

Use Case ID:	UC-1.5
Author	Rei Khalil Galido
Purpose	Allow an Editor to manually override the AI's evaluation verdict for an article, using editorial judgment.
Related Use Case	Extends: Generate Article Evaluation (UC-1.11) at extension point "OverrideRequested"
Requirement Traceability	PR-EDT-05

Priority	Medium
Preconditions	• System is online • Editor is authenticated and logged in • Generate Article Evaluation has produced a verdict the Editor disagrees with
Postconditions	• Article's evaluation verdict is flagged as "Editor Override" • Override justification is recorded
Actors	• Editor
Flow of Actions	BASIC FLOW 1. Editor reviews the AI evaluation verdict for an article. 2. Editor selects "Override AI." 3. System requires the Editor to enter a justification for the override. 4. Editor submits the justification. 5. System updates the article's evaluation record to reflect the manual override. 6. System allows the article to proceed in the pipeline despite the original AI verdict. ALTERNATE FLOW A1 (Partial Override) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and requires the next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Missing Justification) 1. The user reaches the condition described in this flow. 2. The system detects the condition during the relevant basic flow step. 3. The system validates the current record, permission, and business rules.

	4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and requires the next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. UC-1.6: Update Article Workflow Status Use Case Name: Manage Editorial Pipeline_Update Article Workflow Status
--	---

Use Case Name: Update Article Workflow Status

Use Case ID:	UC-1.6
Author	Rei Khalil Galido
Purpose	Allow an Editor to move an article through its editorial workflow stages (e.g., In Review, Approved, Ready for Publication).
Related Use Case	None
Requirement Traceability	PR-EDT-06
Priority	Medium
Preconditions	• System is online • Editor is authenticated and logged in • Article exists in the pipeline
Postconditions	• Article's workflow status is updated • Status change is logged in the article's history
Actors	• Editor
Flow of Actions	BASIC FLOW 1. Editor opens the target article's pipeline entry. 2. Editor selects "Update Workflow Status." 3. System displays available next-stage options based on the current status. 4. Editor selects the new status. 5. Editor confirms the change. 6. System updates the article's status and records the transition with a timestamp.

ALTERNATE FLOW

A1 (Revert Status)

1. The AI or workflow produces a result qualifying for the alternate approval path.
2. The system verifies the result belongs to the current version.
3. The system checks the configured threshold and mandatory-review rules.
4. If all conditions pass, the system advances the workflow.
5. The system records the rule-based advancement.
6. The system notifies the next responsible role.
7. If human review remains mandatory, the system leaves the item in review.

EXCEPTION FLOW

E1 (Invalid Transition)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

UC-1.7: Withdraw Article

	Use Case Name: Manage Editorial Pipeline_Withdraw Article
--	---

Use Case Name: Withdraw Article

Use Case ID:	UC-1.7
Author	Rei Khalil Galido
Purpose	Allow an Editor or Writer to remove an article from the active pipeline before it is published.
Related Use Case	None
Requirement Traceability	PR-EDT-07
Priority	Medium
Preconditions	• System is online • User is authenticated as Editor or Writer • Article is not yet published
Postconditions	• Article status changes to "Withdrawn" • Article is removed from active pipeline views
Actors	• Editor • Writer
Flow of Actions	BASIC FLOW 1. User opens the target article's pipeline entry. 2. User selects "Withdraw Article." 3. System prompts for confirmation and a withdrawal reason. 4. User confirms. 5. System sets the article status to "Withdrawn" and logs the reason. 6. System removes the article from active pipeline dashboards. ALTERNATE FLOW A1 (Restore Withdrawn Article) 1. The user selects the withdrawal operation. 2. The system retrieves the latest authoritative state. 3. The system checks whether withdrawal is still permitted. 4. If permitted, the system requests confirmation and any required reason.

5. The user confirms.
6. The system records the withdrawal and updates the state.
7. If publication is already irreversible, the system blocks withdrawal and directs the user to the appropriate post-publication process.

EXCEPTION FLOW

E1 (Already Published)

1. The user selects the withdrawal operation.
2. The system retrieves the latest authoritative state.
3. The system checks whether withdrawal is still permitted.
4. If permitted, the system requests confirmation and any required reason.
5. The user confirms.
6. The system records the withdrawal and updates the state.
7. If publication is already irreversible, the system blocks withdrawal and directs the user to the appropriate post-publication process.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

UC-1.8: Upload Magazine Design

Use Case Name: Manage Editorial Pipeline_ Upload Magazine Design

Use Case Name: Upload Magazine Design

Use Case ID:	UC-1.8
Author	Rei Khalil Galido
Purpose	Allow a Graphics Designer to upload a magazine design for an issue, create a versioned submission, and provide an Editor with a design that can be reviewed and returned for revision.

Related Use Case	None
Requirement Traceability	PR-EDT-08
Priority	High
Preconditions	• System is online • Graphics Designer is authenticated and logged in • Target issue exists • Designer is assigned or authorized to upload to the target issue • Design file meets configured publication requirements
Postconditions	• Design file is securely stored as a versioned asset • Design is linked to the target issue • New version is submitted for Editor review • Prior versions remain traceable • Editor is notified
Actors	• Graphics Designer • Editor (secondary reviewer)
Flow of Actions	<i>BASIC FLOW</i> User navigates to the specific issue or bundle record in the system. User selects "Upload Magazine Designs." System opens a secure file upload interface. User selects the compiled digital magazine file (e.g., PDF) from their local device. System validates the file format and ensures it is within the maximum file size limits. System securely uploads the file, attaches it to the issue record, and timestamps the action. System displays a success confirmation notice to the user. <i>ALTERNATE FLOW</i> <i>A1 (Version Replacement)</i> 1. Graphics Designer opens an issue that already has a previously uploaded design. 2. System displays the active design version and prior version history.

3. Graphics Designer selects a corrected design file.
4. System validates Designer permission, target issue, file type, file size, and integrity.
5. System stores the corrected file as a new version rather than silently destroying the previous version.
6. System marks the new version as the active design submission.
7. System notifies the Editor that a revised design is ready for review.

ALTERNATE FLOW

A2 (Upload After Revision Request)

1. Graphics Designer opens a design with status "Revision Requested."
2. System displays the Editor's latest revision notes and the version being revised.
3. Graphics Designer prepares a corrected design.
4. Graphics Designer uploads the corrected file.
5. System creates a new version linked to the same revision cycle.
6. System preserves the prior submitted version and its revision notes.
7. System changes the new version to "Submitted for Review" and notifies the Editor.

EXCEPTION FLOW

E1 (Unsupported Format or Size Limit Exceeded)

1. Graphics Designer selects a design file.
2. System validates the file extension, detected content type, and file size before storage.
3. System detects an unsupported format or a file exceeding the configured size limit.
4. System rejects the file and does not create a new design version.
5. System displays the accepted formats and maximum file size.
6. Graphics Designer exports or selects a compliant file.
7. Graphics Designer retries the upload.

EXCEPTION FLOW

E2 (Upload Interruption)

1. Graphics Designer begins transferring a valid design file.
2. The network connection is interrupted during the transfer.
3. System detects that the file was not completely transferred.

4. System marks the upload as failed or resumable according to storage capability.
5. System prevents the incomplete file from becoming the active design version.
6. System informs the Graphics Designer that the upload must be retried or resumed.
7. Graphics Designer retries after connectivity is restored.

EXCEPTION FLOW

E3 (Unauthorized Target Issue)

1. Graphics Designer selects an issue for upload.
2. System verifies that the Designer is assigned or authorized for the selected issue.
3. System determines that the Designer does not have permission for the target issue.
4. System blocks the upload before storing the file.
5. System displays an access-denied message without exposing restricted issue details.
6. Graphics Designer selects an authorized issue or requests assignment from the appropriate staff member.

EXCEPTION FLOW

E4 (Concurrent Design Submission)

1. Graphics Designer opens the issue while another authorized Designer is preparing a newer design version.
2. The other Designer submits a new version before the first upload is finalized.
3. System detects the changed active version when the first Designer confirms the upload.
4. System does not silently overwrite the newer version.
5. System creates the first Designer's file as a separate version only if versioning rules permit it; otherwise it asks the Designer to refresh.
6. System displays the current active version and latest submission history.
7. Graphics Designer reviews the current state and retries using the latest version information.

UC-1.9: View Pipeline Dashboard

Use Case Name: Manage Editorial Pipeline_View Pipeline Dashboard

Use Case Name: View Pipeline Dashboard

Use Case ID:	UC-1.9
Author	Rei Khalil Galido
Purpose	Allow Editorial Staff to view an overview of all bundles currently active in the editorial pipeline, including status and assignees.
Related Use Case	None
Requirement Traceability	PR-EDT-09
Priority	Medium
Preconditions	• System is online • User is authenticated as Editor, Writer, Publisher or Graphics Designer
Postconditions	• Dashboard is displayed reflecting current pipeline state
Actors	• Editorial Staff (Editor, Writer, Graphics Designer, Publisher)
Flow of Actions	BASIC FLOW 1. Editorial Staff member navigates to the Editorial Pipeline module. 2. Editorial Staff selects "View Pipeline Dashboard." 3. System retrieves all active bundles and their current statuses. 4. System displays the dashboard with filters (by status, assignee, deadline). 5. Editorial Staff member may apply filters to narrow the view. ALTERNATE FLOW A1 (No Active Bundles) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Data Load Failure)

	1. The user opens the dashboard. 2. The system verifies session and permissions. 3. The system queries current records. 4. If no records match, the system displays the configured empty state. 5. If retrieval fails, the system displays a controlled error and retry option. 6. The system logs the failure when appropriate. 7. The user retries or changes the filter.
	UC-1.10: View Bundle
	Use Case Name: Manage Editorial Pipeline_View Bundle

Use Case Name: View Bundle

Use Case ID:	UC-1.10
Author	Rei Khalil Galido
Purpose	Allow Editorial Staff to view the full detail of a single content bundle, including its content, assets, status, and history.
Related Use Case	None
Requirement Traceability	PR-EDT-10
Priority	Medium
Preconditions	• System is online • User is authenticated as Editor, Writer, Graphics Designer, or Publisher • Target bundle exists
Postconditions	• Bundle detail view is displayed
Actors	• Editorial Staff (Editor, Writer, Graphics Designer, Publisher)
Flow of Actions	BASIC FLOW 1. Editorial Staff member selects a bundle from the Pipeline Dashboard or search. 2. System retrieves the bundle's content, assets, status, and revision history. 3. System displays the full bundle detail view. 4. Editorial Staff member reviews the information.

	ALTERNATE FLOW A1 (Navigate to Related Action) 1. The user selects a file and begins upload. 2. The system validates role, target assignment, file type, file size, and upload rules. 3. The system rejects invalid files before finalization. 4. For a valid file, the system transfers it to controlled storage. 5. The system verifies transfer completion and file integrity. 6. The system creates a new version and preserves prior versions. 7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable. 8. The user retries or resumes after correcting the problem. EXCEPTION FLOW E1 (Bundle Not Found) 1. The user opens the dashboard. 2. The system verifies session and permissions. 3. The system queries current records. 4. If no records match, the system displays the configured empty state. 5. If retrieval fails, the system displays a controlled error and retry option. 6. The system logs the failure when appropriate. 7. The user retries or changes the filter. UC-1.11: Generate Article Evaluation Use Case Name: Manage Editorial Pipeline_Generate Article Evaluation
--	--

Use Case Name: Generate Article Evaluation

Use Case ID:	UC-1.11
Author	Rei Khalil Galido
Purpose	Allow an Editor to request revisions for either a Writer-submitted article or a magazine design uploaded by a Graphics Designer, based on editorial or design review.
Related Use Case	Extends: Generate Article Evaluation (UC-1.11) for articles; may also be initiated directly from the magazine-design review workflow.

Requirement Traceability	PR-EDT-11
Priority	High
Preconditions	• System is online • Editor is authenticated and logged in • Target article or magazine design exists and is in a reviewable state • Editor has permission to request revision
Postconditions	• Target status changes to "Revision Requested" • Current submitted version is preserved • Revision notes are recorded • Responsible Writer or Graphics Designer is notified
Actors	• Editor • Writer (for article revision requests) • Graphics Designer (for magazine-design revision requests)
Flow of Actions	BASIC FLOW 1. System sends the article's content to the AI evaluation service (triggered via include from Draft Article). 2. AI analyzes the article for grammar, and readability. 3. AI returns a quality score and a recommendation (Approve / Reject). 4. System attaches the evaluation result to the article record. 5. System exposes extension point "RevisionRequested" to the Editor if the recommendation is "Reject." 6. System exposes extension point "OverrideRequested" to the Editor for any evaluation result. 7. System notifies the Editor that evaluation is complete. ALTERNATE FLOW A1 (High-Confidence Approval) 1. The AI or workflow produces a result qualifying for the alternate approval path. 2. The system verifies the result belongs to the current version. 3. The system checks the configured threshold and mandatory-review rules. 4. If all conditions pass, the system advances the workflow.

5. The system records the rule-based advancement.

6. The system notifies the next responsible role.

7. If human review remains mandatory, the system leaves the item in review.

EXCEPTION FLOW

E1 (AI Service Timeout)

1. The workflow reaches the point where an AI result is expected.

2. The system checks for a current result for the exact content version.

3. The system determines that the result is unavailable, incomplete, or delayed.

4. The system preserves the content and marks evaluation as pending/unavailable.

5. The system queues or retries the evaluation.

6. The system informs the Editor that manual review may be required.

7. When a valid result arrives, the system attaches it to the correct version.


MODULE 2: Manage Publication

Actors: Publisher

UC-2.1: Configure Issue Formats

Use Case Name: Manage Publication_Configure Issue Formats

Figure 3. Manage Publication Use Case Diagram

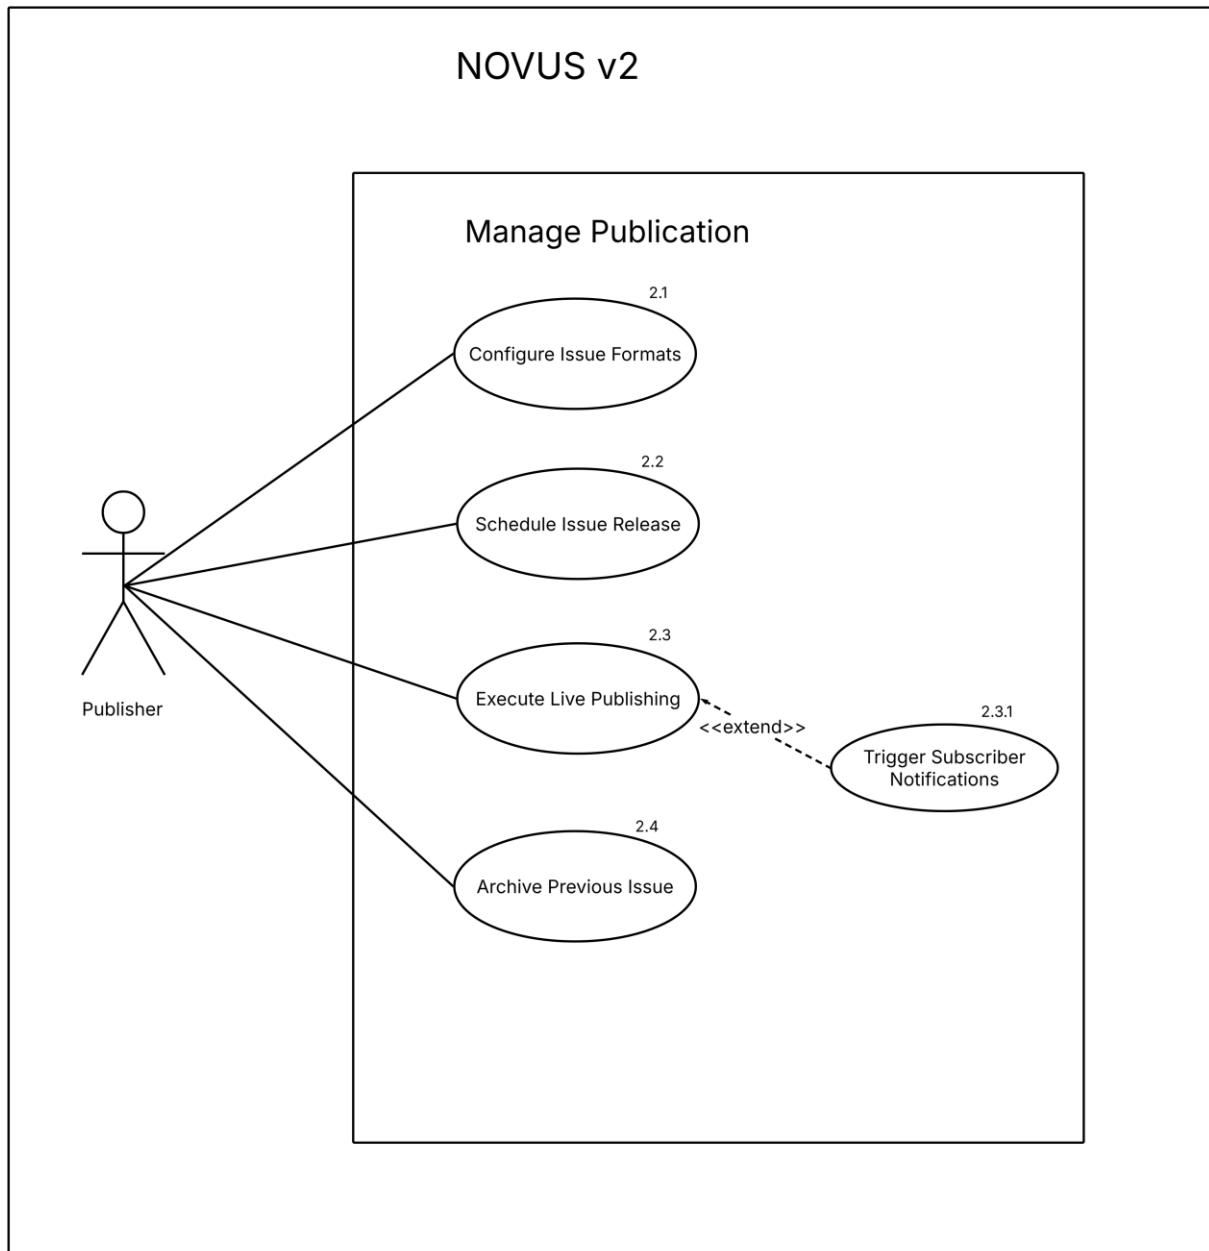

Use Case Name: Configure Issue Formats

Use Case ID:	UC-2.1
Author	Joshmar Clavero
Purpose	Allow the Publisher to define and configure the output formats (digital layout templates, PDF/e-reader formats) available for a publication issue.
Related Use Case	• None
Requirement Traceability	PR-PUB-01

Priority	Medium
Preconditions	• System is online • Publisher is authenticated and logged in
Postconditions	• Issue format configuration is saved and available for scheduling
Actors	• Publisher

Flow of Actions	BASIC FLOW 1. Publisher navigates to the Manage Publication module. 2. Publisher selects “Configure Issue Formats.” 3. System displays existing format templates (e.g., Web, PDF, ePub). 4. Publisher creates a new format or edits an existing one (dimensions, cover template, file type). 5. Publisher saves the configuration. 6. System validates and stores the format settings. ALTERNATE FLOW A1 (Duplicate Format) 1. The user selects a file and begins upload. 2. The system validates role, target assignment, file type, file size, and upload rules. 3. The system rejects invalid files before finalization. 4. For a valid file, the system transfers it to controlled storage. 5. The system verifies transfer completion and file integrity. 6. The system creates a new version and preserves prior versions. 7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable. 8. The user retries or resumes after correcting the problem. EXCEPTION FLOW E1 (Invalid Parameters) 1. The user selects a file and begins upload. 2. The system validates role, target assignment, file type, file size, and upload rules. 3. The system rejects invalid files before finalization. 4. For a valid file, the system transfers it to controlled storage. 5. The system verifies transfer completion and file integrity. 6. The system creates a new version and preserves prior versions. 7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable.
	8. The user retries or resumes after correcting the problem. UC-2.2: Schedule Issue Release Use Case Name: Manage Publication_Schedule Issue Release

Use Case Name: Schedule Issue Release

Use Case ID:	UC-2.2
Author	Joshmar Clavero
Purpose	Allow the Publisher to set a future release date and time for an upcoming issue.
Related Use Case	• None
Requirement Traceability	PR-PUB-02
Priority	High
Preconditions	• System is online • Issue content (approved bundles) is ready • Issue format is configured
Postconditions	• Issue is queued with a scheduled release date/time
Actors	• Publisher
Flow of Actions	<i>BASIC FLOW</i> 1. Publisher selects an issue that is ready for release. 2. Publisher selects “Schedule Issue Release.” 3. System displays a calendar/time picker. 4. Publisher selects the release date and time. 5. Publisher confirms. 6. System sets the issue status to “Scheduled” and stores the release timestamp. <i>ALTERNATE FLOW</i> <i>A1 (Reschedule)</i> 1. The user enters a date/time. 2. The system validates format and scheduling rules. 3. The system detects that the value violates a constraint. 4. The system rejects the value and explains the rule.

	5. The user enters a compliant future value. 6. The system revalidates and continues. EXCEPTION FLOW E1 (Invalid Date) 1. The user enters a date/time. 2. The system validates format and scheduling rules. 3. The system detects that the value violates a constraint. 4. The system rejects the value and explains the rule. 5. The user enters a compliant future value. 6. The system revalidates and continues. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-2.3: Execute Live Publishing Use Case Name: Manage Publication_Execute Live Publishing
--	--

Use Case Name: Execute Live Publishing

Use Case ID:	UC-2.3
Author	Joshmar Clavero
Purpose	Allow the Publisher to manually trigger immediate publishing of an issue, bypassing or overriding a schedule.
Related Use Case	• Extended by: Trigger Subscriber Notifications (UC-2.3.1) – optional
Requirement Traceability	PR-PUB-03
Priority	High

Preconditions	• System is online • Issue is fully approved and ready
Postconditions	• Issue is published live and accessible per its access tier
Actors	• Publisher
Flow of Actions	BASIC FLOW 1. Publisher opens a ready issue. 2. Publisher selects “Execute Live Publishing.” 3. System prompts for confirmation. 4. Publisher confirms. 5. System publishes the issue immediately, updates status to “Published,” and makes it live on the platform. At this point, the optional Trigger Subscriber Notifications extension (UC-2.3.1) may fire. 6. System logs the publishing event. ALTERNATE FLOW A (Flow) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Publishing Failure) 1. The user initiates the operation for the target record. 2. The system validates the required information and components. 3. The system detects that one or more required items are missing or incomplete. 4. The system identifies the missing items and displays corrective guidance. 5. The system prevents the incomplete operation from changing the workflow state.

	6. The user supplies or corrects the missing information and retries. 7. The system revalidates the corrected record before continuing. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-2.3.1: Trigger Subscriber Notifications Use Case Name: Manage Publication_Trigger Subscriber Notifications
--	---

Use Case Name: Trigger Subscriber Notifications

Use Case ID:	UC-2.3.1
Author	Joshmar Clavero
Purpose	Allow the Publisher to send notifications to subscribers and readers about a new issue or article, as an optional extension of the live publishing process.
Related Use Case	• Extends: Execute Live Publishing (UC-2.3)
Requirement Traceability	PR-PUB-04
Priority	Medium
Preconditions	• System is online • Execute Live Publishing (UC-2.3) has reached the point where the issue is published or is about to be published
Postconditions	• Notification is dispatched to the relevant subscriber segment
Actors	• Publisher
Flow of Actions	BASIC FLOW 1. Immediately after Execute Live Publishing (UC-2.3) publishes the issue, System offers the Publisher the option to trigger subscriber notifications.

2. Publisher elects to proceed with the extension.
3. System displays notification channel options (email, push, in-app).
4. Publisher customizes the notification message and target segment.
5. Publisher confirms send.
6. System dispatches the notifications, logs delivery statistics, and returns control to Execute Live Publishing (UC-2.3).

ALTERNATE FLOW

A1 (Schedule Notification)

1. The user enters a date/time.
2. The system validates format and scheduling rules.
3. The system detects that the value violates a constraint.
4. The system rejects the value and explains the rule.
5. The user enters a compliant future value.
6. The system revalidates and continues.

EXCEPTION FLOW

E1 (Delivery Failure)

1. The user initiates the operation for the target record.
2. The system validates the required information and components.
3. The system detects that one or more required items are missing or incomplete.
4. The system identifies the missing items and displays corrective guidance.
5. The system prevents the incomplete operation from changing the workflow state.
6. The user supplies or corrects the missing information and retries.
7. The system revalidates the corrected record before continuing.

EXCEPTION FLOW

E2 (Extension Declined)

1. The user confirms publication.
2. The system validates publish readiness.
3. The system starts the publication transaction and records the pre-publication state.
4. The publishing service returns an error, timeout, or incomplete result.
5. The system verifies what, if anything, reached the live environment.

	6. The system does not report full publication when verification is incomplete.
	7. The system records the failure and exposes controlled recovery/retry.
	UC-2.5: Archive Previous Issue
	Use Case Name: Manage Publication_Archive Previous Issue

Use Case Name: Archive Previous Issue

Use Case ID:	UC-2.5
Author	Joshmar Clavero
Purpose	Allow the Publisher to move an older, already-published issue into the archive for historical access.
Related Use Case	• None
Requirement Traceability	PR-PUB-05
Priority	Low
Preconditions	• System is online • Issue has been published and is no longer the current issue
Postconditions	• Issue is flagged as archived and relocated to the archive listing
Actors	• Publisher
Flow of Actions	BASIC FLOW 1. Publisher navigates to the issue list. 2. Publisher selects an old issue. 3. Publisher selects “Archive Previous Issue.” 4. System prompts for confirmation. 5. Publisher confirms. 6. System updates the issue status to “Archived” and relocates it to the archive section. ALTERNATE FLOW A1 (Bulk Archive) 1. The user confirms publication. 2. The system validates publish readiness.

3. The system starts the publication transaction and records the pre-publication state.
4. The publishing service returns an error, timeout, or incomplete result.
5. The system verifies what, if anything, reached the live environment.
6. The system does not report full publication when verification is incomplete.
7. The system records the failure and exposes controlled recovery/retry.

EXCEPTION FLOW

E1 (Active Issue Protection)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.


MODULE 3: Manage Reports

Actors: Editor; Admin; Publisher; Management Staff (generalized parent of Editor, Admin, and Publisher)

UC-3.1: Generate Revenue Report

Use Case Name: Manage Reports_Generate Subscription Revenue Report

Figure 4. Manage Reports Use Case Diagram

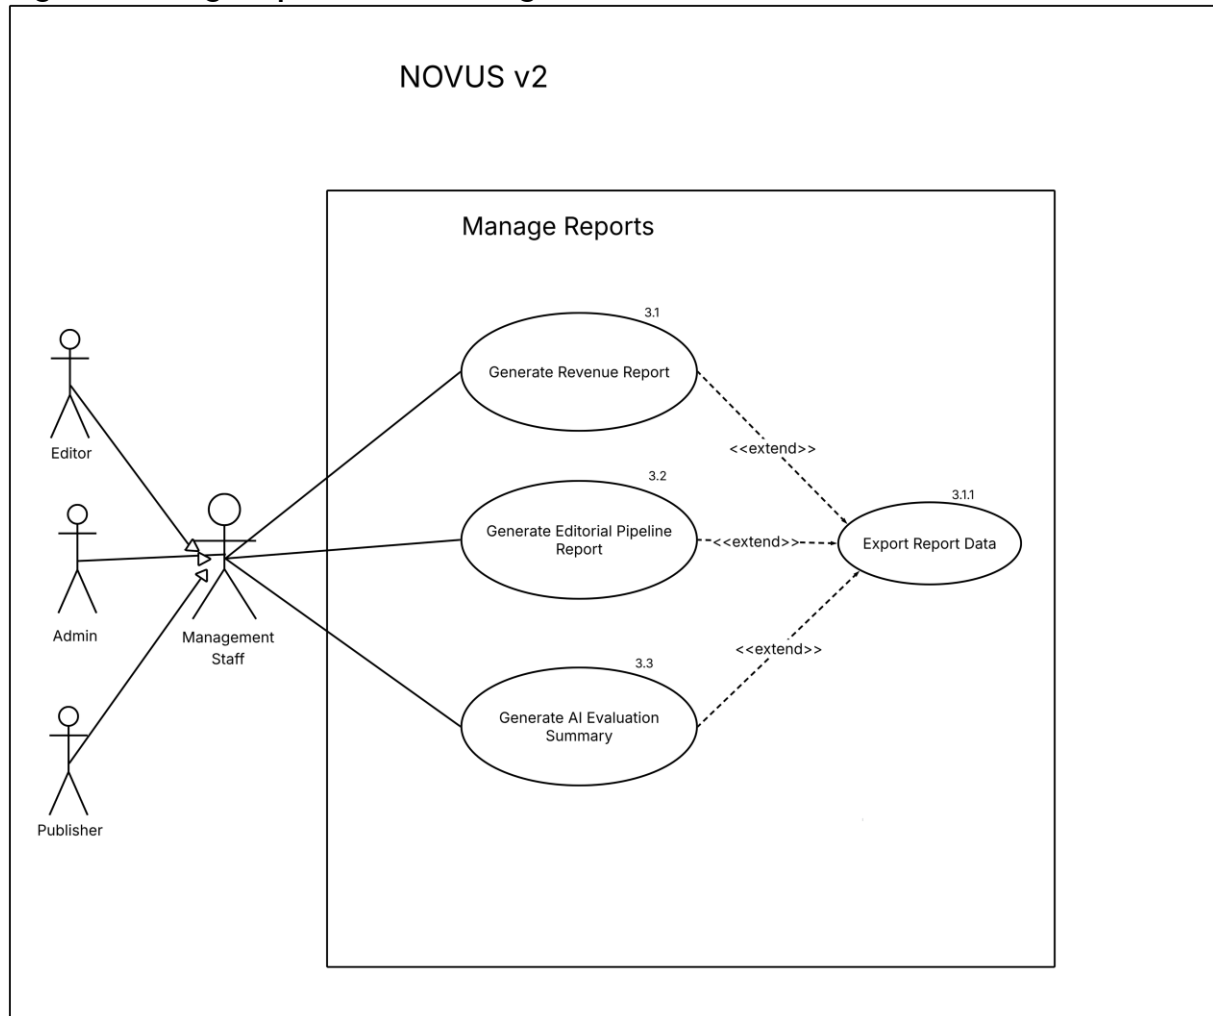

Use Case Name: Generate Revenue Report

Use Case ID:	UC-3.1
Author	Rei Khalil Galido
Purpose	Allow Management Staff to generate a report summarizing subscription and payment revenue over a selected period.
Related Use Case	• Extends into: Export Report Data (UC-3.1.1)
Requirement Traceability	PR-RPT-01
Priority	High
Preconditions	• System is online • User is authenticated as Editor, Admin, or Publisher • Payment data exists for the requested period
Postconditions	• Report is generated and available for viewing/export
Actors	• Management Staff (Editor, Admin, Publisher)

Flow of Actions	<i>BASIC FLOW</i> 1. Management Staff navigates to the Manage Reports module. 2. Management Staff selects “Generate Subscription Revenue Report.” 3. System prompts for a date range and filters (plan type, region). 4. User submits the parameters. 5. System compiles revenue data from payment records. 6. System displays the report on screen; Management Staff may optionally trigger the Export Report Data extension (UC-3.1.1) to download the report as PDF or CSV. <i>ALTERNATE FLOW</i> <i>A1 (Recurring Report)</i> 1. The user enters a date/time. 2. The system validates format and scheduling rules. 3. The system detects that the value violates a constraint. 4. The system rejects the value and explains the rule. 5. The user enters a compliant future value. 6. The system revalidates and continues. <i>EXCEPTION FLOW</i> <i>E1 (No Data Found)</i> 1. The user requests the selected list/report. 2. The system queries the current data set. 3. The system finds no matching records. 4. The system displays the empty state or configured fallback. 5. The system does not present fabricated or stale data. 6. The user adjusts filters or returns to another section. UC-3.1.1: Export Report Data Use Case Name: Manage Reports_Export Report Data
-----------------	---

Use Case Name: Export Report Data

Use Case ID:	UC-3.1.1
Author	Rei Khalil Galido

Purpose	Serve as a shared extension that converts the currently displayed report's on-screen data into a downloadable PDF or CSV file.
Related Use Case	• Extends: Generate Subscription Revenue Report (UC-3.1), Generate Editorial Pipeline Report (UC-3.2), Generate AI Evaluation Summary (UC-3.3)
Requirement Traceability	PR-RPT-04
Priority	Medium
Preconditions	• System is online • A report has been generated and is currently displayed by UC-3.1, UC-3.2, or UC-3.3
Postconditions	• Report data is exported and downloaded in the selected format (PDF or CSV)
Actors	• Management Staff (Editor, Admin, Publisher)
Flow of Actions	BASIC FLOW 1. While viewing a generated report, Management Staff selects "Export." 2. System displays the available export formats (PDF, CSV). 3. Management Staff selects a format. 4. System converts the on-screen report data into the selected file format. 5. System generates the downloadable file and returns control to the originating report use case (UC-3.1, UC-3.2, or UC-3.3). ALTERNATE FLOW A1 (Default Format Download) 1. The user selects a file and begins upload. 2. The system validates role, target assignment, file type, file size, and upload rules. 3. The system rejects invalid files before finalization. 4. For a valid file, the system transfers it to controlled storage. 5. The system verifies transfer completion and file integrity. 6. The system creates a new version and preserves prior versions. 7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable. 8. The user retries or resumes after correcting the problem.

	EXCEPTION FLOW E1 (Export Failure) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. UC-3.2: Generate Editorial Pipeline Report Use Case Name: Manage Reports_Generate Editorial Pipeline Report
--	---

Use Case Name: Generate Editorial Pipeline Report

Use Case ID:	UC-3.2
Author	Rei Khalil Galido
Purpose	Allow Management Staff to generate a report on editorial pipeline throughput, such as articles drafted, submitted, published, and average turnaround time.
Related Use Case	• Extends into: Export Report Data (UC-3.1.1)
Requirement Traceability	PR-RPT-02
Priority	Medium
Preconditions	• System is online • Pipeline activity data exists
Postconditions	• Report is generated and available for viewing/export
Actors	• Management Staff (Editor, Admin, Publisher)
Flow of Actions	BASIC FLOW 1. Management Staff selects “Generate Editorial Pipeline Report.” 2. System prompts for a date range and scope (team or author). 3. User submits the parameters.

4. System compiles pipeline metrics.
5. System displays the report on screen; Management Staff may optionally trigger the Export Report Data extension (UC-3.1.1) to download the report.

ALTERNATE FLOW

A1 (Drill-Down)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Generation Timeout)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

UC-3.3: Generate AI Evaluation Summary

Use Case Name: Manage Reports_Generate AI Evaluation Summary

Use Case Name: Generate AI Evaluation Summary

Use Case ID:	UC-3.3
Author	Rei Khalil Galido
Purpose	Allow Management Staff to generate a summary report of AI article evaluations, including scores, override rate, and revision-request rate.

Related Use Case	• Extends into: Export Report Data (UC-3.1.1)
Requirement Traceability	PR-RPT-03
Priority	Medium
Preconditions	• System is online • AI evaluations exist for the requested period
Postconditions	• Report is generated and available for viewing/export
Actors	• Management Staff (Editor, Admin, Publisher)
Flow of Actions	BASIC FLOW 1. Management Staff selects “Generate AI Evaluation Summary.” 2. System prompts for a date range. 3. User submits the parameters. 4. System aggregates evaluation scores, override counts, and revision-request counts. 5. System displays the summary report on screen; Management Staff may optionally trigger the Export Report Data extension (UC-3.1.1) to download the report. ALTERNATE FLOW A1 (Filter by Staff) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Insufficient Data) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules.

4. The system performs the permitted alternate handling or blocks the invalid operation.

5. The system explains the resulting state and required next action.

6. The system records the event when audit/security rules require it.

7. The user continues from the appropriate point after the condition is resolved.


MODULE 4: Manage Platform Settings

Actors: Admin

UC-4.1: Update Site Theme and Layout

Use Case Name: Manage Platform Settings_Update Site Theme and Layout

Figure 5. Manage Platform Settings Use Case Diagram

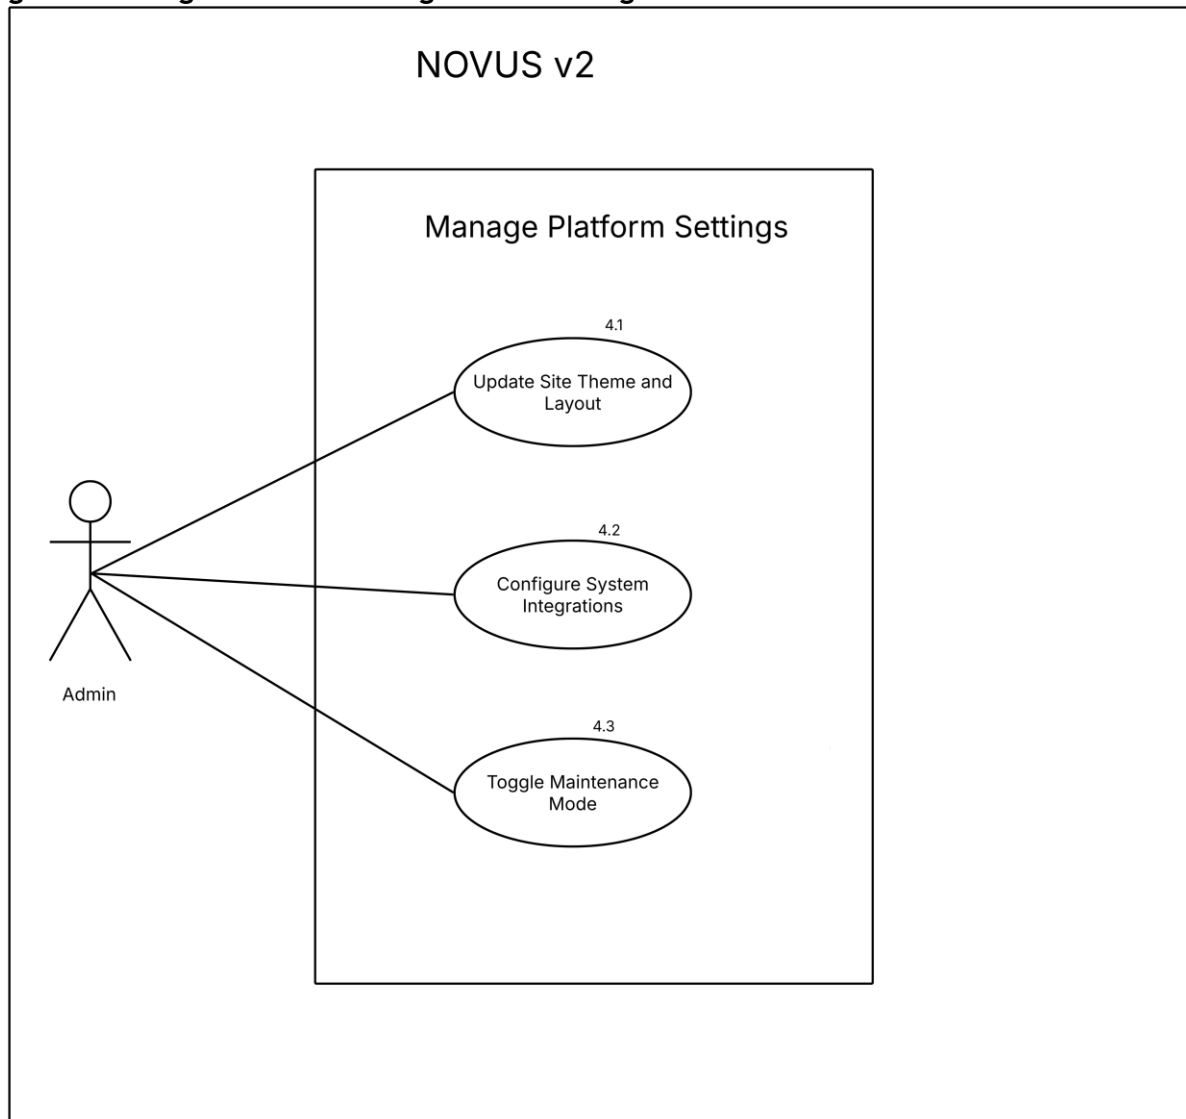

Use Case Name: Update Site Theme and Layout

Use Case ID:	UC-4.1
Author	Roman Rico Albania
Purpose	Allow the Admin to customize the platform's visual theme and homepage layout.
Related Use Case	None
Requirement Traceability	PR-SET-01
Priority	Low
Preconditions	• System is online • Admin is authenticated and logged in
Postconditions	• Theme and layout changes are applied site-wide
Actors	• Admin

Flow of Actions	<i>BASIC FLOW</i> 1. Admin navigates to the Manage Platform Settings module. 2. Admin selects "Update Site Theme and Layout." 3. System displays current theme and layout options. 4. Admin adjusts colors, and section ordering. 5. Admin previews the changes. 6. Admin saves. 7. System applies the changes site-wide. <i>ALTERNATE FLOW</i> <i>A1 (Revert to Default)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. <i>EXCEPTION FLOW</i> <i>E1 (Invalid Configuration)</i>
-----------------	--

	1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-4.2: Configure System Integrations Use Case Name: Manage Platform Settings_Configure System Integrations
--	--

Use Case Name: Configure System Integrations

Use Case ID:	UC-4.2
Author	Roman Rico Albania
Purpose	Allow the Admin to manage third-party integrations such as the payment gateway, and the email service.
Related Use Case	None
Requirement Traceability	PR-SET-02
Priority	High
Preconditions	• System is online

	• Admin is authenticated and logged in
Postconditions	• Integration configuration is updated and connection verified
Actors	• Admin
Flow of Actions	BASIC FLOW 1. Admin selects "Configure System Integrations." 2. System lists available integrations and their connection status. 3. Admin selects an integration to configure. 4. Admin enters or updates the API credentials or settings. 5. Admin tests the connection. 6. Admin saves. ALTERNATE FLOW A1 (Disable Integration) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Connection Test Failure) 1. The user submits credentials. 2. The system validates them against the account. 3. The system determines the credentials are incorrect. 4. The system rejects the operation without revealing sensitive details. 5. The system applies rate limiting or lockout rules when thresholds are reached. 6. The system displays the permitted recovery option. 7. The user retries or starts recovery.

	EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-4.3: Toggle Maintenance Mode Use Case Name: Manage Platform Settings_Toggle Maintenance Mode
--	---

Use Case Name: Toggle Maintenance Mode

Use Case ID:	UC-4.3
Author	Roman Rico Albania
Purpose	Allow the Admin to place the platform into maintenance mode, restricting reader access during updates.
Related Use Case	None
Requirement Traceability	PR-SET-03
Priority	Medium
Preconditions	• System is online • Admin is authenticated and logged in
Postconditions	• Platform maintenance state is toggled and reflected to visitors
Actors	• Admin
Flow of Actions	BASIC FLOW 1. Admin selects "Toggle Maintenance Mode." 2. System prompts for confirmation and an optional custom maintenance message. 3. Admin confirms.

4. System enables maintenance mode, displaying the message to all non-Admin visitors.

5. Admin later disables maintenance mode to restore normal access.

ALTERNATE FLOW

A1 (Scheduled Maintenance)

1. The user enters a date/time.
2. The system validates format and scheduling rules.
3. The system detects that the value violates a constraint.
4. The system rejects the value and explains the rule.
5. The user enters a compliant future value.
6. The system revalidates and continues.

EXCEPTION FLOW

E1 (Publishing Conflict)

1. The user confirms publication.
2. The system validates publish readiness.
3. The system starts the publication transaction and records the pre-publication state.
4. The publishing service returns an error, timeout, or incomplete result.
5. The system verifies what, if anything, reached the live environment.
6. The system does not report full publication when verification is incomplete.
7. The system records the failure and exposes controlled recovery/retry.

EXCEPTION FLOW


E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

MODULE 5: Manage User Privileges

Actors: Admin
UC-5.1: Add New User
Use Case Name: Manage User Privileges_Add New User

Figure 6. Manage User Privileges Use Case Diagram

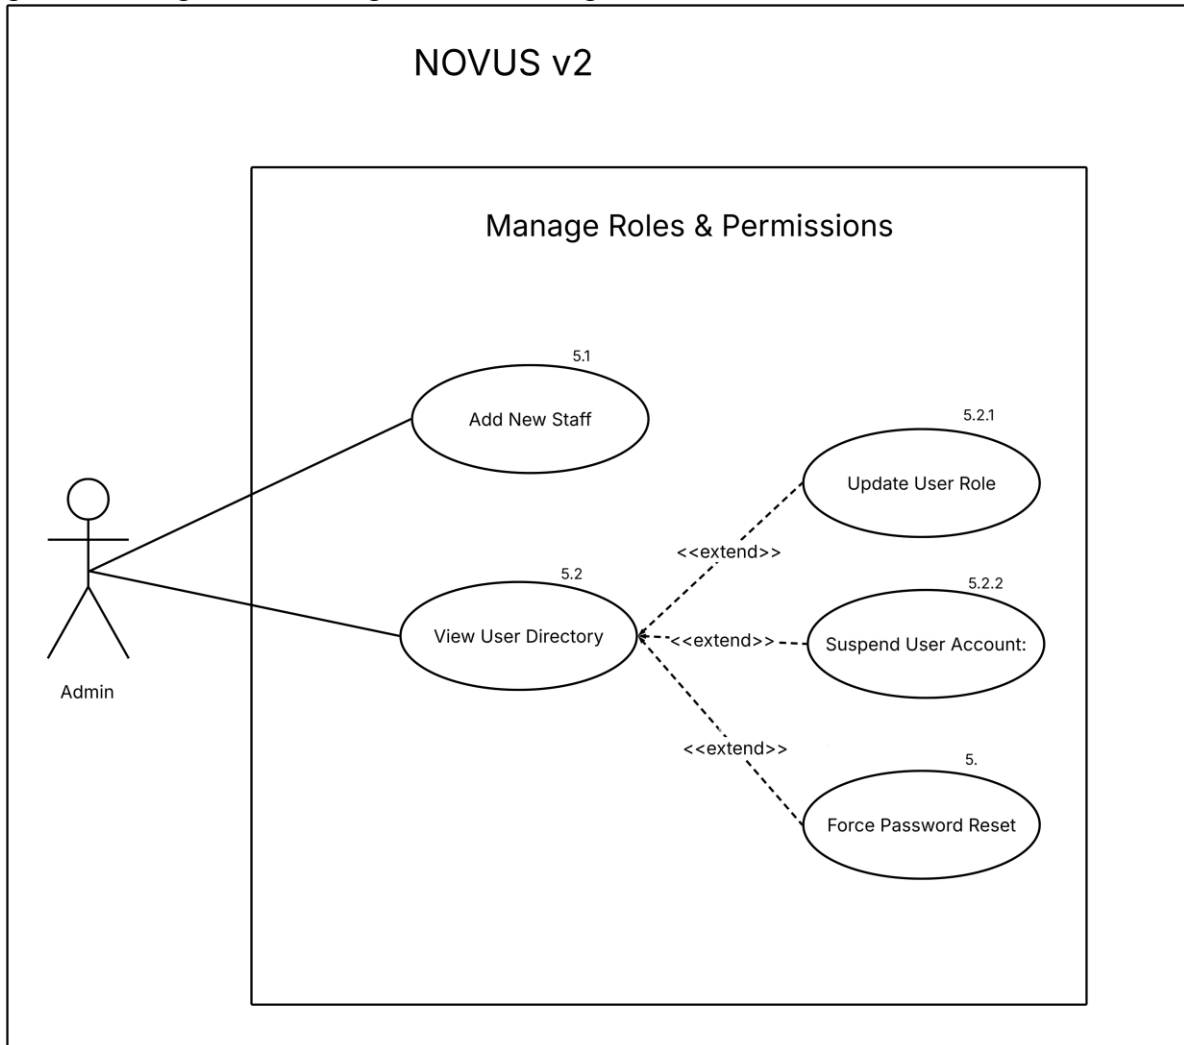

Use Case Name: Add New Staff

Use Case ID:	UC-5.1
Author	Roman Rico Albania
Purpose	Allow the Admin to manually create a new staff or reader account with an assigned role.
Related Use Case	• None
Requirement Traceability	PR-USR-01

Priority	High
Preconditions	• System is online
	• Admin is authenticated and logged in
Postconditions	• New user account is created with the assigned role
Actors	• Admin

Flow of Actions

BASIC FLOW

1. Admin selects “Add New Staff.”
2. System displays a new-user form.
3. Admin enters the name, email, and assigns a role (Editor, Writer, Publisher, Admin, etc.).
4. Admin submits the form.
5. System creates the account and sends setup credentials to the user’s email.

ALTERNATE FLOW

A1 (Bulk Import)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Duplicate Email)

1. The user submits the operation.
2. The system checks unique identifiers against existing records.
3. The system finds an existing matching record.
4. The system prevents duplicate creation.
5. The system displays a controlled message without exposing unrelated private information.
6. The user chooses the permitted recovery action.
7. The system continues only with a valid unique target.

	EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-5.2: View User Directory Use Case Name: Manage User Privileges_View User Directory
--	---

Use Case Name: View User Directory

Use Case ID:	UC-5.2
Author	Roman Rico Albania
Purpose	Allow the Admin to view a searchable list of all system users along with their roles and status.
Related Use Case	• Extended by: Update User Role (UC-5.2.1), Suspend User Account (UC-5.2.2), Force Password Reset (UC-5.2.3)
Requirement Traceability	PR-USR-02
Priority	Medium
Preconditions	• System is online • Admin is authenticated and logged in
Postconditions	• User directory is displayed
Actors	• Admin
Flow of Actions	BASIC FLOW 1. Admin selects “View User Directory.” 2. System retrieves and displays all user accounts. 3. Admin searches or filters by name, role, or status. From this listing, Admin may select a user record and optionally trigger Update User Role (UC-5.2.1), Suspend User Account (UC-5.2.2), or Force Password Reset (UC-5.2.3).

ALTERNATE FLOW
A1 (Export Directory)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW
E1 (Load Failure)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

UC-5.2.1: Update User Role

Use Case Name: Manage User Privileges_Update User Role

Use Case Name: Update User Role

Use Case ID:	UC-5.2.1
Author	Roman Rico Albania
Purpose	Allow the Admin to change a user's assigned role and permission level.
Related Use Case	• Extends: View User Directory (UC-5.2)
Requirement Traceability	PR-USR-03
Priority	High

Preconditions	• System is online • Admin is authenticated and logged in, and is currently viewing the User Directory (UC-5.2) • Target user account exists in the directory listing
Postconditions	• User's role and permissions are updated
Actors	• Admin
Flow of Actions	<i>BASIC FLOW</i> 1. While viewing the User Directory (UC-5.2), Admin selects a target user record and triggers "Update User Role." 2. System displays available roles. 3. Admin selects the new role. 4. Admin confirms. 5. System updates the user's role, applies the permission changes immediately, and returns control to the User Directory (UC-5.2). <i>ALTERNATE FLOW</i> <i>A1 (Multiple Roles)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. <i>EXCEPTION FLOW</i> <i>E1 (Last Admin Protection)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action.

	6. The system records the event when audit/security rules require it.
	7. The user continues from the appropriate point after the condition is resolved.
	UC-5.2.2: Suspend User Account
	Use Case Name: Manage User Privileges_Suspend User Account

Use Case Name: Suspend User Account

Use Case ID:	UC-5.2.2
Author	Roman Rico Albania
Purpose	Allow the Admin to temporarily disable a user's access to the platform.
Related Use Case	• Extends: View User Directory (UC-5.2)
Requirement Traceability	PR-USR-04
Priority	High
Preconditions	• System is online • Admin is authenticated and logged in, and is currently viewing the User Directory (UC-5.2) • Target user account exists in the directory listing
Postconditions	• User account is suspended and active sessions are revoked
Actors	• Admin
Flow of Actions	BASIC FLOW 1. While viewing the User Directory (UC-5.2), Admin selects a target user record and triggers "Suspend User Account." 2. System prompts for a reason and, optionally, a duration. 3. Admin confirms. 4. System suspends the account, revokes active sessions, and returns control to the User Directory (UC-5.2). ALTERNATE FLOW A1 (Reinstate Account) 1. The user requests an operation requiring active entitlement/account status. 2. The system retrieves the authoritative status.

	3. The system determines the account or entitlement is inactive, expired, or suspended. 4. The system blocks the protected operation. 5. The system displays the permitted recovery action. 6. The system records the denied attempt when required. EXCEPTION FLOW E1 (Self-Suspension Protection) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. UC-5.2.3: Force Password Reset Use Case Name: Manage User Privileges_Force Password Reset
--	--

Use Case Name: Force Password Reset


Use Case ID:	UC-5.2.3
Author	Roman Rico Albania
Purpose	Allow the Admin to require a user to reset their password on next login, for example after a security concern.
Related Use Case	• Extends: View User Directory (UC-5.2)
Requirement Traceability	PR-USR-05
Priority	Medium
Preconditions	• System is online • Admin is authenticated and logged in, and is currently viewing the User Directory (UC-5.2) • Target user account exists in the directory listing
Postconditions	• Account is flagged for mandatory password reset

Actors	• Admin
Flow of Actions	BASIC FLOW 1. While viewing the User Directory (UC-5.2), Admin selects a target user record and triggers “Force Password Reset.” 2. System asks the Admin to confirm the action. 3. System invalidates the current password and flags the account for mandatory reset. 4. System emails the user a reset link and returns control to the User Directory (UC-5.2). ALTERNATE FLOW A1 (Bulk Reset) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Undeliverable Email) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. MODULE 6: Manage Account Actors: Unregistered Reader; Registered Reader; Staff; User (generalized parent of Registered Reader and Staff); Payment Gateway (external)

UC-6.1: Register Account

Use Case Name: Manage Account_Register Account

Figure 7. Manage Account Use Case Diagram

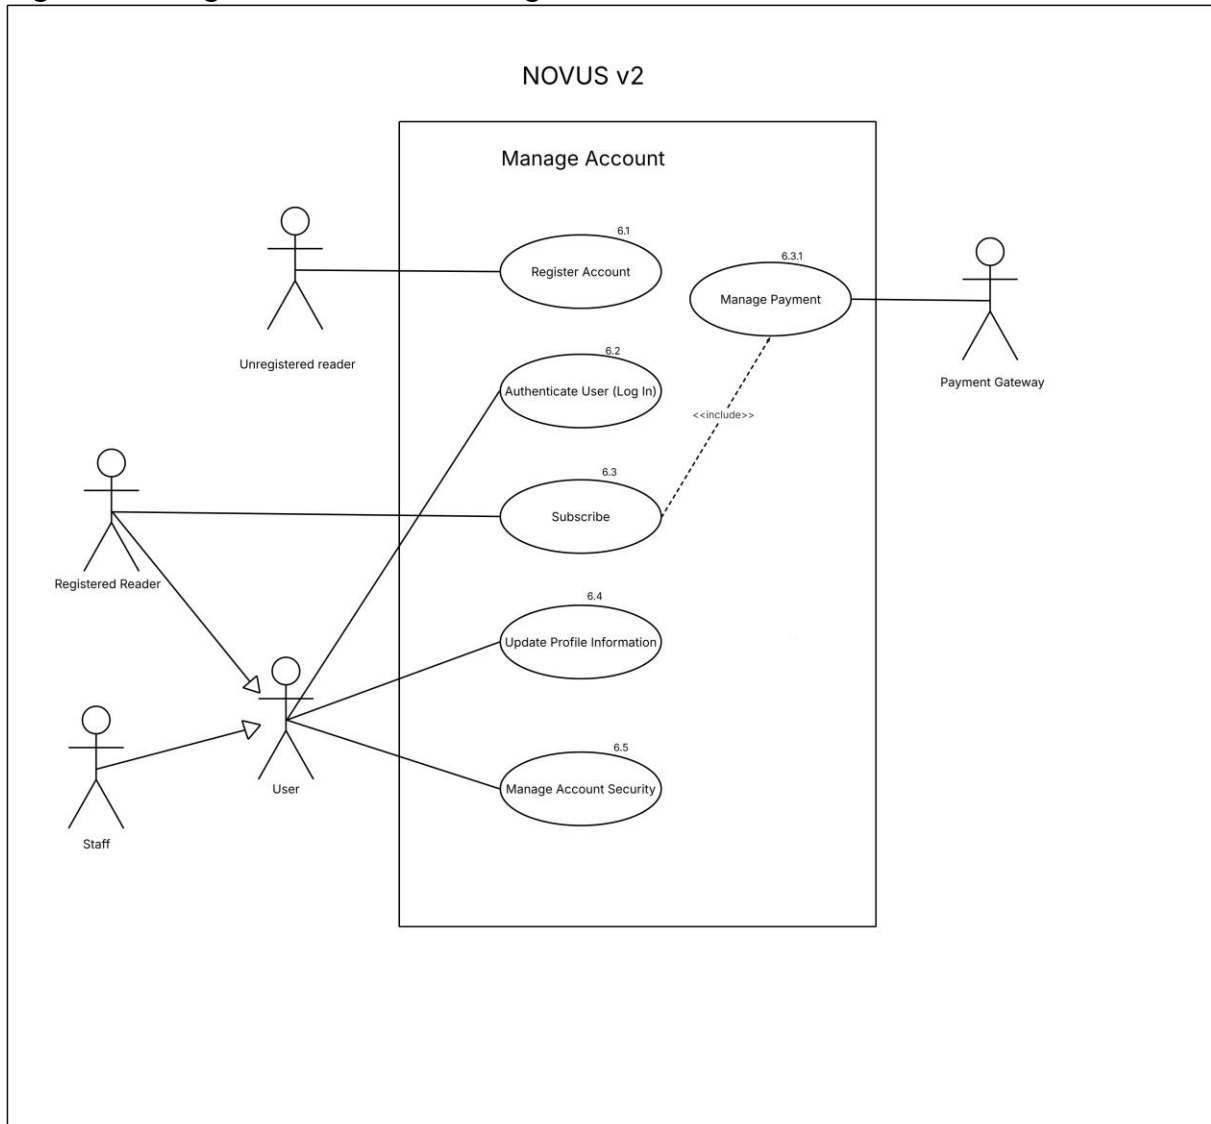

Use Case Name: Register Account

Use Case ID:	UC-6.1
Author	Joshua Concepcion
Purpose	Allow an Unregistered Reader to create a new reader account.
Related Use Case	None
Requirement Traceability	PR-ACC-01

Priority	High
Preconditions	• System is online • Unregistered Reader has navigated to the application's URL
Postconditions	• A new Registered Reader account is created and able to log in
Actors	• Unregistered Reader

Flow of Actions	<i>BASIC FLOW</i> 1. Unregistered Reader clicks "Log In or Sign Up." 2. System displays the registration form. 3. Reader enters their name, email, and password. 4. Reader submits the form. 5. System validates uniqueness of the email and creates the account. 6. System sends a verification email. 7. Reader verifies the email to activate the account. <i>ALTERNATE FLOW</i> <i>A1 (SSO Registration)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. <i>EXCEPTION FLOW</i> <i>E1 (Duplicate Email)</i> 1. The user submits the operation. 2. The system checks unique identifiers against existing records. 3. The system finds an existing matching record. 4. The system prevents duplicate creation. 5. The system displays a controlled message without exposing unrelated private information. 6. The user chooses the permitted recovery action. 7. The system continues only with a valid unique target. UC-6.2: Authenticate User (Log In)
	Use Case Name: Manage Account_Authenticate User (Log In)

Use Case Name: Authenticate User (Log In)

Use Case ID:	UC-6.2
Author	Joshua Concepcion
Purpose	Allow a registered User, whether a Reader or Staff member, to log in to their account.
Related Use Case	None
Requirement Traceability	PR-ACC-02
Priority	High
Preconditions	• System is online • User has a registered, active account
Postconditions	• An authenticated session is created for the User
Actors	• User (Registered Reader, Staff)
Flow of Actions	<i>BASIC FLOW</i> 1. User navigates to the login page. 2. User enters their email/username and password. 3. User submits the form. 4. System validates the credentials. 5. System creates an authenticated session and redirects the user to their dashboard. <i>ALTERNATE FLOW</i> <i>A1 (SSO Login)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it.

7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Invalid Credentials)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E2 (Suspended Account)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

UC-6.3: Subscribe

Use Case Name: Manage Account_Subscribe

Use Case Name: Subscribe

Use Case ID:	UC-6.3
Author	Joshua Concepcion
Purpose	Allow a Registered Reader to purchase a premium subscription plan, upgrading their access to Subscriber status.
Related Use Case	Includes: Manage Payment module – Subscribe to Premium Plan (UC-9.1)

Requirement Traceability	PR-ACC-03
Priority	High
Preconditions	• System is online • Registered Reader is authenticated and logged in
Postconditions	• On successful payment, the Reader's account is upgraded to Subscriber status
Actors	• Registered Reader • Payment Gateway (secondary, via include)
Flow of Actions	BASIC FLOW 1. Registered Reader selects "Subscribe." 2. System displays the available subscription plans. 3. Reader selects a plan. 4. System includes the Manage Payment module to process the transaction (UC-9.1). 5. Upon successful payment, system upgrades the Reader's account to Subscriber status. 6. System confirms the upgrade to the user. ALTERNATE FLOW A1 (Switch Plan Selection) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. ALTERNATE FLOW A2 (Existing Active Subscription) 1. The user opens the dashboard. 2. The system verifies session and permissions.

3. The system queries current records.
4. If no records match, the system displays the configured empty state.
5. If retrieval fails, the system displays a controlled error and retry option.
6. The system logs the failure when appropriate.
7. The user retries or changes the filter.

ALTERNATE FLOW

A3 (Checkout Cancellation)

1. The user chooses to cancel, discard, or leave the operation.
2. The system checks for unsaved changes or a pending transaction.
3. The system requests confirmation when the action could lose work or affect billing.
4. The user confirms cancellation.
5. The system discards only uncommitted changes or safely terminates the pending operation.
6. The system restores the last confirmed state and returns the user to the appropriate screen.
7. The system does not create an unintended version, state change, or entitlement.

EXCEPTION FLOW

E1 (Payment Failure)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.

	3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-6.4: Update Profile Information Use Case Name: Manage Account_Update Profile Information
--	---

Use Case Name: Update Profile Information

Use Case ID:	UC-6.4
Author	Joshua Concepcion
Purpose	Allow a User to update their personal profile details, such as name, avatar, bio, and preferences.
Related Use Case	None
Requirement Traceability	PR-ACC-04
Priority	Low
Preconditions	• System is online • User is authenticated and logged in
Postconditions	• Profile information is updated
Actors	• User (Registered Reader, Staff)
Flow of Actions	BASIC FLOW 1. User navigates to Account Settings. 2. User selects "Update Profile Information." 3. System displays the current profile form. 4. User edits the desired fields. 5. User saves. 6. System validates and stores the updated profile. ALTERNATE FLOW A1 (Photo Upload) 1. The user selects a file and begins upload.

2. The system validates role, target assignment, file type, file size, and upload rules.
3. The system rejects invalid files before finalization.
4. For a valid file, the system transfers it to controlled storage.
5. The system verifies transfer completion and file integrity.
6. The system creates a new version and preserves prior versions.
7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable.
8. The user retries or resumes after correcting the problem.

EXCEPTION FLOW

E1 (Invalid Input)

1. The user enters or confirms information.
2. The system validates format, range, required fields, and business rules.
3. The system identifies invalid values.
4. The system highlights the affected fields and required corrections.
5. The system prevents persistence of invalid data.
6. The user corrects the values.
7. The system validates again and resumes the flow.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

UC-6.5: Manage Account Security

Use Case Name: Manage Account_Manage Account Security

Use Case Name: Manage Account Security

Use Case ID:	UC-6.5
Author	Joshua Concepcion
Purpose	Allow a User to change their password and manage security settings such as two-factor authentication.
Related Use Case	None
Requirement Traceability	PR-ACC-05
Priority	High
Preconditions	• System is online • User is authenticated and logged in
Postconditions	• Security settings are updated; other active sessions are invalidated if the password changed
Actors	• User (Registered Reader, Staff)
Flow of Actions	BASIC FLOW 1. User navigates to Account Settings. 2. User selects "Manage Account Security." 3. System displays security options: change password, enable two-factor authentication, view active sessions. 4. User updates the desired settings. 5. User confirms the changes. 6. System applies the changes and, if the password changed, invalidates other active sessions. ALTERNATE FLOW A1 (Enable 2FA) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Incorrect Current Password)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.


MODULE 7: Manage Content Interaction

Actors: Reader (Registered Reader)

UC-7.1: Browse Featured Content

Use Case Name: Manage Content Interaction_Browse Featured Content

Figure 8. Manage Content Interaction Use Case Diagram

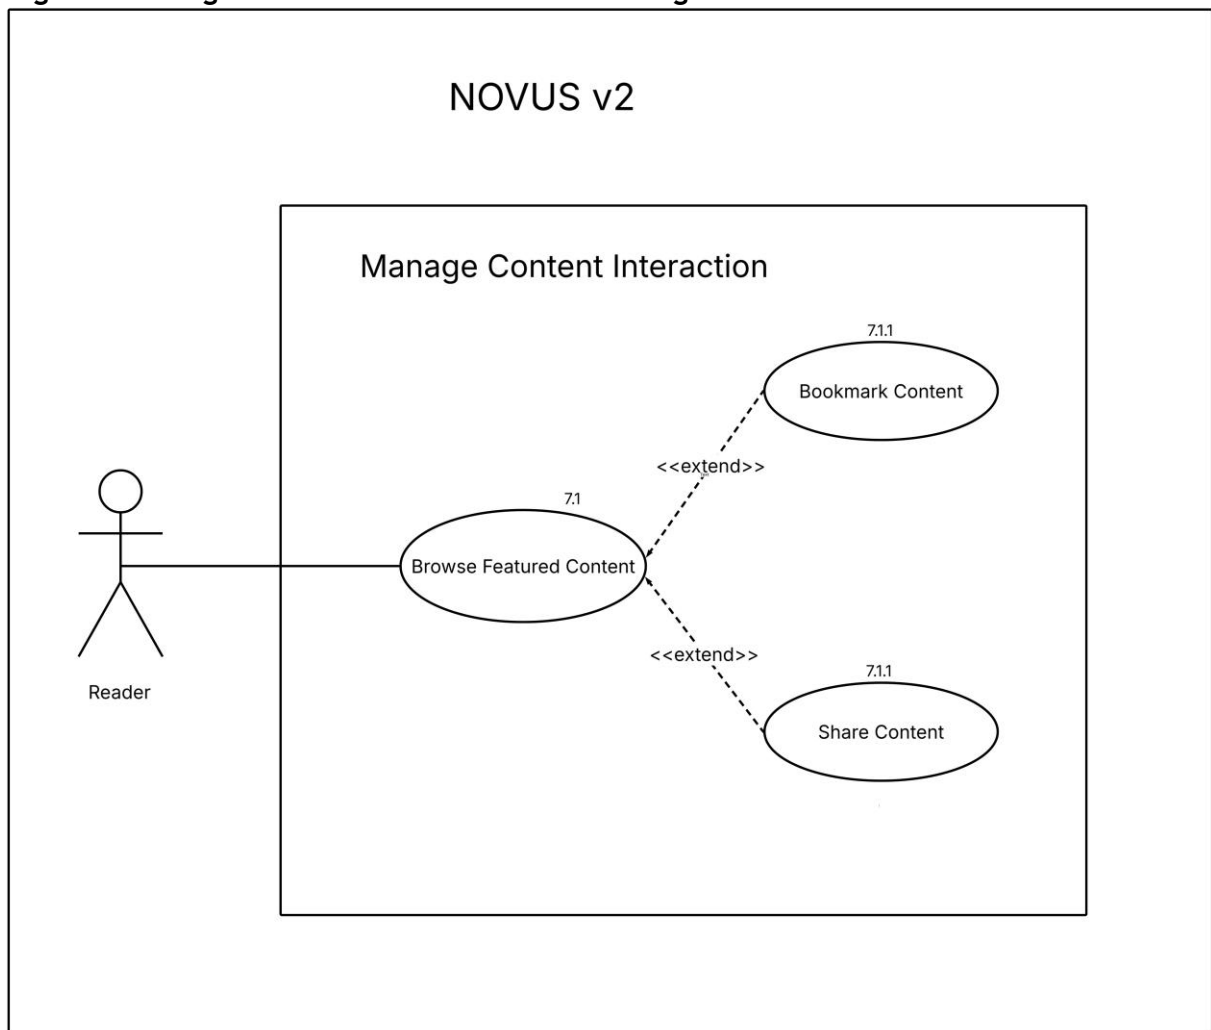

Use Case Name: Browse Featured Content

Use Case ID:	UC-7.1
Author	Joshua Concepcion

Purpose	Allow a Reader to browse curated and featured articles and issues on the platform.
Related Use Case	Extended by: Bookmark Content (UC-7.1.1), Share Content (UC-7.1.2)
Requirement Traceability	PR-INT-01
Priority	Medium
Preconditions	- System is online - Reader has access to the homepage or featured section
Postconditions	Featured content is displayed to the Reader
Actors	Reader

Flow of Actions	<i>BASIC FLOW</i> 1. Reader navigates to the homepage or featured section. 2. System retrieves and displays featured content. 3. Reader scrolls or browses through the featured items. 4. Reader selects an article to read; while viewing it, the Reader may optionally trigger Bookmark Content (UC-7.1.1) or Share Content (UC-7.1.2). <i>ALTERNATE FLOW</i> <i>A1 (Category Filter)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. <i>EXCEPTION FLOW</i> <i>E1 (No Featured Content)</i> 1. The user requests the selected list/report. 2. The system queries the current data set. 3. The system finds no matching records. 4. The system displays the empty state or configured fallback. 5. The system does not present fabricated or stale data. 6. The user adjusts filters or returns to another section.
	UC-7.1.1: Bookmark Content
	Use Case Name: Manage Content Interaction_Bookmark Content

Use Case Name: Bookmark Content

Use Case ID:	UC-7.1.1
Author	Joshua Concepcion
Purpose	Allow a Reader to save an article for later reading.

Related Use Case	• Extends: Browse Featured Content (UC-7.1)
Requirement Traceability	PR-INT-02
Priority	Low
Preconditions	• System is online • Reader is authenticated and logged in • Reader is viewing an article reached through Browse Featured Content (UC-7.1)
Postconditions	• Article is added to the Reader's bookmark list
Actors	• Reader
Flow of Actions	BASIC FLOW 1. While viewing an article reached through Browse Featured Content (UC-7.1), Reader selects "Bookmark." 2. System adds the article to the Reader's bookmark list. 3. System confirms with a visual indicator and returns control to Browse Featured Content (UC-7.1). ALTERNATE FLOW A1 (Remove Bookmark) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it.

	7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Not Logged In) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-7.1.2: Share Content Use Case Name: Manage Content Interaction_Share Content
--	---


Use Case Name: Share Content

Use Case ID:	UC-7.1.2
Author	Joshua Concepcion
Purpose	Allow a Reader to share an article link via social media or a direct link copy.
Related Use Case	• Extends: Browse Featured Content (UC-7.1)
Requirement Traceability	PR-INT-03

Priority	Low
Preconditions	• System is online • Reader is viewing an article reached through Browse Featured Content (UC-7.1)
Postconditions	• A shareable link is generated and the share action is completed
Actors	• Reader
Flow of Actions	BASIC FLOW 1. While viewing an article reached through Browse Featured Content (UC-7.1), Reader selects “Share.” 2. System displays sharing options (social platforms, copy link). 3. Reader selects a channel. 4. System generates the shareable link, completes the share action, and returns control to Browse Featured Content (UC-7.1). ALTERNATE FLOW A1 (Copy Link) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Service Unreachable) 1. The user requests the external-service operation. 2. The system validates the endpoint and configured credentials. 3. The system attempts the connection or transaction. 4. The external service cannot be reached. 5. The system does not save unverified settings or treat the transaction as successful. 6. The system displays a controlled error and records diagnostics without exposing secrets.

	7. The user retries after correction or service recovery.
	MODULE 8: Manage Premium Content
	Actors: Subscriber
	UC-8.1: Download Digital Issues
	Use Case Name: Manage Premium Content_Download Digital Issues

Figure 9. Manage Premium Content Use Case Diagram

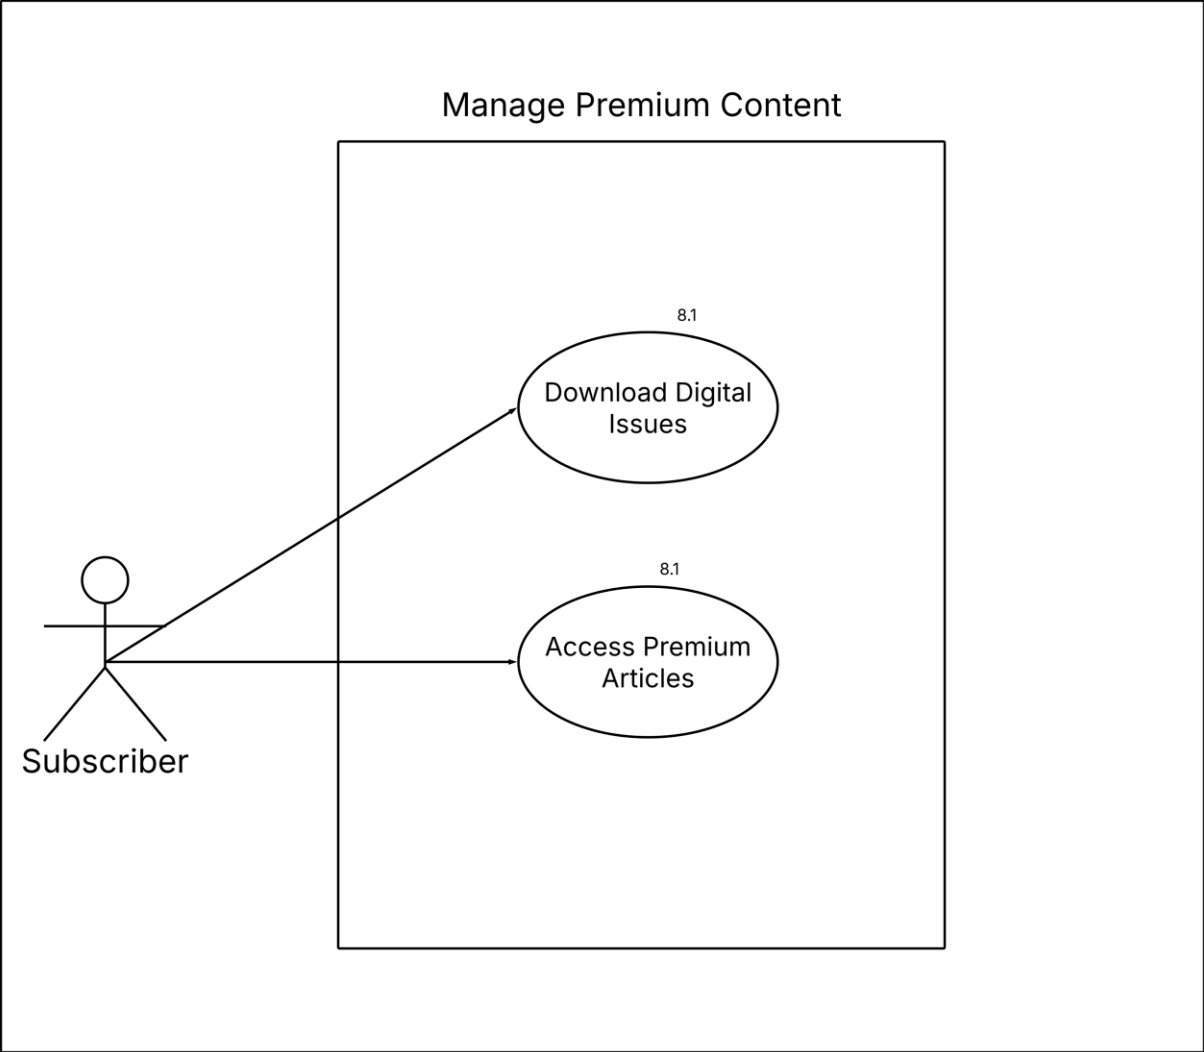

Use Case Name: Download Digital Issues

Use Case ID:	UC-8.1
Author	Roman Rico Albania
Purpose	Allow a Subscriber to download a full digital issue for offline reading.

Related Use Case	None
Requirement Traceability	PR-PRM-01
Priority	Medium
Preconditions	• System is online • Subscriber is authenticated and logged in • Subscriber has an active premium subscription
Postconditions	• The digital issue file is downloaded to the Subscriber's device
Actors	• Subscriber
Flow of Actions	<i>BASIC FLOW</i> 1. Subscriber navigates to an available issue. 2. Subscriber selects "Download Digital Issue." 3. System verifies the Subscriber's active premium status. 4. System generates or serves the downloadable file. 5. Subscriber's device saves the file. <i>ALTERNATE FLOW</i> <i>A1 (Format Choice)</i> 1. The user selects a file and begins upload. 2. The system validates role, target assignment, file type, file size, and upload rules. 3. The system rejects invalid files before finalization. 4. For a valid file, the system transfers it to controlled storage. 5. The system verifies transfer completion and file integrity. 6. The system creates a new version and preserves prior versions. 7. If interrupted, the system prevents the incomplete file from becoming active and marks it failed or resumable. 8. The user retries or resumes after correcting the problem. <i>EXCEPTION FLOW</i> <i>E1 (Expired Subscription)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules.


	4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. UC-8.2: Access Premium Articles Use Case Name: Manage Premium Content_Access Premium Articles
--	--

Use Case Name: Access Premium Articles

Use Case ID:	UC-8.2
Author	Roman Rico Albania
Purpose	Allow a Subscriber to view the full content of paywalled premium articles.
Related Use Case	None
Requirement Traceability	PR-PRM-02
Priority	High
Preconditions	• System is online • Subscriber is authenticated and logged in
Postconditions	• Full premium article content is rendered for the Subscriber
Actors	• Subscriber
Flow of Actions	BASIC FLOW 1. Subscriber selects a premium-marked article. 2. System verifies the Subscriber's active subscription status. 3. System renders the full article content, bypassing the paywall preview. 4. Subscriber reads the article. ALTERNATE FLOW A1 (Single Article Access) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules.

	4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Inactive Subscription) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. MODULE 9: Manage Payment Actors: Registered Reader; Subscriber (generalized from Registered Reader); Payment Gateway (external) UC-9.1: Subscribe to Premium Plan Use Case Name: Manage Payment_Subscribe to Premium Plan
--	--

Figure 10. Manage Payment Use Case Diagram

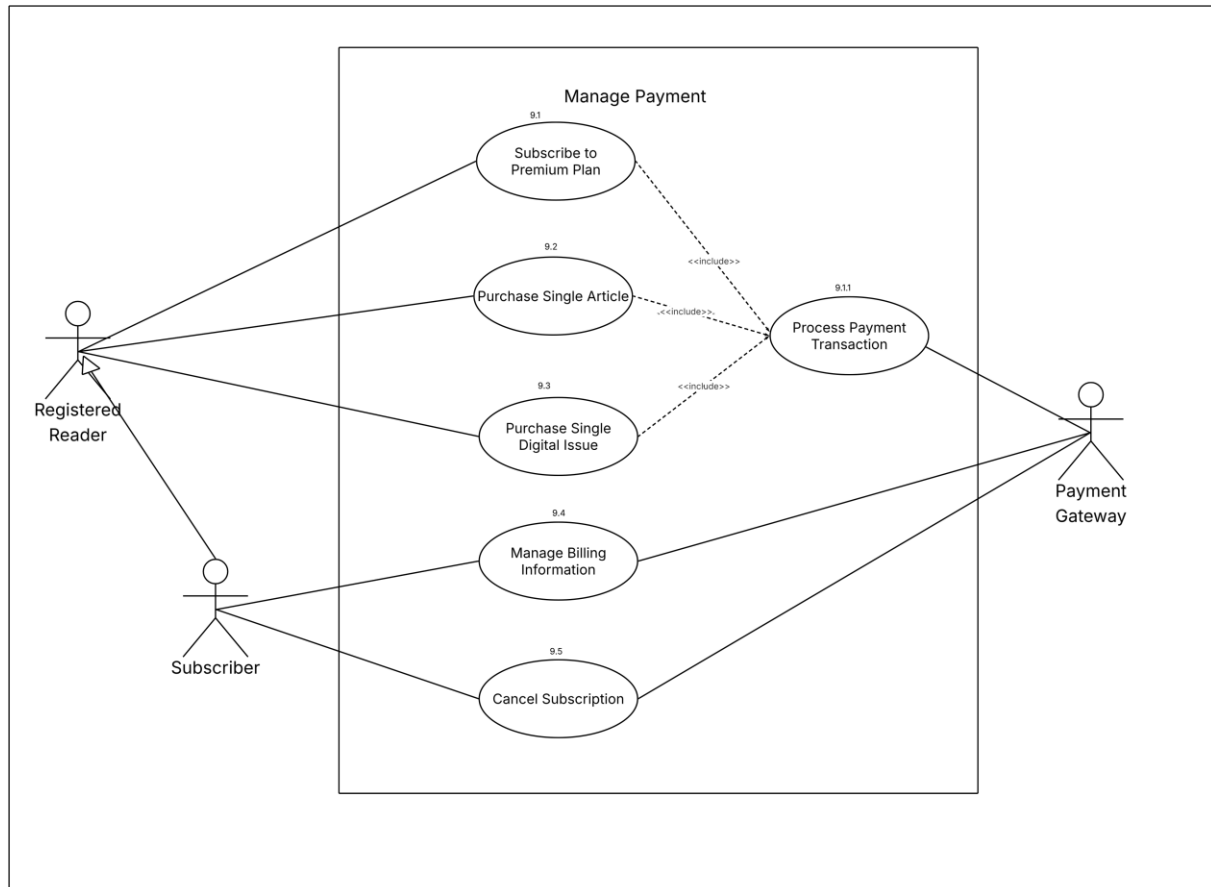

Use Case Name: Subscribe to Premium Plan

Use Case ID:	UC-9.1
Author	Joshmar Clavero
Purpose	Process a Registered Reader's purchase of a recurring premium subscription plan via the Payment Gateway.
Related Use Case	- Included by: Subscribe (UC-6.3) - Includes: Process Payment Transaction (UC-9.1.1)
Requirement Traceability	PR-PAY-01
Priority	High
Preconditions	- System is online - Registered Reader is authenticated and logged in - Payment Gateway service is reachable
Postconditions	Subscriber tier is activated on the Reader's account and the billing cycle is recorded
Actors	- Registered Reader - Payment Gateway (secondary, via include: UC-9.1.1)

Flow of Actions	BASIC FLOW 1. Registered Reader selects a subscription plan and confirms intent to subscribe. 2. System includes Process Payment Transaction (UC-9.1.1) to capture and process the payment. 3. On receiving a success token from UC-9.1.1, System activates the Subscriber tier on the Reader's account and records the billing cycle. ALTERNATE FLOW A1 (Saved Payment Method) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Transaction Declined) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
-----------------	---

	3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-9.1.1: Process Payment Transaction Use Case Name: Manage Payment_Process Payment Transaction
--	---

Use Case Name: Process Payment Transaction

Use Case ID:	UC-9.1.1
Author	Joshmar Clavero
Purpose	Serve as the central payment-processing engine that connects to the Payment Gateway, transmits transaction details, and returns a success or fail token to the invoking use case.
Related Use Case	Included by: Subscribe to Premium Plan (UC-9.1), Purchase Single Article (UC-9.2), Purchase Single Digital Issue (UC-9.3)
Requirement Traceability	PR-PAY-06
Priority	High
Preconditions	- System is online - Payment Gateway service is reachable - The invoking use case has supplied the transaction amount and context
Postconditions	Transaction is processed by the Payment Gateway and a success or fail token, along with a transaction reference, is returned to the invoking use case
Actors	- Registered Reader (indirect, via invoking use case) - Payment Gateway
Flow of Actions	BASIC FLOW 1. Invoking use case (UC-9.1, UC-9.2, or UC-9.3) triggers Process Payment Transaction and passes the transaction amount and context. 2. System connects to the Payment Gateway. 3. Reader enters or confirms payment details. 4. Payment Gateway processes the transaction.

5. Payment Gateway returns a success or fail token to the System.
6. System returns the token and transaction reference to the invoking use case.

ALTERNATE FLOW

A1 (Saved Payment Method)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Transaction Declined)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E2 (Gateway Unreachable)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.

	7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-9.2: Purchase Single Article Use Case Name: Manage Payment_Purchase Single Article
--	--

Use Case Name: Purchase Single Article

Use Case ID:	UC-9.2
Author	Joshmar Claver
Purpose	Process a Registered Reader's one-time purchase of a single premium article without a full subscription.
Related Use Case	• Includes: Process Payment Transaction (UC-9.1.1)
Requirement Traceability	PR-PAY-02
Priority	Medium
Preconditions	• System is online • Registered Reader is authenticated and logged in
Postconditions	• Reader is granted permanent access to the purchased article
Actors	• Registered Reader • Payment Gateway (secondary, via include: UC-9.1.1)
Flow of Actions	BASIC FLOW 1. Registered Reader selects a premium article and chooses "Purchase Single Article."

2. System displays the price and includes Process Payment Transaction (UC-9.1.1) to capture and process the payment.
3. On receiving a success token from UC-9.1.1, System grants the Reader permanent access to that specific article.

ALTERNATE FLOW

A1 (Bundle Purchase)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Transaction Declined)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.

	6. The system redirects to authentication or displays access denied.
	7. After authorization is restored, the user may retry.
	UC-9.3: Purchase Single Digital Issue
	Use Case Name: Manage Payment_Purchase Single Digital Issue

Use Case Name: Purchase Single Digital Issue

Use Case ID:	UC-9.3
Author	Joshmar Clavero
Purpose	Process a Registered Reader's one-time purchase of a single digital issue without a full subscription.
Related Use Case	Includes: Process Payment Transaction (UC-9.1.1)
Requirement Traceability	PR-PAY-03
Priority	Medium
Preconditions	- System is online - Registered Reader is authenticated and logged in
Postconditions	Reader is granted access and download rights to the purchased issue
Actors	- Registered Reader - Payment Gateway (secondary, via include: UC-9.1.1)
Flow of Actions	BASIC FLOW 1. Registered Reader selects an issue and chooses "Purchase Single Digital Issue." 2. System displays the price and includes Process Payment Transaction (UC-9.1.1) to capture and process the payment. 3. On receiving a success token from UC-9.1.1, System grants the Reader access and download rights to that issue. ALTERNATE FLOW A1 (Gift Issue) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation.

5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E1 (Transaction Declined)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

UC-9.4: Manage Billing Information

Use Case Name: Manage Payment_Manage Billing Information

Use Case Name: Manage Billing Information

Use Case ID:	UC-9.4
Author	Joshmar Clavero
Purpose	Allow a Subscriber to view and update their stored billing and payment details.

Related Use Case	• None
Requirement Traceability	PR-PAY-04
Priority	Medium
Preconditions	• System is online • Subscriber is authenticated and logged in
Postconditions	• Billing information is updated and validated with the Payment Gateway
Actors	• Subscriber • Payment Gateway
Flow of Actions	BASIC FLOW 1. Subscriber navigates to Billing Settings. 2. Subscriber selects “Manage Billing Information.” 3. System retrieves current billing details via the Payment Gateway (masked card info). 4. Subscriber updates the payment method or billing address. 5. System validates the update with the Payment Gateway. 6. System confirms the update. ALTERNATE FLOW A1 (Backup Payment Method) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E1 (Method Rejected) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step.

	3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry. UC-9.5: Cancel Subscription Use Case Name: Manage Payment_Cancel Subscription
--	--

Use Case Name: Cancel Subscription

Use Case ID:	UC-9.5
Author	Joshmar Clavero
Purpose	Allow a Subscriber to cancel their recurring premium subscription.
Related Use Case	• None
Requirement Traceability	PR-PAY-05
Priority	High
Preconditions	• System is online • Subscriber is authenticated and logged in • Subscriber has an active subscription

Postconditions	• Recurring charges are stopped and the account is scheduled to downgrade at the end of the billing cycle
Actors	• Subscriber • Payment Gateway
Flow of Actions	<i>BASIC FLOW</i> 1. Subscriber navigates to Billing Settings. 2. Subscriber selects “Cancel Subscription.” 3. System prompts for confirmation and an optional cancellation reason. 4. Subscriber confirms. 5. System notifies the Payment Gateway to stop future recurring charges. 6. System schedules the downgrade to Registered Reader tier at the end of the current billing cycle. <i>ALTERNATE FLOW</i> <i>A1 (Rescind Cancellation)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. <i>EXCEPTION FLOW</i> <i>E1 (Gateway Acknowledgment Failure)</i> 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it.

7. The user continues from the appropriate point after the condition is resolved.


EXCEPTION FLOW

E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

Revision Note: Expanded every documented Alternate and Exception Flow across all nine modules into explicit numbered procedures. UC-1.4 and UC-1.8 now support Editor-requested revisions for both Writer articles and Graphics Designer magazine designs. Module 9 contains no promo-code or discount-code processing.

Figure 11. Manage Notification Use Case Diagram

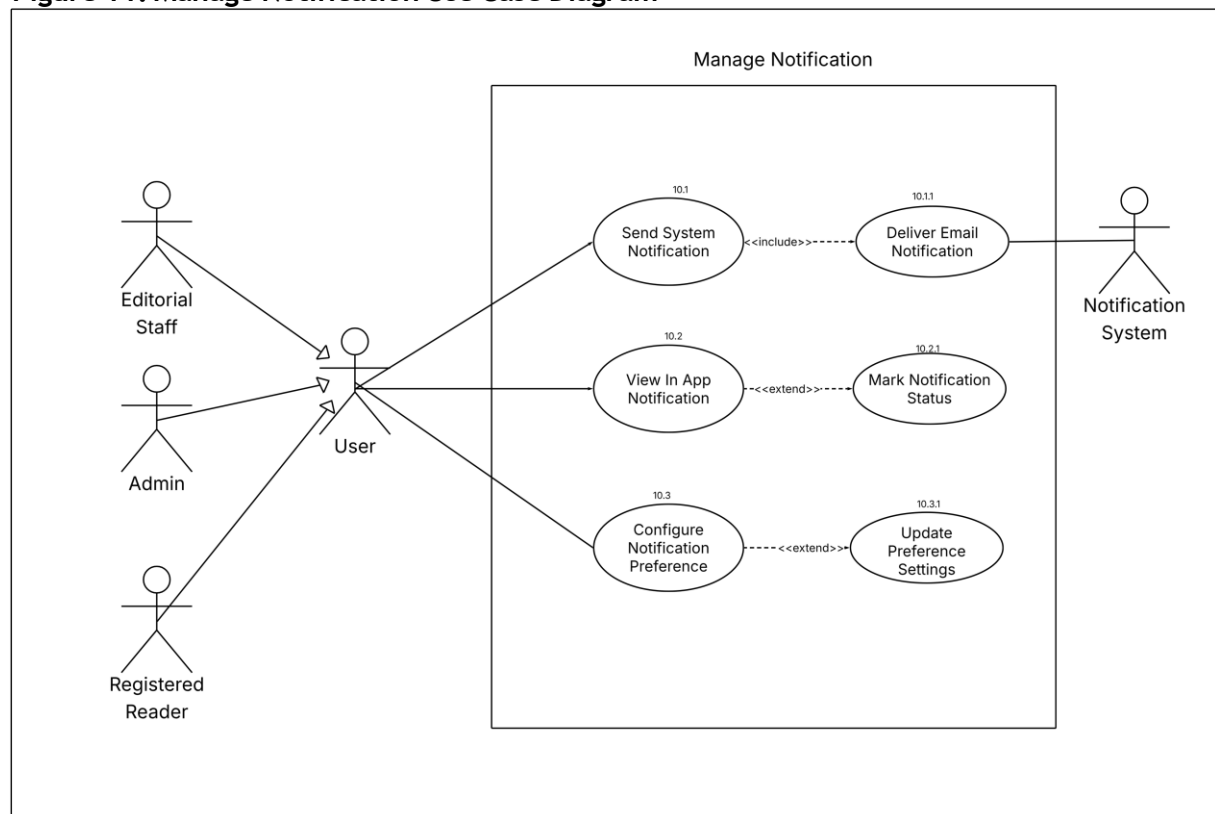

Use Case Name: Send System Notification

Use Case ID:	UC-10.1
Author	Rei Khalil Galido
Purpose	Serve as the shared, system-triggered mechanism that creates and dispatches a notification whenever a triggering event occurs in another NOVUS module (e.g., a revision request, a magazine design upload, a new staff account, a forced password reset, or account registration), and routes it to the applicable channel(s).
Related Use Case	• Includes: Deliver Email Notification (UC-10.1.1) • Invoked internally by (originating events identified in the source paper): Request Revision (UC-1.4); Upload Magazine Design (UC-1.8); Trigger Subscriber Notifications (UC-2.3.1); Add New User (UC-5.1); Force Password Reset (UC-5.2.3); Register Account (UC-6.1)
Requirement Traceability	PR-NOT-01
Priority	High
Preconditions	• System is online • An originating use case has reached a point in its flow that requires notifying a User, and has supplied the recipient, event type, and message content
Postconditions	• A notification record is created and associated with the recipient • The notification is dispatched to the applicable channel(s) – in-app and/or email, via UC-10.1.1 • Delivery status is recorded and returned to the originating use case
Actors	• System (primary – internal trigger, invoked via include from the originating use case) • User – Editorial Staff, Admin, or Registered Reader (recipient) • Notification System / Email Service (secondary, via include: UC-10.1.1 – email channel only)
Flow of Actions	BASIC FLOW 1. An originating use case (e.g., Request Revision UC-1.4, Upload Magazine Design UC-1.8, Trigger Subscriber Notifications UC-2.3.1, Add New User UC-5.1, Force Password Reset UC-5.2.3, or Register Account UC-6.1) reaches the point in its flow where the source specifies that the system notifies a role or sends the user a message.

	2. The originating use case invokes Send System Notification, supplying the recipient, event type, and message content. 3. System creates a notification record and associates it with the recipient User. 4. System determines the delivery channel(s) required for the event (in-app, email, or both), consistent with the channel options documented for Trigger Subscriber Notifications (email, push, in-app). 5. System stores the notification for in-app display and, where an email channel applies, includes Deliver Email Notification (UC-10.1.1) to dispatch the email through the Notification System / Email Service. 6. System returns the delivery status to the originating use case. ALTERNATE FLOW — A1 (Segment / Batch Notification) 1. The originating use case (e.g., Trigger Subscriber Notifications, UC-2.3.1) supplies a recipient segment instead of a single recipient. 2. System resolves the segment to its member Users. 3. System creates an individual notification record for each member of the segment. 4. System proceeds with channel determination and dispatch for each member per Basic Flow steps 4-6. EXCEPTION FLOW — E1 (Notification Failure) 1. System successfully creates the notification record. 2. System attempts to dispatch the notification. 3. The notification service fails to deliver the message. 4. System keeps the originating use case's record state unchanged; no partial state change is committed on account of the failed notification. 5. System records the failed delivery and marks the notification for retry or follow-up. 6. The affected user can see a follow-up indicator on their dashboard. 7. System retries delivery when the notification service becomes available.
Source Note	<i>Grounded directly in UC-1.4 Request Revision (Basic Flow step 11 and Exception Flow E1, which names "the notification service" and its retry behavior), UC-1.8 Upload Magazine Design (Editor is notified), UC-2.3.1 Trigger Subscriber Notifications (full use case), UC-5.1 Add New User ("sends setup credentials to the user's email"), UC-5.2.3 Force Password Reset ("emails the user a reset link"), and UC-c.1 Register Account ("sends a verification email"). The supplied UML draws an association from User to Send System Notification; the source narrative for every originating event shows the System triggering the notification internally rather than a User</i>

	<i>opening a screen to compose one. User is documented here as the recipient/beneficiary of the underlying event, consistent with the UML's inheritance structure, while the Flow of Actions reflects the system-internal trigger shown in the source.</i>
--	--

Use Case Name: Deliver Email Notification

Use Case ID:	UC-10.1.1
Author	Rei Khalil Galido
Purpose	Serve as the shared extension that connects to the Notification System / Email Service to construct and dispatch a transactional email for a given notification event.
Related Use Case	• Included by: Send System Notification (UC-10.1)
Requirement Traceability	PR-NOT-04
Priority	High
Preconditions	• System is online • Notification System / Email Service is reachable • The invoking use case (UC-10.1) has supplied the recipient email address, event type, and message content
Postconditions	• The email is transmitted to the Notification System / Email Service • A delivery status (success or failure) is returned to Send System Notification (UC-10.1)
Actors	• System (primary, invoked via include) • Notification System / Email Service (secondary)
Flow of Actions	BASIC FLOW 1. Send System Notification (UC-10.1) invokes Deliver Email Notification, supplying the recipient email address, event type, and message content. 2. System selects the email template/content appropriate to the supplied event type (e.g., account verification, new-user setup credentials, password reset link, revision notification, design review notification, subscriber announcement). 3. System populates the template with the event-specific data provided by the invoking use case. 4. System connects to the Notification System / Email Service and transmits the email.

	5. Notification System / Email Service dispatches the email and returns a delivery status. 6. System returns the delivery status to Send System Notification (UC-10.1). ALTERNATE FLOW — A1 (Digital Receipt Template) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW — E1 (Undeliverable Email) 1. System attempts to transmit the email via the Notification System / Email Service. 2. The Notification System / Email Service reports the address as undeliverable, or the connection fails. 3. System does not mark the originating event's own postconditions (e.g., password reset, verification) as complete on account of the failed email alone. 4. System records the failed delivery and marks it for retry or follow-up. 5. System retries delivery when the Notification System / Email Service becomes available, or surfaces the failure so the underlying configuration can be corrected (see UC-4.2 Configure System Integrations).
Source Note	<i>Grounded in the technical architecture: "Resend: A developer-focused email service utilized to reliably construct and dispatch transactional communications, including system notifications and digital receipts," and the Component Diagram note that "Resend supporting transactional email delivery." The Exception Flow reuses the exact scenario name ("Undeliverable Email") already documented for UC-5.2.3 Force Password Reset, and the retry behavior documented in UC-1.4 Exception Flow E1.</i>

Use Case Name: View In-App Notification

Use Case ID:	UC-10.2
--------------	---------

Author	Rei Khalil Galido
Purpose	Allow a logged-in User to open a central Notification Panel to view recent notification events, with unread items visually marked, and navigate directly to the related screen.
Related Use Case	• Includes: Mark Notification Status (UC-10.2.1)
Requirement Traceability	PR-NOT-02
Priority	Medium
Preconditions	• System is online • Notification System / Email Service is reachable • The invoking use case (UC-10.1) has supplied the recipient email address, event type, and message content
Postconditions	• Notification Panel is displayed showing the User's recent notification events, newest first, with unread items visually marked
Actors	• User (Editorial Staff, Admin, Registered Reader)
Flow of Actions	BASIC FLOW 1. User taps the notification bell icon from any authenticated screen. 2. System opens the Notification Panel, listing recent events, newest first, with unread items visually marked. 3. User taps a notification. 4. System includes Mark Notification Status (UC-10.2.1) to mark the selected notification read. 5. System navigates the User directly to the screen relevant to that notification. ALTERNATE FLOW — A1 (Mark All As Read) 1. User taps "Mark all as read." 2. System includes Mark Notification Status (UC-10.2.1) for all of the User's unread notifications. 3. System clears the unread markers and displays a confirmation label. 4. User remains on the Notification Panel. EXCEPTION FLOW — E1 (Notification Load Failure) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step.

	3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved.
Source Note	<i>Basic Flow and Alternate Flow A1 are grounded directly in the source's "Viewing In-App Notifications" user story (all roles, system-wide): tapping the bell icon, the Notification Panel, unread markers, tap-to-navigate, and "Mark all as read." No dedicated Exception Flow is narrated in the source for this screen; E1 is modeled on the equivalent pattern already used for other "View" use cases (UC-1.S View Pipeline Dashboard E1 "Data Load Failure"; UC-5.2 View User Directory E1 "Load Failure"). No E-AUTH is included, consistent with the source's pattern for read-only View use cases (UC-1.S, UC-1.10, UC-5.2, UC-7.1), none of which carry E-AUTH.</i>

Use Case Name: Mark Notification Status

Use Case ID:	UC-10.2.1
Author	Rei Khalil Galido
Purpose	Serve as the shared extension that updates a notification's read/unread status for the User, individually or in bulk.
Related Use Case	• Included by: View In-App Notification (UC-10.2)
Requirement Traceability	PR-NOT-05
Priority	Low
Preconditions	• System is online • User is authenticated and logged in • The invoking use case (UC-10.2) has supplied the target notification(s) and the new status
Postconditions	• The specified notification(s) unread marker is updated and reflected the next time the Notification Panel is displayed
Actors	• User (Editorial Staff, Admin, Registered Reader)
Flow of Actions	BASIC FLOW

1. View In-App Notification (UC-10.2) invokes Mark Notification Status, supplying the target notification and "read" as the new status.
2. System validates that the target notification belongs to the requesting User.
3. System updates the notification's status to read.
4. System returns the updated status to View In-App Notification (UC-10.2).

ALTERNATE FLOW — A1 (Bulk Mark As Read)

1. View In-App Notification (UC-10.2) supplies the full set of the User's unread notifications.
2. System validates that all target notifications belong to the requesting User.
3. System updates all target notifications to read in a single operation.
4. System returns the updated count/status to View In-App Notification (UC-10.2).

EXCEPTION FLOW — E1 (Update Failure)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.

EXCEPTION FLOW — E-AUTH (Authorization or Session Failure)

1. The user initiates the protected operation.
2. The system validates the current session and required role or ownership permission immediately before the state-changing action.
3. The system detects an expired session or missing permission.
4. The system blocks the state change and does not partially commit it.
5. The system records the denied attempt when required by security policy.
6. The system redirects to authentication or displays access denied.
7. After authorization is restored, the user may retry.

Source Note	<i>Basic Flow and Alternate Flow A1 are grounded in the source's "tap a notification → system marks it read" / "Mark all as read" behavior. E-AUTH is included by analogy to Bookmark Content (UC-7.1.1) — the source's closest equivalent "save/flag a personal status while viewing content" action, which carries E-AUTH.</i>
-------------	--

Use Case Name: Configure Notification Preference

Use Case ID:	UC-10.3
Author	Rei Khalil Galido
Purpose	Allow a User to specify which notification channel(s) – email and in-app, per the channel options already documented for Trigger Subscriber Notifications (email, push, in-app) – they wish to receive on their account.
Related Use Case	• Includes: Update Preference Settings (UC-10.3.1)
Requirement Traceability	PR-NOT-03
Priority	Low
Preconditions	• System is online • User is authenticated and logged in
Postconditions	• The User's notification preference settings are updated and applied to future notification dispatch
Actors	• User (Editorial Staff, Admin, Registered Reader)
Flow of Actions	BASIC FLOW 1. User navigates to Account Settings. 2. User selects "Notification Preferences." 3. System displays the current channel selection (email, in-app) for each notification category. 4. User edits the desired channel toggles. 5. User saves. 6. System includes Update Preference Settings (UC-10.3.1) to validate and persist the change. 7. System confirms the update to the User. ALTERNATE FLOW – A1 (Reset to Default) 1. User selects "Reset to Default."

	2. System includes Update Preference Settings (UC-10.3.1), supplying the platform default channel selection for each notification category. 3. System persists the default values as the User's current preference. 4. System confirms the reset to the User. EXCEPTION FLOW — E1 (Invalid Configuration) 1. The user reaches the condition described by this flow. 2. The system detects the condition during the relevant basic-flow step. 3. The system validates the current record, permission, and business rules. 4. The system performs the permitted alternate handling or blocks the invalid operation. 5. The system explains the resulting state and required next action. 6. The system records the event when audit/security rules require it. 7. The user continues from the appropriate point after the condition is resolved. EXCEPTION FLOW — E-AUTH (Authorization or Session Failure) 1. The user initiates the protected operation. 2. The system validates the current session and required role or ownership permission immediately before the state-changing action. 3. The system detects an expired session or missing permission. 4. The system blocks the state change and does not partially commit it. 5. The system records the denied attempt when required by security policy. 6. The system redirects to authentication or displays access denied. 7. After authorization is restored, the user may retry.
Source Note	<i>NOT SPECIFIED IN THE SOURCE as a stand-alone screen — no explicit "notification preferences" behavior was found in the paper. This use case is structured only by analogy to the account-settings pattern documented for Update Profile Information (UC-c.4) and Manage Account Security (UC-c.5), and the "Revert to Default" / "Invalid Configuration" pattern documented for Update Site Theme and Layout (UC-4.1), since Module 10 requires it per the supplied UML. Channel names (email, in-app) are the only channel vocabulary explicitly present in the source (Trigger Subscriber Notifications, UC-2.3.1). E-AUTH is included by analogy to UC-c.4 / UC-c.5, both of which carry it as personal, state-changing settings use cases.</i>

Use Case Name: Update Notification Preference

Use Case ID:	UC-10.3.1
Author	Rei Khalil Galido
Purpose	Serve as the shared extension that validates and persists a User's notification-channel preference values.
Related Use Case	Included by: Configure Notification Preference (UC-10.3)
Requirement Traceability	PR-NOT-06
Priority	Low
Preconditions	- System is online - User is authenticated and logged in - The invoking use case (UC-10.3) has supplied the new preference values, or a reset instruction
Postconditions	The updated preference values are persisted and take effect for future notification dispatch
Actors	Registered User
Flow of Actions	BASIC FLOW - Configure Notification Preference (UC-10.3) supplies the new channel selections for each notification category. - System validates the submitted values against the supported channels (email, in-app, per the channel options documented for Trigger Subscriber Notifications). - System persists the updated preference record for the User. - System returns the confirmation to Configure Notification Preference (UC-10.3). ALTERNATE FLOW — A1 (Reset to Default Values) - Configure Notification Preference (UC-10.3) supplies a reset instruction instead of explicit values. - System looks up the platform default channel selection for each notification category. - System persists the default values as the User's current preference. - System returns the confirmation to Configure Notification Preference (UC-10.3). EXCEPTION FLOW — E1 (Persistence Failure)

1. The user reaches the condition described by this flow.
2. The system detects the condition during the relevant basic-flow step.
3. The system validates the current record, permission, and business rules.
4. The system performs the permitted alternate handling or blocks the invalid operation.
5. The system explains the resulting state and required next action.
6. The system records the event when audit/security rules require it.
7. The user continues from the appropriate point after the condition is resolved.