

```

clear
% Import data from text file
%TimeTemp = readtable("\
\apporto.com\dfs\UHCL\Users\1915097_uhcl\Documents\Thesis\TimeTemp.csv");
%TimeTemp = readtable("\
\apporto.com\dfs\UHCL\Users\1915097_uhcl\Documents\Thesis\TimeTemp_2026_Sep_06_Sun_1
3_59_53.csv");
%TimeTemp = readtable("\
\apporto.com\dfs\UHCL\Users\1915097_uhcl\Documents\Thesis\TimeTemp_2026_Sep_07_Mon_1
0_00_49.csv");
TimeTemp = readtable("\
\apporto.com\dfs\UHCL\Users\1915097_uhcl\Documents\Thesis\TimeTemp_2026_Sep_08_Tue_1
4_31_01.csv")

```

TimeTemp = 360000x9 table

...

	now	Temp1	Temp2	Temp3	Temp4	Temp5	Temp6	Temp7
1	1.7889e+09	21.6250	22.1250	21.8750	22.2500	21.8750	22.0625	22
2	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
3	1.7889e+09	21.6250	22.1250	21.8750	22.3125	21.9375	22	22
4	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22.0625
5	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22.0625	22
6	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22.0625	22
7	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
8	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
9	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.9375	22	22.0625
10	1.7889e+09	21.5625	22.0625	21.8750	22.3125	21.8750	22	22
11	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
12	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.8750	22	22
13	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.8750	22	22.0625
14	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22.0625	22
15	1.7889e+09	21.5625	22.0625	21.8125	22.2500	21.8750	22.0625	22
16	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22.0625	22
17	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22	22
18	1.7889e+09	21.6250	22.0625	21.9375	22.3125	21.8750	22	22
19	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22.0625
20	1.7889e+09	21.5625	22.0625	21.8125	22.3125	21.8750	22	22.0625
21	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22.0625	22
22	1.7889e+09	21.6250	22.1250	21.8750	22.2500	21.8750	22	22


	now	Temp1	Temp2	Temp3	Temp4	Temp5	Temp6	Temp7
23	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.9375	22.0625	21.9375
24	1.7889e+09	21.6250	22	21.8750	22.2500	21.8750	22.0625	22
25	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.8750	22.0625	22
26	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
27	1.7889e+09	21.5625	22.0625	21.8125	22.2500	21.8750	22.0625	22
28	1.7889e+09	21.5625	22.1250	21.8125	22.2500	21.9375	22	22
29	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
30	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22	22
31	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
32	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22	22
33	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22	22
34	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.8750	22	22
35	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
36	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22.0625	22
37	1.7889e+09	21.5625	22.1250	21.8750	22.3125	21.8750	22	22
38	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
39	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22.0625	22
40	1.7889e+09	21.6250	22.0625	21.8750	22.2500	21.9375	22	22
41	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22.0625	22
42	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22.0625	22.0625
43	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.9375	22.0625	22
44	1.7889e+09	21.5625	22.0625	21.8125	22.2500	21.8750	22	22.0625
45	1.7889e+09	21.5625	22.0625	21.8125	22.2500	21.8750	22	22
46	1.7889e+09	21.5625	22.0625	21.8125	22.1875	21.8750	22	22
47	1.7889e+09	21.6250	22	21.8750	22.2500	21.8750	22	22
48	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
49	1.7889e+09	21.5625	22	21.8125	22.2500	21.9375	22	22
50	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
51	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
52	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.9375	21.9375	22.0625
53	1.7889e+09	21.5625	22.0625	21.8750	22.2500	21.8750	22	22
54	1.7889e+09	21.6250	22.0625	21.8125	22.2500	21.8750	22	21.9375
55	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	22	22

	now	Temp1	Temp2	Temp3	Temp4	Temp5	Temp6	Temp7
56	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
57	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	22	22
58	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	22	22
59	1.7889e+09	21.6250	22	21.8750	22.2500	21.8750	22	22
60	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	22	22
61	1.7889e+09	21.6250	22	21.8750	22.1875	21.8750	22	22.0625
62	1.7889e+09	21.5625	22.0625	21.8125	22.1875	21.9375	22	22
63	1.7889e+09	21.6250	22	21.8750	22.2500	21.9375	22	22
64	1.7889e+09	21.5000	22.0625	21.8125	22.2500	21.8750	22	22
65	1.7889e+09	21.5625	22.0625	21.8750	22.1875	21.8750	21.9375	22
66	1.7889e+09	21.6250	22	21.8125	22.1875	21.8750	22	22
67	1.7889e+09	21.6250	21.9375	21.8750	22.1875	21.8750	22	22
68	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
69	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	21.9375	22
70	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
71	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	21.9375	22
72	1.7889e+09	21.5625	22	21.8125	22.2500	21.8750	21.9375	22
73	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	21.9375	22
74	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
75	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
76	1.7889e+09	21.5625	22	21.8125	22.1875	21.8125	22	21.9375
77	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	21.9375	22.0625
78	1.7889e+09	21.5625	22	21.8125	22.2500	21.8750	21.9375	22
79	1.7889e+09	21.5625	22	21.8125	22.1875	21.8750	21.9375	22
80	1.7889e+09	21.5625	22	21.8750	22.1875	21.8750	22	22
81	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
82	1.7889e+09	21.5625	22	21.8125	22.2500	21.8750	21.9375	22
83	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
84	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
85	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	22	22
86	1.7889e+09	21.5625	22	21.8125	22.2500	21.8750	21.9375	22
87	1.7889e+09	21.5625	21.9375	21.8750	22.2500	21.8750	21.9375	22
88	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8125	21.9375	22

	now	Temp1	Temp2	Temp3	Temp4	Temp5	Temp6	Temp7
89	1.7889e+09	21.5625	22	21.8750	22.2500	21.8750	21.9375	22
90	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
91	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.8750	22
92	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
93	1.7889e+09	21.5000	21.9375	21.8750	22.1875	21.8750	21.8750	22
94	1.7889e+09	21.5000	22	21.8125	22.1875	21.8750	21.9375	22
95	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8750	21.9375	22
96	1.7889e+09	21.5000	21.9375	21.8750	22.1875	21.8750	22	22
97	1.7889e+09	21.5625	21.9375	21.8125	22.1875	21.8750	21.9375	21.9375
98	1.7889e+09	21.5625	21.9375	21.8125	22.1875	21.8750	21.9375	22
99	1.7889e+09	21.5625	21.9375	21.8750	22.1875	21.8125	21.9375	22
100	1.7889e+09	21.5625	21.9375	21.8750	22.1250	21.8125	21.9375	22

⋮

```
% Calculate intersample interval
dt = [1;diff(TimeTemp{:,"now"})];
figure(); plot(log10(log10(dt)))
title("duration of intersample interval")
ylabel("log10(log10(seconds))")
xlabel("interval")
```

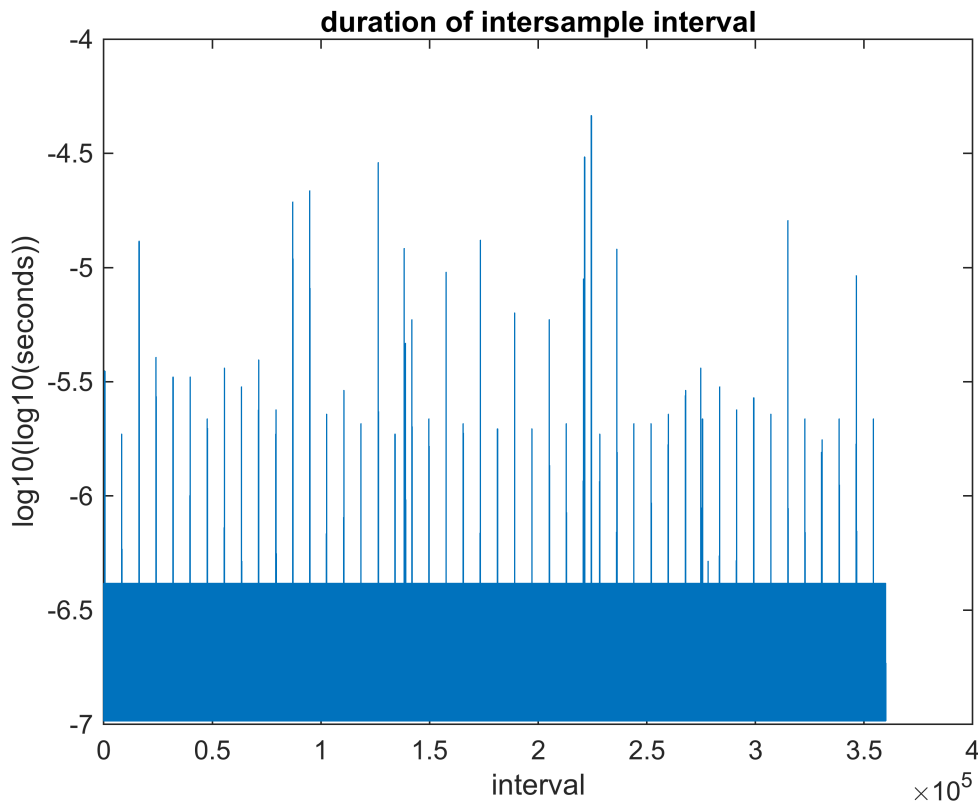

```
%compute the Allan Variance of the Intersample Interval Duration
```

```
dt_tau = 1:height(dt)/2;  
dt_avar=allanvar(dt,dt_tau); % tau channel
```

```
%Compute the slope of the clock Allan Variance over Tau
```

```
idx = dt_tau >= 1 & dt_tau <= 1000; % sample region  
% linear fit in log10-log10 space;  
p = polyfit(log10(dt_tau(idx)), log10(dt_avar(idx)), 1);  
disp("LogLog Slope:" + p(1)) % p(1) = slope;
```

```
LogLog Slope:-0.9701
```

```
disp("LogLog Intercept:" + p(2)) % p(2) = intercept;
```

```
LogLog Intercept:-12.878
```


```
disp("AVAR(\tau)=" + p(2) + "\tau^"+ p(1))
```

```
AVAR(\tau)=-12.878\tau^-0.9701
```

```
yfit = 10.^(p(1)*log10(dt_tau) + p(2)); %create the best fit line
```

```
figure();  
loglog(dt_tau, dt_avar, 'b'); hold on;grid on;  
loglog(dt_tau, yfit, 'r--', 'LineWidth', 2);  
title("Population Allan Variance for the Intersample Interval Duration");
```

```
xlabel('\tau'); ylabel('AVar(\tau)');
legend("Measured", "Trendline");
hold off
```

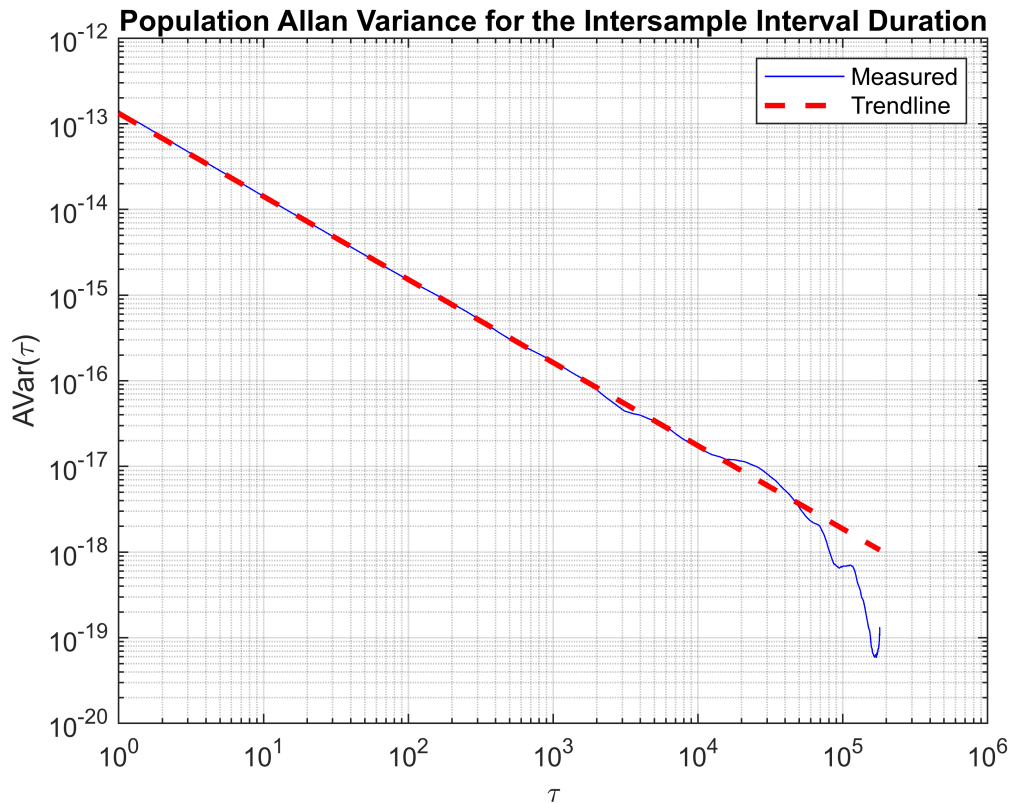

```
predictionTaus = 10.^[0;1;2;3;4;5;6];
predictedJitter = 10.^(p(1)*log10(predictionTaus) + p(2));
table(predictionTaus,predictedJitter)
```

ans = 7×2 table

	predictionTaus	predictedJitter
1	1	1.3242e-13
2	10	1.4186e-14
3	100	1.5197e-15
4	1000	1.6280e-16
5	10000	1.7440e-17
6	100000	1.8683e-18
7	1000000	2.0014e-19

```
% xlim([4.292E4 4.293E4])
% ax = gca;
% chart = ax.Children(1);
% datatip(chart,42923,1.00245);
```

```
%
% TimeTemp = TimeTemp(1:42923,:);

%Create a shortcut to point to the rawdata
allsensors = ["Temp1","Temp2","Temp3","Temp4","Temp5","Temp6","Temp7","Temp8"];


%human readable datetime
%TimeTemp{:, "Days"}=datetime(TimeTemp{1,"now"},'ConvertFrom','posixtime','timezone','America/Chicago');
TimeTemp{:, "Days"} = TimeTemp{:, "now"}/(60*60*24) + datenum(1970,1,1,-5,0,0);%use a -5 offset for UCT to CST
%TimeTemp{:, "DeltaT"}=TimeTemp{:, "now"}-TimeTemp{1,"now"}; %Calculate
```

```
%take the moving average after eliminating outliers from the moving median
% 0. Compute the Per Row Median
TimeTemp{:, "median"}=median(TimeTemp{:,allsensors},2);
% 1. Compute deviation from median
TimeTemp{:, "MedianDifference"} = abs(TimeTemp{:,allsensors} - TimeTemp{:, "median"});
% 2. Build mask of good sensors
TimeTemp{:, "mask"} = TimeTemp{:, "MedianDifference"} <= 0.25; % Nx8 logical
% 3. Zero out bad sensors
TimeTemp{:, "goodVals"} = TimeTemp{:,allsensors} .* TimeTemp{:, "mask"};
% 4. Count good sensors per row
TimeTemp{:, "numGood"} = sum(TimeTemp{:, "mask"}, 2);
% 5. Compute robust average
robustAvg = sum(TimeTemp{:, "goodVals"}, 2) ./ TimeTemp{:, "numGood"};
% 6. Handle rows with zero good sensors
robustAvg(TimeTemp{:, "numGood"} == 0) = NaN;
TimeTemp{:, "robustAvg"}=robustAvg;

clear robustAvg
```

```
% Smooth robustAvg data
[TimeTemp.robustAvgSmoothGauss,winSize] =
smoothdata(TimeTemp{:, "robustAvg"}, "gaussian", 6000, ...
    "SamplePoints", TimeTemp.now);
% Display results
figure
plot(TimeTemp.Days, TimeTemp.median, "SeriesIndex", 6, ...
    "DisplayName", "Input data: robustAvg")
hold on
plot(TimeTemp.Days, TimeTemp.robustAvgSmoothGauss, "SeriesIndex", 1, "LineWidth", 1.5,
    ...
    "DisplayName", "Smoothed data: robustAvgSmoothGauss")
hold off
title("Moving window size: " + string(winSize));
legend
```


```
ylabel('Temperature (\circC)')
xlabel("Time");datetick('x', 'HH:MM:SS');
```

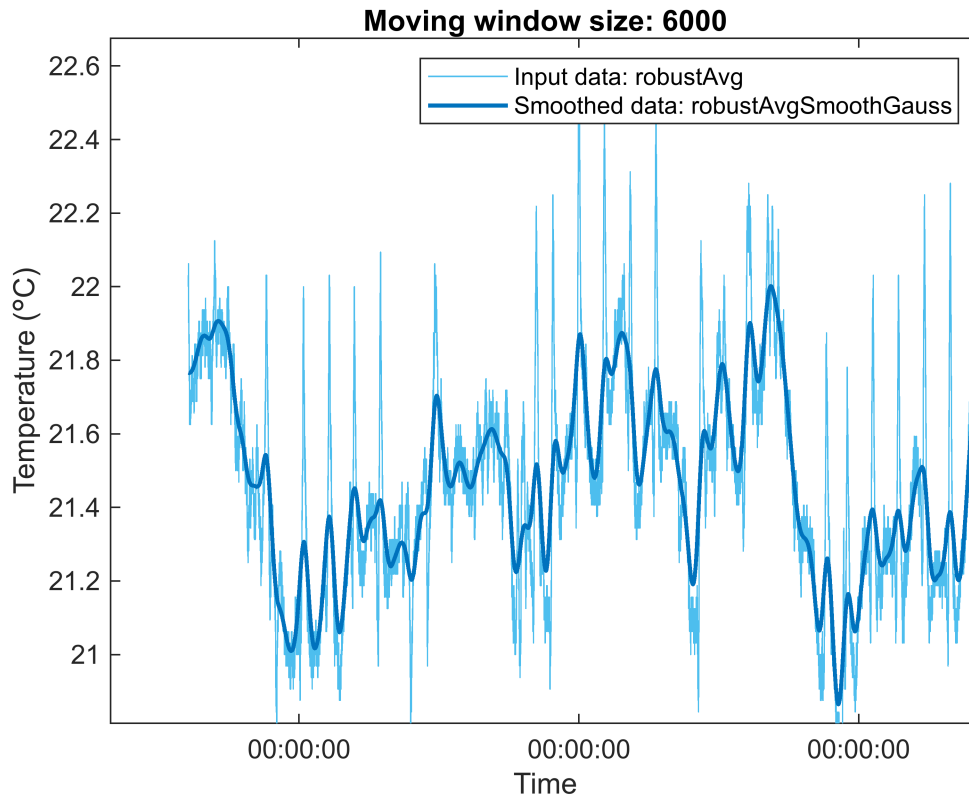

```
clear winSize
```

```
%Plot the robustAverage
figure()
subplot(2,1,1)
scatter(TimeTemp{:, "Days"}, TimeTemp{:, "robustAvg"})
%ylim([21 23.5])
xlabel('Time');datetick('x', 'HH:MM:SS'); % or 'yyyy-mm-dd HH:MM:SS'
ylabel('Temperature (\circC)');
title("robustAvg Temperature over Time")
grid on

%Plot the point to point difference
dT = [0;diff(TimeTemp{:, "robustAvg"})];
subplot(2,1,2)
scatter(TimeTemp{:, "Days"}, dT)
%ylim([-1 1]*0.15)
datetick('x', 'HH:MM:SS'); % or 'yyyy-mm-dd HH:MM:SS'
xlabel('Time');
ylabel('Change in Temperature (\Delta\circC)');
title("Change in robustAvg Temperature over Time")
grid on
```

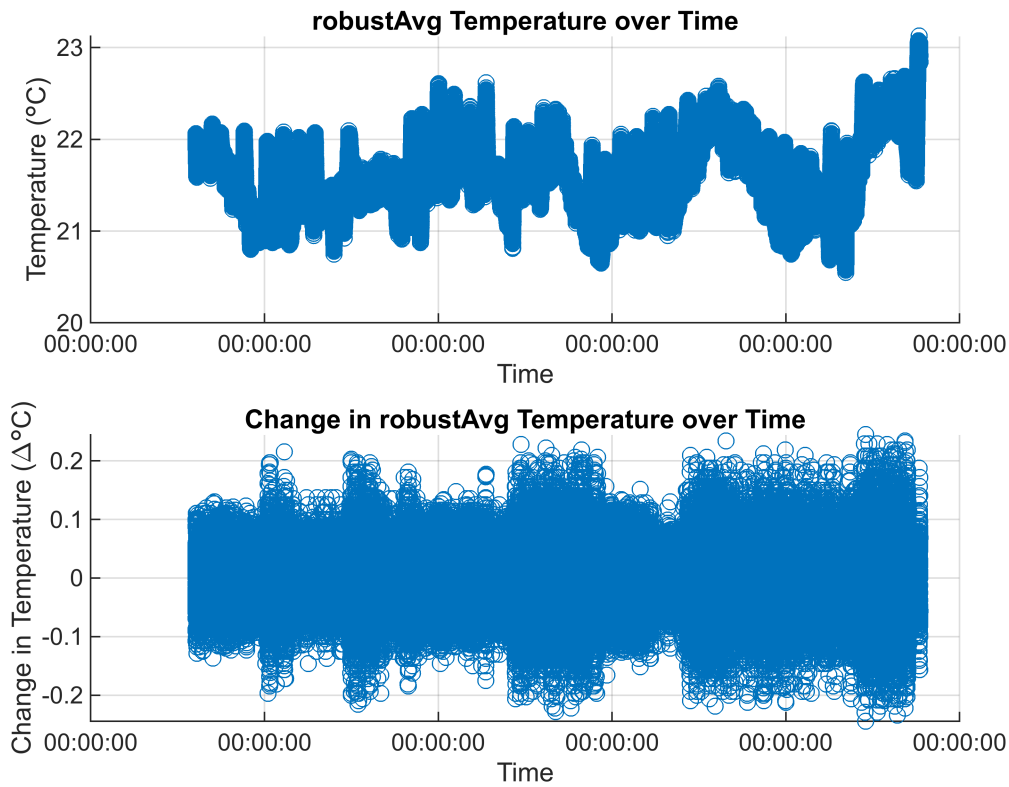


```
%plot dtime over Temp
%plot dtime over dTemp
figure()


subplot(2,1,1)
scatter(TimeTemp.robustAvg,dt)
title("Comparison of clock Intersample Interval Duration to Robust Average Temperature")
xlabel('\circC');ylabel('seconds');

subplot(2,1,2)
scatter(dT,dt)
title("Comparison of clock Intersample Interval Duration to Change in robustAvg Temperature")
xlabel('\Delta\circC');ylabel('seconds');
```

Comparison of clock Intersample Interval Duration to Robust Average Temperature

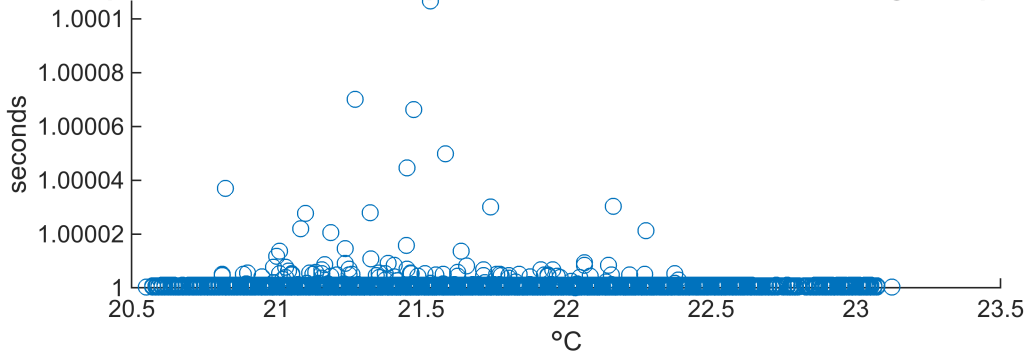

Comparison of clock Intersample Interval Duration to Change in robustAvg Temperature

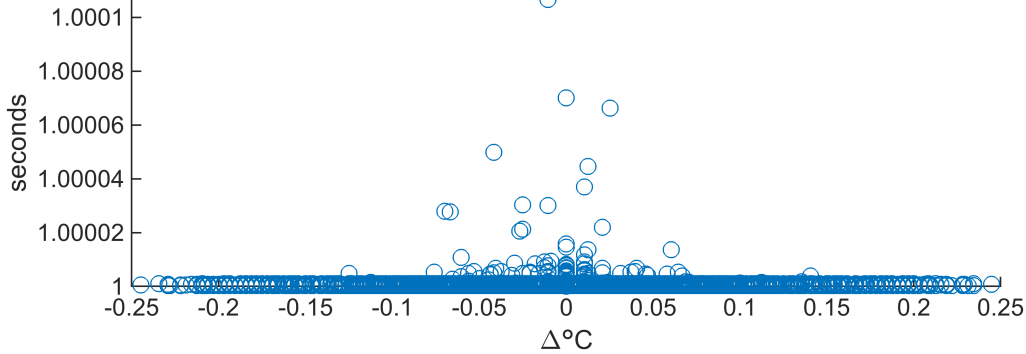

```

plotselect = 0;
if plotselect > 0
    figure()
    hold off
    if plotselect == 1 | plotselect == 3
        dotsize = 4;
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp1"}, dotsize, "filled")
        hold on
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp2"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp3"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp4"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp5"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp6"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp7"}, dotsize, "filled")
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "Temp8"}, dotsize, "filled")
    end
    if plotselect == 2 | plotselect == 3
        scatter(TimeTemp{:, "Days"}, TimeTemp{:, "robustAvg"})
    end
    hold off

```

```

legend()
%ylim([20.5 22.5])
datetick('x', 'HH:MM:SS'); % or 'yyyy-mm-dd HH:MM:SS'
xlabel('Time');
ylabel('Temperature (\circ C)');
grid on
end

```

```

channels = [allsensors,"median","robustAvg","robustAvgSmoothGauss"]


```

```

channels = 1x11 string
"Temp1"      "Temp2"      "Temp3"      "Temp4"      "Temp5"      "Temp6"      "T . . ."

sensorData=TimeTemp{:,channels}; %Samples Sensor
%taufull = unique(round(2.^(0:0.01:log2(size(sensorData,1)/2))));
taufull = 1:height(sensorData)/2;
avarfull=allanvar(sensorData,taufull); % tau channel
figure();loglog(taufull,avarfull);
xlabel('\tau');ylabel('AVar(\tau)');title("Population Allan Variance")
legend([allsensors,"median","robustAvg","robustAvgSmoothGauss"],"Location","southeas
t")

```

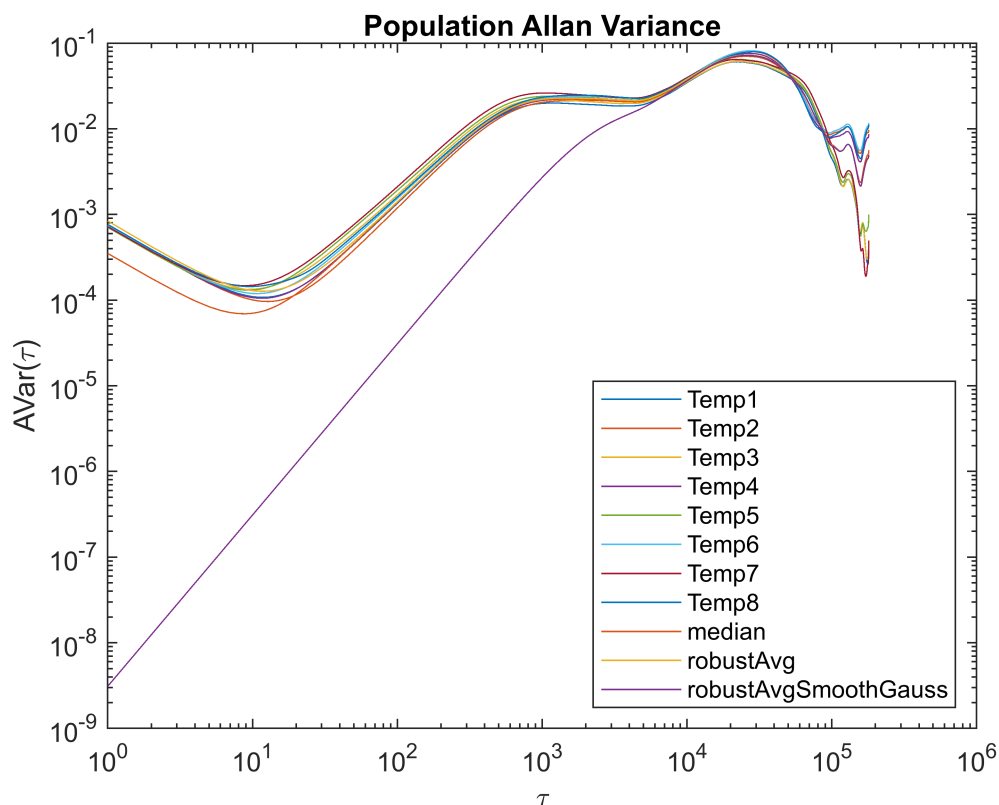

```

%Rolling ALLAN on the data
maxtau=30;minpartitions = 4;
maxpts = maxtau*minpartitions; %seconds of window

```

```

%tau = [1,2,4,5,8,10,15,20,%intervals on the binary then to every 5 seconds
tau=[1:maxtau];%unique(round(2.^(0:0.01:log2(maxpts/2))));
seconds=height(sensorData)-maxpts;
avar = zeros([length(tau) width(sensorData) seconds]);
slices = 1:seconds;

for i = slices
    avar(:, :, i)=allanvar(sensorData(i:i+maxpts,:),tau);
end
size(avar)%avar(tau,channel,slices)

```

```

ans = 1×3
      30      11    359880

```

```

selector=10;
selected_channel = channels(selector)

```

```

selected_channel =
"robustAvg"

```

```

data = squeeze(avar(:,selector,:))';% slices(rows), tau(cols) %select a channel
% %Sort the slices by their minimum tau and amplitude
[minAvar,minidx]=min(data,[],2);
%[maxAvar,maxidx]=max(data,[],2);

avar_sen=table(data,minAvar,minidx);
clear data minAvar minidx maxAvar maxidx;

% avar_sen.data
% avar_sen.minAvar
% avar_sen.minidx


```

```


%average rolling AVAR Cross Section
figure()
plot(tau, avar_sen.data(1,:))
xlabel('\tau');
ylabel('Allan variance');

%legend("T1","T2","T3","T4","T5","T6","T7","T8","RA","Location","northwest");
set(gca, 'XScale', 'log', 'YScale', 'log');

```

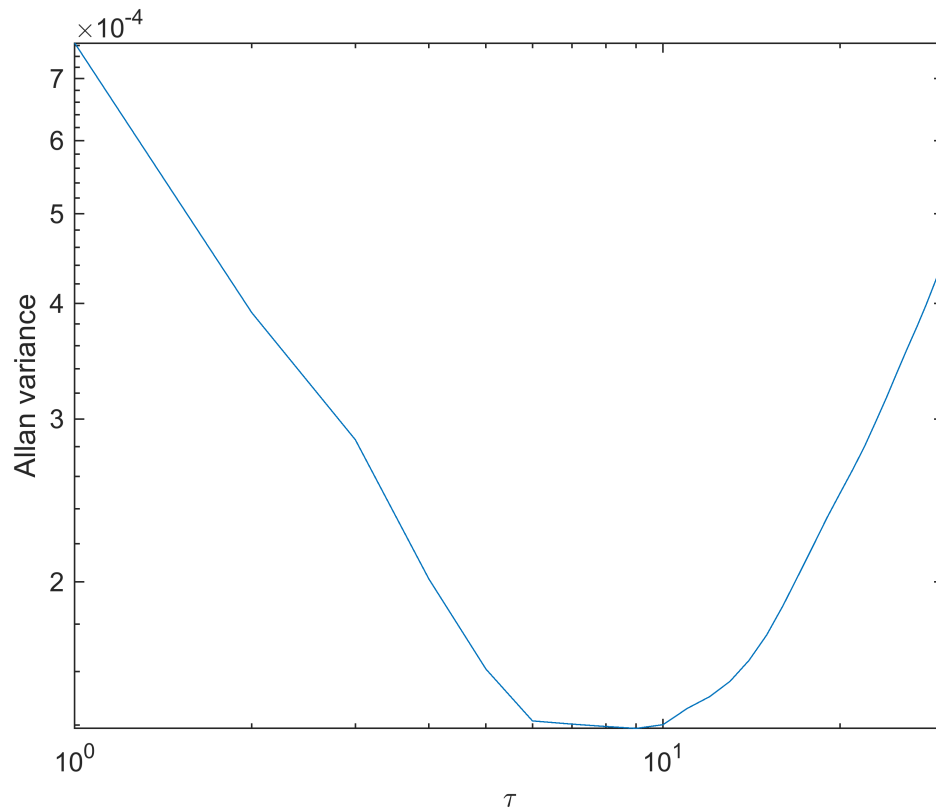

```
%Create a surface with the minimum of each point is marked
figure()
>window = [4.285E+4 42938]
[TIME,TAU] = meshgrid(slices,tau);
surf(TIME, TAU, log10(avar_sen.data), 'EdgeColor','none');
hold('on');
%scatter3(slices,tau(avar_sen.minidx),log10(avar_sen.minAvar));
%scatter3(slices,tau(avar_sen.maxAvar),log10(avar_sen.maxAvar));
hold('off');
set(gca,'YScale','log');
xlabel('Window index');ylabel('\tau');zlabel('log_{10}(\sigma(\tau))');
title('Rolling Allan Deviation Surface');
colormap turbo;colorbar;
clim([min(log10(avar_sen.data),[],"all") max(log10(avar_sen.data),[],"all")]);
view(-37.5,30);%Az El
```

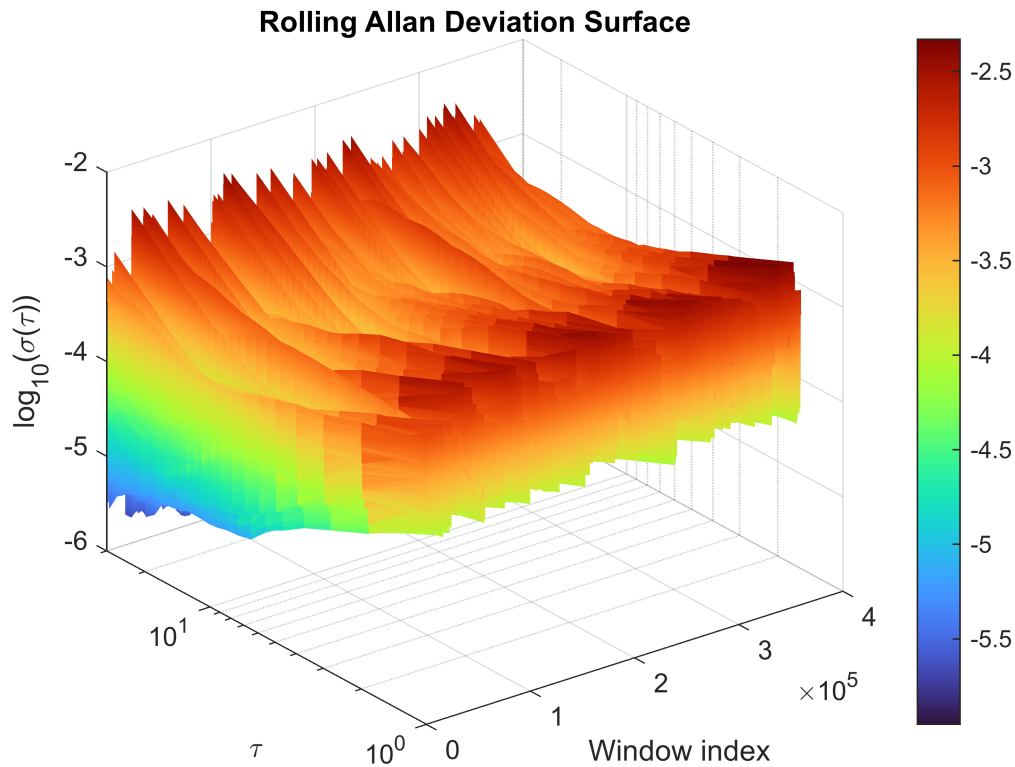

```
%xlim(window)
%figure()
%subplot(2,1,1);scatter(slices,log10(avar_sen{:,"minAvar"}));set(gca,'YScale','log')
;xlabel('Window index');ylabel('log_{10}(\sigma(\tau))');%minimum of each point
%subplot(2,1,2);scatter(slices,log10(avar_sen{:,"maxAvar"}));set(gca,'YScale','log')
; xlabel('Window index'); ylabel('log_{10}(\sigma(\tau))');%maximum of each point

% figure()
% subplot(2,1,1)
% scatter(slices,tau(avar_sen.minidx));
% %xlim(window);
% xlabel('index');ylabel('\tau');title('Minimum Rolling Allan Deviation \tau')
%
% subplot(2,1,2)
% scatter(TimeTemp{:,"Days"},TimeTemp{:,"robustAvg"});
% datetick('x', 'HH:MM:SS'); % or 'yyyy-mm-dd HH:MM:SS'
% xlabel('Time');ylabel('Temperature (°C)');
% grid on
```

```
k = 30000;
```

Warning: Hardware-accelerated graphics is unavailable. Displaying fewer markers to preserve interactivity.

```
figure()
subplot(2,1,1)
imagesc(slices, tau, log10(avar_sen.data'));
```

```


set(gca,'YDir','normal','YScale','linear');
clim([min(log10(avar_sen.data),[],"all") max(log10(avar_sen.data),[],"all")]);
xlabel('Window index');
ylabel('\tau');
colorbar;
title('Rolling Allan Deviation');

hold on;
%scatter(slices,tau(avar_sen.minidx));
% mask=log10(avar_sen.minAvar)<-25;
% scatter(slices(mask),tau(avar_sen.minidx(mask)));

xline(k, 'w-', 'LineWidth', 2); % white vertical hairline
hold off;

subplot(2,1,2)
scatter(tau, avar_sen.data(k,:));
xlabel('\tau');ylabel('Allan Variance');
set(gca,'XScale','log','YScale','log');
grid('on')

```

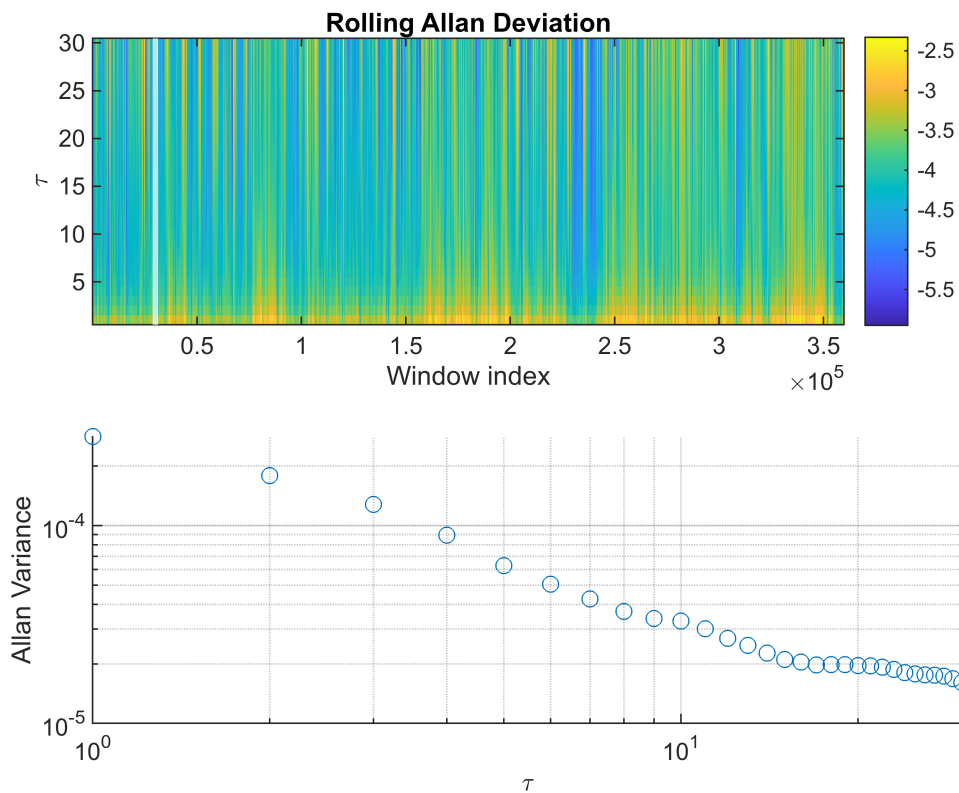


```


%Compute the Per Tau FFT
Fs = 1; % Sampling frequency
T = 1/Fs; % Sampling period
L = length(slices); % Length of signal
Hz=Fs/L*(0:L-1);


```


```
Y_fft = fft(avar_sen.data); %Rows are Time %columns are tau,  
%fft: If X is a matrix, then fft(X) treats the columns of X as vectors and returns  
the Fourier transform of each column.
```


```
for fft_tau = [1 5 10 15 30]  
    mag_fft = abs(Y_fft(:,fft_tau));  
    % Find local maxima  
    maxIndices =  
    islocalmax(mag_fft,"MinSeparation",100,"SamplePoints",Hz,"MaxNumExtrema",1);  
  
    % Display results  
    figure();  
    plot(Hz,mag_fft,"SeriesIndex",6,"DisplayName","Input data")  
    hold on  
  
    % Plot local maxima  
  
    scatter(Hz(maxIndices),mag_fft(maxIndices),"^","filled","SeriesIndex",2,"DisplayName",  
    "Local maxima")  
    title({"Complex Magnitude of fft Spectrum","Tau:"+fft_tau,"Number of extrema: "  
    + nnz(maxIndices)})  
    hold off;grid on;  
    legend  
    xlabel("f (Hz)");ylabel("|fft(X)|");  
    set(gca,'XScale','log','YScale','log');  
    %xlim([0 0.5]);  
end
```

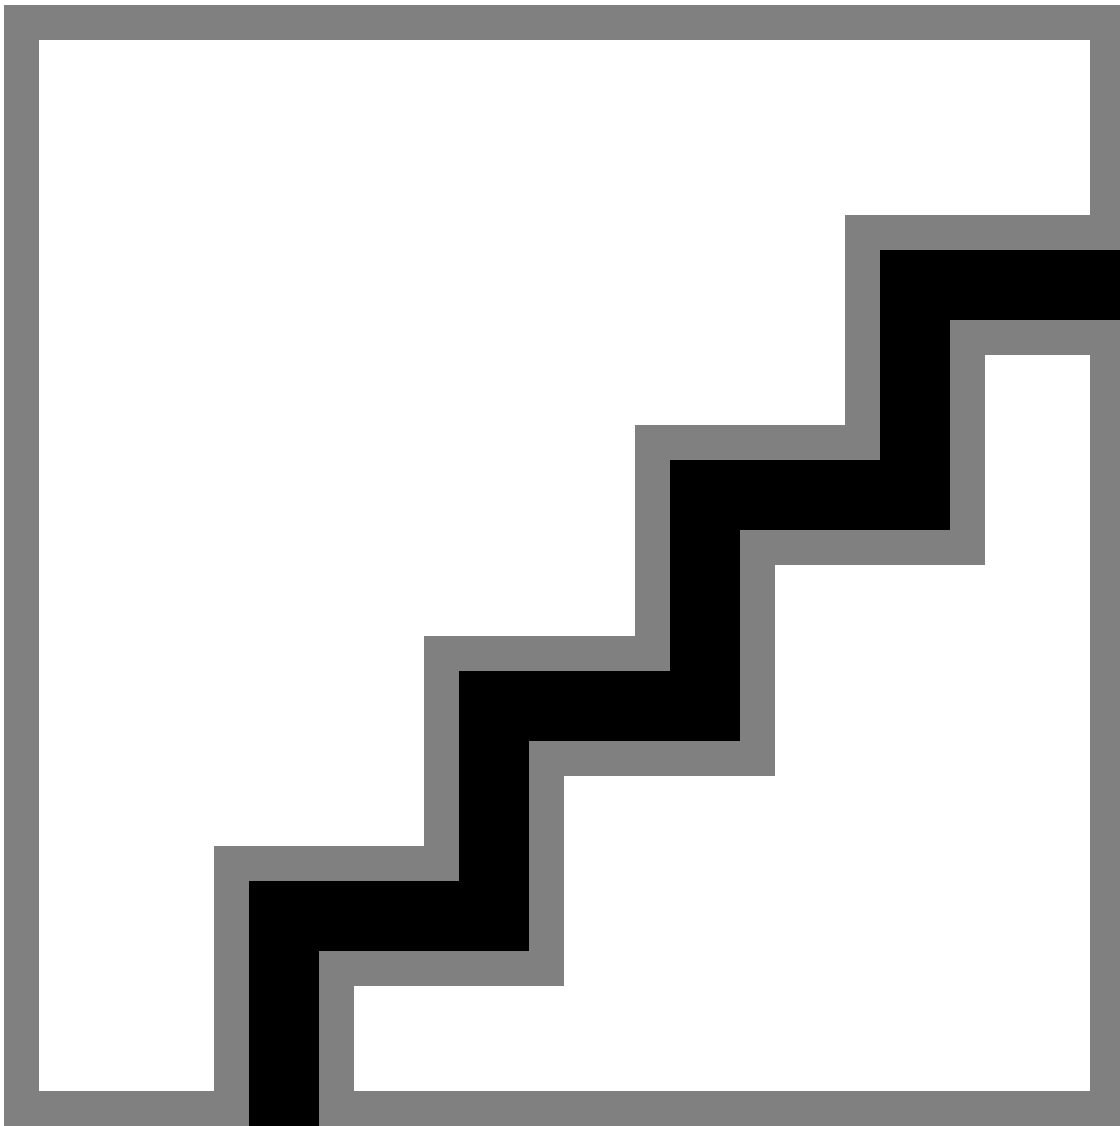

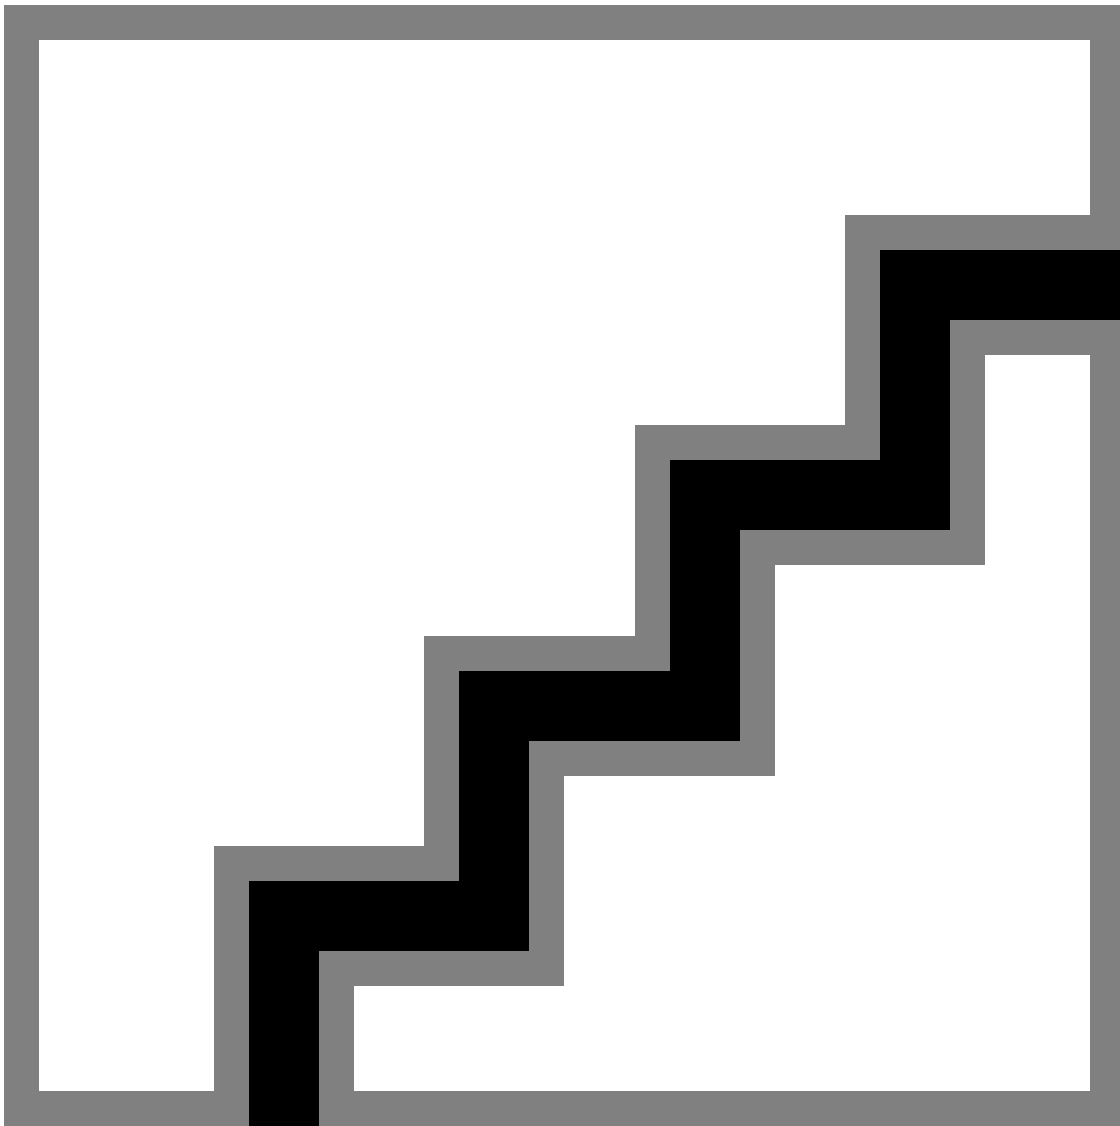


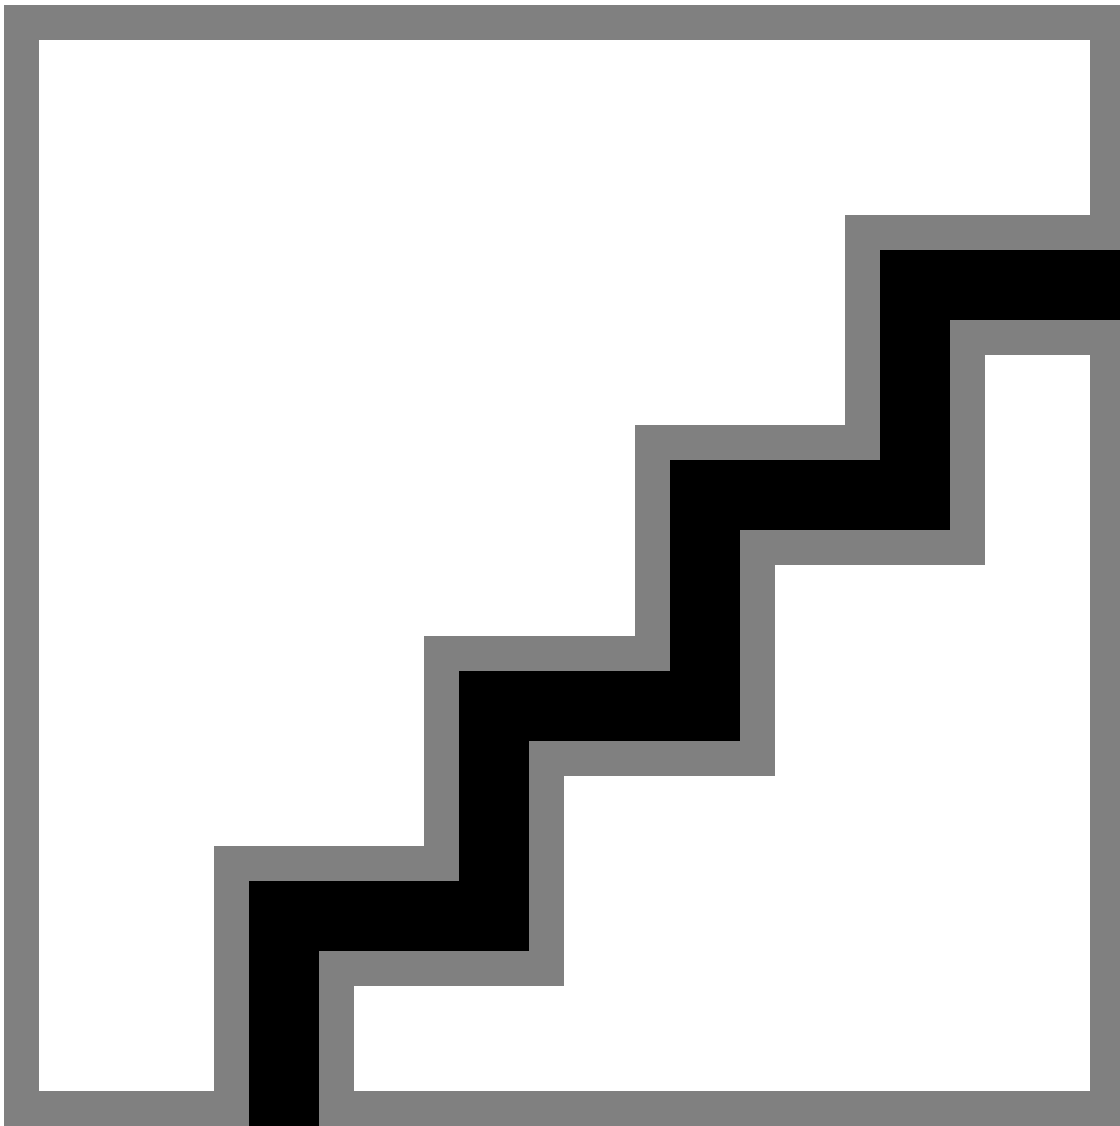

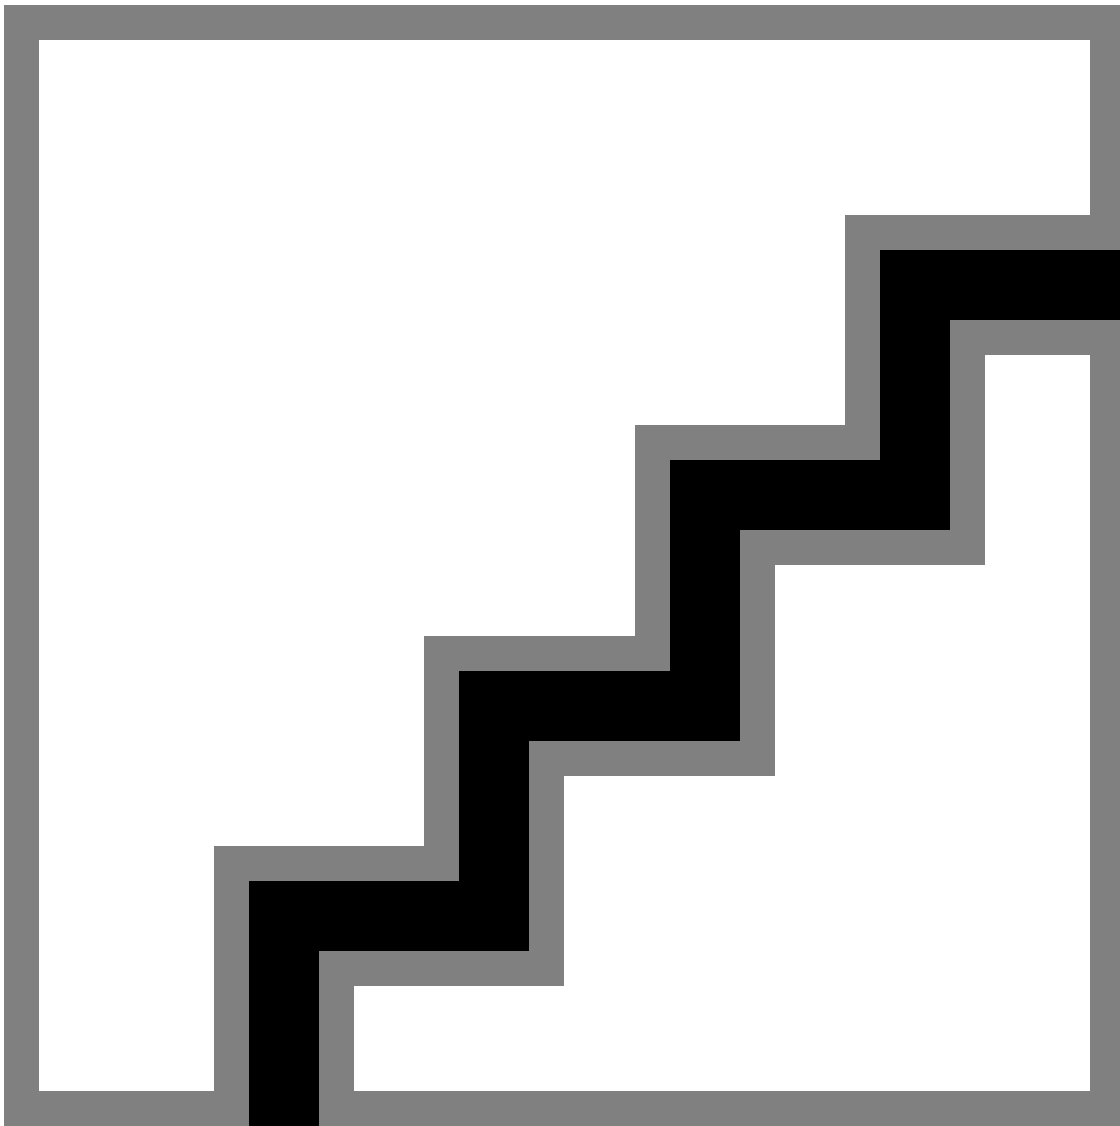

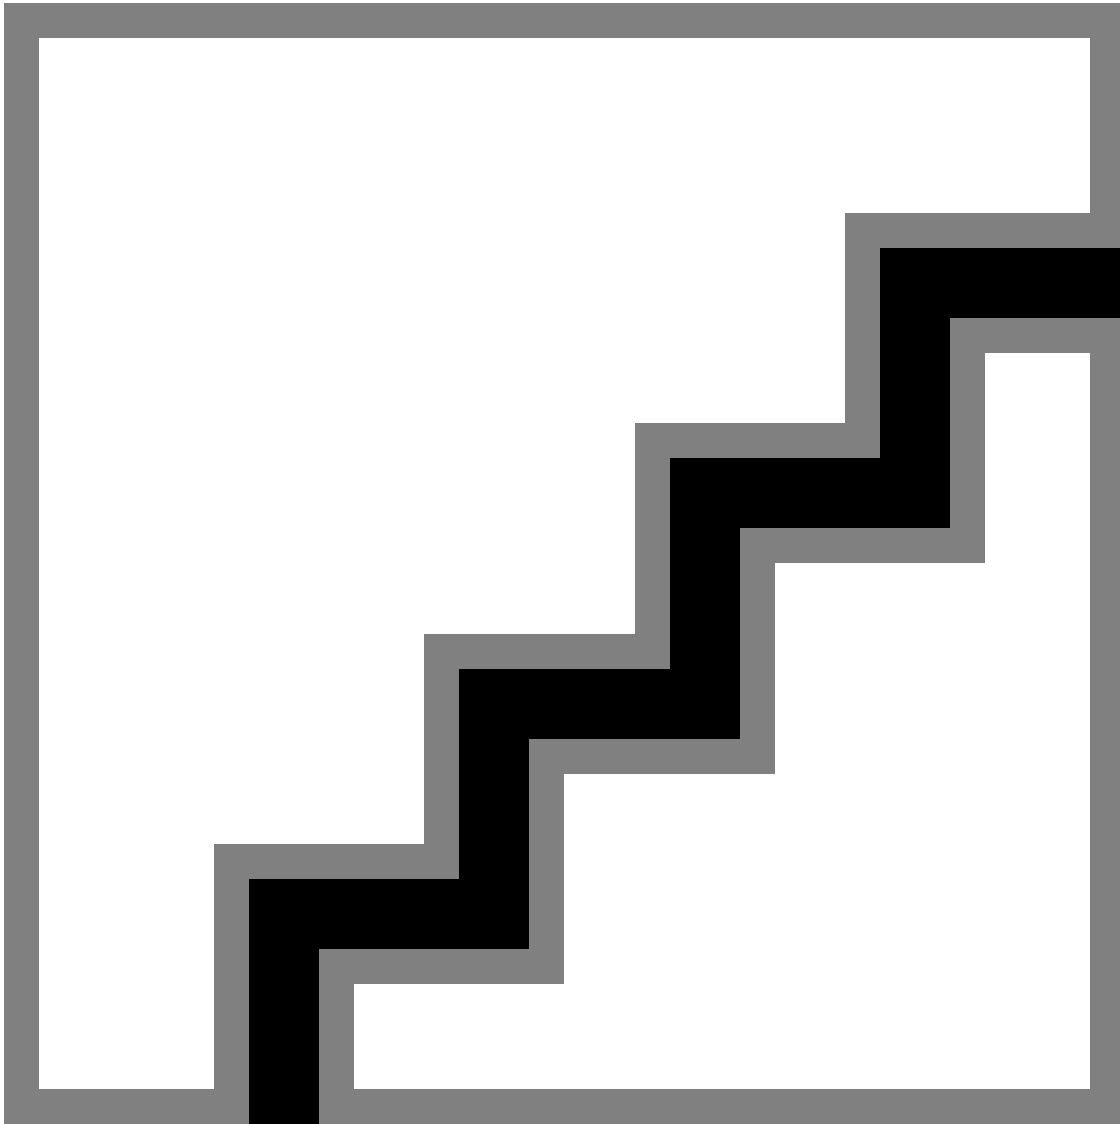

```
figure();
surf(tau,Hz,log10(abs(Y_fft)),"EdgeColor","none");
xlabel("tau");ylabel("f (Hz)");zlabel("log10|fft(X)|");
set(gca,'XScale','linear','YScale','log','zscale','linear');
view(90+15,20);%Az El
ylim([0 0.5])
colorbar;
%colormap turbo;
colormap parula;
```

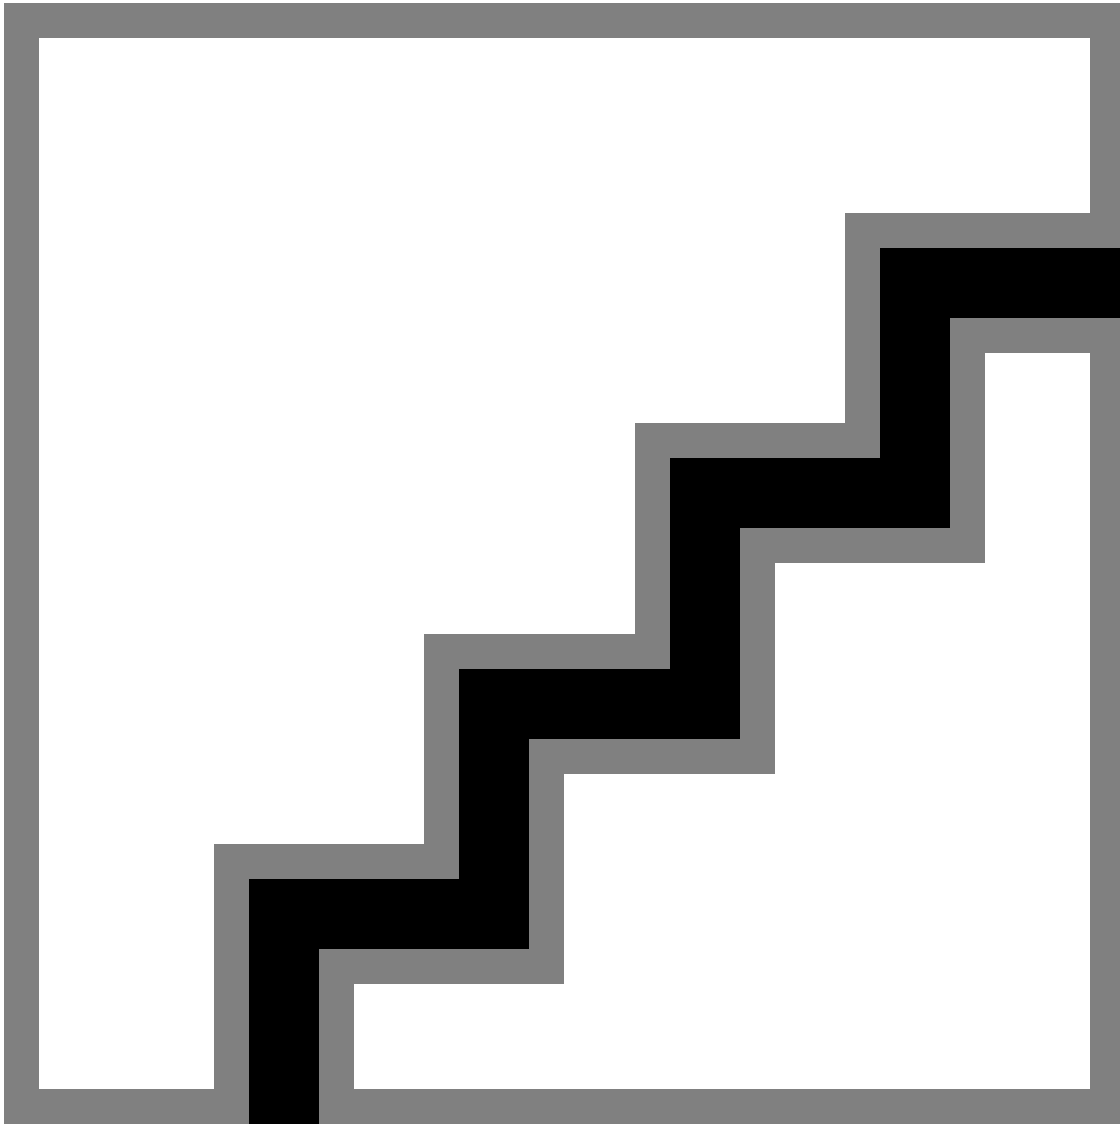

```
%Keeping this because I made it but this is absolutely pointless so far as I can tell
```

```
%Sort the slices by their minimum tau and amplitude
% avar_sen2 = sortrows(avar_sen,["minidx" "minAvar"]);
```

```
% k = 1000;
% figure()
% subplot(2,1,1)
% imagesc(slices, tau, log10(avar_sen2{:,1:30}'));
% set(gca,'YDir','normal','YScale','log');
% clim([min(log10(avar_sen2{:,1:30}')),[],"all") max(log10(avar_sen2{:,1:30}')),
% [],"all")]);
% xlabel('Window index');
% ylabel('\tau');
% colorbar;
% title('Rolling Allan Deviation');
```

```

%
% hold on;
% scatter(slices,tau(avar_sen2{:,"minidx"}));
% xline(k, 'w-', 'LineWidth', 2); % white vertical hairline
% hold off;
%
% subplot(2,1,2)
% scatter(tau, avar_sen2{k,1:30});
% xlabel('\tau');ylabel('Allan Variance');
% set(gca,'XScale','log','YScale','log');
% grid('on')

```

```

% figure()
% subplot(2,1,2)
% scatter(slices,tau(avar_sen2{:,"minidx"}));
% %xlim(window);
% xlabel('index');ylabel('\tau');title('Minimum Rolling Allan Deviation \tau')
% subplot(2,1,1)
% surf(TIME, TAU, log10(avar_sen2{:,1:30}'), 'EdgeColor','none');
% hold('on');
% scatter3(slices,tau(avar_sen2{:,"minidx"}),log10(avar_sen2{:,"minAvar"}));
% % scatter3(slices,tau(avar_sen2{:,"maxAvar"}),log10(avar_sen2{:,"maxAvar"}));
% hold('off');
% set(gca,'YScale','log');xlabel('Window index');ylabel('\tau');zlabel('log_{10}
(\sigma(\tau))');title('Rolling Allan Deviation Surface');
% colormap turbo;colorbar;
% view(20,70);

```