

## for loops.

Week 4 | Lecture 2 (4.2.1)

if nothing else, write `#cleancode`

# Today's Content

- Lecture 4.2.1
  - **for** loops
  - Reading: 9.3, 9.4
- Lecture 4.2.2
  - **for** loops on indices, nested loops
  - Reading: 9.5 – 9.9

# Looping (Iterating)

- Looping means repeating something over and over until a particular condition is satisfied.

**Email** ←

**Send  
Promotional  
Email**

**Looping**



**List of  
Customers**

# Looping (Iterating)

- Looping means repeating something over and over until a particular condition is satisfied.

Yes/No



Does the  
Tweet  
contain  
#cleancode

Looping





List of  
Tweets



# Looping (Iterating)



- Looping means repeating something over and over until a particular condition is satisfied.

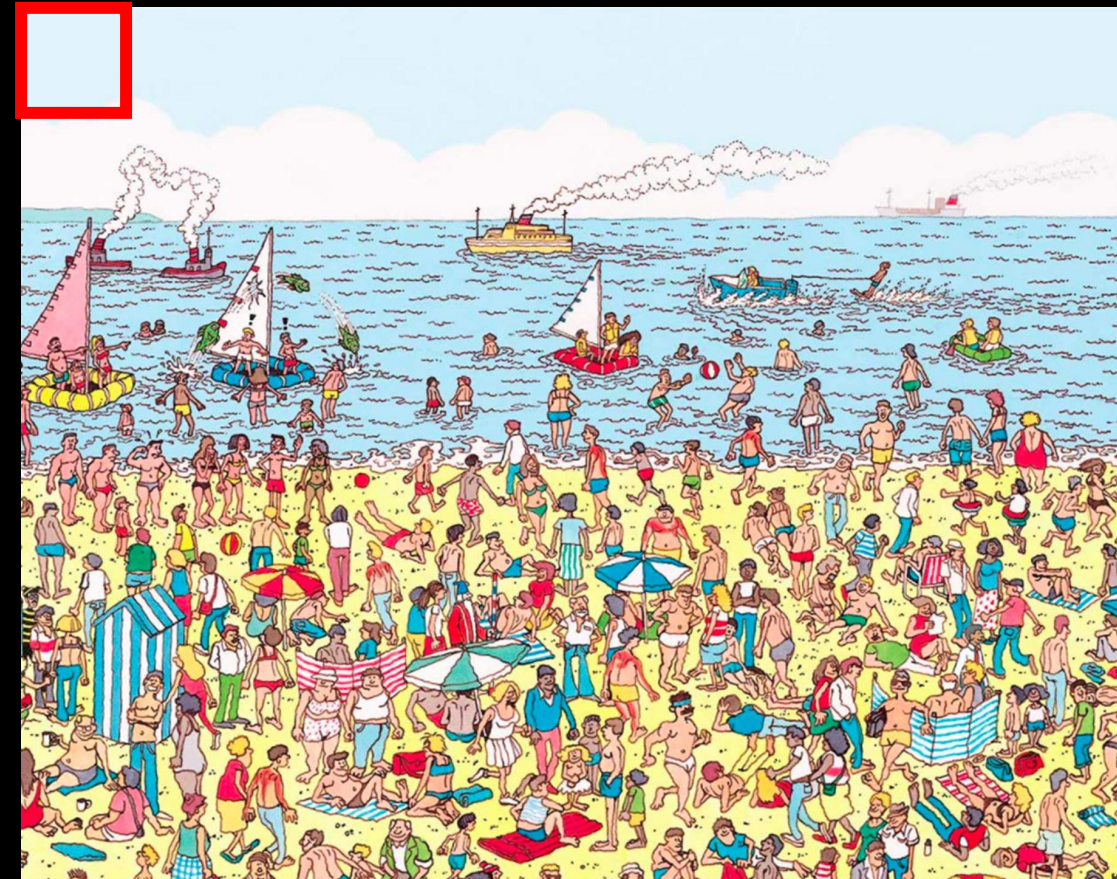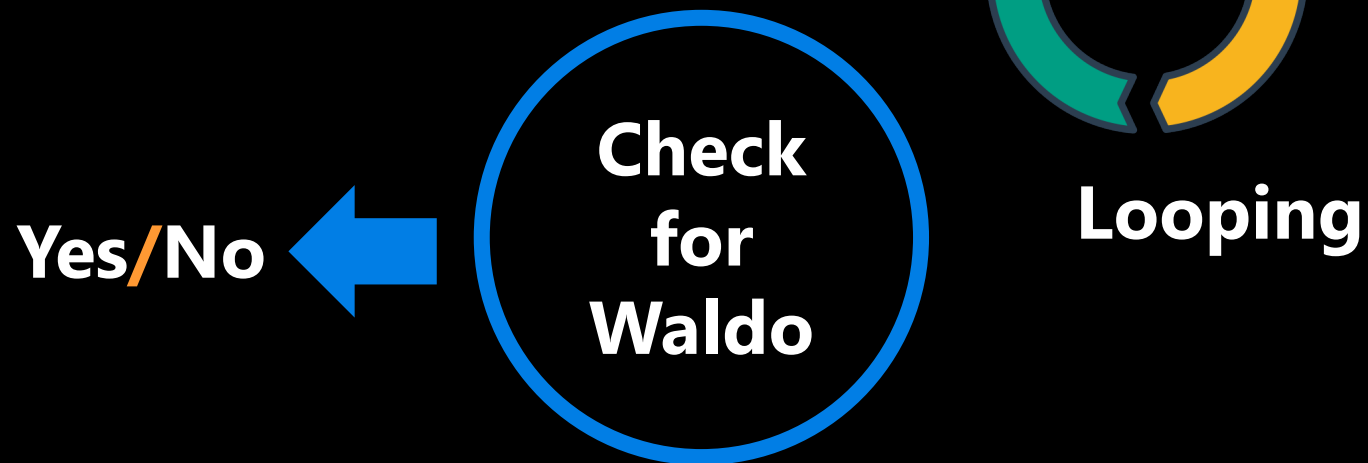





# Looping (Iterating)

- Looping means repeating something over and over until a particular condition is satisfied.

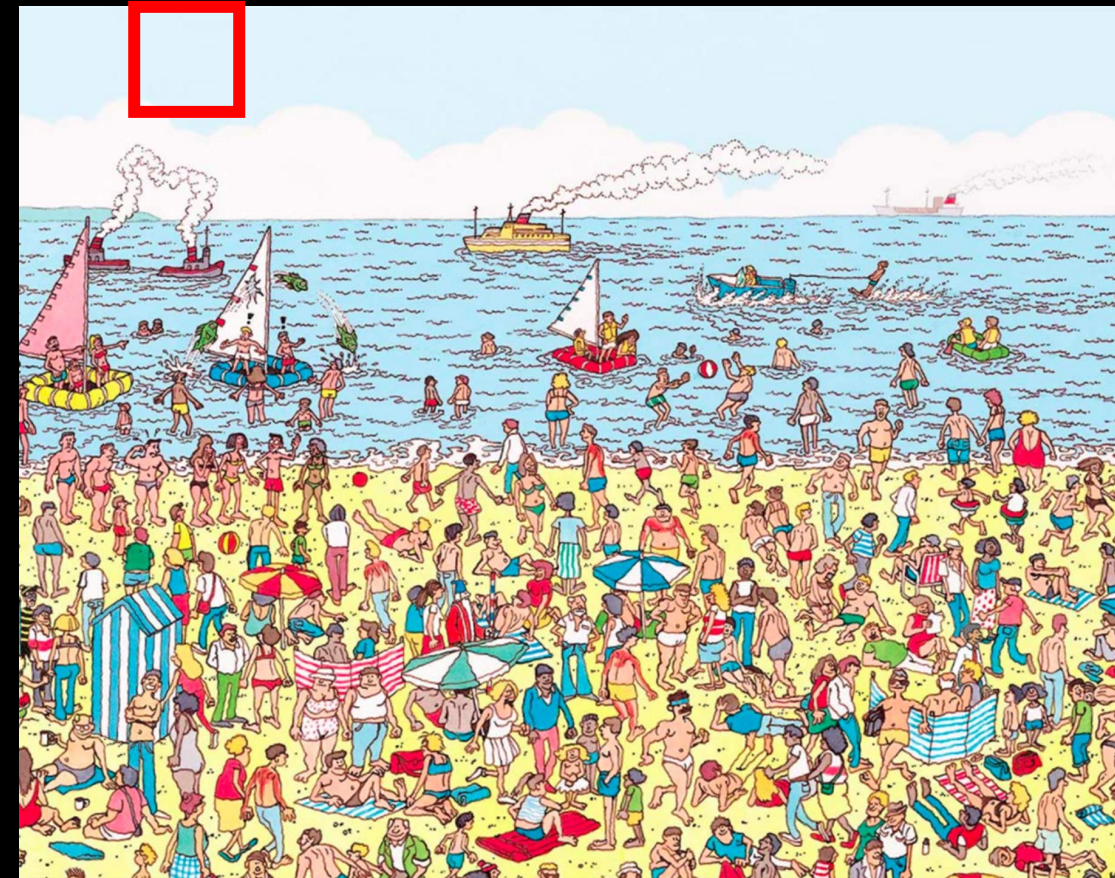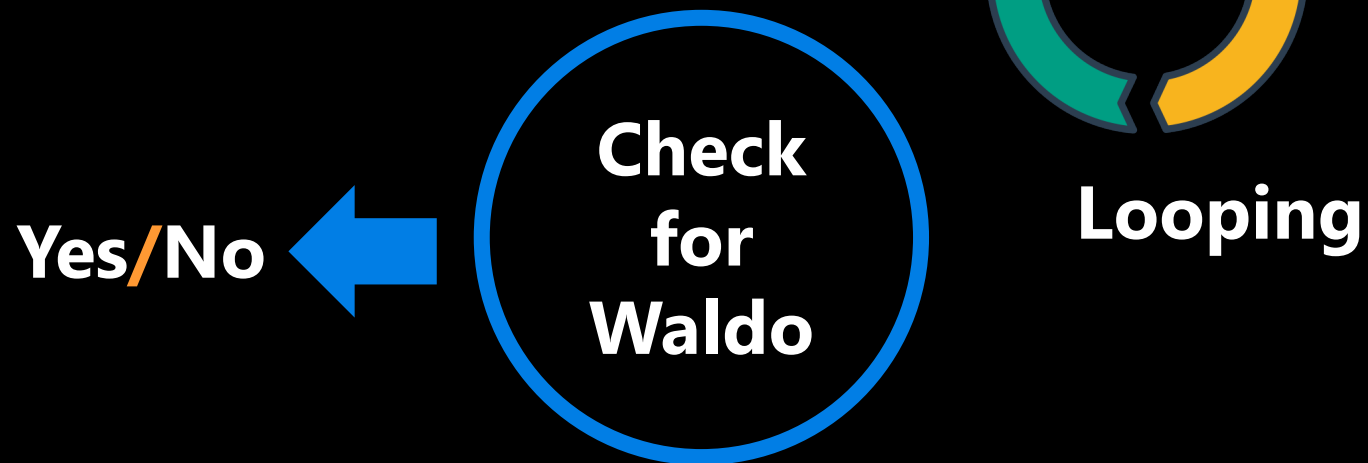

# Looping (Iterating)



- Looping means repeating something over and over until a particular condition is satisfied.

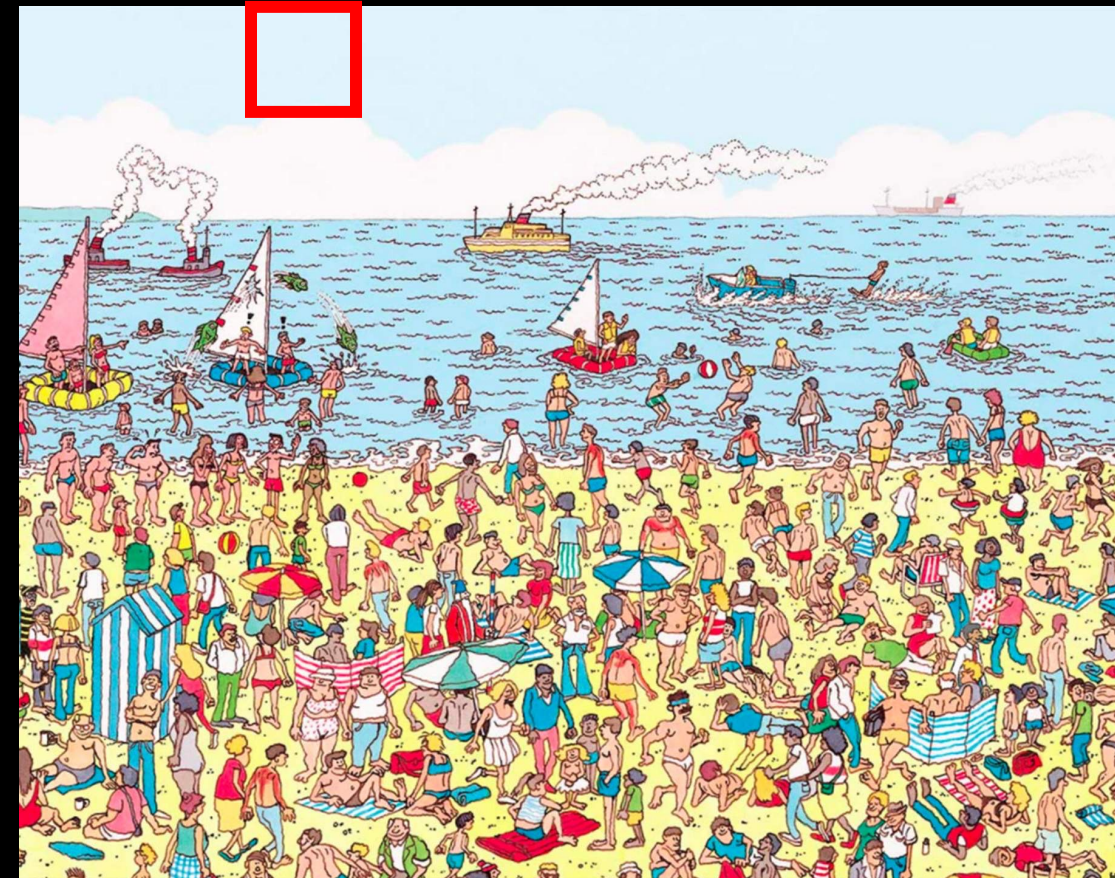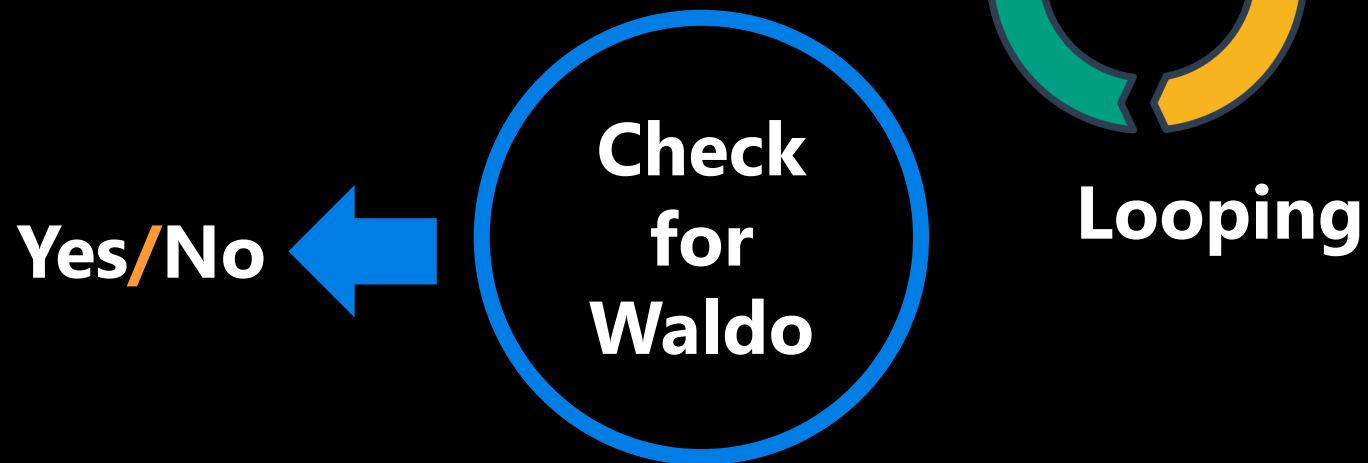



# Looping (Iterating)


- Looping means repeating something over and over until a particular condition is satisfied.

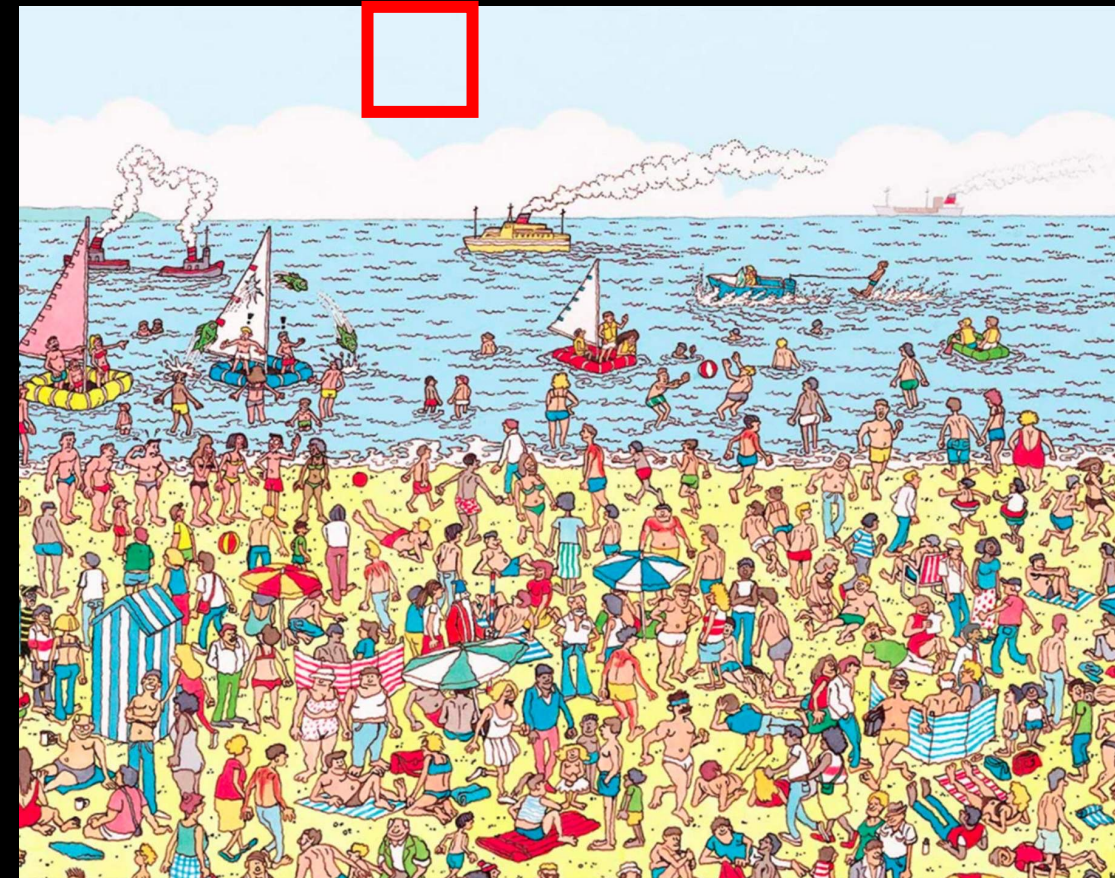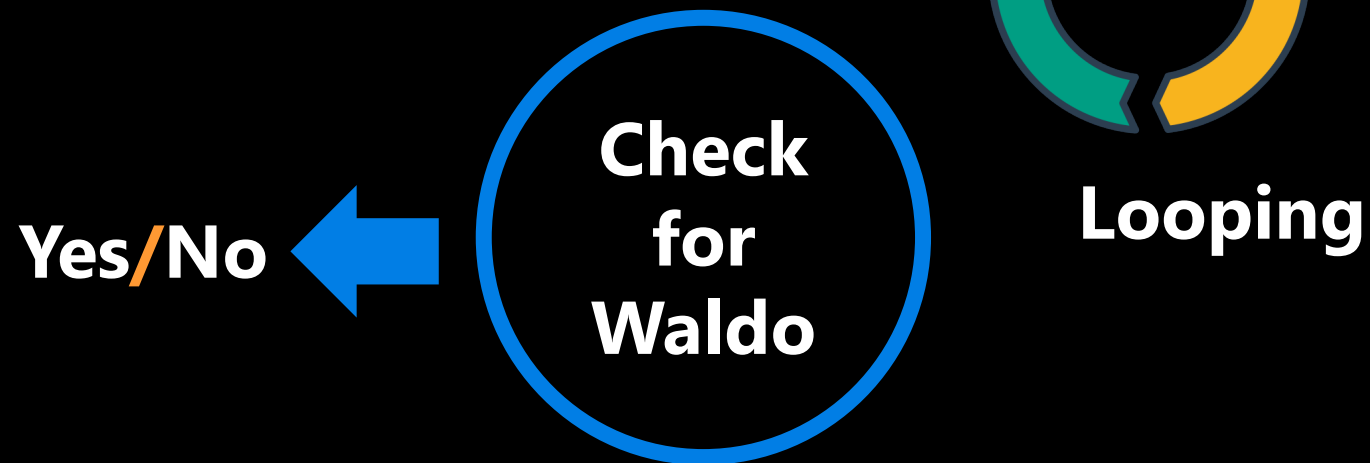



# Looping (Iterating)

- Looping means repeating something over and over until a particular condition is satisfied.

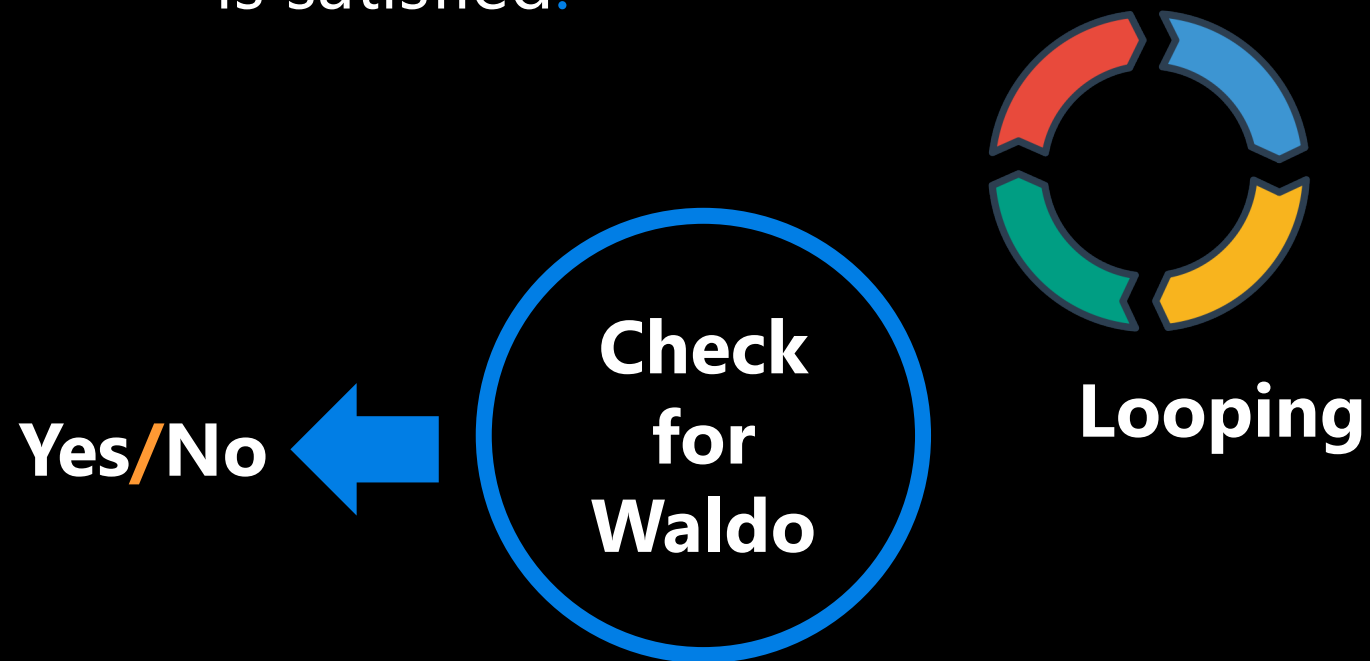

# for loops

- There are several ways to repeat a block of code.
- We've already seen **while** loops and this week, we'll discuss **for** loops.
- Do Something = block of code we want to execute.

```
while expression:  
    do something.
```

```
for item in iterable:  
    do something.
```

# for loops

- A **for** loop starts with the keyword **for**.

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

# for loops

- Next, we provide the name of one of more variables.
- We have called the variable `character`, but you can call it whatever you like as long as it follows rules for naming a variable.

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

```
for item1, item2 in iterable:  
    do something.
```



## for loops

- Our variable `character` will be bound to each of the items in the sequence in turn.

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

# for loops

- Specify what the values are in.
- What is the iterable?
- An iterable is an object that can be iterated over.
- Strings are iterable (we know these from last week).
- Lists (**next week**) are iterable.

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

## for loops

- As with the `while` loop, the `for` loop statement ends with a colon.
- This is how Python knows you are going to create a new block of code.

```
name = 'Sebastian'
```


```
for character in name:  
    print(character)
```

# for loops

- Indenting four spaces tells Python what lines of code are in that block you want to repeated.

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```



Indent



## for loops

- What output should we get?

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

# for loops

- What output should we get?

```
name = 'Sebastian'
```

```
for character in name:  
    print(character)
```

Output:

```
S  
e  
b  
a  
s  
t  
i  
a  
n
```

# for loops

- Let's try it ourselves.

**Open your  
notebook**

**Click Link:**

**1. Your first for loop**

# for vs while

- You've learned about **for** loops and **while** loops, but when should you use them?
- Firstly, all **for** loops can be written as **while** loops, and vice-versa.
- You should use a **for** loop when you know how many times the loop should run.
- If you want the loop to break based on a condition (do this until...) you should use a **while** loop.



# for vs while

- Problem: You have had your **DNA** sequenced and each of your chromosomes is represented by a string of nucleotides: adenine (A), thymine (T), guanine (G), and cytosine (C).
- **chrome\_4 = ATGGGCAA**
- Create a function to count the number of occurrences of a nucleotides.

```
my_func(chrome_4, 'A')  
>>> 3
```

**Open your  
notebook**

**Click Link:**  
**2. while vs for**

## while

```
i = 0
counter = 0
while i < len(chrome_4):
    if chrome_4[i] == 'A':
        counter += 1
    i += 1
```

## for

```
counter = 0
for character in chrome_4:
    if character == 'A':
        counter += 1
```


- Differences

## while

```
i = 0
counter = 0
while i < len(chrome_4):
    if chrome_4[i] == 'A':
        counter += 1
    i += 1
```

## for

```
counter = 0
for character in chrome_4:
    if character == 'A':
        counter += 1
```

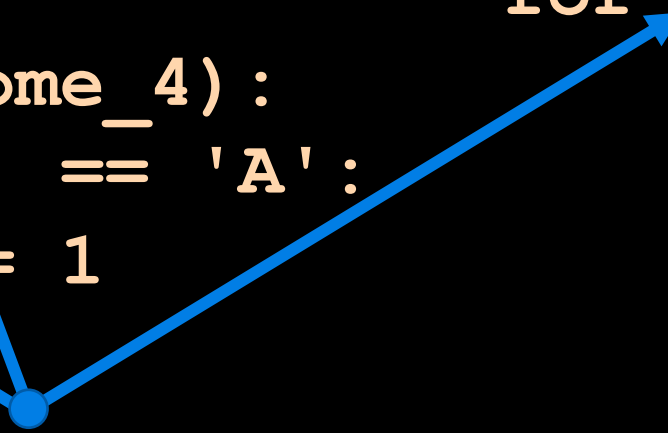- 
- Differences
  - In the **while** loop, the loop variable (**i**) was the index of each character, while in the for loop the loop variable (**character**) is the value of each character.
  - No indexing [**i**] required in the for loop.

## while

```
i = 0
counter = 0
while i < len(chrome_4):
    if chrome_4[i] == 'A':
        counter += 1
    i += 1
```

## for

```
counter = 0
for character in chrome_4:
    if character == 'A':
        counter += 1
```



### ■ Differences

- We do not have to worry about how long the string is (e.g., use `len()`) because the **for** loop will go through every character of the string exactly once.



## while

```
i = 0
counter = 0
while i < len(chrome_4):
    if chrome_4[i] == 'A':
        counter += 1
    i += 1
```

## for

```
counter = 0
for character in chrome_4:
    if character == 'A':
        counter += 1
```



### ■ Differences

- We do not have to worry about incrementing the loop variable (`i += 1`) as the `for` loop takes care of this.

## while

```
i = 0
counter = 0
while i < len(chrome_4):
    if chrome_4[i] == 'A':
        counter += 1
    i += 1
```

## 6 lines

## for

```
counter = 0
for character in chrome_4:
    if character == 'A':
        counter += 1
```

## 4 lines

- Differences
- The for loop is **MUCH** easier to read and therefore, desirable when writing code for large collaborative projects.
- #cleancode

# Breakout Session 1

Vowels: a, e, i, o, u.

- Write a function that takes in a string and returns the number of vowels in the string. (use **for** loop)
- Test 1
  - `count_vowels('Happy Anniversary!')`
  - 5
- Test 2
  - `count_vowels('xyz')`
  - 0

**Open your notebook**

**Click Link:**

**3. Breakout Session 1**

## Breakout Session 2

- Write a function to return the unique separators in a string of integer codes. (use **for** loop)
- The string only contains integers and separators.
- Test 1
  - `find_seperators('23,613-23;2:45')`
  - `',';-;:'`
- Test 2
  - `find_seperators('613-555-3224')`
  - `'_'`

**Open your  
notebook**

**Click Link:**

**4. Breakout Session 2**

# Lecture Recap

Practice!

- **for** loops.
- Looping over strings.
- When to use a **for** loop over a **while** loop.

## for loops.

Week 4 | Lecture 2 (4.2.1)

if nothing else, write `#cleancode`