

functions, input & output, importing modules.

## Week 2 | Lecture 1 (2.1)

### Upcoming

- Lab 0 Due 11:59 pm Friday.
- Lab 1 Released Thursday 6:00 pm.
- Reflection 2 Released Friday 6:00 pm.
- Tutorial and Practical sessions running all week.

if nothing else, write **#cleancode**.

# This Week's Content

- **Lecture 2.1**
  - Functions, input & output, importing modules
- **Lecture 2.2**
  - Defining your own function
- **Lecture 2.3**
  - Design Problem: Forward Kinematics

# What is a function?

- A function is a piece of code that you can “call” repeatedly to do one thing.
- Think about the **sine** key on your calculator. It takes in an angle, does some calculations and returns the sine of that angle.
- Python has **built-in functions** (today), but programmers can also create their own **user-defined functions** (next lecture).



# Why do we write functions?

- Let's consider our sine function.
- In Python, this could take 10 or more line of code to compute.
- If you have to compute the sine of an angle multiple times in your code, this means you have to repeat the same 10 lines of code over and over and OVER again!
- This is both inefficient and it creates more opportunities to bugs (mistakes) to creep into your code.

**Open your  
notebook**

**Click Link:**

**1. Why do we write  
functions?**

# Why do we write functions?

- **Reuse:**

- The practice of using the same piece of code in multiple applications.

- **Abstraction:**

- A technique for managing the complexity of the code (how much do we really need to know?).
- `model.fit(X, y)` → This could train a deep neural network.

- **Collaboration:**

- Easy to read, Easy to modify, Easy to maintain.

- **#cleancode**

# Calling Functions

"snake case" or  
"pothole case"?

In **Python** names of variables and functions use low case and underscores.



`function_name`  
`Function_Name`  
`FunctionName`

- The general form of a function call:

`function_name(arguments)`

`function_name()`

`function_name`



Would not result in  
a function call.

- Terminology

- *argument*: a value given to a function.
- *pass*: to provide an argument to a function.
- *call*: ask Python to execute a function (by name).
- *return*: give a value back to where the function was called from.

# Calling Functions

- The general form of a function call:

`function_name(arguments)`

`function_name()`

`function_name`


← Would not result in  
a function call.

- Terminology

- *argument*: a value given to a function.
- *pass*: to provide an argument to a function.
- *call*: ask Python to execute a function (by name).
- *return*: give a value back to where the function was called from.

The stuff we **pass** **Arguments**  
to the function.

Call  
Function  
`()`

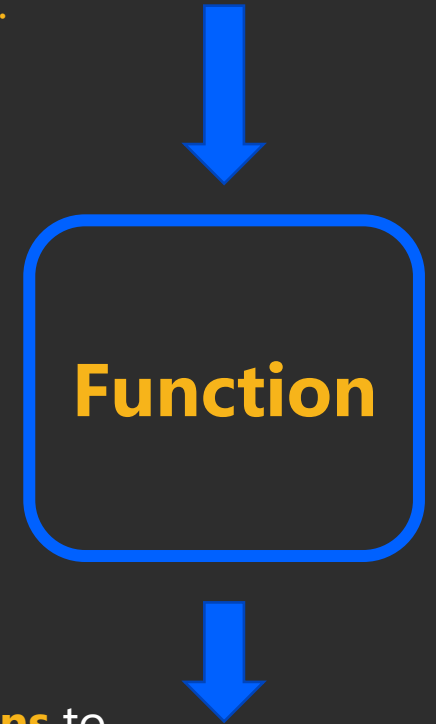

The stuff the  
function **returns** to  
us after we **call** it. **Returns**

# Calling Functions

- The general form of a function call:

`function_name(arguments)`

- Terminology

- *argument*: a value given to a function.
- *pass*: to provide an argument to a function.
- *call*: ask Python to execute a function (by name).
- *return*: give a value back to where the function was called from.

**Open your  
notebook**

**Click Link:**

**2. Function Call**



# Back to evaluation and expressions

- Last week we learned about the assignment statement (=).
- Remember, the value of the expression on the right-hand side (RHS) of the = sign is figured out first and then assigned to the variable on the left-hand side.
- This also applies if the thing on the RHS is a function!

First, the function is *called* while passing it an *argument*.



**x = abs(-20+5)**



Then, what the function *returns* is assigned to x.

# Back to evaluation and expressions

- Last week we learned about the assignment statement (=).
- Remember, the value of the expression on the right-hand side (**RHS**) of the = sign is figured out first and then assigned to the variable on the left-hand side.
- This also applies if the thing on the **RHS** is a function!

`x = abs(-20+5)`

The stuff we **pass** **Arguments** to the function.

?



**Function**

?



The stuff the function **returns** to us after we **call** it. **Returns**

?

# Back to evaluation and expressions

- Last week we learned about the assignment statement (=).
- Remember, the value of the expression on the right-hand side (**RHS**) of the = sign is figured out first and then assigned to the variable on the left-hand side.
- This also applies if the thing on the **RHS** is a function!

$x = \text{abs}(-20+5)$

The stuff we **pass** **Arguments** to the function.

-15



abs

The stuff the function **returns** to us after we **call** it.

**Returns**

15



# Back to evaluation and expressions

- Last week we learned about the assignment statement (=).
- Remember, the value of the expression on the right-hand side (**RHS**) of the = sign is figured out first and then assigned to the variable on the left-hand side.
- This also applies if the thing on the **RHS** is a function!

**Open your  
notebook**

**Click Link:**

**3. Back to  
Evaluation and  
Expressions**

# Breakout Session 1

- $x = \frac{|y + z| + |y * z|}{y^\alpha}$

- where,

- $y = -20$

- $z = -100$

- $\alpha = 2$

- What is  $x$  ?

**Open your  
notebook**

**Click Link:**

**4. Breakout Session 1**

# Built-in Functions

- The *function\_name* is the name of the function (like `sin` or `print`).
- Python has many built-in functions. Learn more about them [here](#).

## Built-in Functions

### A

`abs()`  
`aiter()`  
`all()`  
`any()`  
`anext()`  
`ascii()`

### B

`bin()`  
`bool()`  
`breakpoint()`  
`bytearray()`  
`bytes()`

### C

`callable()`  
`chr()`  
`classmethod()`  
`compile()`  
`complex()`

### D

`delattr()`  
`dict()`  
`dir()`  
`divmod()`

### E

`enumerate()`  
`eval()`  
`exec()`

### F

`filter()`  
`float()`  
`format()`  
`frozenset()`

### G

`getattr()`  
`globals()`

### H

`hasattr()`  
`hash()`  
`help()`  
`hex()`

### I

`id()`  
`input()`  
`int()`  
`isinstance()`  
`issubclass()`  
`iter()`

### L

`len()`  
`list()`  
`locals()`

### M

`map()`  
`max()`  
`memoryview()`  
`min()`

### N

`next()`

### O

`object()`  
`oct()`  
`open()`  
`ord()`

### P

`pow()`  
`print()`  
`property()`

### R

`range()`  
`repr()`  
`reversed()`  
`round()`

### S

`set()`  
`setattr()`  
`slice()`  
`sorted()`  
`staticmethod()`  
`str()`  
`sum()`  
`super()`

### T

`tuple()`  
`type()`

### V

`vars()`

### Z

`zip()`

`__import__()`

# Built-in Functions

- The *function\_name* is the name of the function (like `sin` or `print`).
- Python has many built-in functions. Learn more about them [here](#).

**Open your  
notebook**

**Click Link:  
5. Built-in Functions**

# Function Help

- To get information about a particular function, call **help** and pass the function as the argument.
- **help** is one of Python's built-in functions.

■ `help(abs)`

■ `help(abs())` 

Notice how  
we're not  
calling the  
function.

**Open your  
notebook**

**Click Link:**  
**6. Function Help**



# Output

- Python has a built-in function named **print** for displaying messages to the user.
- The general form of a **print** function call:

```
print(arguments)
```

- The arguments can be of type **int**, **float**, **strings** and others we will discuss next week.

**Open your  
notebook**

**Click Link:**  
**7. Output**

# Input

- Python has a built-in function named **input** for reading inputs from the user.
- The general form of an **input** function call:

**input(argument)**

- The **argument** is the text you want displayed to the user.
  - *"What is your name?"*
- The value returned by the **input** function is always a string.

**Open your  
notebook**

**Click Link:**  
**8. Input**

## Breakout Session 2

- Write code to print out the following text:

```
"Hello, my name is {} and  
I'm hoping to get a grade of  
{} in APS106 this term."
```

- Where you see curly brackets {} you need to use the **input** function to prompt the user to enter that information.

**Open your  
notebook**

**Click Link:**

**9. Breakout Session 2**

# Importing Functions **and** Modules

- Not all useful functions are built-in and they must be imported.
- Groups of functions are stored in separate Python files, which are called **modules**.
- Some modules come pre-installed with Python and other need to be installed separately.
  - For example, there are a lot of machine learning methods implemented in the scikit-learn modules.
- To get access to the functions in a module, you need to **import** the module.


# Importing Functions **and** Modules

- The general form of an import statement is:

- `import module_name`

- To access a function within a module:

- `module_name.function_name`



- The dot is an operator:

1. Look up the object that the variable to the left of the dot refers to.
2. In that object, find the name that occurs to the right of the dot.

```
import math
```

```
math.sqrt(16)
```

# Importing Functions **and** Modules

- The general form of an import statement is:
  - `import module_name`
- To access a function within a module:
  - `module_name.function_name`


**Open your  
notebook**

**Click Link:**  
**10. Importing  
Function and  
Modules**

# Defining Your Own Functions

- The real power of functions is in defining your own.
- Good programs typically consist of many small functions that call each other.
- If you have a function that does **only one thing** (like calculate the sine of an angle), it is likely not too large.
- If its not too large, it will be easy to test and maintain.

**Code quality**  
is measured in WTFs/min

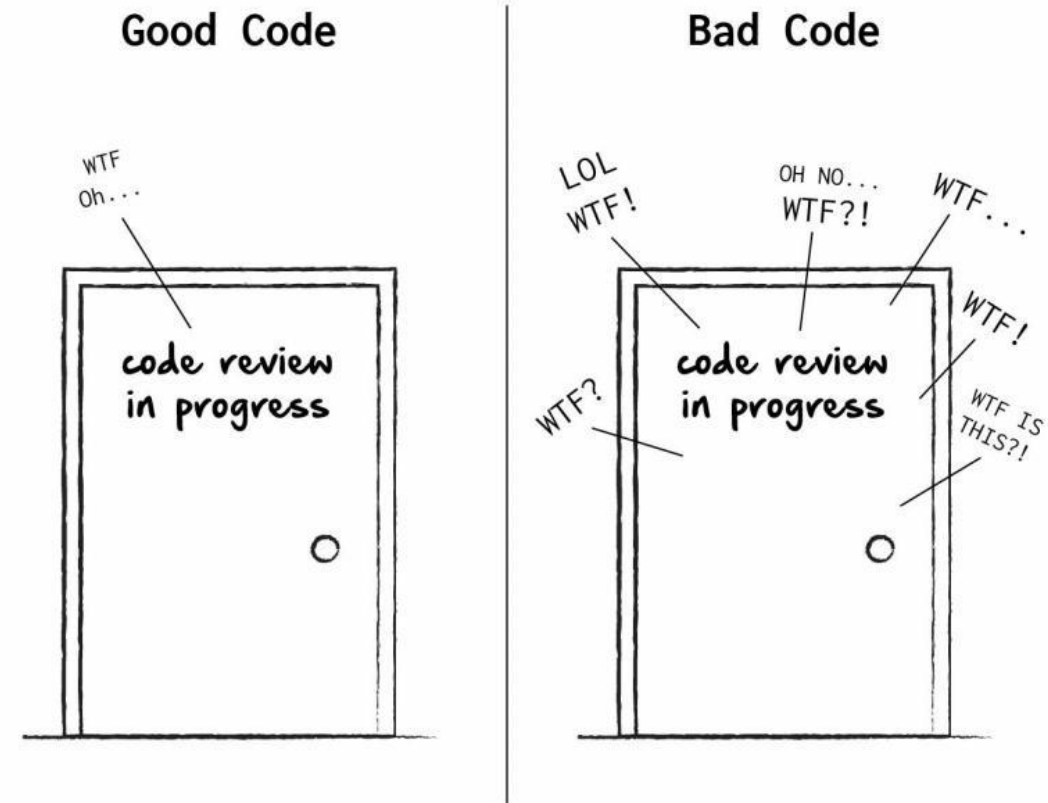


# Defining Your Own Functions


- As a general rule, you should not write functions more than a 30 or 40 lines.
- Smaller is better: 10 or less is good.
- If you need something bigger, break it up into multiple functions.
- **#cleancode**

**Code quality**  
is measured in WTFs/min

Good Code

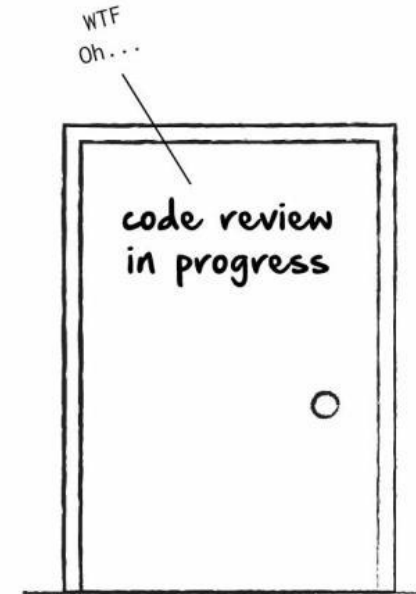

Bad Code

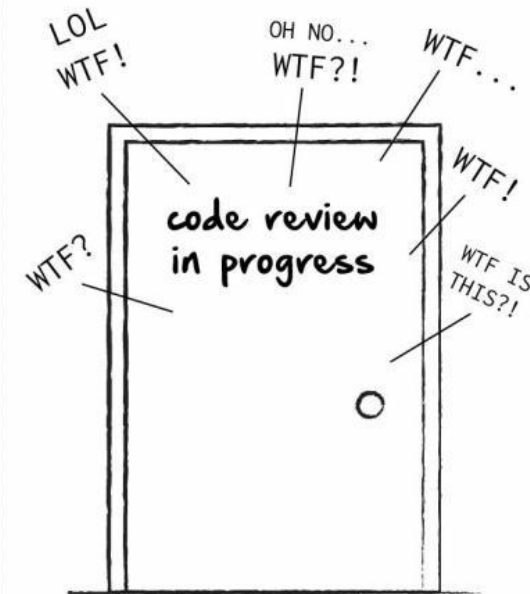



# Function Definitions

- The general form of a function definition is:

```
def function_name(parameters) :  
    body  
    return
```


Diagram annotations:

- Colon**: points to the colon at the end of the first line.
- Indent**: points to the first line of the function body.
- What are we returning?**: points to the `return` statement.
- (parameter1, parameter2, ...)**: points to the parameters in parentheses.

- **def** is a keyword, standing for **definition**. All function definitions must begin with `def`. The `def` statement must end with a colon.
- **function\_name** is the name you will use to call the function (like `sin`, `abs` but you need to create your own name).
- **parameters** are the variables that get values when you call the function. You can have 0 or more parameters, separated by commas. Must be in parenthesis.
- **body** is a sequence of commands like we've already seen (assignment, multiplication, function calls).
- **return** ends the function and returns data (like the sine of an angle).
- **Important:** all the lines of body must be **indented**. That is how Python knows that they are part of the function.

# Function Definitions

- The general form of a function definition is:

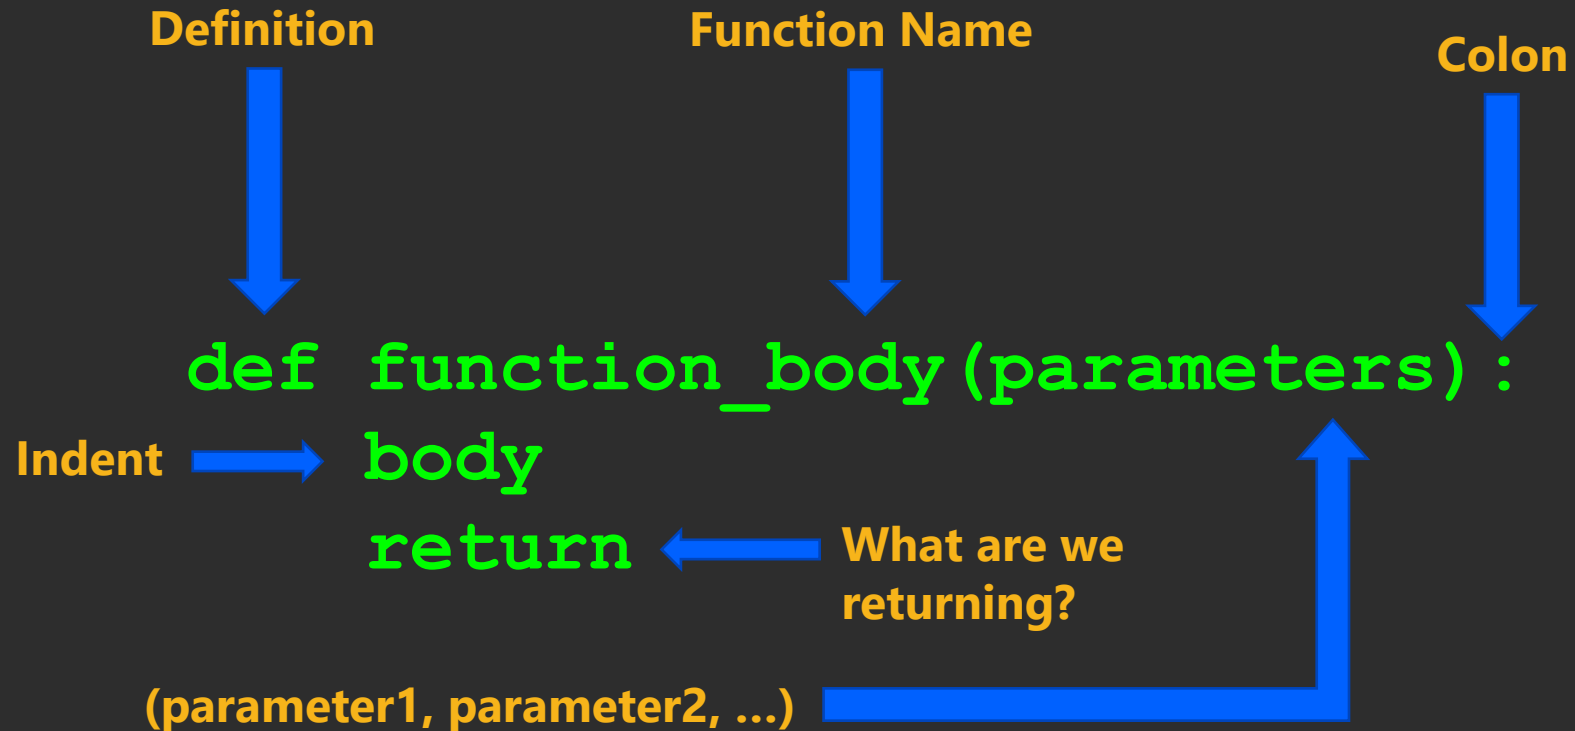

The diagram illustrates the components of a function definition in Python. It shows the code `def function_body(parameters):` on the first line, `body` on the second line (indented), and `return` on the third line (indented). Labels with arrows point to these parts: 'Definition' points to `def`, 'Function Name' points to `function_body`, 'Colon' points to `:`, 'Indent' points to the indentation of `body`, 'What are we returning?' points to `return`, and '(parameter1, parameter2, ...)' points to the parameters in parentheses.

```
def function_body(parameters):  
    body  
    return
```

(parameter1, parameter2, ...)

**Open your  
notebook**

**Click Link:**  
**11. Defining Your  
Own Functions**

# PRACTICE!

functions, input & output, importing modules.

**Week 2** | Lecture 1 (2.1)

if nothing else, write **#cleancode**.