

FHRP: First Hop Redundancy Protocols

A Hands-On Guide to Redundant Routing

Author: Mehdi JAFARI ZADEH

Date: March 2, 2025

Contents

0.1	Introduction to Network Topology for HSRP Implementation	4
1	HSRP Hands-On Configuration	5
1.1	Introduction to HSRP Configuration	5
1.1.1	Overview of HSRP and Its Importance	5
1.2	Basic HSRP Setup	5
1.2.1	Configuring an Interface for HSRP	5
1.2.2	Assigning Virtual IP Addresses in HSRP	6
1.2.3	Verifying HSRP Configuration	6
1.3	HSRP Priority and Preemption	6
1.3.1	Setting HSRP Priority Levels	6
1.3.2	Configuring Preemption for Faster Failover	7
1.3.3	Adjusting Preemption Delay Timers	8
1.4	HSRP Timer Adjustments	8
1.4.1	Modifying HSRP Hello and Hold Timers	8
1.5	HSRP Authentication	9
1.5.1	Configuring Text-Based Authentication	9
1.5.2	Configuring MD5 Authentication	9
1.5.3	Configuring MD5 Key-Chain Authentication	10
1.6	HSRP Tracking Mechanisms	11
1.6.1	Tracking Interface Status with HSRP	11
1.6.2	Using Object Tracking for Failover	11
1.6.3	Adjusting HSRP Tracking Decrement Values	12
1.7	HSRP Versioning and IPv6	12
1.7.1	Upgrading to HSRP Version 2	12
1.7.2	Configuring HSRP for IPv6	13
1.8	Verifying and Troubleshooting HSRP	13
1.8.1	Using <code>show standby</code> Commands for Verification	13
1.8.2	Common HSRP Misconfigurations and Fixes	14

0.1 Introduction to Network Topology for FHRP Implementation

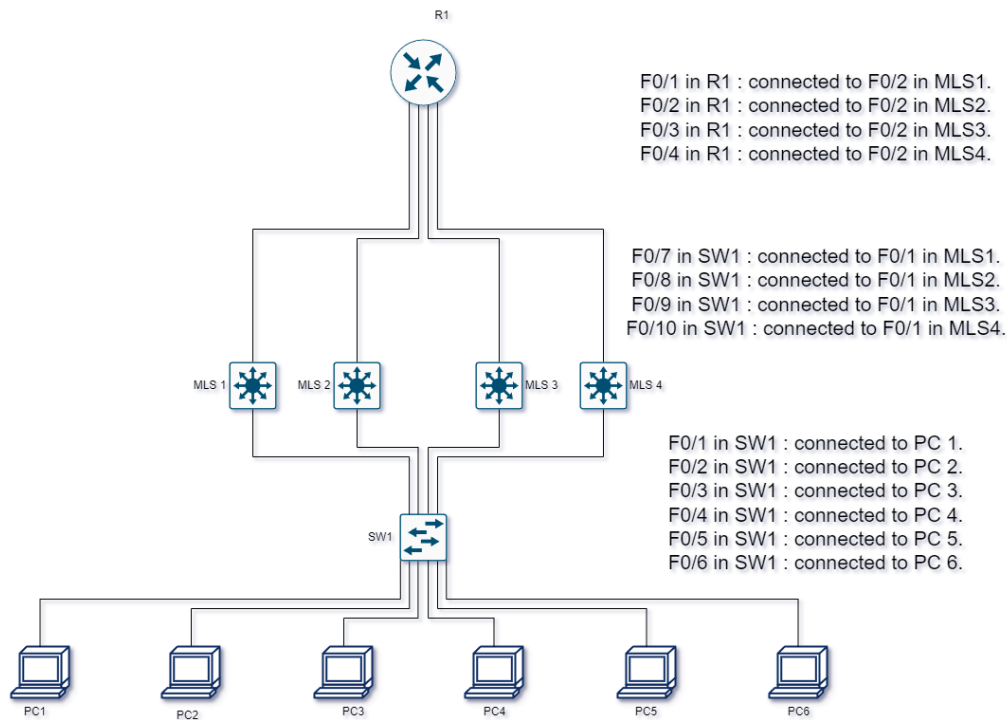


Figure 1:

This network topology is designed to demonstrate the implementation and functionality of First Hop Redundancy Protocols (FHRP), including **HSRP (Hot Standby Router Protocol)**, **VRRP (Virtual Router Redundancy Protocol)**, and **GLBP (Gateway Load Balancing Protocol)**. These protocols ensure high availability and fault tolerance by providing redundancy for default gateway routers in a network.

Topology Components

The topology consists of the following key components:

- **R1 (Router 1):** Serves as the upstream router that connects the network to external destinations.
- **MLS (Multi-Layer Switches) 1, 2, 3, and 4:** Act as Layer 3 distribution switches that participate in FHRP to provide redundancy and load balancing for end devices.
- **SW1 (Layer 2 Switch):** Functions as the access layer switch, connecting end devices (PC1 to PC6) to the network.
- **End Devices (PC1 - PC6):** Represent client machines that rely on a stable and resilient default gateway for communication beyond their local subnet.

Interconnections and Purpose

- The **end devices are connected to SW1** through FastEthernet ports (F0/1 to F0/6).
- SW1 is connected to the **multi-layer switches (MLS1 - MLS4)** via uplink ports (F0/7 to F0/10).
- Each **multi-layer switch is connected to the router (R1)** via FastEthernet links to provide redundancy at the Layer 3 distribution level.

Chapter 1

HSRP Hands-On Configuration

1.1 Introduction to HSRP Configuration

1.1.1 Overview of HSRP and Its Importance

Hot Standby Router Protocol (HSRP) is a Cisco proprietary redundancy protocol that provides **high availability** for IP networks by ensuring a backup router takes over automatically when the primary router fails.

In the **topology provided**, we have:

- R1 (Router)
- Four Multi-Layer Switches (MLS1, MLS2, MLS3, MLS4)
- One Layer 2 Switch (SW1)
- Six PCs (PC1 - PC6)

HSRP ensures **network uptime** by providing a **virtual gateway IP address**, which devices use as their default gateway. The **primary device** (Active Router) forwards packets, while the **secondary device** (Standby Router) takes over in case of failure.

1.2 Basic HSRP Setup

1.2.1 Configuring an Interface for HSRP

Each Multi-Layer Switch (MLS) needs an **HSRP virtual IP address** to act as the default gateway for connected hosts.

Lab Exercise 1: Configuring HSRP on VLAN 10

Objective: Configure **HSRP on VLAN 10** for MLS1 and MLS2 with a virtual IP.

Configuration Steps:

1. Access the VLAN interface on **MLS1** and assign an IP address.

[Click here to display the answer:](#)

2. Repeat for **MLS2** (standby switch).

3. [Click here to display the answer:](#)

4. Verify HSRP status.

[Click here to display the answer:](#)

Expected Outcome:

- One switch (MLS1 or MLS2) should be **Active**.
- The other switch should be **Standby**.
- The PCs should use 192.168.10.1 as the default gateway.

1.2.2 Assigning Virtual IP Addresses in HSRP

- The `standby 1 ip` command defines the **virtual IP address**.
- All hosts on **VLAN 10** should have 192.168.10.1 as their default gateway.

1.2.3 Verifying HSRP Configuration

To verify:

```
switch# show standby vlan 10
```

This command displays:

- **Active and Standby router roles**
- **Virtual IP and priority values**

1.3 HSRP Priority and Preemption

1.3.1 Setting HSRP Priority Levels

By default, the HSRP **Active Router** is chosen based on the highest **IP address**. However, we can manually assign priority.

Lab Exercise 2: Configuring HSRP Priority on MLS1 and MLS2

Objective: Set **MLS1** as the **Active Router** by increasing its priority.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- MLS1 should now be the **Active Router** because it has **higher priority (110 vs. 100)**.
- MLS2 should remain **Standby**.

1.3.2 Configuring Preemption for Faster Failover

- If the Active Router (**MLS1**) fails, **MLS2** takes over.
- When **MLS1** comes **back online**, it should **automatically reclaim the Active role**. This is done using **preemption**.

Lab Exercise 3: Configuring Preemption

Objective: Ensure **MLS1** **reclaims its role** as Active after recovery.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- If MLS1 fails, MLS2 becomes Active.
- When MLS1 returns, it **automatically reclaims** the role because of preemption.

1.3.3 Adjusting Preemption Delay Timers

To avoid flapping (switching back and forth between routers), we can add a **preemption delay** to wait before re-electing the Active Router.

Lab Exercise 4: Configuring Preemption Delay

Objective: Set a **30-second delay** before preemption occurs.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- **MLS1 will wait 30 seconds** before reclaiming Active status after recovering from failure.

1.4 HSRP Timer Adjustments

1.4.1 Modifying HSRP Hello and Hold Timers

By default, HSRP uses the following timers:

- **Hello Timer:** 3 seconds
- **Hold Timer:** 10 seconds

Adjusting these timers can **speed up failover** or **stabilize the network** in case of high traffic or latency.

Lab Exercise 5: Adjusting HSRP Timers

Objective: Configure **faster failover** by modifying **hello** and **hold timers** on VLAN 10.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- **Hello Timer = 1 second**
- **Hold Timer = 3 seconds**
- **Failover will happen faster** if the Active Router fails.

1.5 HSRP Authentication

HSRP authentication prevents **unauthorized devices** from participating in the election process, which enhances security.

1.5.1 Configuring Text-Based Authentication

Text authentication allows devices in the same group to verify each other using a **shared password**.

Lab Exercise 6: Configuring Text Authentication

Objective: Secure HSRP using a **shared password** (“SecureHSRP”).

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- Both switches will **only communicate** if they have the same authentication key.

1.5.2 Configuring MD5 Authentication

MD5 authentication encrypts the authentication key, making it more secure than plain text.

Lab Exercise 7: Configuring MD5 Authentication

Objective: Use **MD5 authentication** to secure HSRP communications.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- HSRP **will not function** if authentication keys don't match.

1.5.3 Configuring MD5 Key-Chain Authentication

Instead of storing a key as a plain string, we can use **Key-Chains**, which allow key rotation for added security.

Lab Exercise 8: Configuring Key-Chain Authentication

Objective: Use **MD5 key-chain authentication** for HSRP.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- HSRP uses **encrypted authentication** with rotating keys.

1.6 HSRP Tracking Mechanisms

HSRP tracking allows switches to **monitor interface states** and adjust priorities dynamically when an interface fails.

1.6.1 Tracking Interface Status with HSRP

When an uplink fails, the **standby router should take over immediately**.

Lab Exercise 9: Configuring HSRP Interface Tracking

Objective: Track interface **GigabitEthernet 1/1** on MLS1. If it fails, reduce priority by **20** to allow MLS2 to take over.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- If GigabitEthernet1/1 goes down, MLS1's priority decreases by **20**.
- If priority drops below MLS2, MLS2 will become **Active Router**.

1.6.2 Using Object Tracking for Failover

Instead of tracking interfaces, we can track an **IP route or other conditions**.

Lab Exercise 10: Configuring Object Tracking for HSRP

Objective: Track an **IP route (192.168.1.0/24)** and decrement HSRP priority if it becomes unreachable.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- If 192.168.1.0/24 route fails, MLS1 will lower its priority by **15**, allowing MLS2 to take over.

1.6.3 Adjusting HSRP Tracking Decrement Values

You can modify **how much priority is reduced** when tracking a failure. For example, a higher decrement value makes failover happen **faster**:

```
MLS1(config-if)# standby 1 track 1 decrement 30
```

Expected Outcome:

- If the tracked object **fails**, the priority is lowered more significantly, triggering a failover faster.

1.7 HSRP Versioning and IPv6

1.7.1 Upgrading to HSRP Version 2

By default, HSRP uses **Version 1**, but **Version 2** offers:

- Support for **larger group numbers** (0–4095 instead of 0–255)
- IPv6 compatibility
- Faster failover performance

Lab Exercise 11: Enabling HSRP Version 2

Objective: Upgrade HSRP to **Version 2** on MLS1 and MLS2.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- **HSRP version 2** should be active on both switches.
- **Virtual IP and group number remain unchanged.**

1.7.2 Configuring HSRP for IPv6

HSRP also works with **IPv6**, providing the same high-availability benefits.

Lab Exercise 12: Configuring HSRP for IPv6

Objective: Implement **IPv6 HSRP** on VLAN 20 using a **link-local virtual address**.

Configuration Steps:

[Click here to display the answer:](#)

Expected Outcome:

- IPv6 HSRP should be operational.
- **Virtual IPv6 address** should be auto-configured.

1.8 Verifying and Troubleshooting HSRP**1.8.1 Using show standby Commands for Verification**

The `show standby` command is essential for **monitoring HSRP status**.

Lab Exercise 13: Verifying HSRP Configuration

Objective: Check which router is active and standby in VLAN 10. **Verification Command:**

[Click here to display the answer:](#)

Expected Output Example:

```
Vlan10 Group 1 State: Active
Virtual IP: 192.168.10.1
Active Router: Local
Standby Router: 192.168.10.3
Priority: 110
Preemption: Enabled
```

- **Active Router:** MLS1 (local device).
- **Standby Router:** MLS2 (192.168.10.3).
- **Preemption enabled** to reclaim Active role when MLS1 recovers.

Other Useful Commands:**1. Show detailed HSRP information:**

```
MLS1# show standby vlan 10
```

2. Check timers and authentication settings:

```
MLS1# show standby vlan 10 detail
```

1.8.2 Common HSRP Misconfigurations and Fixes**Issue #1: Both Routers in Active State**

Problem: Both MLS1 and MLS2 are showing as **Active**. **Solution:**

- Ensure **HSRP authentication keys match**.

```
MLS1# show standby vlan 10 | include Auth
```

- If different, reconfigure authentication:

```
MLS1(config-if)# standby 1 authentication md5 key-string HSRP_MD5
MLS2(config-if)# standby 1 authentication md5 key-string HSRP_MD5
```

Issue #2: Standby Router Never Becomes Active

Problem: When MLS1 fails, **MLS2 does not take over**. **Solution:**

- Ensure **preemption is enabled**:

```
MLS2(config-if)# standby 1 preempt
```

- Check if interface tracking is **causing a low priority**.

```
MLS2# show standby vlan 10
```

If priority is **too low**, increase it:

```
MLS2(config-if)# standby 1 priority 120
```

Issue #3: Hosts Can't Reach the Virtual Gateway**Problem:** PCs cannot ping 192.168.10.1 (HSRP virtual IP). **Solution:**

- Check if VLAN interface is **up** on both switches:

```
MLS1# show ip interface brief | include Vlan10
```

- If it shows "**administratively down**", enable it:

```
MLS1(config)# interface vlan 10
MLS1(config-if)# no shutdown
```