


Process to check the tape drives availability.

This process need to be followed every Monday - Friday between 7am – 9am EST on system IASU1079 or some other system if IASU1079 is not available.

1, To check the tape drives are loaded with any media.

DSPTAPSTS TAPMLB02

Screenshot: 1

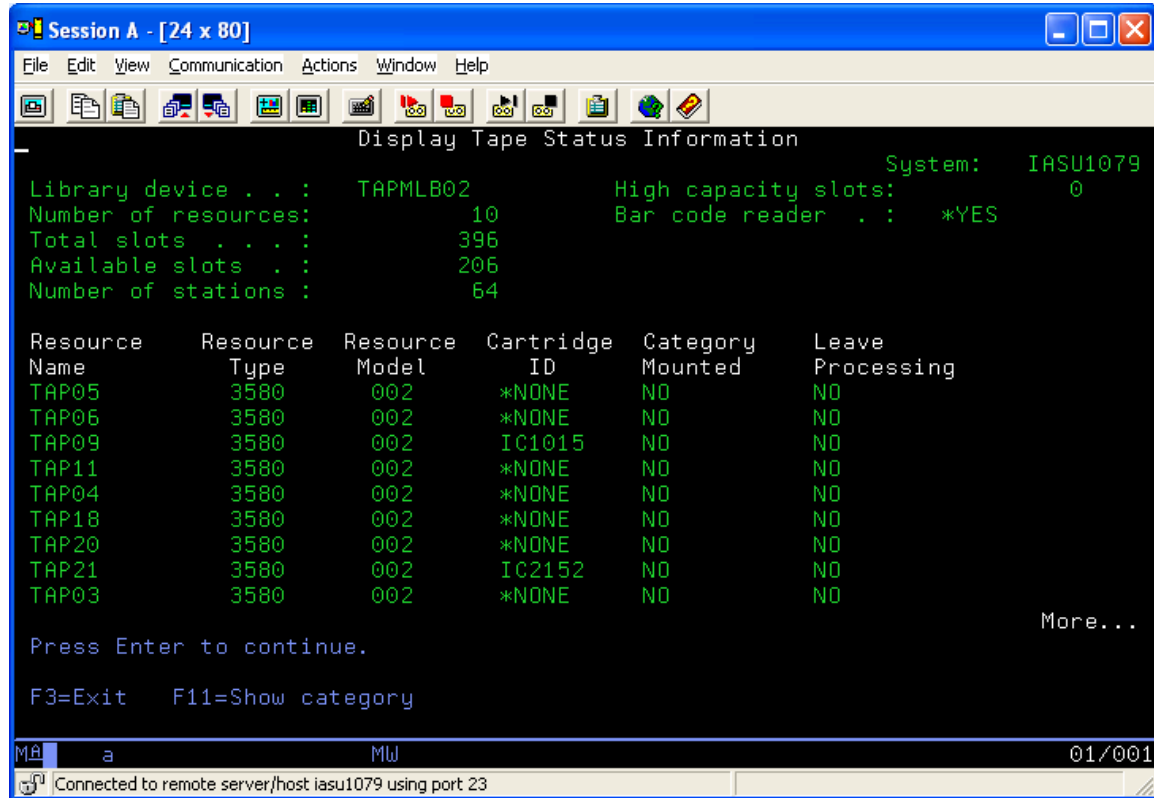

Usually there won't be any media loaded in the tapedrive between 7am – 9am EST.
If there is no media found on the drives.

Please follow **Section A**.

If you found any media loaded in the drives as in the **Screenshot 1**.

Please follow **Section B**.


Section A

To verify all the drives are not engaged for any system, try to allocate all the tape drives resources for this system by using below command in command line.

**VRYCFG CFGOBJ (TAPMLB02) CFGTYPE (*MLBRSC) STATUS
(*ALLOCATE) RSRCTYPE (*ALL)**

Then perform **WRKMLBSTS** and check the drive status.

Screenshot: 2

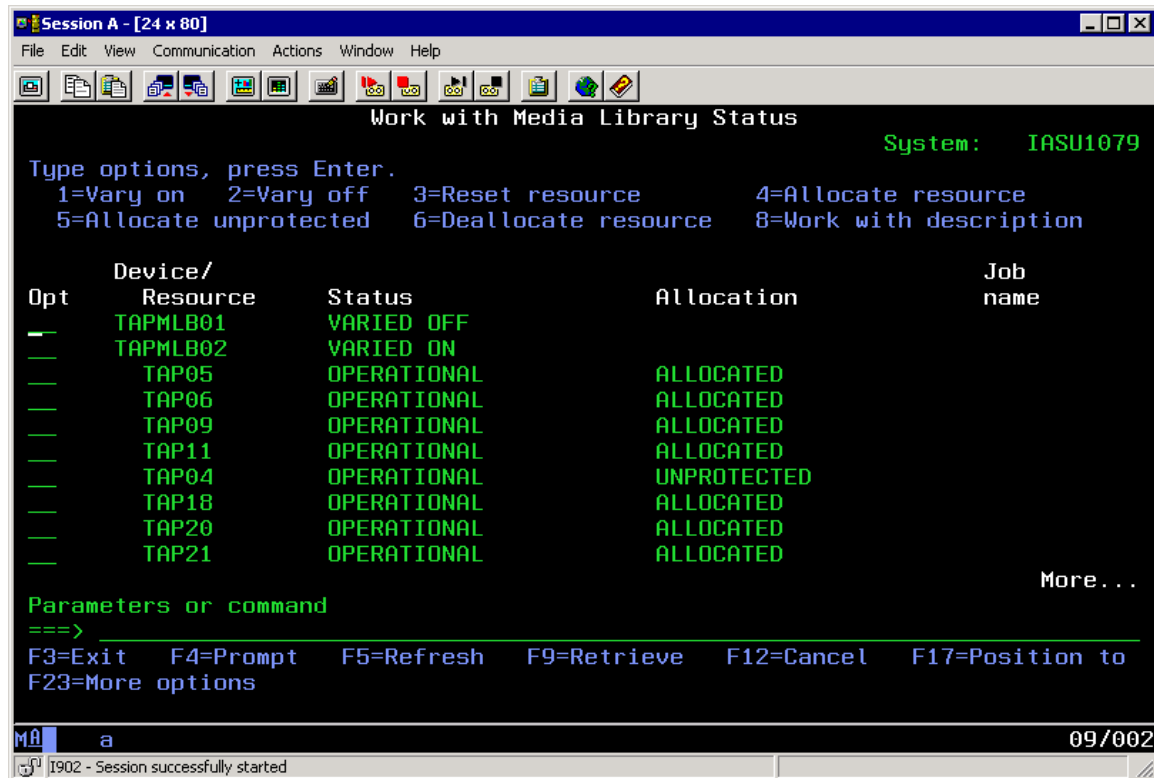

If all the drive status becomes **OPERATIONAL ALLOCATED** then revert back it to **OPERATIONAL UNPROTECTED** by using the follow command.

The below command need to be executed without fail.

**VRYCFG CFGOBJ (TAPMLB02) CFGTYPE (*MLBRSC) STATUS
(*UNPROTECTED) RSRCTYPE (*ALL)**

Result: All the tape drives status is verified and it is working fine.

If the tape drives resource status not changed as **TAP04** mentioned in the **Screenshot 2**, **Then take the below action:**

Find the serial number of Tapedrive, location in IBM 3584 Tape library and Power cycle it using tape library web interface

Process to find the serial number of particular tape drives resource.

WRKHDWRSC TYPE(*STG)

Session A - [24 x 80]

File Edit View Communication Actions Window Help

Work with Storage Resources

System: IASU1079

Type options, press Enter.
7=Display resource detail 9=Work with resource

Opt	Resource	Type-model	Status	Text
—	CMB01	2844-001	Operational	Combined function IOP
—	DC01	5703-001	Operational	Storage Controller
—	CMB02	268C-001	Operational	Combined function IOP
—	DC02	6B02-001	Operational	Storage Controller
—	CMB03	2844-001	Not detected	Storage Controller
—	DC05	5702-001	Not detected	Storage Controller
—	CMB04	2844-001	Operational	Storage Controller
—	DC03	2787-001	Operational	Disk Storage Controller
—	CMB05	2844-001	Operational	Combined function IOP
—	DC04	5704-001	Operational	Tape Controller
—	TAPMLB04	3494-012	Operational	Tape Library
—	TAPMLB05	3494-012	Operational	Tape Library
—	TAPMLB02	3494-012	Operational	Tape Library
—	TAPMLB03	3584-032	Operational	Tape Library
—	CMB06	2844-001	Not detected	Storage Controller

More...

F3=Exit F5=Refresh F6=Print F12=Cancel

MA a MW A 21/003

Connected to remote server/host iasu1079 using port 23

Take option 9 over 3584 Operational Tape Library

Session A - [24 x 80]

File Edit View Communication Actions Window Help

Work with Storage Resources

System: IASU1079

Type options, press Enter.
7=Display resource detail 9=Work with resource

Opt	Resource	Type-model	Status	Text
—	CMB01	2844-001	Operational	Combined function IOP
—	DC01	5703-001	Operational	Storage Controller
—	CMB02	268C-001	Operational	Combined function IOP
—	DC02	6B02-001	Operational	Storage Controller
—	CMB03	2844-001	Not detected	Storage Controller
—	DC05	5702-001	Not detected	Storage Controller
—	CMB04	2844-001	Operational	Storage Controller
—	DC03	2787-001	Operational	Disk Storage Controller
—	CMB05	2844-001	Operational	Combined function IOP
—	DC04	5704-001	Operational	Tape Controller
—	TAPMLB04	3494-012	Operational	Tape Library
—	TAPMLB05	3494-012	Operational	Tape Library
—	TAPMLB02	3494-012	Operational	Tape Library
9	TAPMLB03	3584-032	Operational	Tape Library
—	CMB06	2844-001	Not detected	Storage Controller

More...

F3=Exit F5=Refresh F6=Print F12=Cancel

MA a MW A 21/003

Connected to remote server/host iasu1079 using port 23

Take option 7 and find the serial number of tape drive.

```
Session A - [24 x 80]
File Edit View Communication Actions Window Help
Work with Storage Controller Resources
System: IASU1079
Type options, press Enter.
5=Work with configuration descriptions 7=Display resource detail

Opt Resource      Type-model Status      Text
-  TAPMLB03        3584-032 Operational Tape Library
7  TAP04           3580-002 Operational Tape Unit
-  TAP03           3580-002 Operational Tape Unit
-  TAP06           3580-002 Operational Tape Unit
-  TAP05           3580-002 Operational Tape Unit
-  TAP18           3580-002 Operational Tape Unit
-  TAP12           3580-002 Not detected Tape Unit
-  TAP22           3580-002 Operational Tape Unit
-  TAP11           3580-002 Operational Tape Unit
-  TAP20           3580-002 Operational Tape Unit
-  TAP09           3580-002 Operational Tape Unit
-  TAP19           3580-002 Not detected Tape Unit
-  TAP21           3580-002 Operational Tape Unit
-  TAP10           3580-002 Not detected Tape Unit

F3=Exit F5=Refresh F6=Print F12=Cancel
Bottom
MA a MW 09/003
Connected to remote server/host iasu1079 using port 23
```

```
Session A - [24 x 80]
File Edit View Communication Actions Window Help
Display Resource Detail
System: IASU1079
Resource name . . . . . : TAP04
Text . . . . . : Tape Unit
Type-model . . . . . : 3580-002
Serial number . . . . . : 00-0303722
Part number . . . . . :

Location:

Logical address:
PCI bus:
System bus 27
System board 0
System card 32
Library:

More...
Press Enter to continue.
F3=Exit F5=Refresh F6=Print F12=Cancel
MA a MW 01/001
Connected to remote server/host iasu1079 using port 23
```

Note down the serial number here: 00-0303722

Process to find the row location for particular drive using web-interface link.

http://54.49.196.25/US/En_US-En_US-01829059994/whtm_index.htm

54.49.196.25 - IBM UltraScalable Specialist - Microsoft Internet Explorer provided by Merck & Co., Inc.

Address: http://54.49.196.25/US/En_US-En_US-01829059994/whtm_index.htm

IBM System Storage™ TS3500 Tape Library

Work Items

- Welcome Page
- Manage Cartridges
- Manage Drives
- Manage Library - CTCLT28691
- Manage Ports
- Manage Access
- Service Library

Switch to Original Navigation

Welcome Page

TS3500 Tape Library

The Specialist enables you to monitor library status and perform library operations from a remote location. Use the Work Items area on the left to navigate to available Specialist tasks.

[Manage Physical Library](#)

[Manage Logical Library](#)

• Advanced Library Management System is Enabled

javascript:navClick("logicalNew")

Local intranet

To find the row location for particular drive with reference serial number.

Go to Service Library – DriveVPD

54.49.196.25 - IBM UltraScalable Specialist - Microsoft Internet Explorer provided by Merck & Co., Inc.

Address: http://54.49.196.25/US/En_US-En_US-01829059994/whtm_index.htm

IBM System Storage™ TS3500 Tape Library

Work Items

- Welcome Page
- Manage Cartridges
- Manage Drives
- Manage Library - CTCLT28691
- Manage Ports
- Manage Access
- Service Library
 - Library VPD
 - Drive VPD
 - Node Card VPD
 - Download Library Logs
 - Download Drive Logs
 - View Library Error Log
 - Firmware Update
 - Master Console
 - Adjust Scanner Speed

Switch to Original Navigation

Drive Vital Product Data

Location	Drive Type	Firmware Version	Serial Number
Frame 2, Row 1	ULT3580-TD2	5AT0	1110224602
Frame 2, Row 2	ULT3580-TD2	5AT0	1110220496
Frame 2, Row 3	ULT3580-TD2	5AT0	1110224226
Frame 2, Row 4	ULT3580-TD2	5AT0	1110331908
Frame 2, Row 5	ULT3580-TD2	5AT0	1110220534
Frame 2, Row 6	ULT3580-TD2	5AT0	1110219947
Frame 2, Row 7	ULT3580-TD2	5AT0	1110223185
Frame 2, Row 8	ULT3580-TD2	5AT0	1110220569
Frame 2, Row 9	ULT3580-TD2	5AT0	1110226523
Frame 2, Row 10	ULT3580-TD2	5AT0	1110226850
Frame 5, Row 1	ULT3580-TD2	67U1	1110303722
Frame 5, Row 2	ULT3580-TD2	67U1	1110214982
Frame 5, Row 3	ULT3580-TD2	67U1	1110219647
Frame 5, Row 4	ULT3580-TD2	67U1	1110224617
Frame 5, Row 5	ULT3580-TD2	67U1	1110366638
Frame 5, Row 6	ULT3580-TD2	73V1	1110144517
Frame 5, Row 7	ULT3580-TD2	5AT0	1110226818
Frame 5, Row 8	ULT3580-TD2	67U1	9110182324
Frame 5, Row 9	ULT3580-TD2	5AT0	1110220587

00-0303722

Local intranet

Note down the Frame and Row location here: **F5, R1**

Power Cycling the Tape Drive.

Vary off the TAPMLB02 in system and vary on back once power cycle done.

Go to Manage Drives – Drive Summary – Select TAPMLB12 and TAPEDRIVE

Select option – Power Cycle - GO

IBM System Storage™ TS3500 Tape Library

Work Items

- Welcome Page
- Manage Cartridges
- Manage Drives
 - Drive Summary
 - Drive Assignment
 - Control Paths
 - World Wide Names
 - Cleaning Mode
- Manage Library - CTCLT28691
- Manage Ports
- Manage Access
- Service Library
 - Library VPD
 - Drive VPD
 - Node Card VPD
 - Download Library Logs
 - Download Drive Logs
 - View Library Error Log
 - Firmware Update
 - Master Console
 - Adjust Scanner Speed

Switch to Original Navigation

Drives

Select a Frame: All Frames OR Select a Logical Library: TAPMLB12

DOWNLOAD: Drive Statistics(csv)

Power Cycle Go

Select	Drive	Location	Frame	Row	Logical Library	Element Address	Type	Contents	SCSI/Loop ID	Drive Interface	Status	Drive Displa
☒	30F01EC41	5	1		TAPMLB12	305	LTO Ultrium-2	Empty	81	Fibre	Online	0
☐	30F01EC42	5	2		TAPMLB12	306	LTO Ultrium-2	Empty	82	Fibre	Online	0
☐	30F01EC43	5	3		TAPMLB12	307	LTO Ultrium-2	Empty	83	Fibre	Online	0
☐	30F01EC44	5	4		TAPMLB12	308	LTO Ultrium-2	Empty	84	Fibre	Online	0
☐	30F01EC45	5	5		TAPMLB12	309	LTO Ultrium-2	Empty	85	Fibre	Online	0
☐	30F01EC46	5	6		TAPMLB12	310	LTO Ultrium-2	Empty	86	Fibre	Online	0
☐	30F01EC47	5	7		TAPMLB12	311	LTO Ultrium-2	Empty	87	Fibre	Online	0
☐	30F01EC48	5	8		TAPMLB12	312	LTO Ultrium-2	Empty	88	Fibre	Online	0
☐	30F01EC49	5	9		TAPMLB12	313	LTO Ultrium-2	Empty	89	Fibre	Online	0
☐	30F01EC4A	5	10		TAPMLB12	314	LTO Ultrium-2	Empty	90	Fibre	Online	0

Once it is Power cycled then try to allocate and unprotect the particular drive by using the follow process..

WRKMLBSTS

```
Session A - [24 x 80]
File Edit View Communication Actions Window Help

Work with Media Library Status

System: IASU1079

Type options, press Enter.
1=Vary on 2=Vary off 3=Reset resource 4=Allocate resource
5=Allocate unprotected 6=Deallocate resource 8=Work with description

Opt Device/ Resource Status Allocation Job name
--- TAPMLB01 VARIED OFF
--- TAPMLB02 VARIED ON
--- TAP05 OPERATIONAL UNPROTECTED
--- TAP06 OPERATIONAL UNPROTECTED
--- TAP09 OPERATIONAL UNPROTECTED
--- TAP11 OPERATIONAL UNPROTECTED
--- TAP04 OPERATIONAL UNPROTECTED
--- TAP18 OPERATIONAL UNPROTECTED
--- TAP20 OPERATIONAL UNPROTECTED
--- TAP21 OPERATIONAL UNPROTECTED

Parameters or command
==>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel F17=Position to
F23=More options
(C) COPYRIGHT IBM CORP. 1980, 2003.

MA a MW A 09/002
Connected to remote server/host iasu1079 using port 23
```

Take option 4=Allocate resource and 5=Allocate unprotected for the particular problem drive.

```
Session A - [24 x 80]
File Edit View Communication Actions Window Help

Work with Media Library Status

System: PRODDOME1

Type options, press Enter.
1=Vary on 2=Vary off 3=Reset resource 4=Allocate resource
5=Allocate unprotected 6=Deallocate resource 8=Work with description

Opt Device/ Resource Status Allocation Job name
--- TAPMLB01 VARIED OFF
--- TAPMLB02 VARIED ON
4 TAP04 OPERATIONAL UNPROTECTED
--- TAP06 OPERATIONAL UNPROTECTED
--- TAP08 OPERATIONAL UNPROTECTED
--- TAP09 OPERATIONAL UNPROTECTED
--- TAP11 OPERATIONAL UNPROTECTED
--- TAP12 OPERATIONAL UNPROTECTED
--- TAP13 OPERATIONAL UNPROTECTED
--- TAP17 OPERATIONAL UNPROTECTED

Parameters or command
==>
F3=Exit F4=Prompt F5=Refresh F9=Retrieve F12=Cancel F17=Position to
F23=More options
(C) COPYRIGHT IBM CORP. 1980, 2003.

MA a A 11/003
Connected to remote server/host PRODDOME1 using port 23
```


Result: The particular drive should be allocated and revert back to Unprotected. If it does not works, please contact next level support.

End of Section A

Section B

Check for which system backup the media has been allocated.

WRKMEDBRM VOL (IC1015) and press F11.

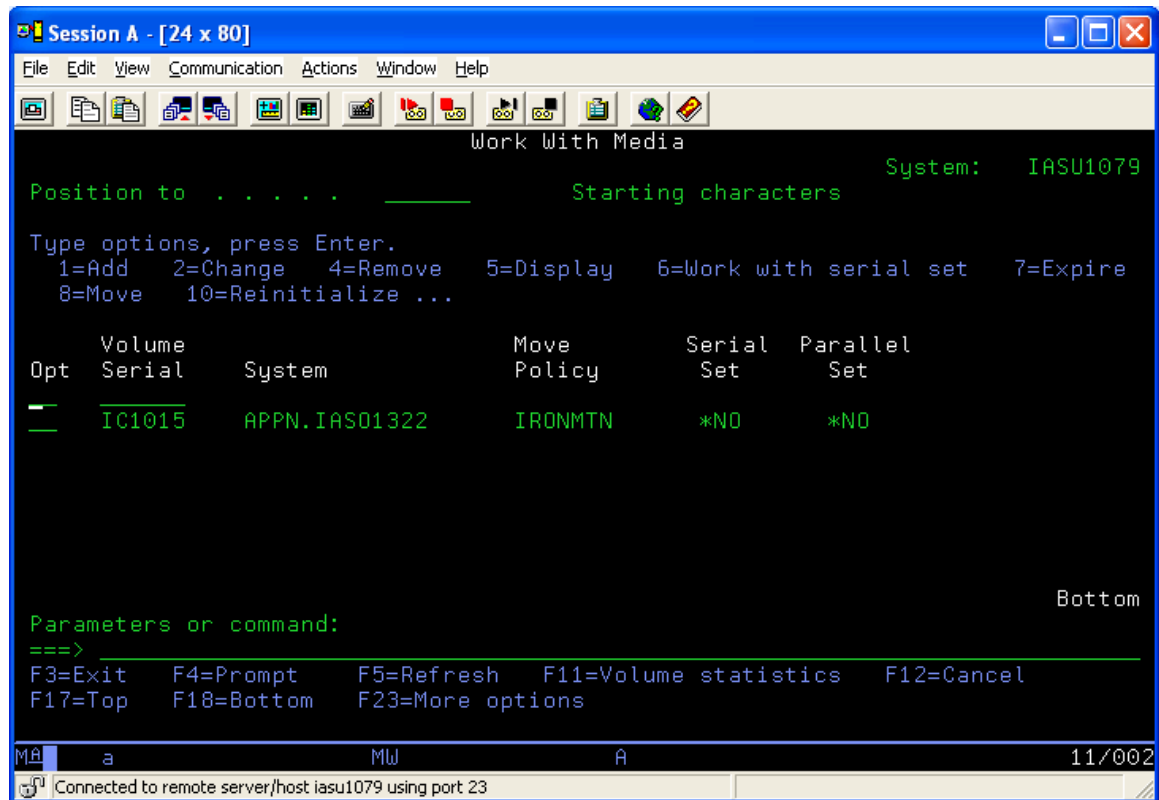

If you found that backup is completed long back and still the media is in Tape Library, Then eject those media's by following the process to eject media from the tape library document which we have already in KM.

http://54.49.196.25/US/En_US-En_US-01829059994/whtm_index.htm

Now continue with Section A Process

End of Section B