





- James Gosling

- first version Jan, 23, 1996
Java 1 , version 1.0.2

- old name was oak → java

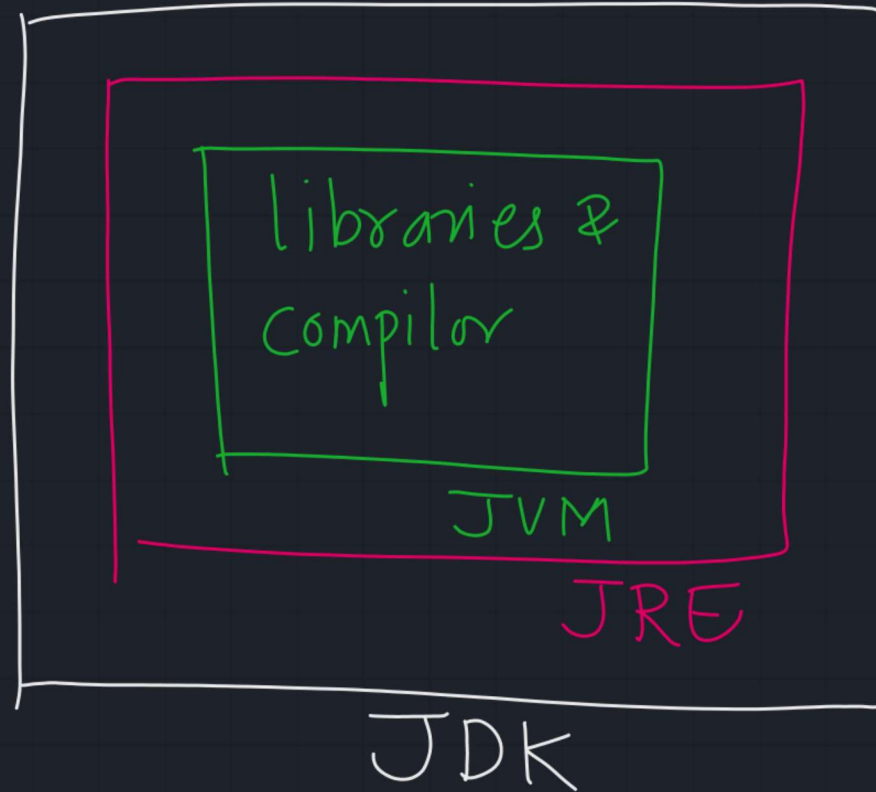

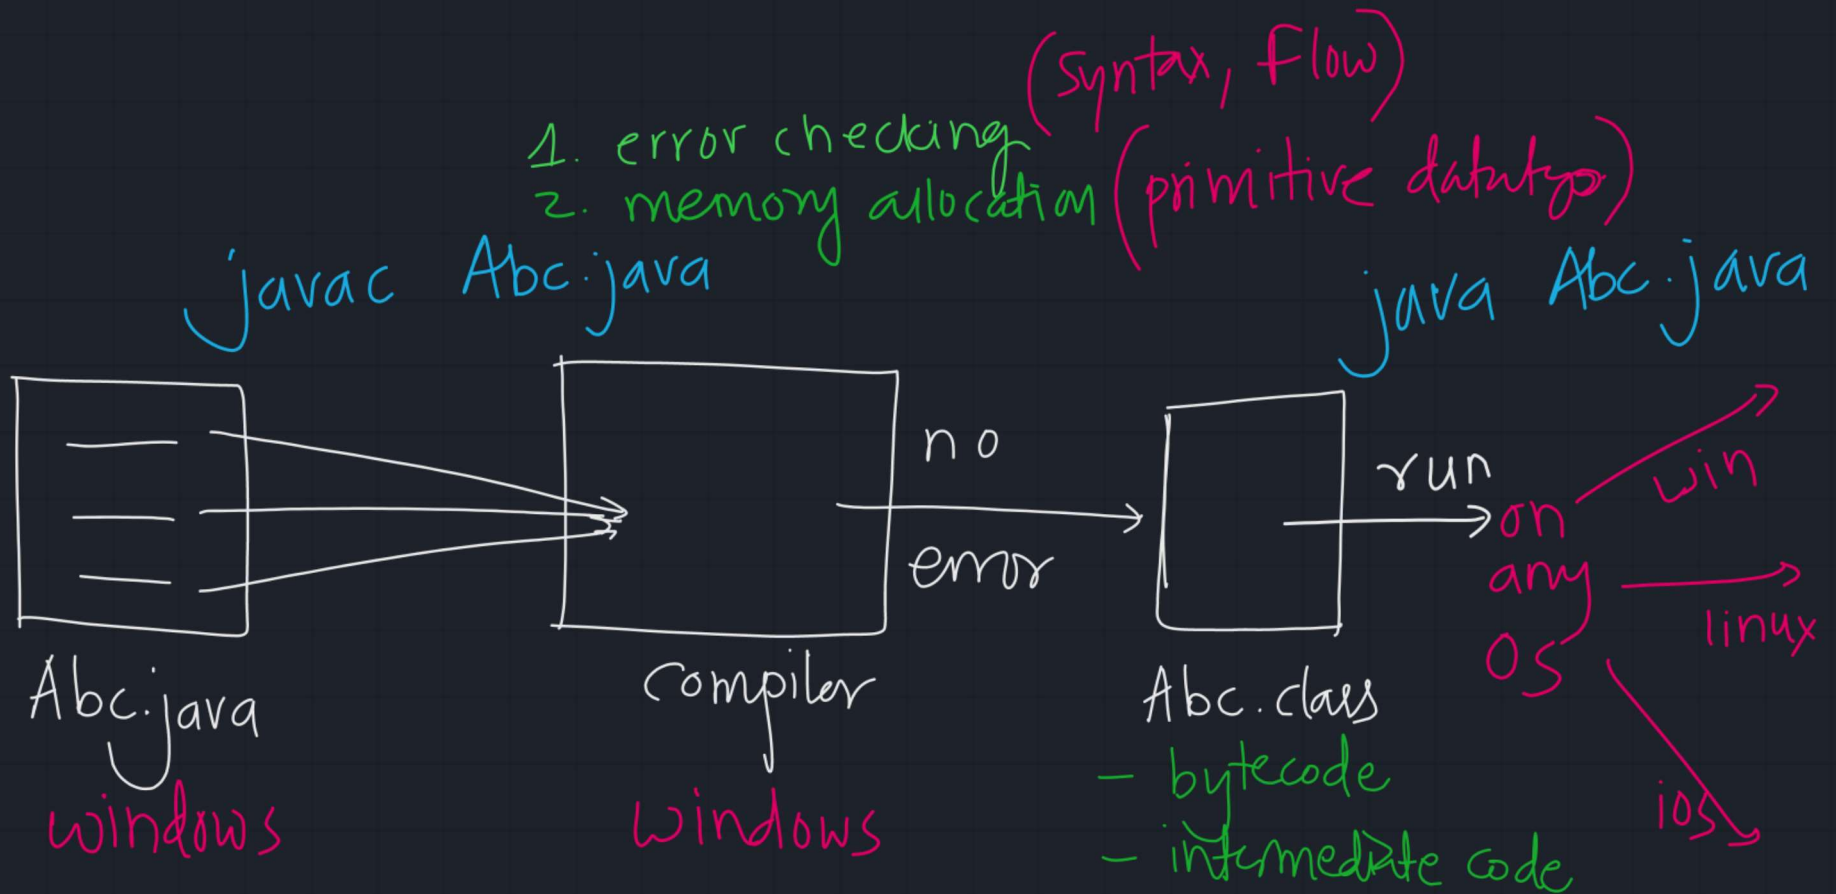

Python → dynamically typed

`x = 30`

→ datatype of `x` → int

`x = "hi"`

→ datatype of `x` → string

java → Strictly typed

`int x = 30;`

↳ `int x;` declaration

↳ `x = 30;` initialization

— datatype of `x` → int

`x = "hi"` X

wrong

Rules for creating java file

1. java file can have multiple classes

2. in one java file there must be atmost one public class allowed

2.1 if your java file has one public class then its name must be given to the file

3. if your java file does not have any public class then you can give any name to file

1. class : it is blueprint or plan

2. object : physical existence of class it has attributes & behaviours



3. reference variable : used to access or modify attributes and behaviours of object

scope
of
class

```
class Ac  
{  
    String brand = "LG";  
    void turbo-cooling()  
    {  
        System.out.println("turbo ON");  
    }  
    public static void main(String[] args)  
    {  
        Ac ac = new Ac();  
        System.out.println(ac.brand);  
        ac.turbo-cooling();  
    }  
}
```

class name

variable/attribute

method/behaviour

print statement

main method

reference variable

object

accessed variable using rv

accessed method using rv