

Variable :- name given to the memory locⁿ to store data

- used to store data

- ex: datatype variable_name;
int x; → variable declⁿ
x = 10; → variable initialⁿ

Identifier naming convention

↳ name given to any entity in Java like class, interface, method, variable, constant

- must be start with capital letter
- must be noun like Car, Employee etc

- must be start with capital letter
- must be adjective like Skill

- must be start with small case & follow camel notation
- must be verb like working()


variable :- must be start with small case
& follow camel notation
name, fullName

constant :- must be all in caps.
to differentiate use (-)
MAX-AGE

- do not start with number or special symbol
- use number anywhere other than start

never
use

Java Datatypes (which type of data variable holds)

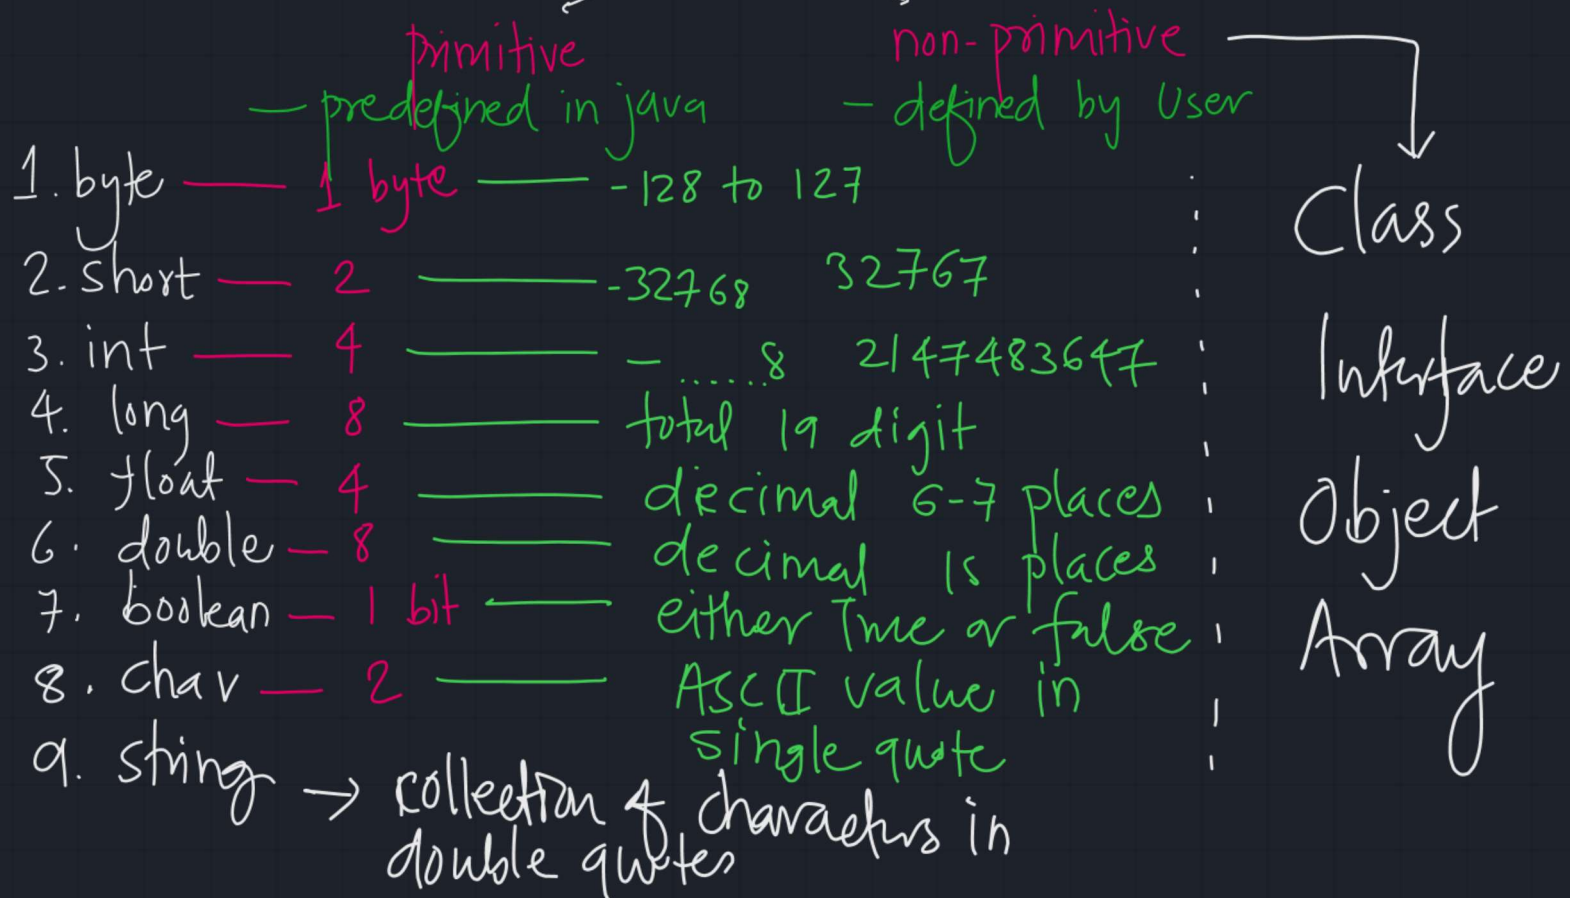

operators :
Symbols / tools we use to perform operation on datatype

1. Arithmetic ——— $+$, $-$, $*$, $/$, $\%$

2. Unary ——— $++$, $--$ } arithmetic + assignment

3. Assignment ——— $=$, $+=$, $-=$, $*=$

4. Comparison ——— $>$, $<$, $>=$, $<=$, $!=$, $==$

5. Logical ——— $\&\&$, $||$, $!$

6. bitwise ——— $<<$, $>>$, $\&$, $|$, $\wedge$, $\cup$

7. Ternary ——— $? :$