



Question #1301

Topic 1

DRAG DROP

-

Drag and drop the characteristic from the left onto the IPv6 address type on the right.

sends packets to a group address rather than a single address

confined to a single link

provides one-to-many communications

serves as the next-hop addresses in IGP

Multicast

Link-Local Address

Correct Answer:

Multicast

sends packets to a group address rather than a single address

provides one-to-many communications

Link-Local Address

confined to a single link

serves as the next-hop addresses in IGP

<https://www.examtopics.com/exams/cisco/200-301/view/11/>

1/39

Question #1302

Topic 1


What causes a port to be placed in the err-disabled state?

- A. shutdown command issued on the port
- B. port security violation Most Voted
- C. nothing plugged into the port
- D. latency

Correct Answer: B

Community vote distribution

B (100%)

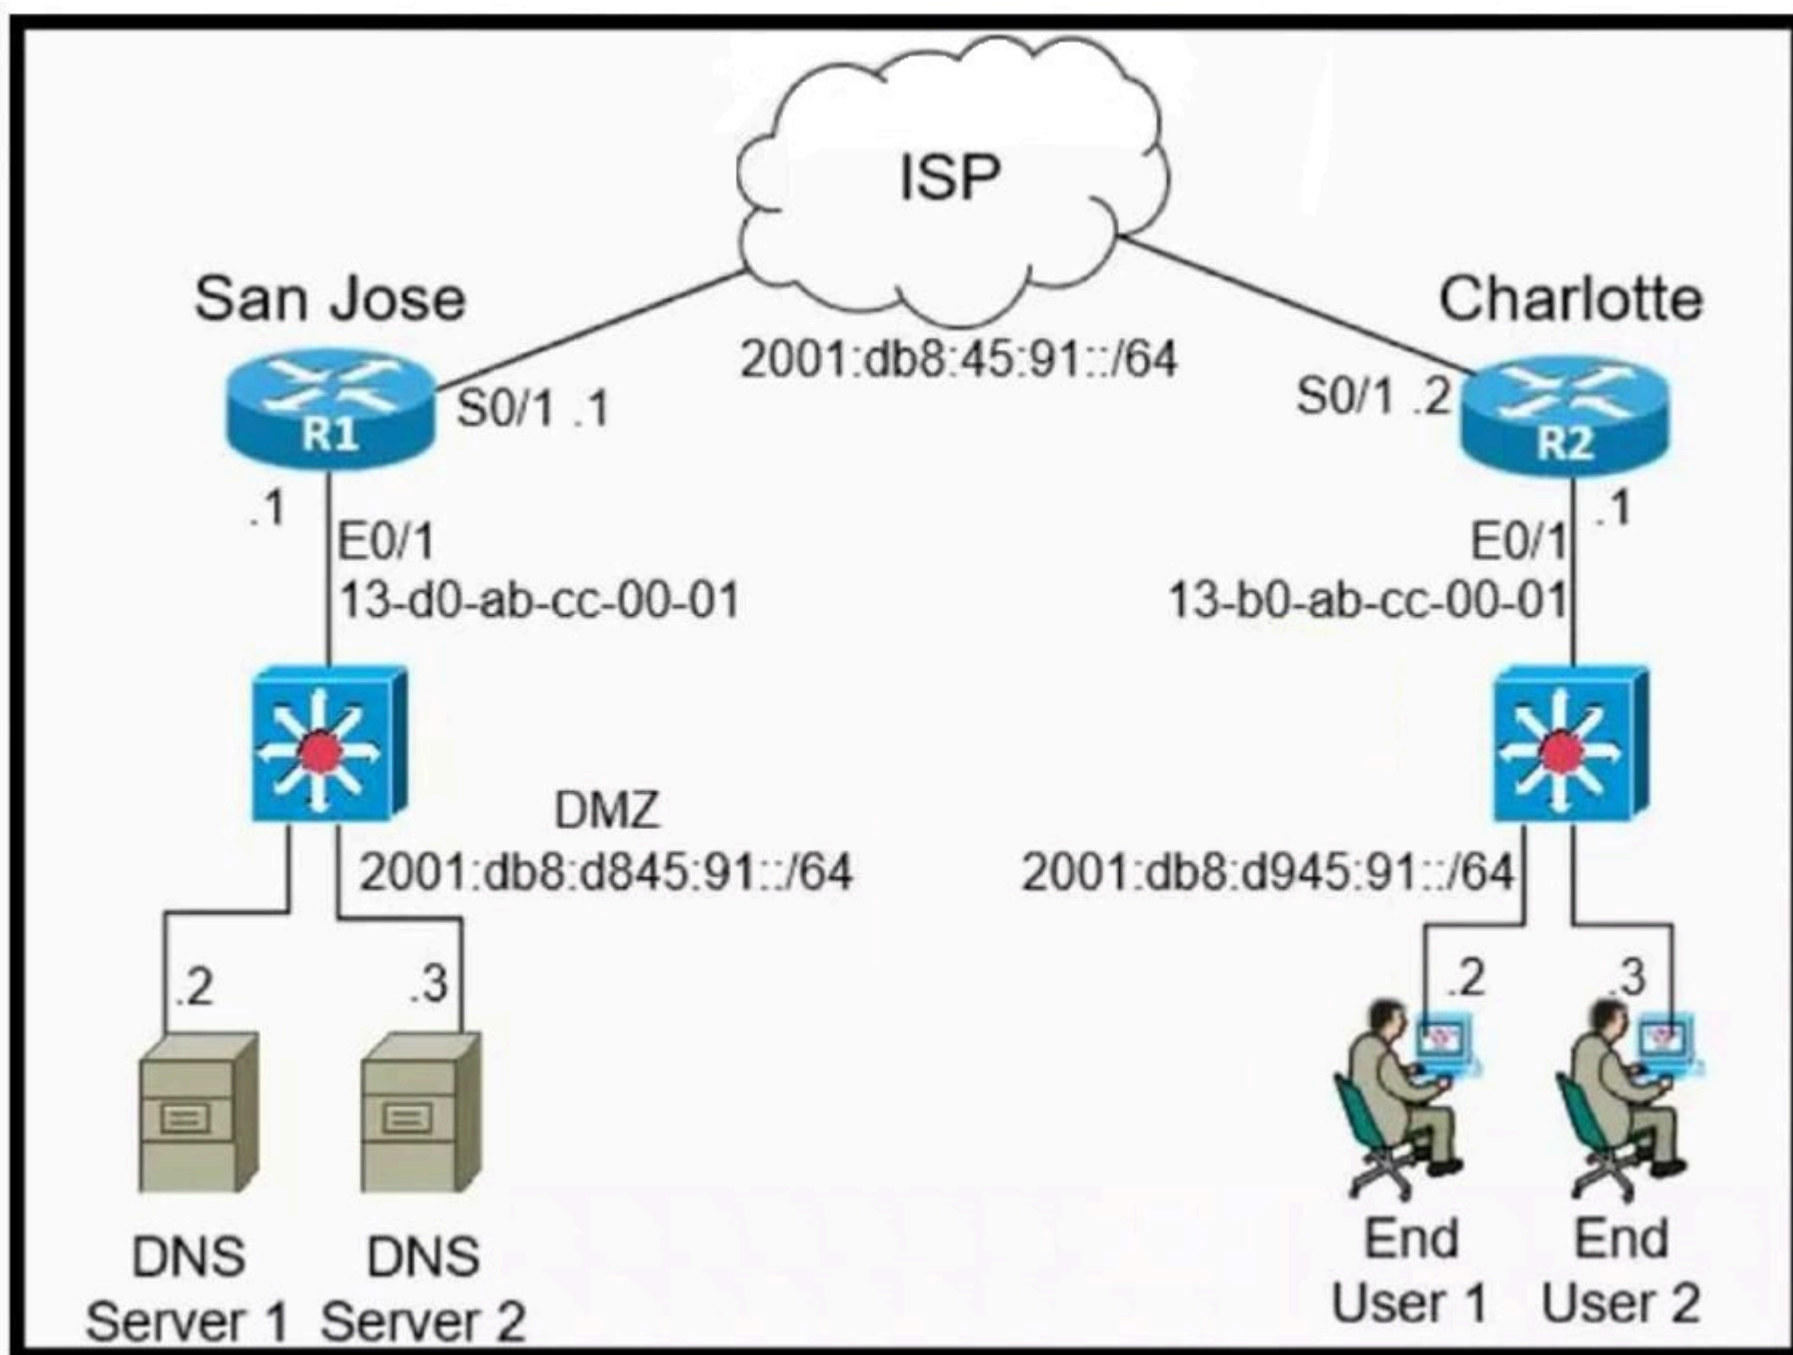

Refer to the exhibit. The IPv6 address for the LAN segment on router R2 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:d945:91:12A0:AB34:FFCC:1
- B. 2001:db8:d945:91:11B0:ABFF:FECC:1 Most Voted
- C. 2001:db8:d945:91:4661:59FF:FF53:5
- D. 2001:db8:d945:91:1130:ABFF:FECC:1

Correct Answer: B

Community vote distribution

B (100%)

Question #1304

Topic 1

What is a characteristic of private IPv4 addressing?

A. reduces the forwarding table on network routers

B. allows communication across external internet boundaries

C. assigned by an enterprise organization to internal hosts

Most Voted

D. complies with Payment Card industry regulations

Correct Answer: C

Community vote distribution

C (100%)

Question #1305

Topic 1



Refer to the exhibit. Which switch becomes the root bridge?

A. SW 1 -

Bridge Priority - 8192 -
mac-address 00:10:a1:30:eb:38

Most Voted

B. SW 2 -

Bridge Priority - 8192 -
mac-address 00:10:a1:80:fb:29

C. SW 3 -

Bridge Priority - 24576 -
mac-address 00:10:a1:50:55:8f

D. SW 4 -

Bridge Priority - 24576 -
mac-address 00:10:a1:90:7e:66

Correct Answer: A

Community vote distribution

A (100%)

Question #1306

Topic 1

What is a characteristic of a Layer 2 switch?

A. responsible for sending data in a particular sequence

B. maintains stateful transaction information

C. makes forwarding decisions based on MAC addresses

Most Voted

D. filters based on a transport layer protocol

Correct Answer: C

Community vote distribution

C (100%)

Question #1307

Topic 1

What is represented by the word "switch" within this JSON schema?

1 [

2 {"IDS": "IPS22", "port": "te3/46"},

3 {"load balancer": "LB12", "port": "te6/38"},

4 {"switch": "SW18", "port": "ge2/41"},

5]

A. key

Most Voted

B. object

C. array

D. value

Correct Answer: A

Community vote distribution

A (100%)

Question #1308

Topic 1

How does encryption protect the wireless network?

A. via integrity checks to identify wireless forgery attacks in the frame

B. via an algorithm to change wireless data so that only the access point and client understand it

Most Voted

C. via specific ciphers to detect and prevent zero-day network attacks

D. via a policy to prevent unauthorized users from communicating on the wireless network

Correct Answer: B

Community vote distribution

B (100%)

DRAG DROP

-

Drag and drop the characteristic from the left onto the cable type on the right.

comprised of shielded and unshielded twisted pairs

comprised of insulated glass strands

is affected by electrical and magnetic interference

uses a single wavelength of light

cooper

single-mode fiber

cooper

comprised of shielded and unshielded twisted pairs

is affected by electrical and magnetic interference

single-mode fiber

comprised of insulated glass strands

uses a single wavelength of light

Correct Answer:

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices.

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology lab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked, the lab closes and cannot be reopened.

Topology

-

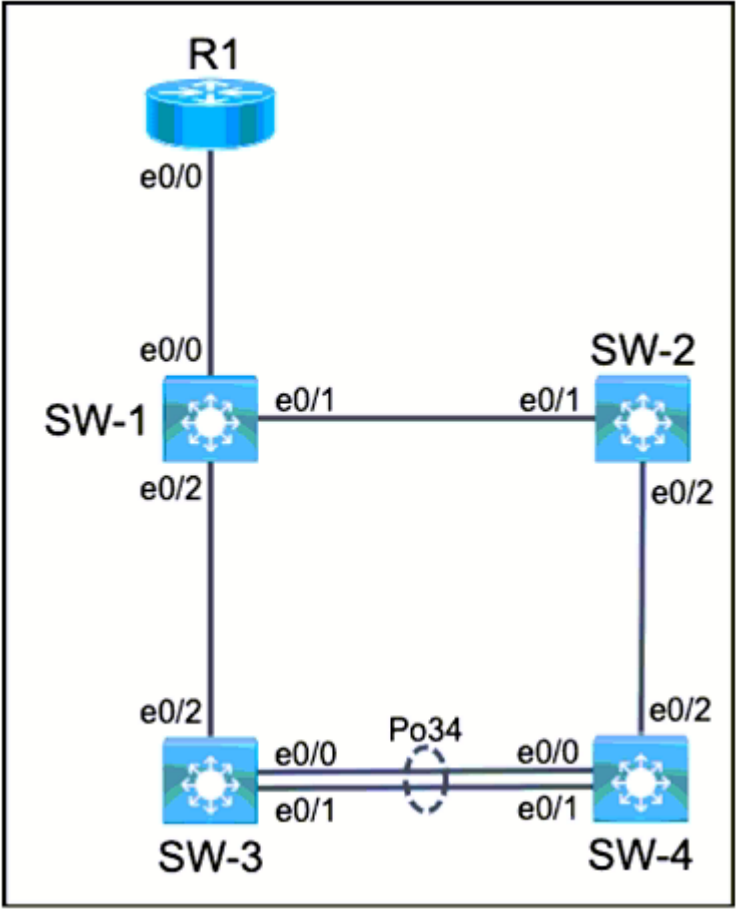

Tasks

-

All physical cabling is in place and verified. Router R1 is configured and passing traffic for VLANs 5 and 6. All relevant ports are pre-configured as 802.1q trunks.

1. Configure SW-1 port E0/0 to permit only VLANS 5 and 6
2. Configure both SW-1 and SW-2's E0/1 ports to send and receive untagged traffic over VLAN 77
3. Configure SW-2 E0/2 port to permit only VLAN 6
4. Configure both SW-3 and SW-4 ports e0/0 and e0/1 for link aggregation using the industry standard protocol with the following requirements:
 - o SW-3 ports must immediately negotiate the aggregation protocol
 - o SW-4 ports must not initiate the negotiation for the aggregation protocol
 - o Use the designated number assignment

```
SW-1:
SW-1>en
SW-1# Config t
SW-1(config)# int e0/0
SW-1(config-if) # switchport trunk allowed vlan 5,6
SW-1(config)# int e0/1
SW-1(config-if) # switchport trunk allowed vlan 77
SW-1(config-if) # end
SW-1# wr mem
```

```
SW-2:
SW-2>en
SW-2# Config t
SW-2(config)# interface range eth0/0-1
SW-2(config-if) # channel-group 44 mode active
SW-2(config)# int e0/1
SW-2(config-if) # switchport trunk allowed vlan 77
SW-2(config-if) # end
```


Correct Answer: SW-2# wr mem

```
SW-3>en
SW-3# Config t
SW-3(config)# interface range eth0/0-1
SW-3(config-if) # channel-group 34 mode active
SW-3(config)# interface port34
SW-3(config-if) # switchport trunk encapsulation dot1q
SW-3(config-if) # end
SW-3# wr mem
```

```
SW-4>en
SW-4# Config t
SW-4(config)# interface range eth0/0-1
SW-4(config-if) # channel-group 34 mode passive
SW-4(config)# interface port34
SW-4(config-if) # switchport trunk encapsulation dot1q
SW-4(config-if) # end
SW-4# wr mem
```


Question #1311

Topic 1

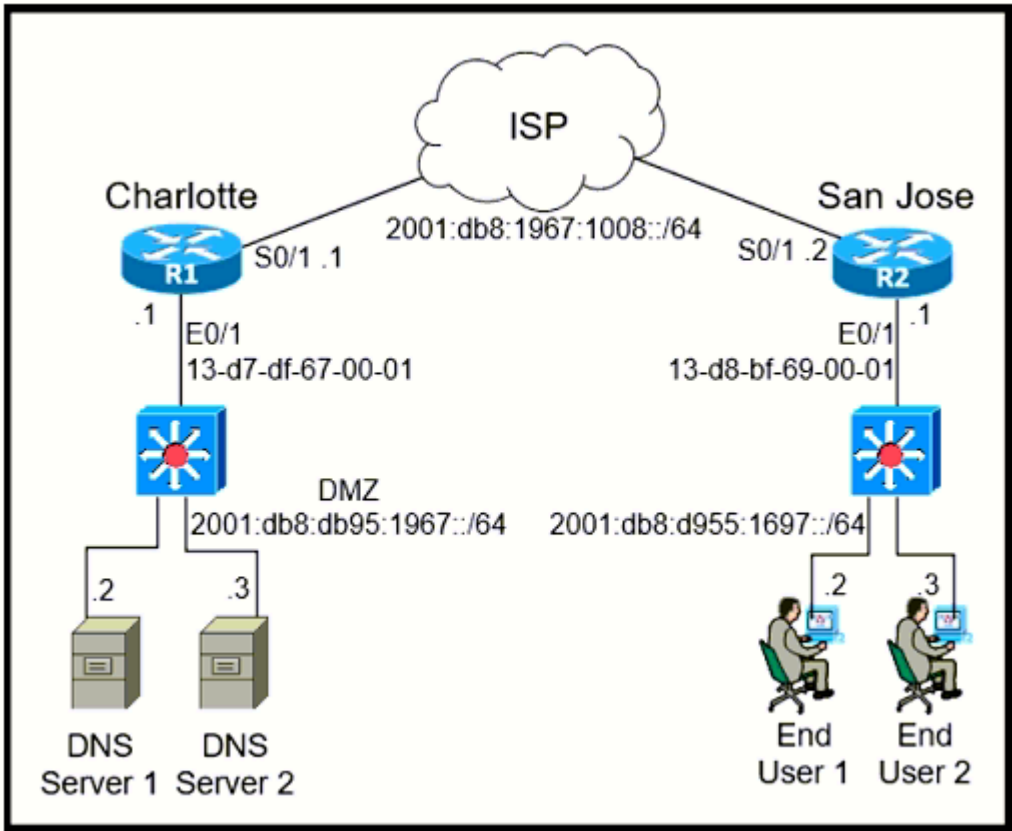

Refer to the exhibit. The IPv6 address for the LAN segment on router R2 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:d955:1697:1130:ABFF:FECC:1
- B. 2001:db8:d955:1697:4657:149F:FE65:1
- C. 2001:db8:d955:1697:11D8:BFFF:FE69:1 Most Voted
- D. 2001:db8:d955:1697:12D8:BAFE:FF01:1

Correct Answer: C

Community vote distribution

C (100%)

Question #1312

Topic 1

What is represented by the word "LB13" within this JSON schema?

```
1 [
2 {"load balancer": "LB13", "port": "fe9/2"},
3 {"firewall": "FW20", "port": "e2/28"},
4 {"router": "R41", "port": "te7/27"},
5 ]
```

- A. array
- B. value Most Voted
- C. object
- D. key

Correct Answer: B

Community vote distribution

B (100%)

Question #1313

Topic 1

```
{
  "Interfaces": ["ethernet0/3", "ethernet0/4", "ethernet0/5"]
}
```

Refer to the exhibit. Which type of JSON data is shown?

A. Boolean

B. string

C. object

Most Voted

D. sequence

Correct Answer: C

Community vote distribution

C (100%)

Question #1314

Topic 1

What is a characteristic of private IPv4 addressing?

A. enables secure connectivity over the internet

B. allows communication across external internet boundaries

C. assigned by an enterprise organization to internal hosts

Most Voted

D. used by ISP's when only one IP is needed to connect to the internet

Correct Answer: C

Community vote distribution

C (100%)

Question #1315

Topic 1

A DHCP pool has been created with the name NOCC. The pool is using 192.168.20.0/24 and must use the next to last usable IP address as the default gateway for the DHCP clients. What is the next step in the process?

A. next-server 192.168.20.254

B. network 192.168.20.254 255.255.255.0 secondary

C. default-router 192.168.20.253

Most Voted

D. ip default-gateway 0.0.0.0 0.0.0.0 192.168.20.253

Correct Answer: C

Community vote distribution

C (100%)

Question #1316

Topic 1

Which Windows command is used instead of the route print command to display the contents of the IP routing table?

A. ipconfig

B. netstat -r

Most Voted

netstat -r displays the routing table of your system (like running route print).

C. netstat -n

netstat -n shows active network connections but displays IP addresses and port numbers as numbers (instead of names).

D. ifconfig

Correct Answer: B

Community vote distribution

B (100%)

Question #1317

Topic 1

What is a characteristic of frame switching?

A. rewrites the source and destination MAC address

B. performs a lookup to learn the destination interface

Most Voted

C. sends a retransmission request when a new frame is received

D. inspects and drops frames from unknown destinations

Correct Answer: B

Community vote distribution

B (100%)

```
R1#show ip ospf interface g0/0/0
GigabitEthernet0/0/0 is up, line protocol is up
  Internet address is 192.168.1.2/24, Area 0
  Process ID 1, Router ID 192.168.1.2, Network Type POINT-TO-POINT, Cost: 1
  Transmit Delay is 1 sec, State POINT-TO-POINT,
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:08
  Index 1/1, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Suppress hello for 0 neighbor(s)

R2#show ip ospf interface g0/0/0
GigabitEthernet0/0/0 is up, line protocol is up
  Internet address is 192.168.1.1/24, Area 0
  Process ID 1, Router ID 1.1.1.1, Network Type POINT-TO-POINT, Cost: 1
  Transmit Delay is 1 sec, State POINT-TO-POINT,
  Timer intervals configured, Hello 15, Dead 40, Wait 40, Retransmit 5
    Hello due in 00:00:11
  Index 1/1, flood queue length 0
  Next 0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Suppress hello for 0 neighbor(s)
```

Refer to the exhibit. The network engineer is configuring router R2 as a replacement router on the network. After the initial configuration is applied, it is determined that R2 failed to show R1 as a neighbor. Which configuration must be applied to R2 to complete the OSPF configuration and enable it to establish the neighbor relationship with R1?

- A. R2(config)#interface g0/0/0 -
R2(config-if)#ip ospf hello-interval 10 Most Voted
- B. R2(config)#router ospf 1 -
R2(config-router)#router-id 192.168.1.1
- C. R2(config)#router ospf 1 -
R2(config-router)#network 192.168.1.0 255.255.255.0 area 2
- D. R2(config)#interface g0/0/0 -
R2(config-if)#ip ospf dead-interval 45

Correct Answer: A

Community vote distribution

A (100%)

Question #1319

Topic 1


What is a characteristic of an SSID in wireless networks?

- A. allows easy file sharing between endpoints
- B. identifies a wireless network Most Voted
- C. eliminates network piggybacking
- D. requires the use of PoE for functionality

Correct Answer: B

Community vote distribution

B (100%)

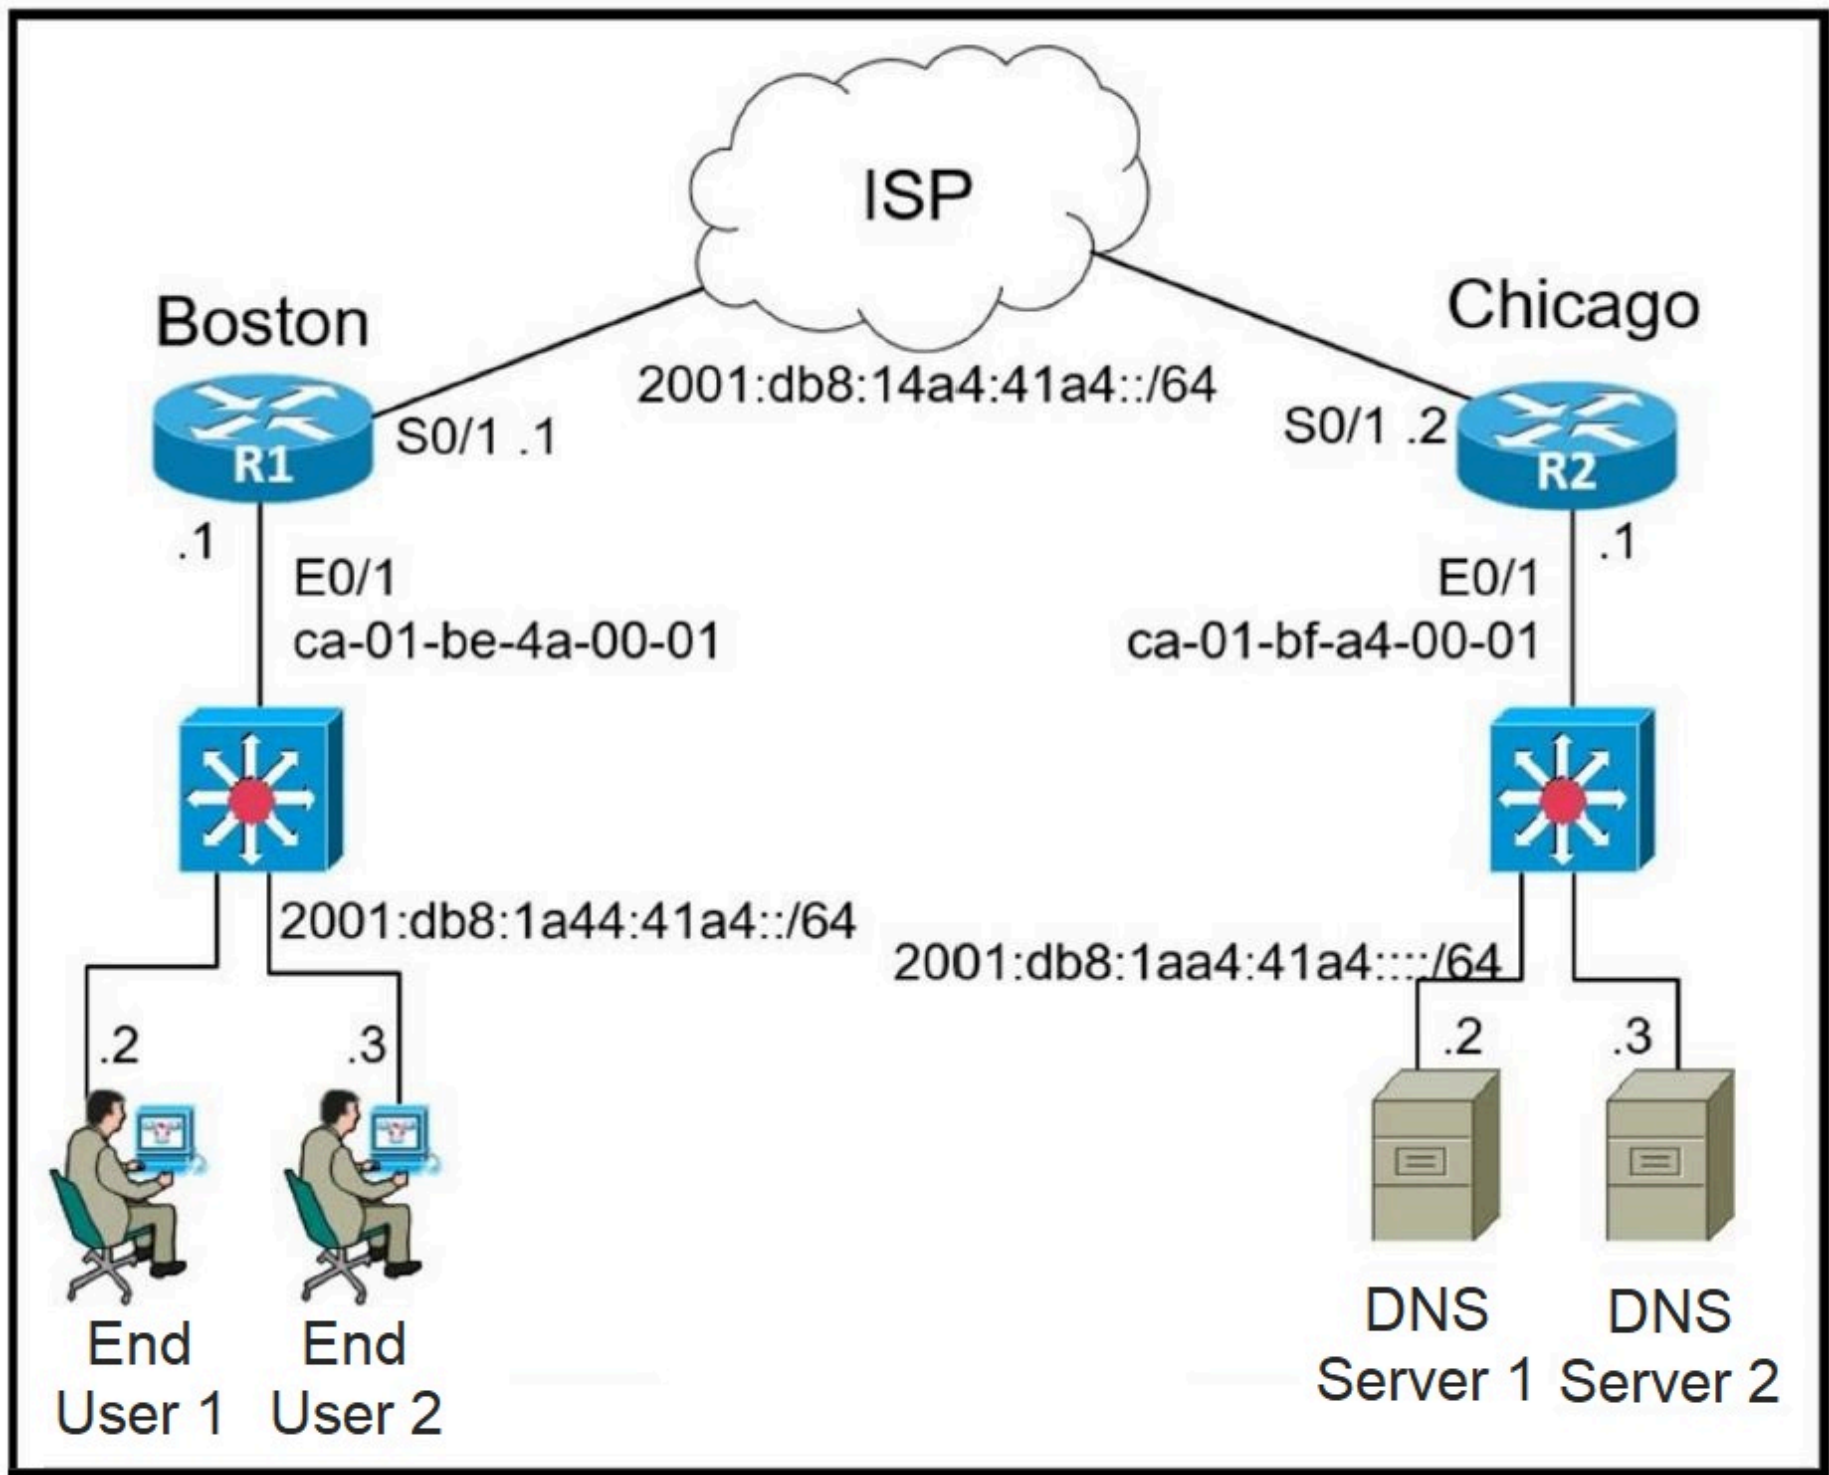

Refer to the exhibit. The IPv6 address for the LAN segment on router R1 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:1a44:41a4:C081:BFFF:FE4A:1
- B. 2001:db8:1a44:41a4:C801:BEFF:FE4A:1 Most Voted
- C. 2001:db8:1a44:41a4:4660:592F:FE65:1
- D. 2001:db8:1a44:41a4:C800:BAFE:FF00:1

Correct Answer: B

Community vote distribution

B (71%)A (29%)

Question #1321

Topic 1

What does a router do when it is configured with the default DNS lookup settings, and a URL is entered on the CLI?

A. It continuously attempts to resolve the URL until the command is cancelled.

B. It initiates a ping request to the URL.

C. It prompts the user to specify the desired IP address.

D. It attempts to query a DNS server on the network.

Most Voted

Correct Answer: D

Community vote distribution

D (100%)

Question #1322

Topic 1

How does MAC learning function?

A. overwrites the known source MAC address in the address table

B. enabled by default on all VLANs and interfaces

Most Voted

C. protects against denial of service attacks

D. forwards frames to a neighbor port using CDP

Correct Answer: B

Community vote distribution

B (88%)

13%

Question #1323

Topic 1

DRAG DROP

-

Drag and drop the characteristic from the left onto the cable type on the right.

contains a conductor, bedding, and sheathing

contains a core, cladding, and coating

affected by electrical and magnetic interference

comprised of insulated glass strands

cooper

single-mode fiber

cooper

contains a conductor, bedding, and sheathing

affected by electrical and magnetic interference

single-mode fiber

contains a core, cladding, and coating

comprised of insulated glass strands

Correct Answer:

Question #1324

Topic 1

How does MAC learning function?

A. sends a retransmission request when a new frame is received

B. enabled by default on all VLANs and interfaces

Most Voted

C. populates the ARP table with the egress port

D. protects against denial of service attacks

Correct Answer: B

Community vote distribution

B (83%)

A (17%)

https://www.examtopics.com/exams/cisco/200-301/view/11/

16/39

Question #1325

Topic 1

DRAG DROP

-

Drag and drop the characteristic from the left onto the IPv6 address type on the right.

counterpart of private IPv4 addresses

never used as a source address

provides one-to-many communications

may be used by multiple organizations at the same time

Unique Local

Multicast

Correct Answer:

Unique Local

counterpart of private IPv4 addresses

may be used by multiple organizations at the same time

Multicast

never used as a source address

provides one-to-many communications

he sender's normal unicast IP (e.g., 192.

https://www.examtopics.com/exams/cisco/200-301/view/11/

17/39

Question #1327

Topic 1

DRAG DROP

-

Drag and drop the commands from the left onto the destination interfaces on the right. Not all commands are used.

Answer Area

uses templates to implement QoS configuration

ability to boost a wi-fi signal

requires a special adapter for PoE

supplies user connection data within a device group

configurable as a workgroup bridge

Access Point

Wireless LAN Controller

Correct Answer:

Access Point

uses templates to implement QoS configuration

requires a special adapter for PoE

Wireless LAN Controller

supplies user connection data within a device group

ability to boost a wi-fi signal

? `gjgrw rm `mmqr _ Ug+Dg qge l _j

? Nq a _l _bhsqr rp _l q k gr nmucp _lb _lrc l l _ qcrrgleq rm `mmqr ugpcjcqq am t

Aml dgesp _`jc \_q \_ umpiepmsn `pgbec

Qm k c Agqam ? Nq a _l `c aml dgespcb \_q umpiepmsn `pgbecq rm aml l car ugp

Uses templates to implement QoS configuration

WLCs centrally manage QoS policies using templates to apply consistent

Question #1328

Topic 1

What is a function of a Next-Generation IPS?

A. It analyzes and mitigates observed vulnerabilities in a network.

Most Voted

B. It serves as a controller within a controller-based network

C. It integrates with a RADIUS server to enforce Layer 2 device authentication rules

D. It makes forwarding decisions based on learned MAC addresses

Correct Answer: A

Community vote distribution

A (100%)

https://www.examtopics.com/exams/cisco/200-301/view/11/

18/39

Question #1329

Topic 1

DRAG DROP

-

Drag and drop the characteristic from the left onto the cable type on the right.

Answer Area

is affected by electrical and magnetic interference

is ideal over longer distances with little loss of integrity

is comprised of shielded and unshielded twisted pairs

transmits signals using pulses of light

copper

single-mode fiber

Correct Answer:

copper

is affected by electrical and magnetic interference

is comprised of shielded and unshielded twisted pairs

single-mode fiber

transmits signals using pulses of light

is ideal over longer distances with little loss of integrity

Question #1330

Topic 1

What is a characteristic of encryption in wireless networks?

- A. prevents intercepted data from being easily read

Most Voted
- B. uses a unidirectional handshake for authentication
- C. intercepts data threats before they attack a network
- D. uses integrity checks to identify forgery attacks


Correct Answer: A

Community vote distribution

A (100%)

Question #1331

Topic 1

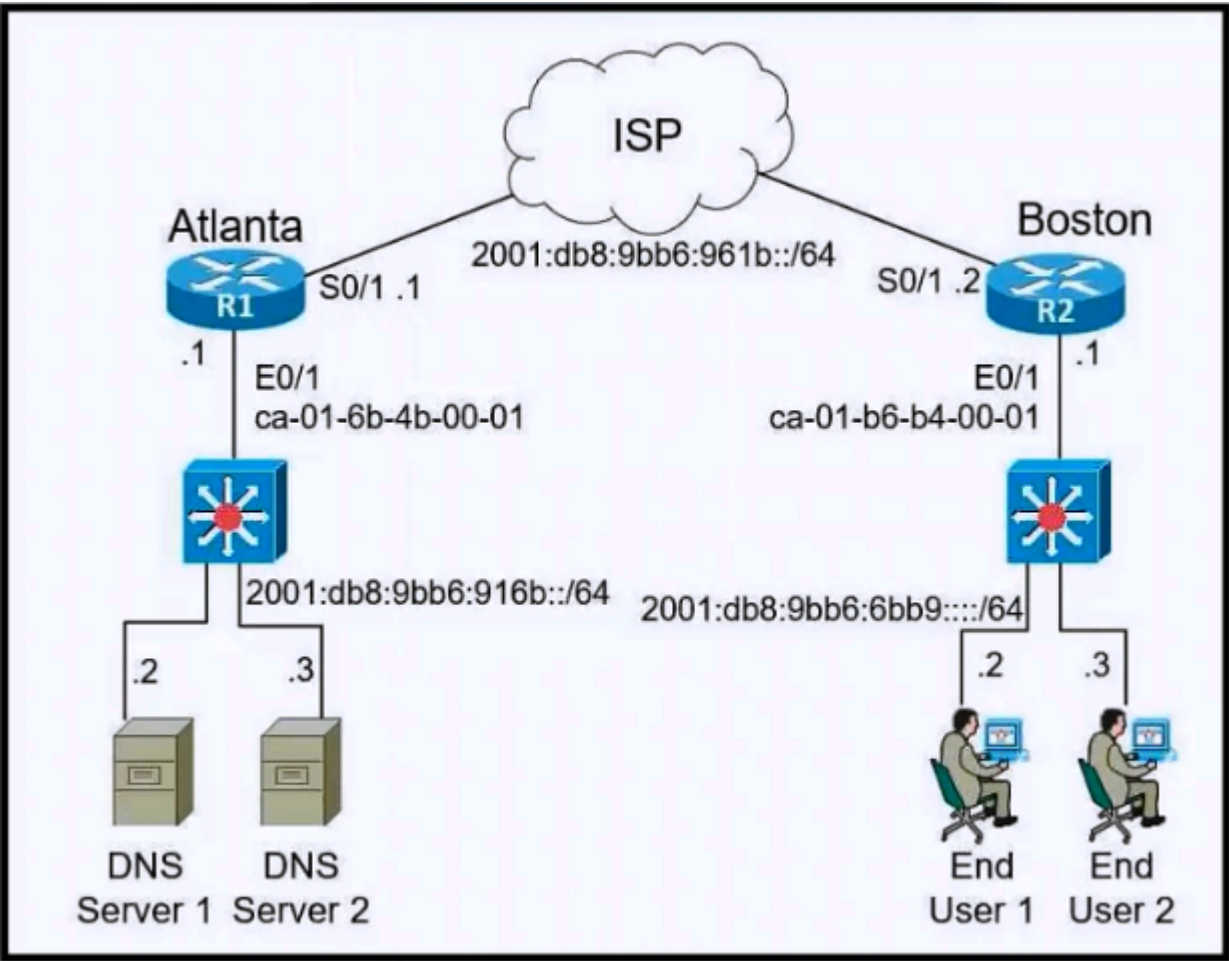

Refer to the exhibit. The IPv6 address for the LAN segment on router R2 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:9bb6:6bb9:C081:B6FF:FF4B:1
- B. 2001:db8:9bb6:6bb9:C001:6BFE:FF01:1
- C. 2001:db8:9bb6:6bb9:4679:824F:FE88:1
- D. 2001:db8:9bb6:6bb9:C801:B6FF:FEB8:1 Most Voted

Correct Answer: D

Community vote distribution

D (100%)

Question #1332

Topic 1

What is a characteristic of a Layer 2 switch?

- A. tracks the number of active TCP connections
- B. maintains stateful transaction information
- C. filters based on a transport layer protocol
- D. supports segmentation using tagging protocols Most Voted

Correct Answer: D

Community vote distribution

D (100%)

Question #1333

Topic 1

Which interface is used to send traffic to the destination network?

- D 10.47.114.119/29 [90/6451] via F0/2
- D 10.47.114.119/29 [90/52201] via F0/20
- R 10.47.114.119/29 [120/9] via F0/12
- R 10.47.114.119/29 [120/10] via F0/10

A. F0/2 Most Voted

B. F0/20

C. F0/12

D. F0/10

Correct Answer: A

Community vote distribution

A (100%)

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked the lab closes and cannot be reopened.

Topology

-

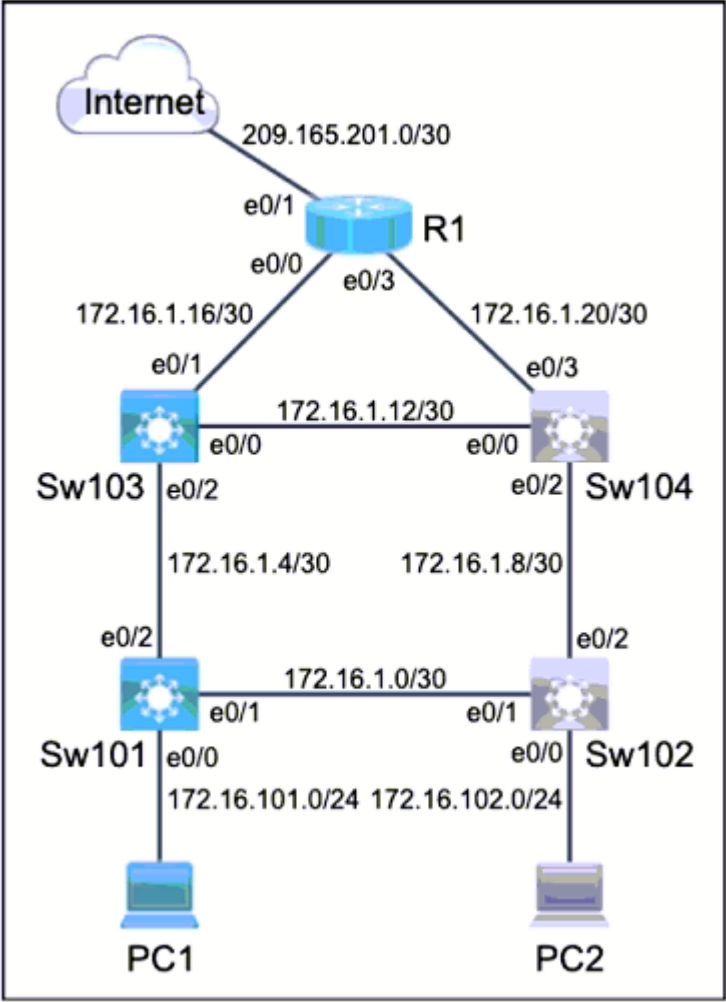

Tasks

-

Refer to the topology. All physical cabling is in place. Configure local users accounts, modify the Named ACL (NACL), and configure DHCP Snooping. The current contents of the NACL must remain intact.

1. Configure a local account on Sw103 with telnet access only on virtual ports 0-4. Use the following information:
 - Username: devnet
 - Password: access8cli
 - Algorithm type: SHA256
 - Privilege level: Exec mode

2. Using the minimum number of ACEs, modify the existing NACL "INTERNET_ACL" to control network traffic destined for the Internet, and apply the ACL on R1:
- Allow HTTPS from 172.16.0.0/16
 - Allow Telnet only for VLAN 101
 - Restrict all other traffic and log the ingress interface, source MAC address, the packet's source and destination IP addresses, and ports
3. Configure Sw101:
- Enable DHCP Snooping for VLAN 101
 - Disable DHCP Option-82 data insertion
 - Enable DHCP Snooping MAC address verification

Correct Answer:

```
SW103:
SW103>en
SW103#config t
SW103(config)# username devnet privilege 15 algorithm-type sha256 secret access8cli
SW103(config)# line vty 0 4
SW103(config-line)#login local
SW103(config-line)#transport input telnet
SW103(config-line)#end
SW103# wr

R1:
R1>en
R1#config t
R1(config)# ip access-list extended INTERNET_ACL
R1(config-ext-nacl)#permit tcp 172.16.0.0 0.0.255.255 any eq 443
R1(config-ext-nacl)#permit tcp 172.16.101.0 0.0.0.255 any eq telnet
R1(config-ext-nacl)#deny ip any any log
R1(config-ext-nacl)#end
R1#wr

SW101:
Sw101>en
Sw101#config t
Sw101(config)#ip dhcp snooping vlan 101
Sw101(config)#no ip dhcp snooping information option
Sw101(config)#ip dhcp snooping verify mac-address
Sw101(config)#end
Sw101#wr
```

Question #1335

Topic 1

Which Rapid PVST+ feature should be configured on a switch port to immediately send traffic to a connected server as soon as it is active?

- A. portfast

Most Voted
- B. uplinkfast
- C. BPDU guard
- D. loop guard

Correct Answer: A

Community vote distribution

A (100%)

DRAG DROP

-

Drag and drop the characteristic from the left onto the IPv6 address type on the right.

Answer Area

publicly routable in the same way as IPv4 addresses

provides one-to-many communications

has a unicast source sent to a group

routable and reachable via the Internet

Global Unicast Address

Multicast

Answer Area

Correct Answer:

Global Unicast Address

publicly routable in the same way as IPv4 addresses

routable and reachable via the Internet

Multicast

provides one-to-many communications

has a unicast source sent to a group

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked the lab closes and cannot be reopened.

Topology

-

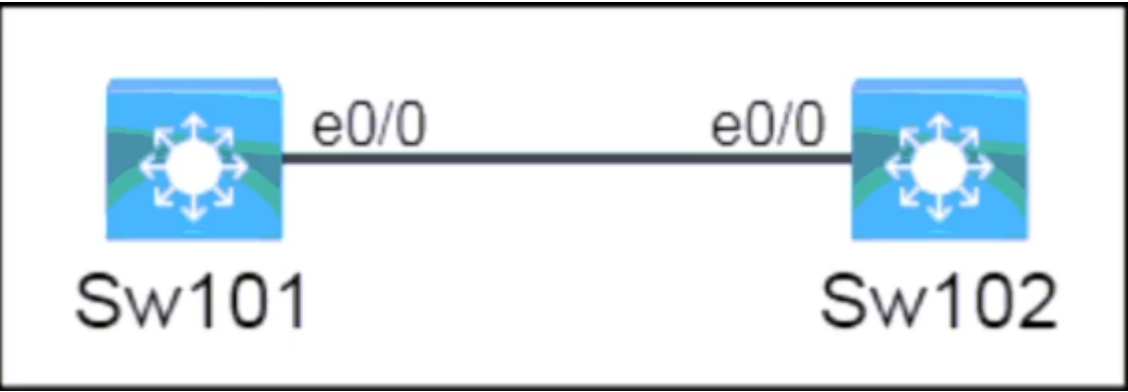

Tasks

-

All physical cabling is in place. A company plans to deploy 64 new sites. The sites will utilize both IPv4 and IPv6 networks.

1. Subnet 10.30.64.0/19 to meet the subnet requirements and maximize the number of hosts
 - Using the second subnet
 - Assign the first usable IP address to e0/0 on Sw101
 - Assign the last usable IP address to e0/0 on Sw102
2. Subnet 2001:db8::/56 to meet the subnet requirements and maximize the number of hosts
 - Using the second subnet
 - Assign an IPv6 GUA using a unique 64-Bit interface identifier on e0/0 on Sw101
 - Assign an IPv6 GUA using a unique 64-Bit interface identifier on e0/0 on Sw102

Correct Answer:

- To subnet 10.30.64.0/19 to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the host portion of the address to create enough subnets for 64 sites. Since 64 is 2^6 , you need to borrow 6 bits, which means your new subnet mask will be /20 or 255.255.240.0. To find the second subnet, you need to add the value of the fifth bit (64) to the third octet of the network address (0), which gives you 10.30.64.0/20 as the second subnet. The first usable IP address in this subnet is 10.30.64.1, and the last usable IP address is 10.30.64.254.

- To assign the first usable IP address to e0/0 on Sw101, you need to enter the following commands on the device console:

```
Sw101#configure terminal
```

```
Sw101(config)#interface e0/0
```

```
Sw101(config-if)#ip address 10.30.64.1 255.255.240.0
```

```
Sw101(config-if)#no shutdown
```

```
Sw101(config-if)#end
```

- To assign the last usable IP address to e0/0 on Sw102, you need to enter the following commands on the device console:

```
Sw102#configure terminal
```

```
Sw102(config)#interface e0/0
```

```
Sw102(config-if)#ip address 10.30.64.254 255.255.240.0
```

```
Sw102(config-if)#no shutdown
```

```
Sw102(config-if)#end
```

- To subnet an IPv6 GUA to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the interface identifier portion of the address to create enough subnets for 64 sites. Since 64 is 2^6 , you need to borrow 5 bits, which means your new prefix length will be /68 or ffff:fff:fff:fff8::/68 (assuming that your IPv6 GUA has a /64 prefix by default). To find the second subnet, you need to add the value of the fifth bit (64) to the fourth hextet of the network address (0000), which gives you xxxx:xxxx:xxxx:0020::/68 as the second subnet (where xxxx:xxxx:xxxx is your IPv6 GUA prefix). The first and last IPv6 addresses in this subnet are xxxx:xxxx:xxxx:0020::1 and xxxx:xxxx:xxxx:0027:fff:fff:fff:ffe respectively.

- To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on Sw101, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw101#configure terminal
```

```
Sw101(config)#interface e0/0
```

```
Sw101(config-if)#ipv6 address 2001:db8::20::1/68
```

```
Sw101(config-if)#no shutdown Sw101(config-if)#end
```

- To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on Sw102, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw102#configure terminal
```

```
Sw102(config)#interface e0/0
```

```
Sw102(config-if)#ipv6 address 2001:db8::27::ffe/68
```

```
Sw102(config-if)#no shutdown Sw102(config-if)#end
```

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked the lab closes and cannot be reopened.

Topology

-

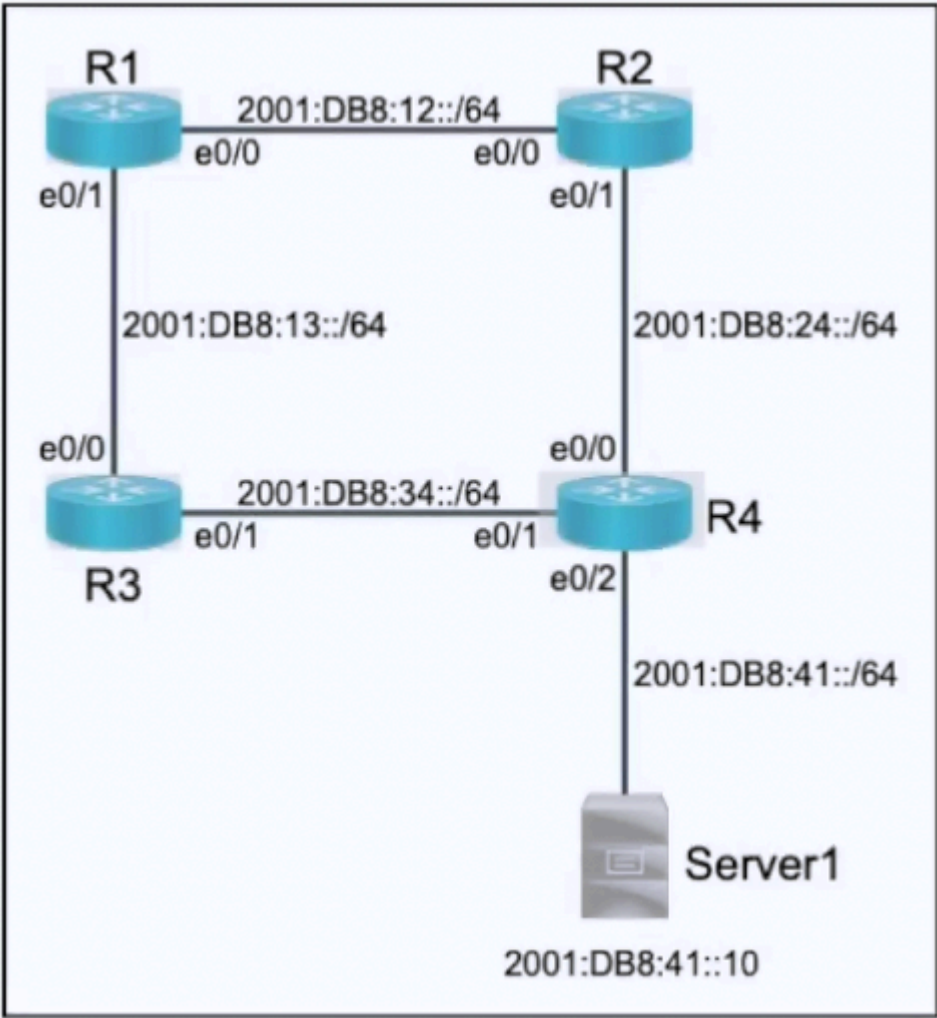

Tasks

-

All physical cabling is in place. Configurations should ensure that connectivity is established end-to-end.

1. Configure a route on R1 to ensure that R1 prefers R2 to reach the 2001:db8:41::/64 network
2. Configure a floating route on R1, and ensure that R1 uses R3 to reach the 2001 :db8:41::/64 network if the connection between R1 and R2 is down
3. Ping and traceroute should be working

```
R1# config t
R1(config)# ipv6 route 2001:db8:41::/64 2001:db8:12::2
R1(config)# ipv6 route 2001:db8:41::/64 2001:db8:13::3 2
R1(config)#end
R1#wr
```

```
R2:
R2> en
R2# config t
R2(config)# ipv6 route 2001:db8:41::/64 2001:db8:24::4
R2(config)#end
R2#wr
```


Correct Answer:

```
R3:
R3> en
R3# config t
R3(config)# ipv6 route 2001:db8:41::/64 2001:db8:34::4
R3(config)#end
R3#wr
```

```
R4:
R4>en
R4# config t
R4(config)# ipv6 route 2001:db8:12::/64 2001:db8:24::2
R4(config)# ipv6 route 2001:db8:13::/64 2001:db8:34::3
R4(config)#end
4#wr
```


Question #1339

Topic 1

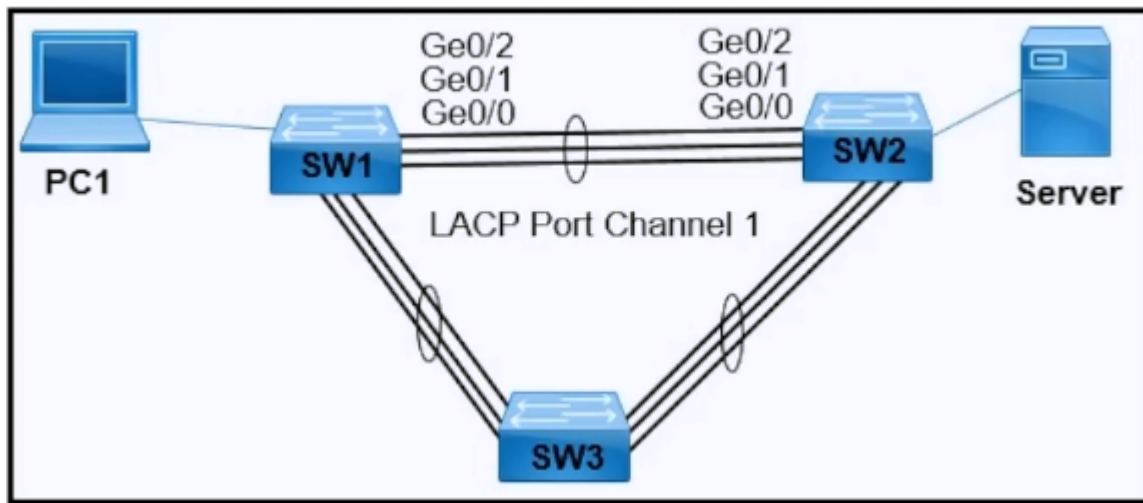

Refer to the exhibit. PC1 regularly sends 1800 Mbps of traffic to the server. A network engineer needs to configure the EtherChannel to disable Port Channel 1 between SW1 and SW2 when the Ge0/0 and Ge0/1 ports on SW2 go down. Which configuration must the engineer apply to the switch?

A. SW2# configure terminal -
SW2(config)# interface port-channel 4
SW2(config-if)# port-channel min-links 2

Most Voted

B. SW2# configure terminal -
SW2(config)# interface port-channel 4
SW2(config-if)# lacp port-priority 32000

C. SW2# configure terminal -
SW2(config)# interface port-channel 4
SW2(config-if)# lacp max-bundle 2

D. SW2# configure terminal -
SW2(config)# lacp system-priority 32000

Correct Answer: A

Community vote distribution

A (100%)

Question #1340

Topic 1

An administrator is configuring a Cisco Catalyst switch so that it will accept management connections only from hosts in the 203.0.113.0/24 network. Other traffic passing through the switch must transit without interruption. Which two configurations must the engineer apply to the router? (Choose two.)

- A. interface range vlan 1 - 4094
ip access-group Management out
- B. line vty 0 15
access-class Management in Most Voted
- C. ip access-list standard Management
permit 203.0.113.0 0.0.0.255 Most Voted
- D. ip access-list standard Management
permit 203.0.113.0 255.255.255.0
- E. ip access-list extended Management
permit tcp any range 22 23 203.0.113.0 0.0.0.255


Correct Answer: BC

Community vote distribution

BC (100%)

Question #1341

Topic 1

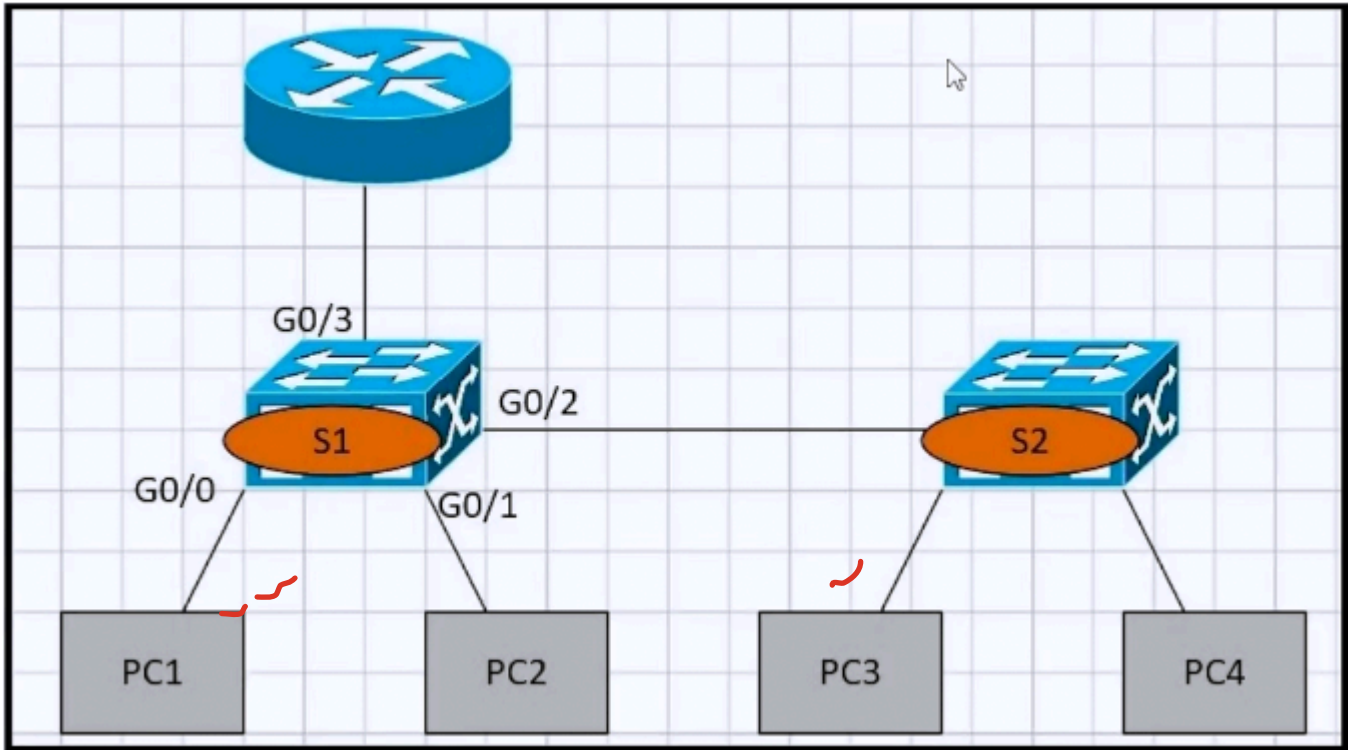

Refer to the exhibit. PC1 tries to ping PC3 for the first time and sends out an ARP to S1. Which action is taken by S1?

- A. It is flooded out every port except G0/0. Most Voted
- B. It drops the frame.
- C. It forwards it out G0/3 only.
- D. It forwards it out interface G0/2 only.

Correct Answer: A

Community vote distribution

A (75%)

C (25%)

Which interface condition is occurring in this output?

```
R30# show interface fa0/0
FastEthernet0/0 is up, line protocol is up
Hardware is DEC21140, address is ca02.7788.0000 (bia ca02.7788.0000)
Description: madrid_subnet
Internet address is 10.32.102.2/30
MTU 1500 bytes, BW 100000 Kbit/sec, DLY 100 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive set (60 sec)
Half-duplex, 100 Mb/s, 100BaseTX/FX
ARP type: ARPA, ARP Timeout 04:00:00
Last input 00:00:01, output 00:00:00, output hang never
Last clearing of "show interface" counters 00:00:18
Input queue: 0/300/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue: 0/300 (size/max)
30 second input rate 0 bits/sec, 0 packets/sec
30 second output rate 0 bits/sec, 0 packets/sec
7331 packets input, 7101162 bytes
Received 267 broadcasts (0 IP multicasts)
35 runs, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
0 watchdog
0 input packets with dribble condition detected
3927 packets output, 1440403 bytes, 0 underruns
0 output errors, 480 collisions, 0 interface resets
0 unknown protocol drops
0 babbles, 0 late collision, 0 deferred
0 lost carrier, 0 no carrier
0 output buffer failures, 0 output buffers swapped out
```

- A. duplex mismatch

Most Voted
- B. high throughput
- C. bad NIC
- D. queueing


Correct Answer: A

Community vote distribution

A (100%)

Question #1343

Topic 1

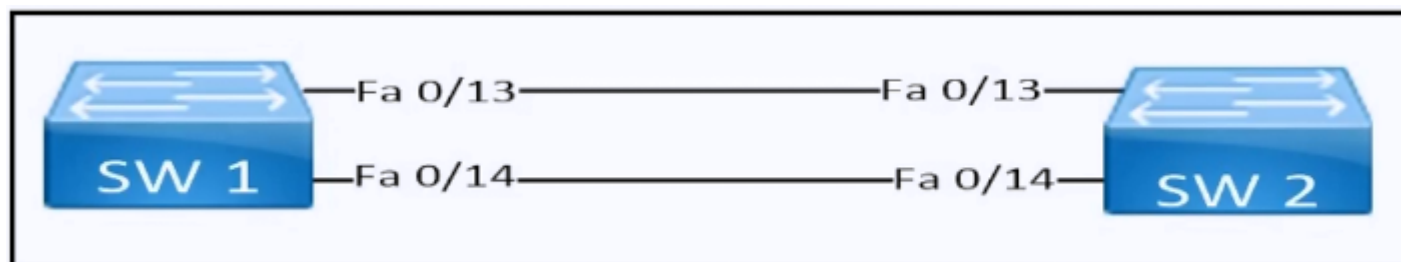

Refer to the exhibit. Which set of commands must be applied to the two switches to configure an LACP Layer 2 EtherChannel?

A. SW1(config)#interface range f0/13 -14

SW1(config-if-range)#channel-group 1 mode auto

SW2(config)#interface range f0/13 -14

SW2(config-if-range)#channel-group 1 mode passive

B. SW1(config)#interface range f0/13 -14

SW1(config-if-range)#channel-group 1 mode desirable ✗

SW2(config)#interface range f0/13 -14

SW2(config-if-range)#channel-group 1 mode passive

C. SW1(config)#interface range f0/13 -14

SW1(config-if-range)#channel-group 1 mode on ✗

SW2(config)#interface range f0/13 -14

SW2(config-if-range)#channel-group 1 mode passive

D. SW1(config)#interface range f0/13 -14

SW1(config-if-range)#channel-group 1 mode active

SW2(config)#interface range f0/13 -14

SW2(config-if-range)#channel-group 1 mode passive **Most Voted**


Correct Answer: D

Community vote distribution

D (100%)

SIMULATION

-

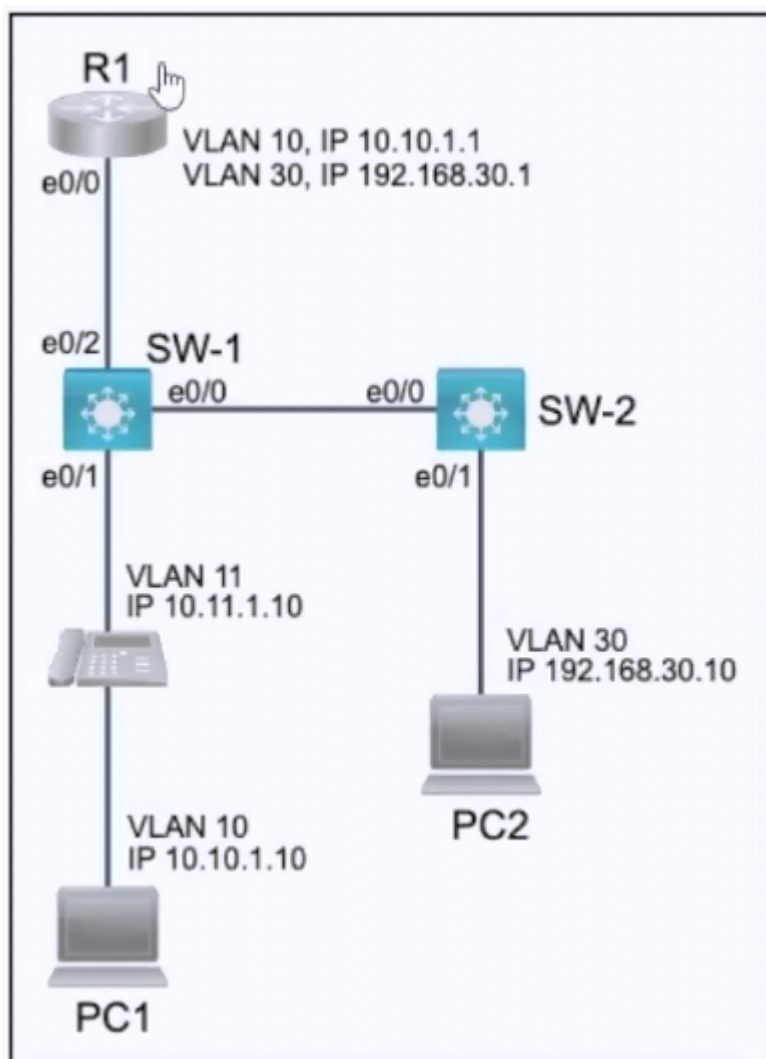

R1 has been pre-configured with all the necessary commands. All physical cabling is in place and verified. Connectivity to the end devices must be configured.

1. Configure SW-1 switch port 0/1 to carry traffic for the Cisco IP phone and PC
2. Configure SW-2 E0/1 to carry traffic for PC2
3. Configure VLAN 10 with the name "Engineering" on SW-1
4. Configure the link between SW-1 and SW-2 to use the vendor neutral neighbor discovery protocol
5. Configure the link on SW-1 to R1 so that it does not allow the Cisco neighbor discovery protocol to pass

SW-1:
SW-1>en
SW-1# Config t
SW-1(config)# vlan 10
SW-1(config-vlan)# name Engineering
SW-1(config-vlan)#int f0/10
SW-1(config-if)#lldp transmit
SW-1(config-if)#lldp receive
SW-1(config-if)#int f0/1
SW-1(config-if)#switchport mode access
SW-1(config-if)#switchport access vlan 10
SW-1(config-if)#switchport voice vlan 11
SW-1(config-if)#int f0/2
SW-1(config-if)#no cdp enable
SW-1(config-if)#end
SW-1#wr

SW-2:
SW-2>en
SW-2# Config t
SW-2(config)#int f0/10
SW-2(config-if)#lldp transmit
SW-2(config-if)#lldp receive
SW-2(config-if)#int f0/1
SW-2(config-if)#switchport mode access
SW-2(config-if)#switchport access vlan 30
SW-2(config-if)#end
SW-2#wr

Question #1345

Topic 1

How is noise defined in Wi-Fi?

- A. measured difference between the desired Wi-Fi signal and an interfering Wi-Fi signal
- B. any interference that is not Wi-Fi traffic that degrades the desired signal

Most Voted
- C. signals from other Wi-Fi networks that interfere with the local signal
- D. ratio of signal-to-noise rating supplied by the wireless device


Correct Answer: B

Community vote distribution

B (100%)

Question #1346

Topic 1

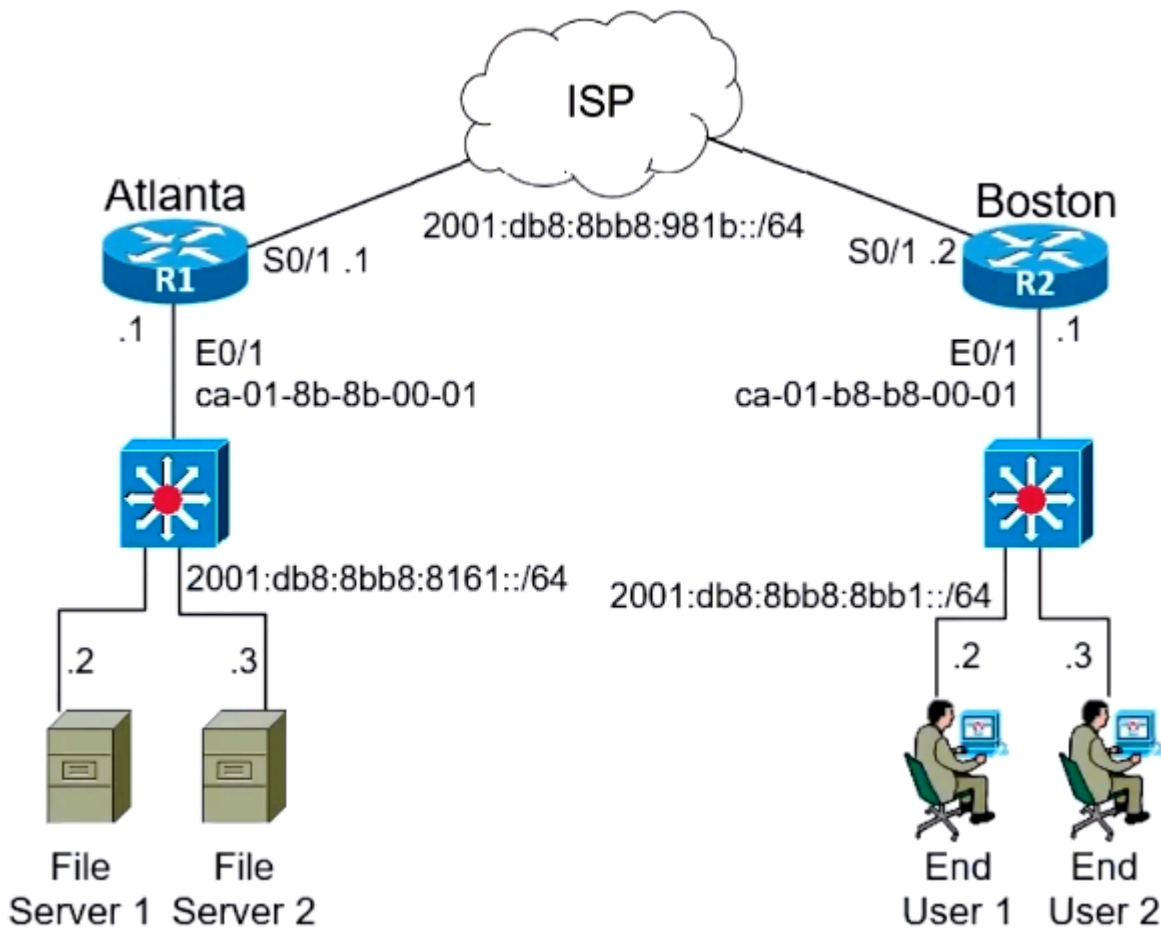

Refer to the exhibit. The IPv6 address for the LAN segment on router R2 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:8bb8:8bb1:C081:B8FF:FF4B:1
- B. 2001:db8:8bb8:8bb1:C001:8BFE:FF01:1
- C. 2001:db8:8bb8:8bb4:6792:43FF:EF87:1
- D. 2001:db8:8bb8:8bb1:C801:B8FF:FEB8:1 Most Voted

Correct Answer: D

Community vote distribution

D (100%)

Question #1347

Topic 1

What is a characteristics of frame switching?

- A. floods unknown destinations to all ports except the receiving port Most Voted
- B. inspects and drops frames from unknown destinations
- C. forwards frames to a neighbor port using CDP
- D. protects against denial of service attacks

Correct Answer: A

Community vote distribution

A (100%)

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked the lab closes and cannot be reopened.

Topology

-

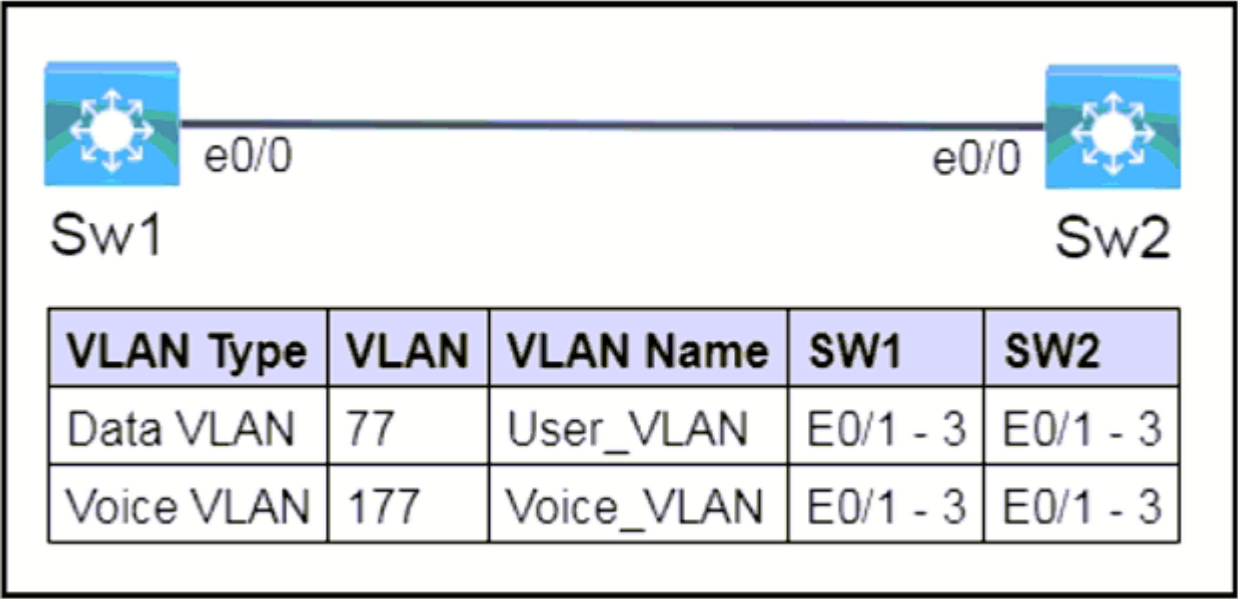

Tasks

-

All physical cabling is in place and verified. Connectivity for the Switches on ports E0/1, E0/2, and E0/3 must be configured and available for voice and data capabilities.

1. Configure Sw1 and Sw2 with both VLANS, naming them according to the VLAN Name provided in the topology.
2. Configure the E0/1, E0/2, and E0/3 ports on both switches for both VLANS and ensure that Cisco IP phones and PCs pass traffic.
3. Configure Sw1 and Sw2 to allow neighbor discovery via the vendor-neutral protocol on e0/0.

Correct Answer:

Task 1. Configure Sw1 and Sw2 with both VLANS, naming them according to the VLAN Name provided in the topology

```
SW-1(config)#vlan 77
SW-1(config-vlan)#name User_VLAN
SW-1(config-vlan)#exit
SW-1(config)#vlan 177
SW-1(config-vlan)#name Voice_VLAN
SW-1(config-vlan)#exit
```

```
SW-2(config)#vlan 77
SW-2(config-vlan)#name User_VLAN
SW-2(config-vlan)#exit
SW-2(config)#vlan 177
SW-2(config-vlan)#name Voice_VLAN
SW-2(config-vlan)#exit
```

Task 2. Configure the E0/1, E0/2, and E0/3 ports on both switches for both VLANS and ensure that Cisco IP phones and PCs pass traffic.

```
SW-1(config)#interface range E0/1-3
SW-1(config-if)#switchport mode access
SW-1(config-if)#switchport access vlan 77
SW-1(config-if)#switchport voice vlan 177
```

```
SW-2(config)#interface range E0/1-3
SW-2(config-if)#switchport mode access
SW-2(config-if)#switchport access vlan 77
SW-2(config-if)#switchport voice vlan 177
```

Task 3. Configure Sw1 and Sw2 to allow neighbor discovery via the vendor-neutral protocol on e0/0.

```
SW-1(config)#lldp run
SW-2(config)#lldp run
```

Question #1349

Topic 1

What are two reasons to implement DHCP in a network? (Choose two.)

- A. manually control and configure IP addresses on network devices
- B. control the length of time an IP address is used by a network device Most Voted
- C. reduce administration time in managing IP address ranges for clients Most Voted
- D. dynamic control over the best path to reach an IP address
- E. access a website by name instead of by IP address

Correct Answer: BC*Community vote distribution*

BC (100%)

SIMULATION

-

Guidelines


-

This is a lab item in which tasks will be performed on virtual devices.

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked, the lab doses and cannot be reopened.

Topology

-

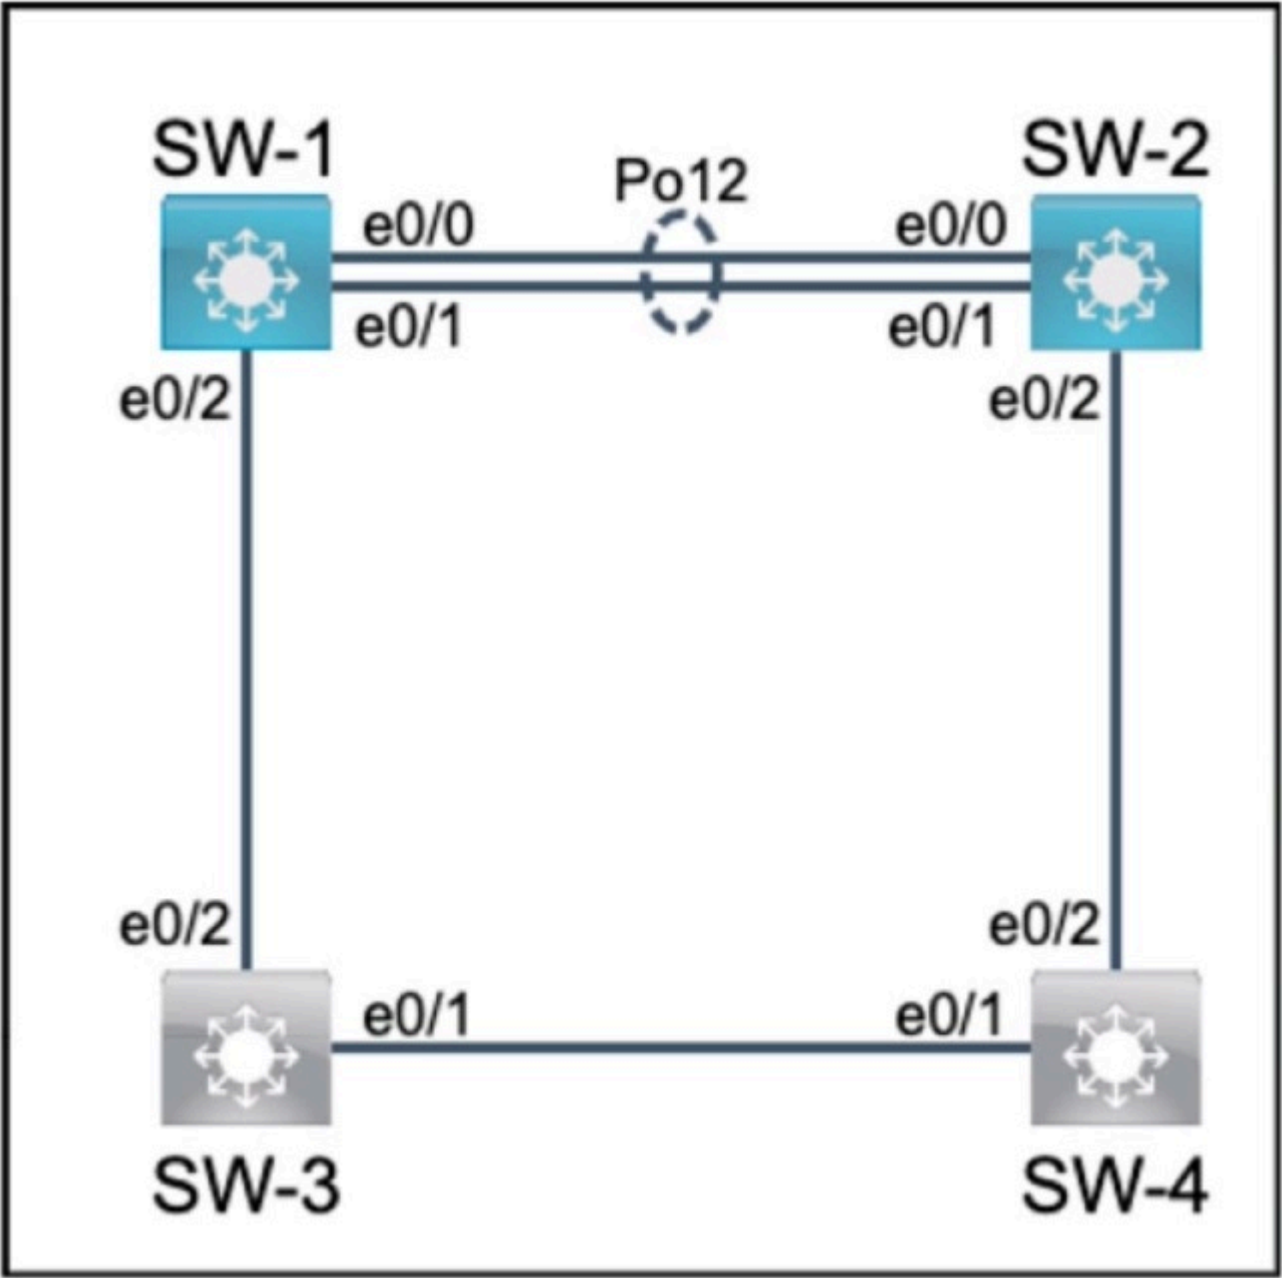

Tasks

-

SW-3 and SW-4 are preconfigured with all necessary commands. All physical cabling is in place and verified. All connectivity must be operational.

1. Configure both SW-1 and SW-2 switch ports e0/0 and e0/1 for 802.1q trunking with only VLANS 1, 12, and 22 permitted.

2. Configure SW-1 port e0/2 for 802.1q trunking and include only VLANS 12 and 22.
3. Configure both SW-1 and SW-2 switch ports e0/0 and e0/1 for link aggregation using the industry standard protocol. All ports must be configured so that they immediately negotiate the link.

Step 1:**SW-1:**

```
interface e0/0
switchport mode trunk
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 1,12,22
interface e0/1
switchport mode trunk
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 1,12,22
```

SW-2:

```
interface e0/0
switchport mode trunk
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 1,12,22
interface e0/1
switchport mode trunk
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 1,12,22
```

Correct Answer:**Step 2:****SW-1:**

```
interface e0/2
switchport mode trunk
switchport trunk encapsulation dot1q
switchport trunk allowed vlan 12,22
```

Step 3:**SW-1:**

```
interface range e0/0 - e0/1
channel-group 1 mode active
```

SW-2:

```
interface range e0/0 - e0/1
channel-group 1 mode active
```

[← Previous Questions](#)[Next Questions →](#)Browse atleast **50%** to increase passing rate 🌞

Viewing page 11 out of 12 pages.

Viewing questions **501-550** out of 1395 questions