


WEEK 6 DBSE

2520030331 Arnav Chitikena


Execution


1. Created a **Spring Boot application named Productsapi** in Spring Tools and added the required dependencies such as Spring Web, Spring Data JPA, MySQL Driver, and Spring Boot DevTools.
2. Created the required packages and classes for the **Controller, Entity, Repository, and Service layers** and added the respective code.
3. Created the **kluh database in MySQL** and configured the Spring Boot application to connect to it.
4. Used **Postman** to send a POST request to `http://localhost:8989/api/products` with the product details in JSON format.
5. The product was successfully inserted into the MySQL **product table** and verified using SQL.

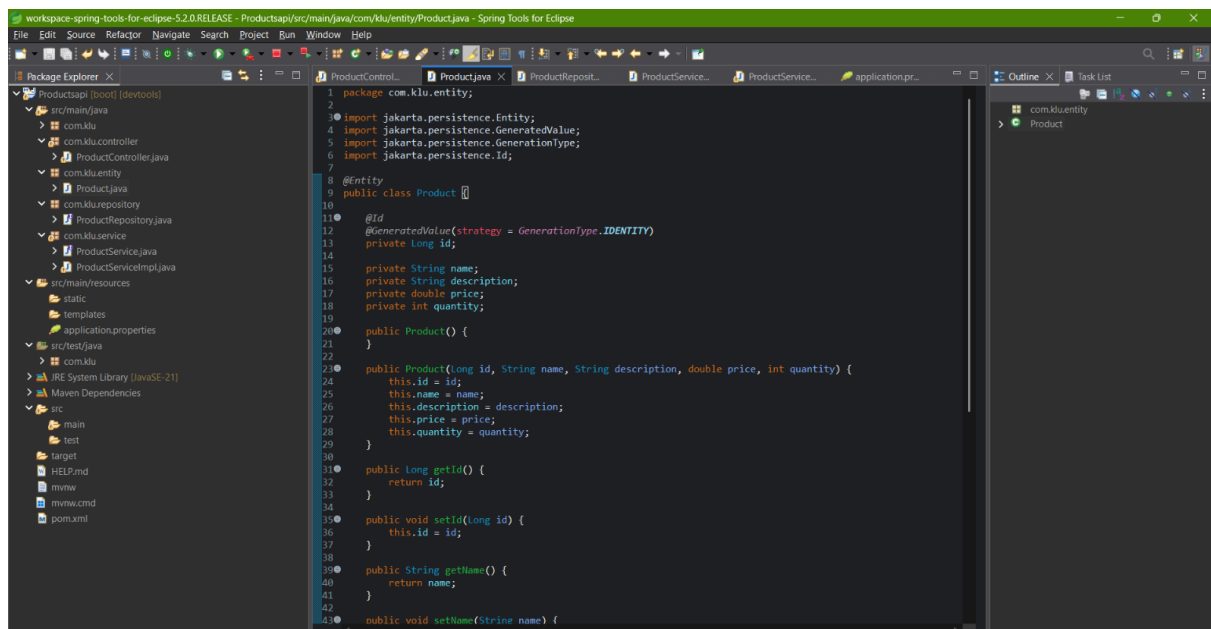

The screenshot displays the Spring Tools for Eclipse IDE interface. The Package Explorer on the left shows the project structure for 'Productsapi (boot) (devtools)', including packages like 'com.klu', 'com.klu.controller', 'com.klu.entity', 'com.klu.repository', 'com.klu.service', and 'com.klu.service.impl'. The main editor window shows the 'Product.java' file in the 'com.klu.entity' package. The code defines a JPA Entity for a product with attributes: id (long, generated), name (String), description (String), price (double), and quantity (int). It includes a no-argument constructor and a constructor with all attributes, along with getter and setter methods for each attribute.

```
1 package com.klu.entity;
2
3 import jakarta.persistence.Entity;
4 import jakarta.persistence.GeneratedValue;
5 import jakarta.persistence.GenerationType;
6 import jakarta.persistence.Id;
7
8 @Entity
9 public class Product {
10
11     @Id
12     @GeneratedValue(strategy = GenerationType.IDENTITY)
13     private Long id;
14
15     private String name;
16     private String description;
17     private double price;
18     private int quantity;
19
20     public Product() {
21     }
22
23     public Product(Long id, String name, String description, double price, int quantity) {
24         this.id = id;
25         this.name = name;
26         this.description = description;
27         this.price = price;
28         this.quantity = quantity;
29     }
30
31     public Long getId() {
32         return id;
33     }
34
35     public void setId(Long id) {
36         this.id = id;
37     }
38
39     public String getName() {
40         return name;
41     }
42
43     public void setName(String name) {
```

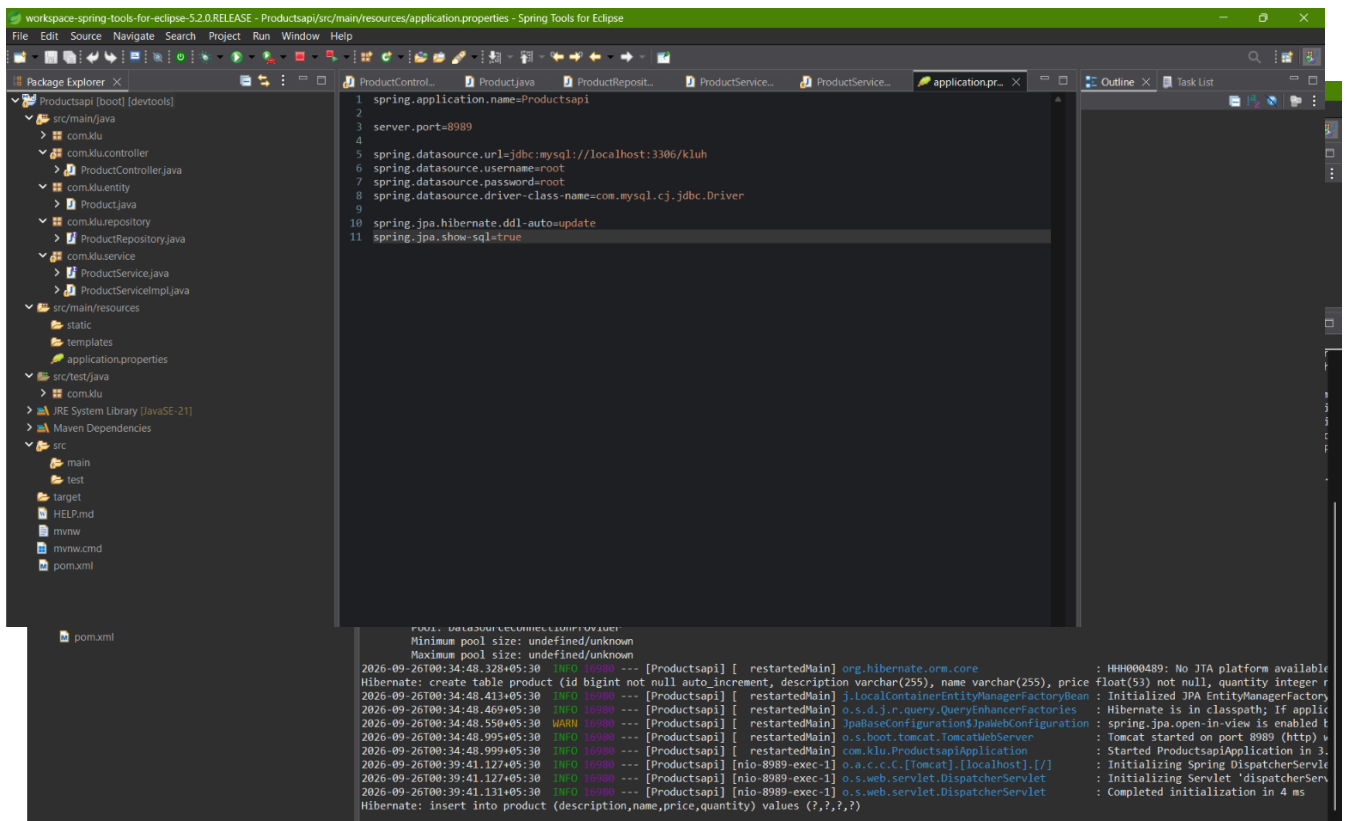

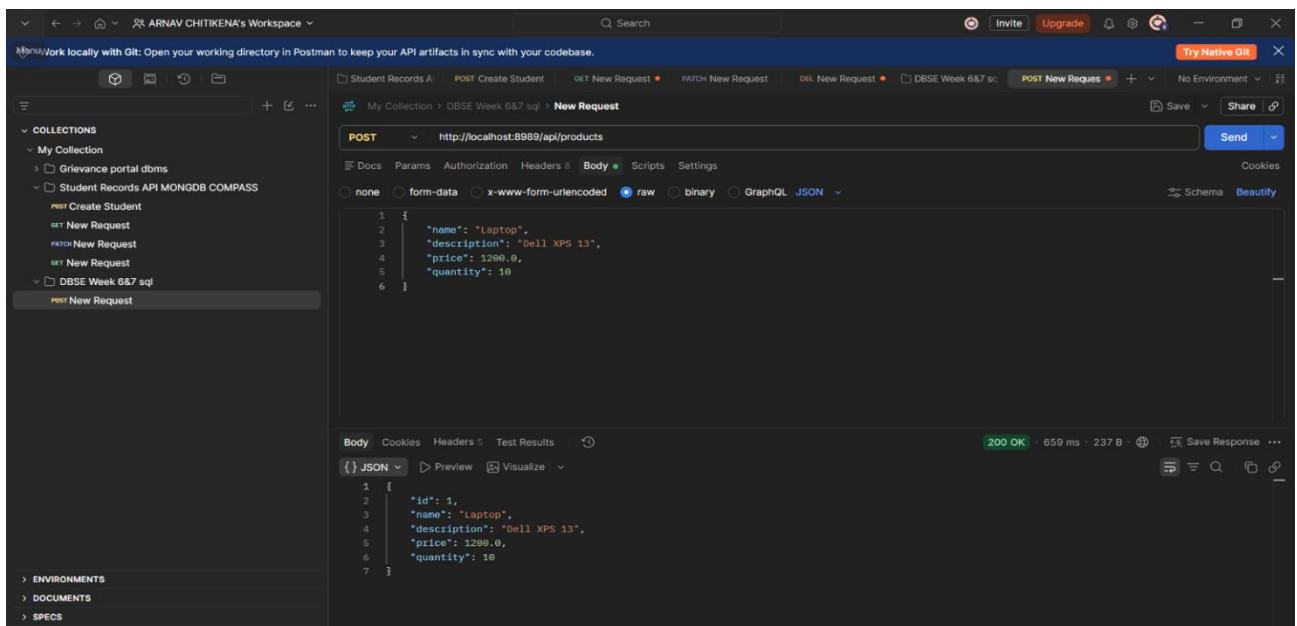

```
MySQL 8.0 Command Line CLI
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE kluh;
Query OK, 1 row affected (0.04 sec)

mysql> SHOW DATABASES;
+-----+
| Database |
+-----+
| bookflow_db |
| bookflow_week2 |
| employee |
| information_schema |
| kluh |
| mysql |
| performance_schema |
| productdb |
| sakila |
| student |
| sys |
| test |
| world |
+-----+
13 rows in set (0.03 sec)

mysql> USE kluh;
Database changed
mysql> SHOW TABLES;
+-----+
| Tables_in_kluh |
+-----+
| product |
+-----+
1 row in set (0.01 sec)

mysql> SELECT * FROM product;
+----+-----+-----+-----+-----+
| id | description | name | price | quantity |
+----+-----+-----+-----+-----+
| 1 | Dell XPS 13 | Laptop | 1200 | 10 |
+----+-----+-----+-----+-----+
1 row in set (0.00 sec)

mysql> |
```