


WEEK 6 DBSE

2520030331 Arnav Chitikena

Execution



1. Created a **Spring Boot application named Productsapi** in Spring Tools and added the required dependencies such as Spring Web, Spring Data JPA, MySQL Driver, and Spring Boot DevTools.
2. Created the required packages and classes for the **Controller, Entity, Repository, and Service layers** and added the respective code.
3. Created the **kluh database in MySQL** and configured the Spring Boot application to connect to it.
4. Used **Postman** to send a POST request to `http://localhost:8989/api/products` with the product details in JSON format.
5. The product was successfully inserted into the MySQL **product table** and verified using SQL.

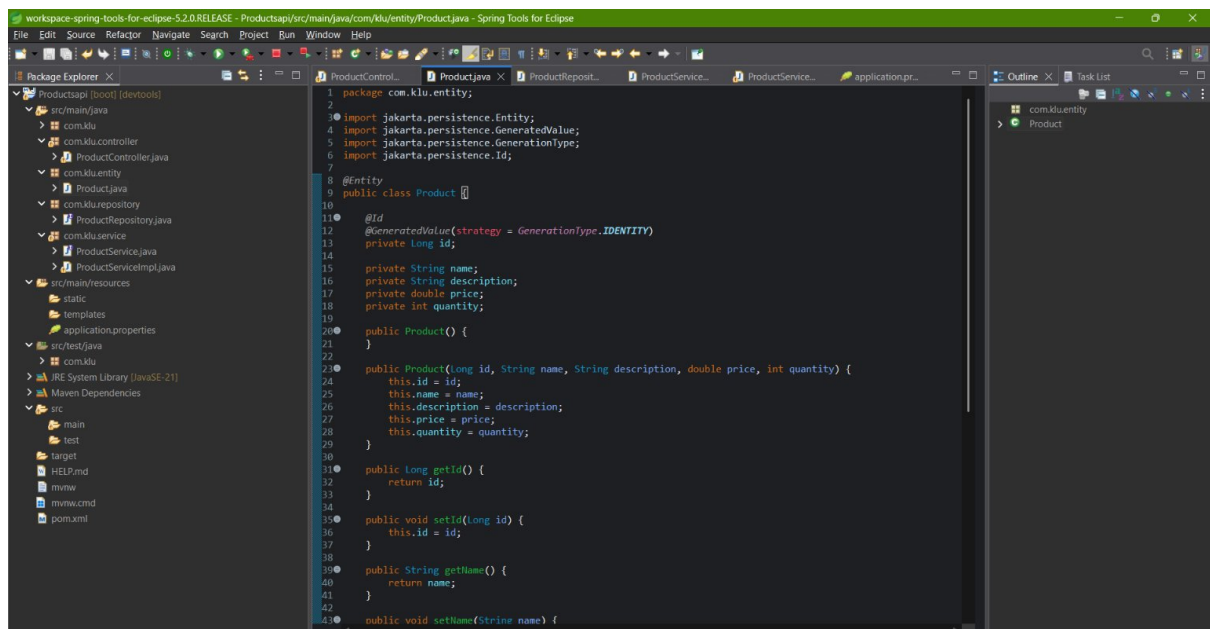


The screenshot displays the Spring Tools for Eclipse IDE interface. On the left, the Package Explorer shows the project structure for 'Productsapi [boot] (devtools)', including packages like 'com.klu', 'com.klu.controller', 'com.klu.entity', 'com.klu.repository', 'com.klu.service', and 'com.klu.service.impl'. The main editor window shows the 'Product.java' file in the 'com.klu.entity' package. The code defines a JPA entity with the following details:

```
1 package com.klu.entity;
2
3 import jakarta.persistence.Entity;
4 import jakarta.persistence.GeneratedValue;
5 import jakarta.persistence.GenerationType;
6 import jakarta.persistence.Id;
7
8 @Entity
9 public class Product {
10
11     @Id
12     @GeneratedValue(strategy = GenerationType.IDENTITY)
13     private Long id;
14
15     private String name;
16     private String description;
17     private double price;
18     private int quantity;
19
20     public Product() {
21     }
22
23     public Product(Long id, String name, String description, double price, int quantity) {
24         this.id = id;
25         this.name = name;
26         this.description = description;
27         this.price = price;
28         this.quantity = quantity;
29     }
30
31     public Long getId() {
32         return id;
33     }
34
35     public void setId(Long id) {
36         this.id = id;
37     }
38
39     public String getName() {
40         return name;
41     }
42
43     public void setName(String name) {
```

The Outline view on the right shows the 'com.klu.entity' package containing the 'Product' class.

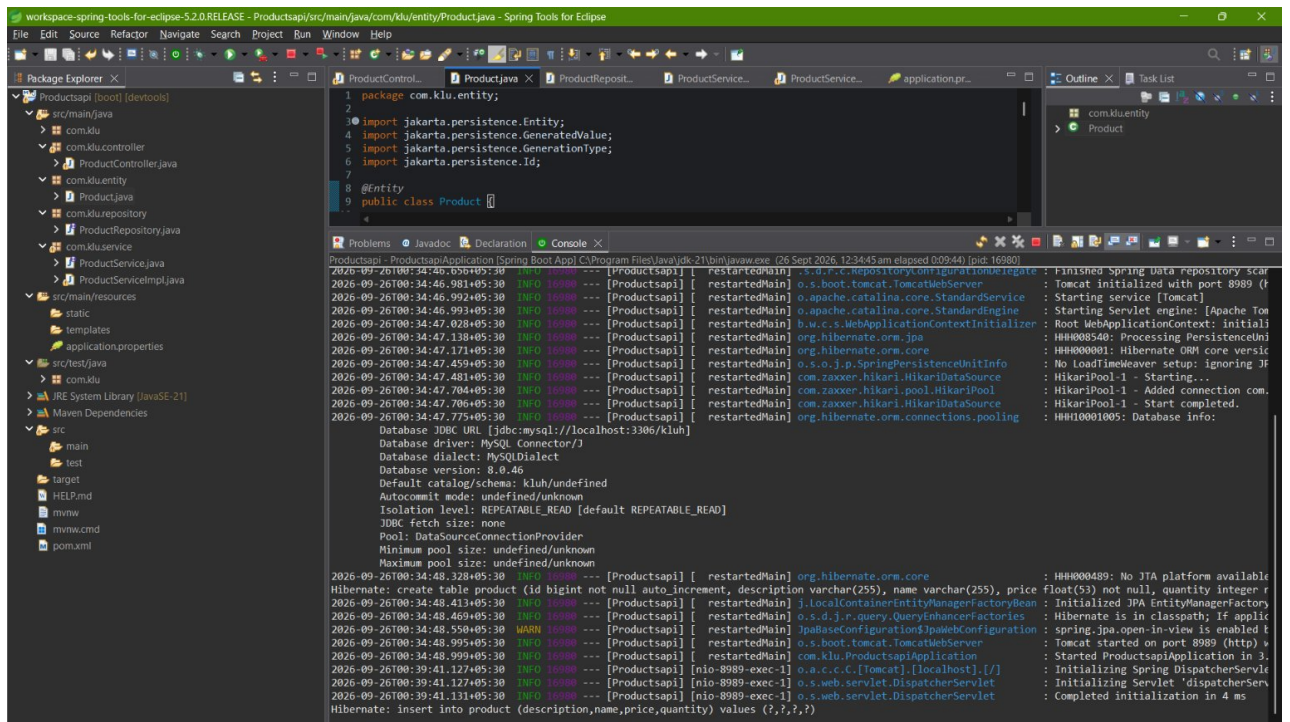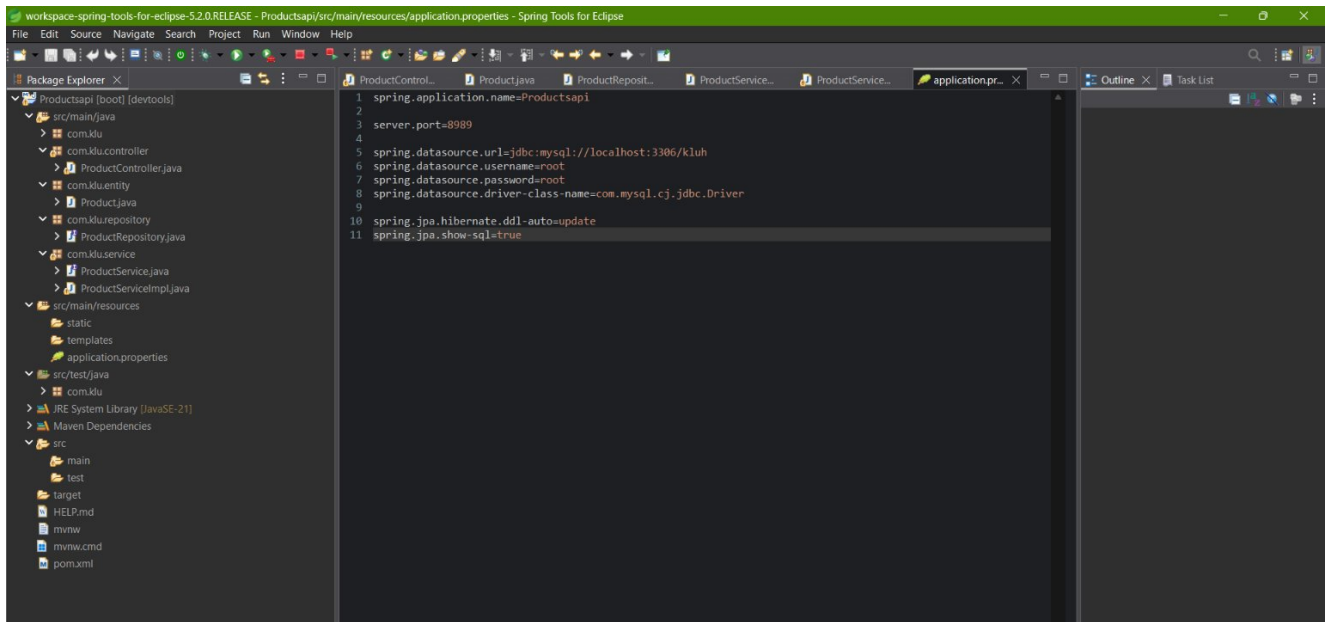

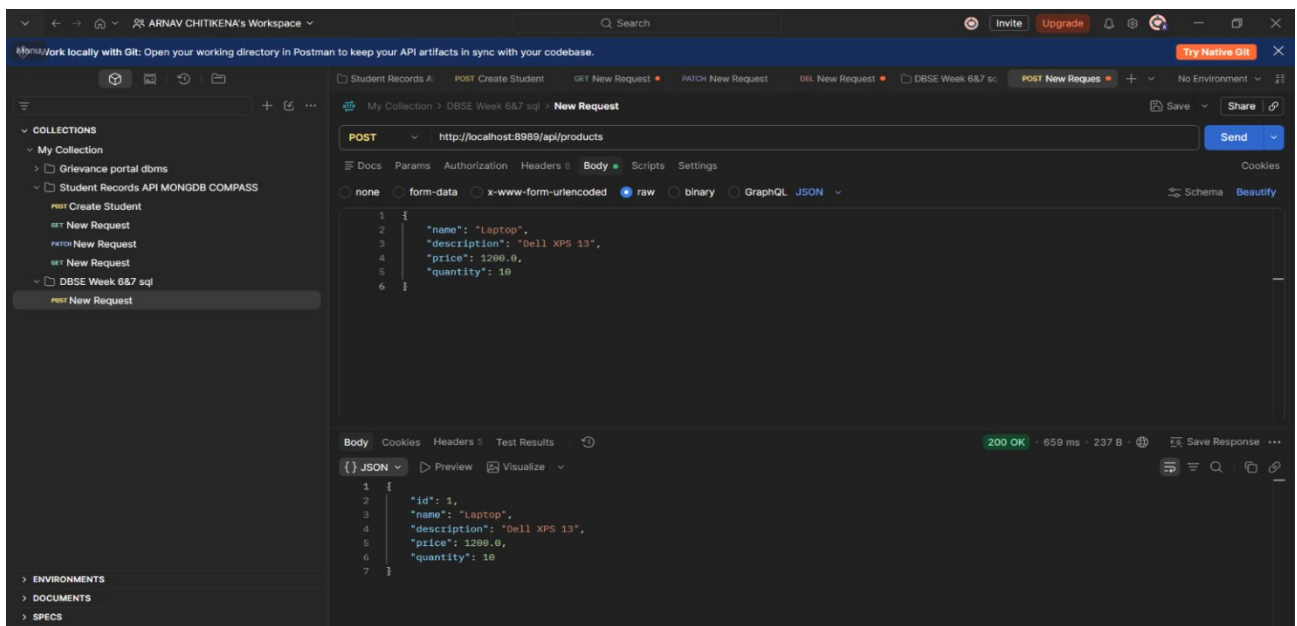

```
MySQL 8.0 Command Line CLI x + v

owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE kluh;
Query OK, 1 row affected (0.04 sec)

mysql> SHOW DATABASES;
+-----+
| Database |
+-----+
| bookflow_db |
| bookflow_week2 |
| employee |
| information_schema |
| kluh |
| mysql |
| performance_schema |
| productdb |
| sakila |
| student |
| sys |
| test |
| world |
+-----+
13 rows in set (0.03 sec)

mysql> USE kluh;
Database changed
mysql> SHOW TABLES;
+-----+
| Tables_in_kluh |
+-----+
| product |
+-----+
1 row in set (0.01 sec)

mysql> SELECT * FROM product;
+----+-----+-----+-----+-----+
| id | description | name | price | quantity |
+----+-----+-----+-----+-----+
| 1 | Dell XPS 13 | Laptop | 1200 | 10 |
+----+-----+-----+-----+-----+
1 row in set (0.00 sec)

mysql> |
```