

SIMATS ENGINEERING

ASSESSMENT TOOL 1

COURSE CODE: CSA14

COURSE NAME: COMPILER DESIGN

COURSE OUTCOME COVERED

CO3: *Analyze syntax-directed translation method using synthesized and inherited attributes to generate a Parser Tree. (BL4)*

Assessment Tool Weightage: 40%

QUESTIONS:5

Total Marks:100

Annexure A

EXPERIMENTS

Code of Conduct:

I Arun B (192421346) certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment.

I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the student: Arun B

Annexure A

EXPERIMENTS

Q1. You are developing a compiler-based desk calculator that evaluates arithmetic expressions using syntax-directed definitions (SDD).

The system should:

- (i) Accept an arithmetic expression with operators +, -, *, / and parentheses
- (ii) Use syntax-directed evaluation to compute values based on operator precedence
- (iii) Optimize evaluation by reducing unnecessary temporary computations
- (iv) Display the final result of the expression

Demonstrate how SDD rules (synthesized attributes) are used for expression evaluation.

SDD

Grammar with semantic rules:

$E \rightarrow E + T \quad \{ E.val = E1.val + T.val \}$

$E \rightarrow E - T \quad \{ E.val = E1.val - T.val \}$

$E \rightarrow T \quad \{ E.val = T.val \}$

$T \rightarrow T * F \quad \{ T.val = T1.val * F.val \}$

$T \rightarrow T / F \quad \{ T.val = T1.val / F.val \}$

$T \rightarrow F \quad \{ T.val = F.val \}$

$F \rightarrow (E) \quad \{ F.val = E.val \}$

$F \rightarrow \text{digit} \quad \{ F.val = \text{digit} \}$

Q2. In a compiler, postfix expressions are evaluated during code generation using stack-based bottom-up evaluation.

Write a C program that:

- (i) Evaluates a postfix expression
- (ii) Demonstrates S-attributed definition evaluation
- (iii) Shows how intermediate results are computed

Q3. You are designing a parser that uses L-attributed definitions, where inherited attributes are passed from parent to child.

Write a C program that:

- (i). Evaluates a simple expression like $a + b * c$
- (ii) Uses function parameters to simulate inherited attributes
- (iii). Ensures correct precedence handling
- (iv). Demonstrates top-down evaluation logic

Explain how inherited attributes influence computation.

Q4. In a compiler, it is important to check whether two type expressions are equivalent.

Write a C program that:

- (i). Accepts two type expressions (e.g., `int`, `float`, `int*`)
- (ii). Compares them for **type equivalence**
- (iii). Displays whether they are:
 - (a). Equivalent
 - (b). Not equivalent

Extend the logic to handle pointer types (`int*`, `float*`).

Q5. You are building a semantic analyzer that detects type errors in arithmetic expressions.

Write a C program that:

- (i). Accepts two operands and their types
- (ii). Checks whether the operation (e.g., `+`, `*`) is valid
- (iii). Reports:
 - (a). Valid expression
 - (b). Type error (e.g., `int + char*`)

Demonstrate how compilers detect semantic errors during type checking

Answers:

1) calculator:

```

#include <stdio.h>
#include <ctype.h>

char expr[100];
int pos = 0;

int E();
int T();
int F();

int E()
{
    int val = T();

    while (expr[pos] == '+' || expr[pos] == '-')
    {
        char op = expr[pos++];

        int value2 = T();

        if (op == '+')
            val = val + value2;
        else
            val = val - value2;
    }

    return val;
}

int T()
{
    int val = F();

    while (expr[pos] == '*' || expr[pos] == '/')
    {
        char op = expr[pos++];

        int value2 = F();

        if (op == '*')
            val = val * value2;
        else
            val = val / value2;
    }

    return val;
}

int F()
{

```

```

int val;

if (expr[pos] == '(')
{
    pos++;
    val = E();
    pos++;
}
else
{
    val = expr[pos] - '0';
    pos++;
}

return val;
}


int main()
{
    printf("Enter arithmetic expression: ");
    scanf("%s", expr);

    printf("Result = %d\n", E());

    return 0;
}

```

Output:

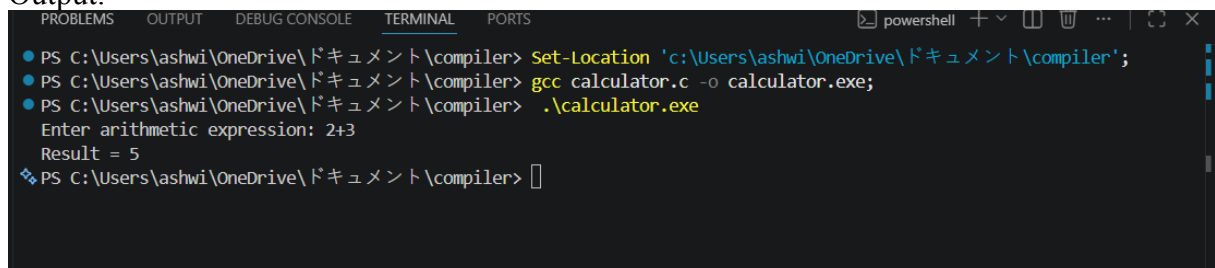

```

PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ドキュメント\compiler';
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> gcc calculator.c -o calculator.exe;
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> .\calculator.exe
Enter arithmetic expression: 2+3
Result = 5
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler>

```

2)Postfix Evaluation

```

#include <stdio.h>
#include <ctype.h>

int stack[100];
int top = -1;

void push(int value)
{
    stack[++top] = value;
}

```

```

int pop()
{
    return stack[top--];
}

int main()
{
    char postfix[100];
    int i, a, b, result;

    printf("Enter postfix expression: ");
    scanf("%s", postfix);

    for (i = 0; postfix[i] != '\0'; i++)
    {
        if (isdigit(postfix[i]))
        {
            push(postfix[i] - '0');
        }
        else
        {
            b = pop();
            a = pop();

            switch (postfix[i])
            {
                case '+':
                    result = a + b;
                    break;

                case '-':
                    result = a - b;
                    break;

                case '*':
                    result = a * b;
                    break;

                case '/':
                    result = a / b;
                    break;
            }


            printf("Intermediate result: %d\n", result);
            push(result);
        }
    }

    printf("Final Result = %d\n", pop());
}

```

```
    return 0;
}
```

Output:

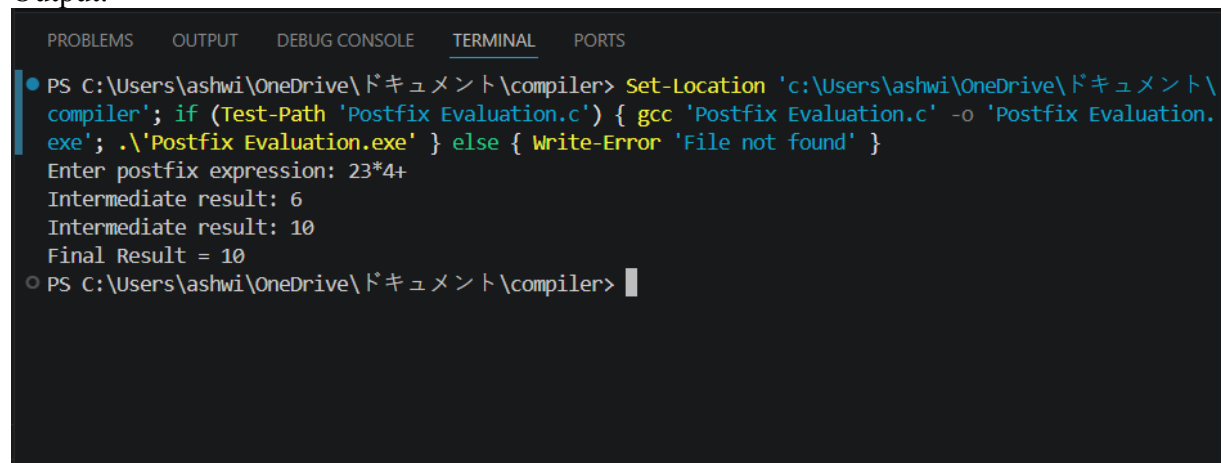

The screenshot shows a Visual Studio interface with the 'TERMINAL' tab selected. The terminal displays the following commands and output:

```
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ドキュメント\
compiler'; if (Test-Path 'Postfix Evaluation.c') { gcc 'Postfix Evaluation.c' -o 'Postfix Evaluation.
exe'; .\'Postfix Evaluation.exe' } else { Write-Error 'File not found' }
Enter postfix expression: 23*4+
Intermediate result: 6
Intermediate result: 10
Final Result = 10
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> |
```

3)L-Attributed Definition:

```
#include <stdio.h>
```

```
int E(int inherited)
```

```
{
```

```
    int t = 0;
```

```
    printf("Inherited attribute received by E: %d\n", inherited);
```

```
    return inherited + t;
```

```
}
```

```
int main()
```

```
{
```

```
    int a = 2;
```

```
    int b = 3;
```

```
    int c = 4;
```

```
    int multiplication;
```

```
    int result;
```

```
    printf("Expression: a + b * c\n");
```

```
    multiplication = b * c;
```

```
    result = a + multiplication;
```

```
    E(a);
```

```
    printf("Inherited attribute passed to child: %d\n", a);
```




```

printf("b * c = %d\n", multiplication);
printf("Final Result = %d\n", result);

return 0;
}

```

Output:

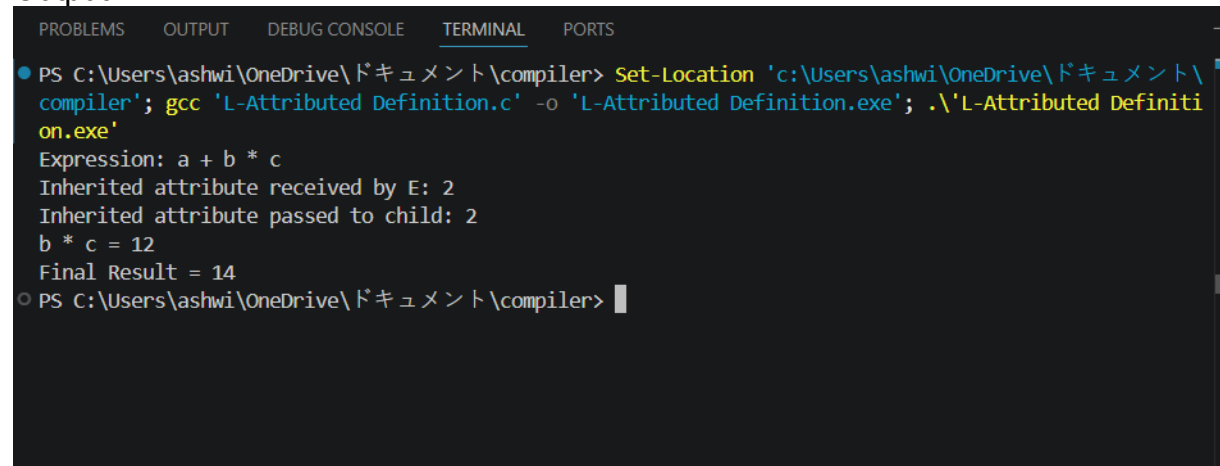

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ドキュメント\
compiler'; gcc 'L-Attributed Definition.c' -o 'L-Attributed Definition.exe'; .\L-Attributed Definiti
on.exe
Expression: a + b * c
Inherited attribute received by E: 2
Inherited attribute passed to child: 2
b * c = 12
Final Result = 14
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler>

```

4)Type Expression Equivalence:

```

#include <stdio.h>
#include <string.h>

int typeEquivalent(char type1[], char type2[])
{
    return strcmp(type1, type2) == 0;
}

int main()
{
    char type1[20], type2[20];

    printf("Enter first type expression: ");
    scanf("%s", type1);

    printf("Enter second type expression: ");
    scanf("%s", type2);

    if (typeEquivalent(type1, type2))
    {
        printf("Types are Equivalent\n");
    }
    else
    {
        printf("Types are Not Equivalent\n");
    }
}

```

```

    return 0;
}

```

Output:

```

PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ドキュメント\compiler';
if (Test-Path 'Type Expression Equivalence.c') { gcc 'Type Expression Equivalence.c' -o 'Type Expression Equival
ence.exe'; .\Type Expression Equivalence.exe' } else { Write-Error 'File not found' }
Enter first type expression: int
Enter second type expression: int
Types are Equivalent
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ドキュメント\compiler';
if (Test-Path 'Type Expression Equivalence.c') { gcc 'Type Expression Equivalence.c' -o 'Type Expression Equival
ence.exe'; .\Type Expression Equivalence.exe' } else { Write-Error 'File not found' }
Enter first type expression: int
Enter second type expression: float
Types are Not Equivalent
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler>

```

5) Semantic Type Checking:

```

#include <stdio.h>
#include <string.h>

```

```

int isValid(char type1[], char type2[], char op)

```

```

{
    if (strchr(type1, '*') != NULL ||
        strchr(type2, '*') != NULL)
    {
        return 0;
    }

    if ((strcmp(type1, "int") == 0 ||
         strcmp(type1, "float") == 0) &&
        (strcmp(type2, "int") == 0 ||
         strcmp(type2, "float") == 0))
    {
        if (op == '+' || op == '-' ||
            op == '*' || op == '/')
        {
            return 1;
        }
    }
}

```

```

return 0;

```

```

}

int main()
{
    char type1[20], type2[20];
    char op;

    printf("Enter first operand type: ");
    scanf("%s", type1);

    printf("Enter operator (+, -, *, /): ");
    scanf(" %c", &op);

    printf("Enter second operand type: ");
    scanf("%s", type2);

    printf("\nExpression: %s %c %s\n",
           type1, op, type2);

    if (isValid(type1, type2, op))
    {
        printf("Valid expression\n");
    }
    else
    {
        printf("Type Error\n");
    }

    return 0;
}

```

Output:

```
● PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ド
キュメント\compiler'; if (Test-Path 'Semantic Type Checking.c') { gcc 'Semantic Type Checki
ng.c' -o 'Semantic Type Checking.exe'; .\'Semantic Type Checking.exe' } else { Write-Error
'File not found' }
Enter first operand type: int
Enter operator (+, -, *, /): +
Enter second operand type: int

Expression: int + int
Valid expression
PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> Set-Location 'c:\Users\ashwi\OneDrive\ド
キュメント\compiler'; if (Test-Path 'Semantic Type Checking.c') { gcc 'Semantic Type Checki
ng.c' -o 'Semantic Type Checking.exe'; .\'Semantic Type Checking.exe' } else { Write-Error
'File not found' }
● Enter first operand type: int
Enter operator (+, -, *, /): +
Enter second operand type: char*

Expression: int + char*
Type Error
○ PS C:\Users\ashwi\OneDrive\ドキュメント\compiler> 
```

RUBRICS FOR CALCULATION

Criteria	Weightage	Level 4 – Exemplary	Level 3 – Proficient	Level 2 – Developing	Level 1 – Beginning
Understanding of Concepts	25	Demonstrates thorough understanding and effectively integrates multiple concepts/technologies	Good understanding with proper integration of most concepts	Basic understanding; limited or partial integration	Poor understanding; unable to integrate concepts
Experimental Design	30	Well-planned, systematic implementation with optimal solution	Correct implementation with minor issues	Basic implementation with errors or inefficiencies	Incorrect or incomplete implementation
Use of Tools	20	Effective and advanced use of tools/technologies with proper configuration	Appropriate use of tools with correct execution	Limited or inconsistent use of tools	Incorrect or minimal use of tools
Analysis of Results	15	Insightful analysis with accurate interpretation and validation of results	Good analysis with reasonable interpretation	Basic analysis with limited insights	Poor or incorrect analysis of results
Documentation	10	Clear, well-structured documentation with diagrams, code, and results	Organized documentation with necessary details	Basic documentation with missing details	Poor or incomplete documentation