

Title

University of Glasgow



University
of Glasgow

Joseph Henry Briggs

Day Month Year

Contents

1	Balanced Homodyne for LIGO A+	4
1.1	BHD versus DC readout for A+	4
1.2	Local Oscillator Path Length Stability Requirement and HRTS requirement	8
1.2.1	Local Oscillator Path	8
1.2.2	Simulation of the Linear Response Function Between a Differential Strain and the Power at the AS Port	11
1.2.3	Converting the Sensitivity Curve for A+ into the HRTS requirement	13
1.2.4	HRTS	15
1.3	HAM6 layout	18
1.3.1	The Constraints and Requirements of the Layout of HAM6	18
1.4	Chosen Layout	21
1.5	Sensing and Control	28
1.5.1	Longitudinal Control	28
1.5.2	Alignment Control	29
1.5.3	Alignment of the LO-AS beam to the OMC	29

1.6	WS visulations as a tool for understanding mode matching problems .	30
1.7	Conclusion about BHD for A^+	40

Chapter 1

Balanced Homodyne for LIGO A+

There doesn't need to be a discussion about what BHD is, but it is worth briefly mentioning what it is and the other readout methods again Context for BHD upgrade being part of A+.

1.1 BHD versus DC readout for A+

Different gravitational wave signals carry their information in different frequency bands, and the detector may be optimised to reflect this. For instance, BNS signals continue to higher frequencies than BBH signals (due to them being smaller) so it may be of interest to optimise the detector around these frequencies to improve the understanding of the properties of BNS. The current generation of gravitational wave detectors are going to be limited by a combination of radiation pressure noise and shot noise in their detection bands. These two noise sources are intrinsically linked by the Heisenberg uncertainty principle, and can both be understood as arising due to the number of photons used to probe the position of the end

test masses. This limit in the noise floor is known as the standard quantum limit. A squeezed light field can be used to surpass the noise floor set by an squeezed state. The exact way in which the quantum noise is changed is controlled by the squeezing angle, and to detect these squeezed states the homodyne angle must be correctly set. The effect that controlling the squeezing angle has on the SQL has been demonstrated for at LLO [?], however this used a diagnostic BHD set-up which was not intended for providing the low noise required to make gravitational wave detections.

In addition to being key in shaping the noise curve of the detector, BHD has some practical benefits over DC readout. These benefits revolve around being able to eliminate the DC light required for DC readout to work. The primary benefit is in the reduction in SRC length noise coupling to the gravitational wave signal, and another benefit is being able to reduce the scattering from the septum window between HAM5 and HAM6. While strictly speaking these are not properties of BHD readout, as both could be achieved by other means. For instance, the septum window could be removed and suspensions with additional stages could be used. These solutions however are not as practical as they sound, and are not more practical than implemented BHD. The septum window is key to being able to commission the interferometer. The number of times HAM5 and the other chambers connected are vented should be kept low, as each time this is done gas and water vapour enters the system and this will not be removed as this is a large engineering challenge. The design and install of three new suspensions is also a large design task, which ultimately gives less benefit to having a BHD readout scheme.

DC readout produces a field due to a constant differential offset in the arm lengths. The field due to the differential offset is the local oscillator in DC readout. The local oscillator beats with a field created by a gravitational wave in order to produce a measurable signal. This method of readout has some key advantages, such as there being no phase noise between the local oscillator and the signal carrying field, and the local oscillator and signal being perfectly aligned and mode matched. The BHD system will need to provide sufficiently low phase noise as to not degrade the GW signal. The control over the alignment and mode matching between the LO and the signal is also important, as this will cause light to be scattered back into the interferometer from the OMCs. The new layout for the BHD readout will have to provided these features.

As the BHD signal is obtained through subtracting the signals from two photodiodes, it is possible to obtain a very low electronic noise floor when designing the transimpedance amplifier by subtracting the currents produced by the photodiodes rather than having two separate transimpedance amplifiers and subtracting the signals made by these later. This is not really an advantage, as low enough electronic noise can be obtained using other construction techniques that allow for small DC signals while still having signal shaping that gives a large enough SNR in the detection band. Having separate transimpedance amplifiers for each photodiode also has useful diagnostic advantages, such as being able to see the sum of the two photo-diode signals. Therefore, direct subtraction of the photo-diode signals should not be considered an advantage of BHD over DC readout.

One of the practical outcomes of implementing BHD is the potential to reduce SRC length noise coupling. Noise on the length of the SRC can couple to the gravitational wave signal via two routes. The dominant coupling will arise due to the power entering the SRC, which is proportional to the DC offset. The other coupling arises due to the optical spring between the SRC and the arm cavity length, whose strength depends on the DC offset.

The dominant coupling due to the power entering the SRC can be intuitively understood by considering a Fabry-Perot cavity. For small changes in the cavity length, the light transmitted by the cavity way that length noise may couple to the signal light is due to the dependence on the transmitted light by the SRC on its length and the amount of light entering the cavity. There is a relationship between the length noise and the power transmitted that scales linearly with the DC offset.

The second route that SRC length noise may couple to the signal is by the optomechanical coupling due to the optical springs between the SRC and the arm cavity. Due to this optical spring effect, a change in length of the SRC will cause the arm cavity length to change as well[1]. This effect is much smaller than the first effect, so the estimate for the reduction of SRC length coupling will only consider the first effect.

SRC length noise is currently too high for LIGO to meet the A+ requirements Shelia Dwyer post. To estimate the reduction in SRC length noise that BHD may provide, the amount the DC offset that is currently used should be compared to the amount that is proposed for BHD. LIGO currently uses at the AS port there is 23 mW, with 1 mW of residual light (light that cannot be removed)(shelia dwyer

answer in email FW: BHD review committee request & document PREVIEW). Assume 0.85 A/W ($q_e = 99\%$). The AS power for BHD is between 1 and 5 mW. Therefore, a conservative estimate would for the factor that the SRC length noise coupling is reduced by is 4.

1.2 Local Oscillator Path Length Stability Requirement and HRTS requirement

The requirement for the path length stability of the local oscillator is determined by the sensitivity goal for A+. Deconvolving the strain sensitivity curve for A+ with the linear response function between differential strain, h , and power at the AS port gives the noise of the AS beam. This is then converted to an equivalent phase noise between the AS the LO beams. Finally, the requirement for the suspended optics is derived.

A gravitational wave produces a phase modulated signal in the AS beam. The LO beam will also be phase modulated by the motion of the mirrors in the LO path. When these beams are combined, it is the phase difference between the two fields that produces a signal, so the phase noise of the LO path must be sufficiently low that the signal that is generated by the interference of the LO and AS beams corresponds to the phase modulation of the AS beam.

1.2.1 Local Oscillator Path

Two options for the local oscillator path were considered: a beam picked off from the main beam splitters AR coating (BSAR) or the beam transmitted through PR2 [3]

(POP). The determining factor in choice of LO path was the effect of backscatter, and the POP choice is far superior to the BSAR choice at all frequencies and scatter phases. This is because any backscatter from the BSAR enters only one arm, and therefore is a differential effect. Any back scatter that enters the POP port is common-mode, meaning that the differential arm signal is far less sensitive to this source of backscatter.

The layout for the optics which combine the the LO and AS beam is shown in figure 1.1. The beam transmitted by PR2 is used for control of the interferometer, so BHDBS1 is needed to pick off some of this light. The LO beam is steered towards the combining beam splitter BHDBS2. with BHDM1. Two lenses (**need names for these**) are used for mode matching the LO beam to the AS beam. The AS beam is transmitted through the SRM and OFI, and then is steered towards BHDBS2 with OM0.

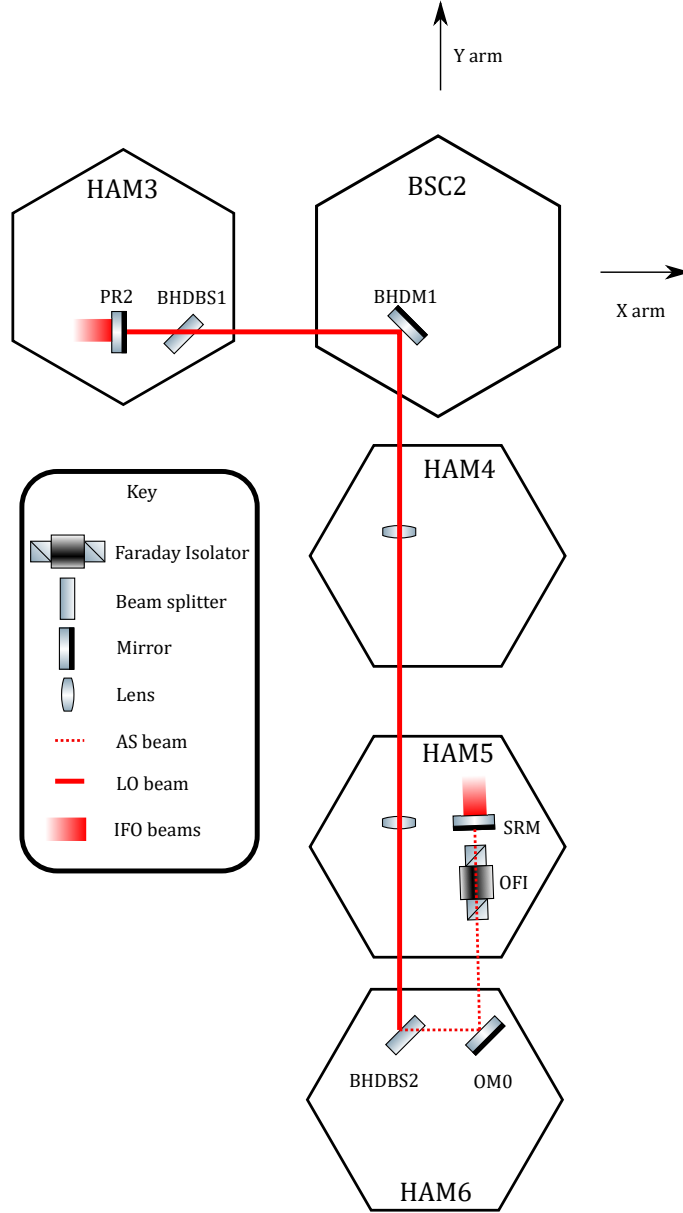


Figure 1.1: Sketch of the LO and AS beam paths. The LO beam is obtained from the light transmitted by PR2. Some of this light is needed for control of the interferometer, so BHDBS1 is used to split the light. The LO beam is then directed towards the combining beam splitter BHDBS2 with BHDM1. Two lenses are needed to mode match the LO beam to the AS beam. The AS beam is transmitted through the SRM, passes through the OFI, and is directed to BHDBS2 via OM0.

1.2.2 Simulation of the Linear Response Function Between a Differential Strain and the Power at the AS Port

The linear response function of the A+ detectors was obtained using FINESSE. Since the core optics of the interferometer will not be changing in a way relevant to this calculation, the LLO model[4] was used to calculate the response between differential motion of the ETMs and the power transmitted through the OMC. To apply a differential arm signal with FINESSE, `fsig` commands were used to apply two signals in antiphase with each other to the ETMs,

```
fsig sig1 ETMXHR 1 0
fsig sig2 ETMYHR 1 180.
```

The frequency of this modulation was swept, and the signal produced at the AS port was measured by demodulating the light at the modulation frequency. The commands

```
xaxis sig1 f log 5 5000 2999
put P_DC_OMC_probe f1 $x1
```

do this. Since the input modulation is doubled by moving the mirrors differentially the response needs dividing by 2. To account for the ETMs retro-reflecting the light (or is the weird Finesse convention), the response needs dividing by 2 again. To convert this from phase units to strain units, a factor of $\frac{\lambda}{2\pi L_{\text{arm}}}$ is needed. Therefore, the output of the the FINESSE simulation needs to be multiplied by $\frac{1}{2} \frac{1}{2} \frac{2\pi L_{\text{arm}}}{\lambda}$ to be in units of $\frac{\text{W}}{\text{h}}$. The linear response function between a differential arm strain and the power at the AS port is shown in figure 1.2.

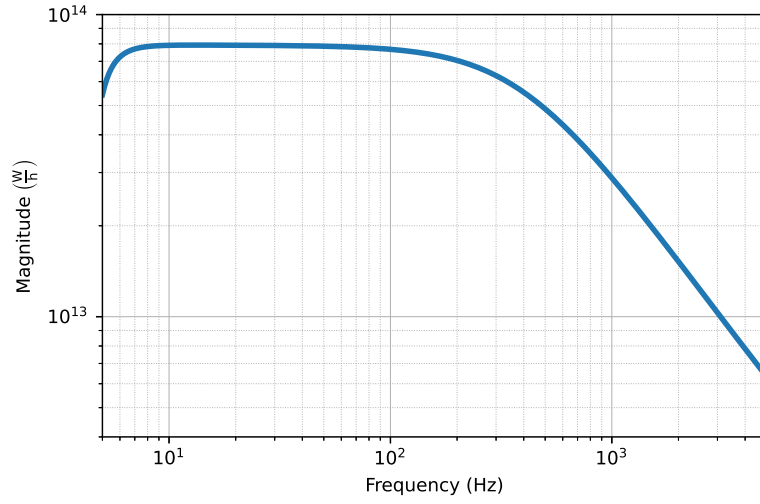


Figure 1.2: The linear response function between strain and light power at the AS port was obtained from a FINESSE simulation of the LLO detector[4]. The corner frequency at ≈ 300 Hz comes from the pole of the coupled SRC-arm cavity. The behaviour below 6 Hz is due to optical spring effects.

1.2.3 Converting the Sensitivity Curve for A+ into the HRTS requirement

The sensitivity curve will be shown in an earlier chapter. To convert the A+ sensitivity curve into a path length stability requirement for the local oscillator, a few steps are required. First, the sensitivity curve must be expressed in units of $\frac{W}{\sqrt{\text{Hz}}}$. Secondly, the intensity noise of the AS beam needs to be converted into a phase noise. In order for the phase noise of the local oscillator to not limit the performance of the gravitational wave detector, the phase noise of the AS beam must be greater than the phase noise of the LO beam. Finally, a factor of 10 safety margin is required. The HRTS requirement is then obtained by including the number of reflective optics in the LO path.

The A+ sensitivity[5] curve was multiplied by the function shown in 1.2 to convert it from units of $\frac{h}{\sqrt{\text{Hz}}}$ to $\frac{W}{\sqrt{\text{Hz}}}$. This is shown in figure 1.3. At frequencies above 1 kHz, the requirement is flat as this is the region dominated by shot noise. At lower frequencies, the requirement is relaxed as the sensitivity curve becomes dominated by other noise sources.

The quantum mechanics of this problem have been included in the A+ sensitivity curve [5], therefore we can approach this with classical physics. When the LO and AS beams interfere at the beam splitter (BHSBS2), the power of the resulting beam is

$$P = |E_s e^{i\omega t} + E_{\text{LO}} e^{i\omega t + \phi}|^2 = |E_s|^2 + |E_{\text{LO}}|^2 + 2|E_s E_{\text{LO}}^\dagger| \cos(\phi), \quad (1.1)$$

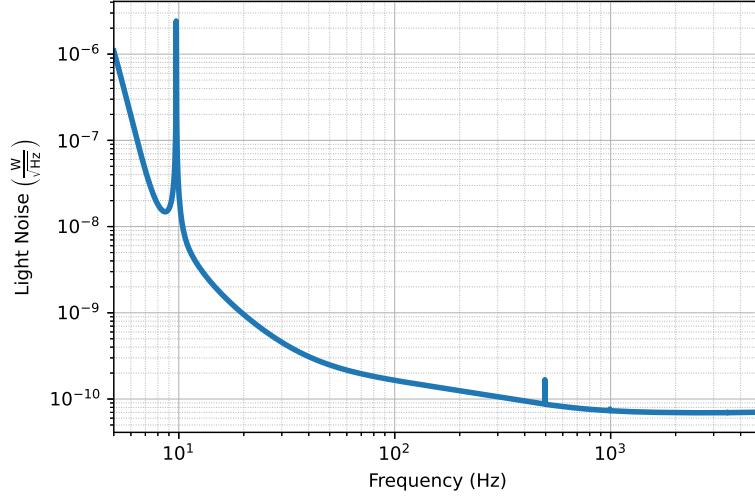


Figure 1.3: The intensity noise of the light at the AS port for the A+ detector. This was obtained by deconvolving the detectors sensitivity curve[5] with the function shown in figure 1.2.

where E_s and E_{LO} are the (complex) field amplitude of the signal and local oscillator beams, ω is the laser frequency, t is time, and ϕ is the phase difference between the local oscillator and the signal beam, also known as the homodyne angle. Differentiating with respect to ϕ gives the relationship between a change in power and a change in phase between the two beams,

$$dP = -2|E_s E_{LO}^\dagger| \sin(\phi) d\phi. \quad (1.2)$$

and since the homodyne angle is 90° , this becomes

$$dP = -2|E_s E_{LO}^\dagger| d\phi. \quad (1.3)$$

To convert ϕ to distance, use

$$\frac{\lambda}{2\pi}d\phi = dx. \quad (1.4)$$

The light noise curve shown in figure 1.3 should be multiplied by $\frac{\lambda}{2\pi} \frac{1}{2|E_s E_{\text{sig}}^*|}$ to obtain the the noise floor of the interferometer in units of LO path length noise. For a 98 mW LO beam and a 5 mW AS beam, the noise floor of the interferometer in units of LO path length is shown in figure 1.5.

The HRTS requirement assumes, based on the current design, that there will be 2 mirrors at 45° which are used to steer the AS and LO beams. As the optics reflected at 45 degrees, the path length change due to the optics motion is multiplied by $\frac{2}{\sqrt{2}} = \sqrt{2}$. The beams are combined on a beamsplitter, and the notion of this beam splitter needs to be counted twice. A sketch of this is shown in figure 1.4. A factor of 10 is then included as a safety margin since there are many uncorrelated noise sources in LIGO. With a 98 mW LO beam and a 5 mW AS beam, the requirement for the HRTS optics longitudinal motion at 100 Hz is $5 \times 10^{-17} \text{m}/\sqrt{\text{Hz}}$. A typical motion of the optical benches at 10 Hz is $10 \times 10^{-1} \text{m}/\sqrt{\text{Hz}}$ [6]. To achieve this with passive isolation, a triple suspensions will be used. make figure showing requirement as a fuction of AS power?

1.2.4 HRTS

remove references to HRTS in previous section. Refer to the HRTS there as table motion isolation requirements, or something like that. Discuss the HRTS in its own separate section.

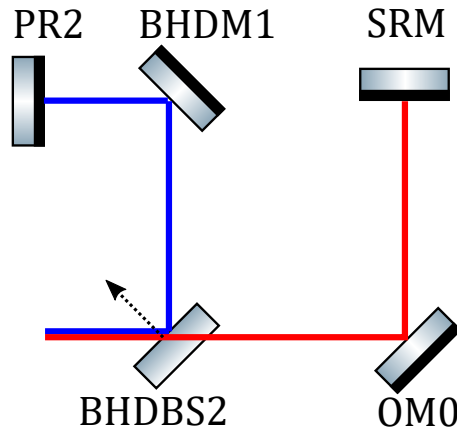


Figure 1.4: A sketch of the LO and AS beam paths. The LO beam path is shown in blue and the AS beam is shown in red. A dashed line indicates the direction that the recombining beamsplitter, BHDBS2, moves. When this happens, at the point of the beams combining the phase of the AS beam has increased while the phase of the LO beam has decreased. This means that the recombination beamsplitter motion needs to be counted twice.

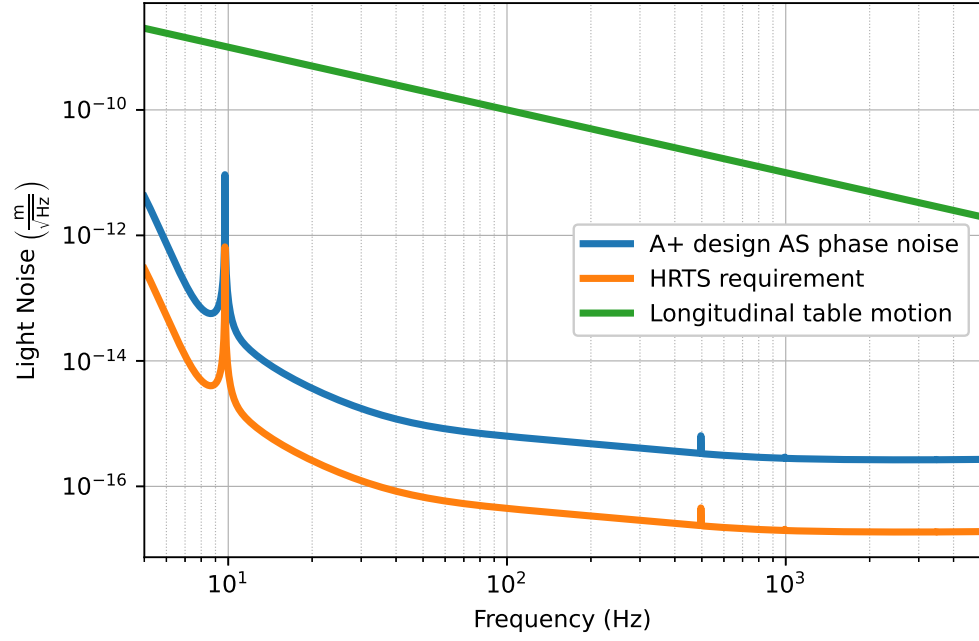


Figure 1.5: The phase noise between the LO and the AS beams causes noise. The sensitivity curve for A+ sets the limit on how much path length noise is acceptable between the AS and LO beams. The blue line shows sensitivity curve is shown in units of path length noise between the AS and LO beams, and the orange line shows the requirement of HRTS mirror motion. **Replot, the y axis is shit!**

1.3 HAM6 layout

Fundamentally, the layout in HAM6 must combine the AS beam and the LO beam, and sense the combined beams to form a balanced homodyne detector. There are several other functionalities required and constraints imposed on the layout of HAM6. The following section will describe these functionalities and constraints and how they guided the design of the HAM6 layout. This work was undertaken by a team including myself, Ken Strain, Russel Jones, Stephen Webster and Mark Barton.

1.3.1 The Constraints and Requirements of the Layout of HAM6

The entry point of the AS and LO beams in principle can be anywhere in HAM6, however in reality they are fixed due to the location of HAM6 with respect to the interferometer, due to the location of the septum windows between HAM5 and HAM6, and due to the many other components of the interferometer that these beams need to avoid. The LO beam is steered with BHDM1 onto BHDBS2, and the AS beam is steered with OM0 onto BHDBS2. This is required to provide the degrees of freedom to co-align the AS and LO beams. There is some freedom in choice for the location of OM0 and BHDBS2, but there is no choice in the location of the AS and LO beams.

The design beam parameter at the SRM is $q_{\text{SRM}} = -3.55 + 1.09i$ m, so the design of the HAM6 mode matching optics is based on this number. In reality, the beam parameter could be different to this, as discussed in chapter ??). At the SRM, there

are two sets of modes we could design the AWC to match to: The arm mode, or the SRC mode. Ideally, these would be the same mode, however geometry errors in the SRC cause the arm and the SRC to be mismatched meaning the radius of curvature and beam size at the SRM will not correspond to the eigenmode of the SRM. This set of likely modes, shown in ??, was taken into consideration when choosing a layout for the AWC in HAM6.

After BHDBS2, the layout the optics between OMC input couplers and BHDBS2 must provide the functionality for steering the combined AS and LO beam into the OMC, and provide mode matching for the AS beam to the OMC. In addition to this, sensors in HAM6 are required for targeting the AS and LO beams. Some of these functions will be achieved using beams which are picked off from the main beam path, and so additional mirrors will be required to steer these beams around the chamber. A set of smaller optics will be installed to provide diagnostic beams which can be imaged with CCDs. A shutter will be required to protect the hardware in HAM6 from being damaged by the large amounts of light that can potentially be transmitted through the SRM.

After the AS and LO beams are combined, double stage suspensions will guide the beam from BHDBS2 to the OMC. These suspensions provide active positioning control and active wave front control. In principle, the role of the AWC in HAM6 is to correct for geometry errors of the optics after the SRM such that the mode matching between the Arm mode and the OMC waist is maximised. This assumes that the changes in the interferometers mode, for instance due to a change in thermal state, will be corrected for by other subsystems e.g. the TCS. In practice, operators

of the interferometer do what ever improves the SNR of the the gravitational wave signal. For instance, it has been found that TCS can be used to decrease laser intensity noise coupling to the the GW signal channel **CHECK**. The AWC in HAM6 was designed with this flexibility in mind. The losses due to components in HAM6 is summarised in table 1.1 (See E1900385).

To provide orthogonal alignment control in each beam path after BHDBS2, two of the mirrors are required to be separated by 90° of Gouy phase. Additionally, to provide orthogonal mode matching control, two of the mirrors should be separated by 45° . The Gouy phase separation requirements give us a starting point for designing layouts, as these can be interpreted as needing the mode matching mirrors to be as far apart as possible from each other on the HAM table. As the Rayleigh range of the beams is on the order of a meter, and most gouy phase is accumulated within one Rayleigh range either side of a beam waist, a beam will have to travel quite far across the table before it acquires sufficient Gouy phase. While in principle only two curved mirrors would be required to mode match the beam from the interferometer to the OMC, in fact a single mirror may be able to do that, a lens in the OFI will be used to provide further Gouy phase separation between the two active mode matching mirrors after BHDBS2.

The goal for mode matching between the arm mode and the OMC mode is is $> 98\%$. The SAMS actuators will provide ± 100 , mD of optical power tuning range, with a bandwidth of the order 100 Hz. Astigmatism can be considered as a loss, and none-zero angles of incidence (AOI) of beams onto curved optics results in a the beam becoming astigmatic. This prevents designs using large AOI. This is described

in detail in Chapter ??.

The current OMC design (with trivial modifications) will be used to remove junk light from the signal beam, so there is no choice in target waist size. The input beam at the SRM is defined in T1200410. The mode matching is designed assuming that the beam at the SRM is the ‘design mode’. Mode matching between the beam exiting the SRM and the OMC waist will be done with a static lens and 2 active mirrors. The static lens will be placed just after the OFI and its purpose is to provide sufficient Gouy phase separation of the 2 active mirrors.

The light transmitted by the OMCs is used to measure the gravitational wave signal, since the higher order modes are suppressed by a factor of the finesse of the OMC. The OMCs are expected to be the largest contributor of back-scatter from HAM6 back to the interferometer. By having the OMCs after the AS and LO beams are combined, and by having the OFI protect the interferometer, the requirement on the motion of the OMCs is fairly lax. Nevertheless, a single stage suspended platform is required. This will provide isolation down to 4 Hz.

It was decided that the two beams after BHDBS2 would have the same path length to reduce the cost of the HAM6 optics. This may also improve the common-mode noise rejection ratio.

1.4 Chosen Layout

Optically, there are many layouts which could have satisfied the above requirements and constraints. Ultimately the choice of layout for HAM6 was determined by

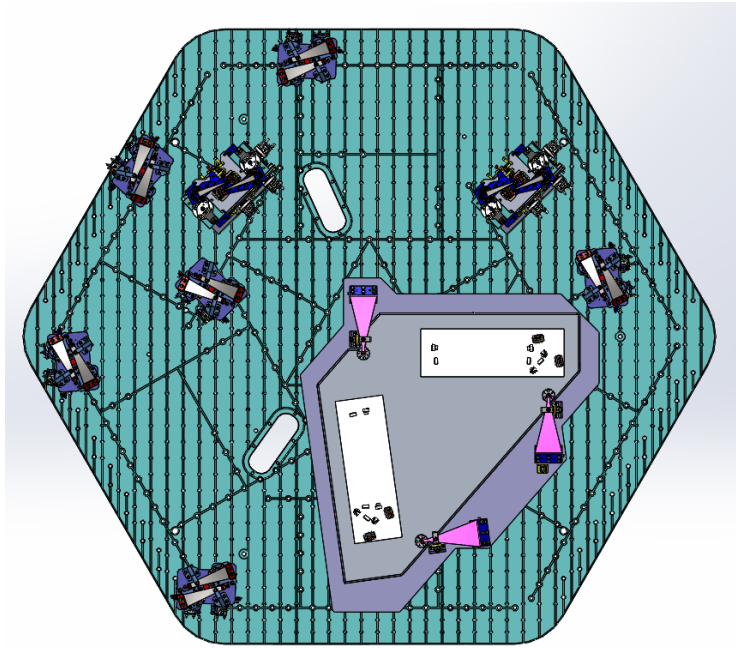


Figure 1.6: Place holder graphic. The pentagram layout. CAD will be inserted later.

HAM6 loss Source	Target for O5
OMC throughput	$< 2\%$
OM3 transmission (or equivalent) for sensing	1–2%
PD quantum efficiency	1%
Mode mismatch to the OMC	$< 2\%$ (as low as possible)
Any other optical loss	$< 1\%$

Table 1.1: Target for losses in HAM6. Reproduction of E1900385

mechanical factors such as table space and number of suspensions. The design that is being taken forward at the time of writing is known as the ‘pentagram’, and is shown in figure 1.6. The beam size as the a function of position along the optical axis is shown in figure 1.7. The astigmatism loss was calculated to be $> 0.05\%$. This astigmatism loss was plotted as a function of angle, and above 10° the loss becomes significant. The optical properties of this layout are summarised in table 1.2.

The focal lengths of the OFI lens, OMx1 and OMx2 where optimised so that there was a close to 45° Gouy phase separation between OMx1 and OMx2 as possilbe. This is shown in figure 1.8. With this layout, it was possible to achieve 43° Gouy phase separation between OMx1 and OMx2. Other layouts were able to provide exactly 45° Gouy phase separation, however the pentagram layout offers many practical benefits over the other considered designs that outweigh an additional 2° of Gouy phase separation. This layout also provides good Gouy phase seperation for alignment control, with there being 88° between OMxS and OMx2.

Optic	Power (1/m)	Focal length (m)	RoC (m)
OFI lens	-0.0583	-17.1552	-
OMx1	-0.3539	-2.8290	5.6580 (concave)
OMx2	-0.8737	-1.1445	2.2891 (concave)

Space Name	Optical Path Length (mm)
SRM to OFI lens	1120
OFI lens to HAM6 table edge	720
HAM6 table edge to OM0	432
OM0 to BHDBS2	905
BHDBS2 to OMxS	225
OMxS to OMx1	1240
OMx1 to OMx2	1590
OMx2 to OMCx waist	1220

Parameter	Value
SRM Complex Beam Parameter	$q_{\text{SRM}} = -3.55 + 1.09i \text{ m}$
OMC waist width	485 μm
OMx1 to OMx2 Gouy phase	43 $^\circ$
OMxS to OMx2 Gouy phase	88 $^\circ$
OMxS and OMx2 AOI	10 $^\circ$

Table 1.2: Layout properties

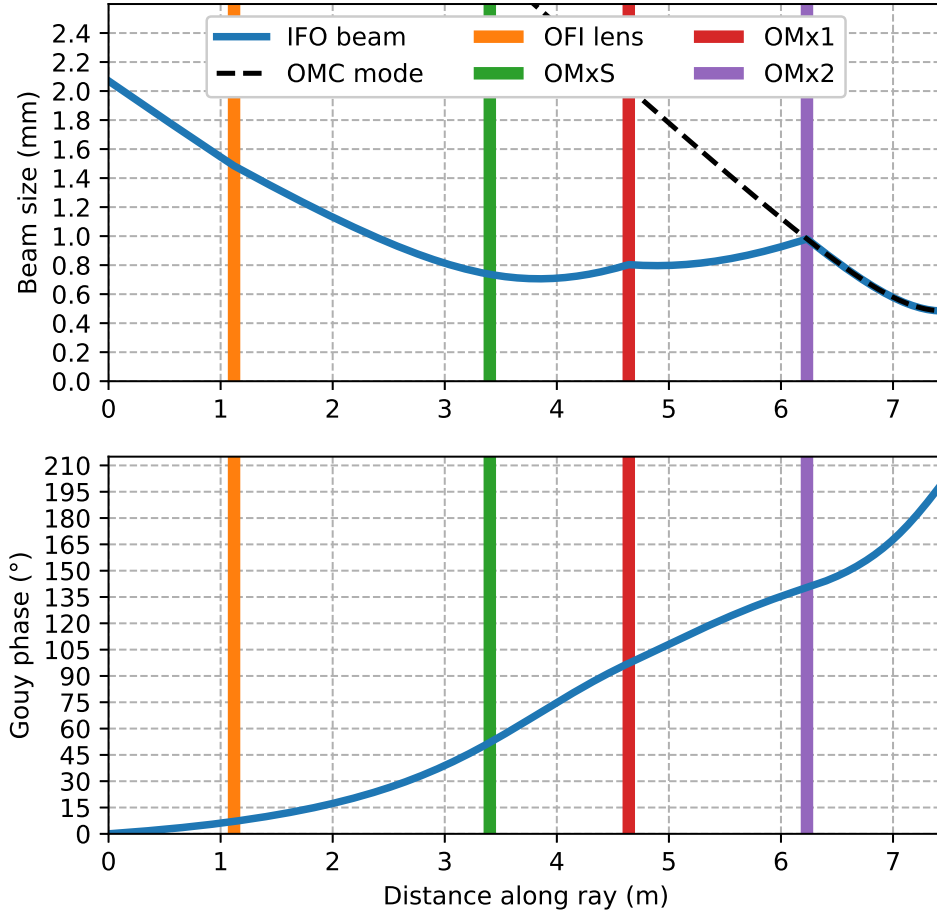


Figure 1.7: The radius of the beam as it travels from the SRM ($z = 0$) to the waist of the OMC.

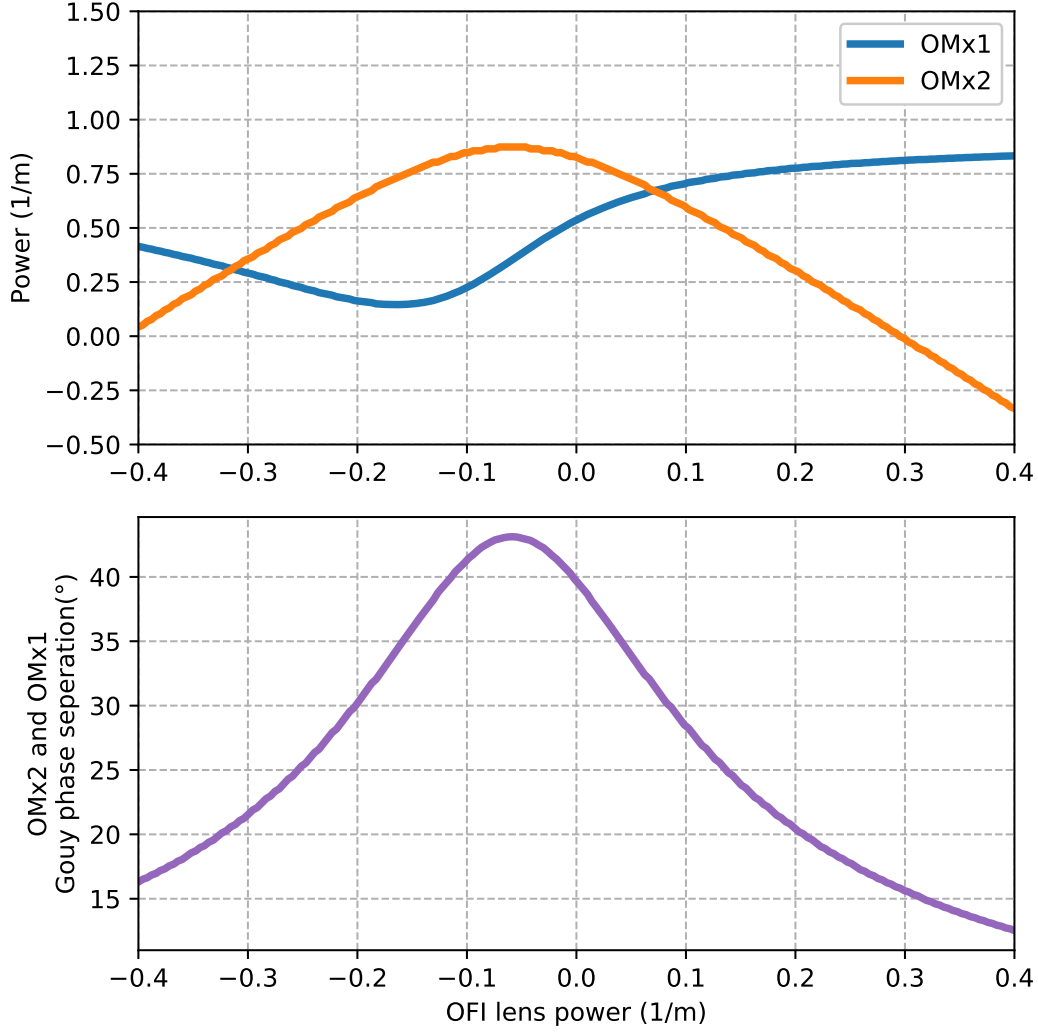


Figure 1.8: OFI lens power effects the optimal combination of OMx1 and OMx2 power required for 100% mode matching. The best choice of these lenses is the pair which gives the Gouy phase separation closest to 45° .

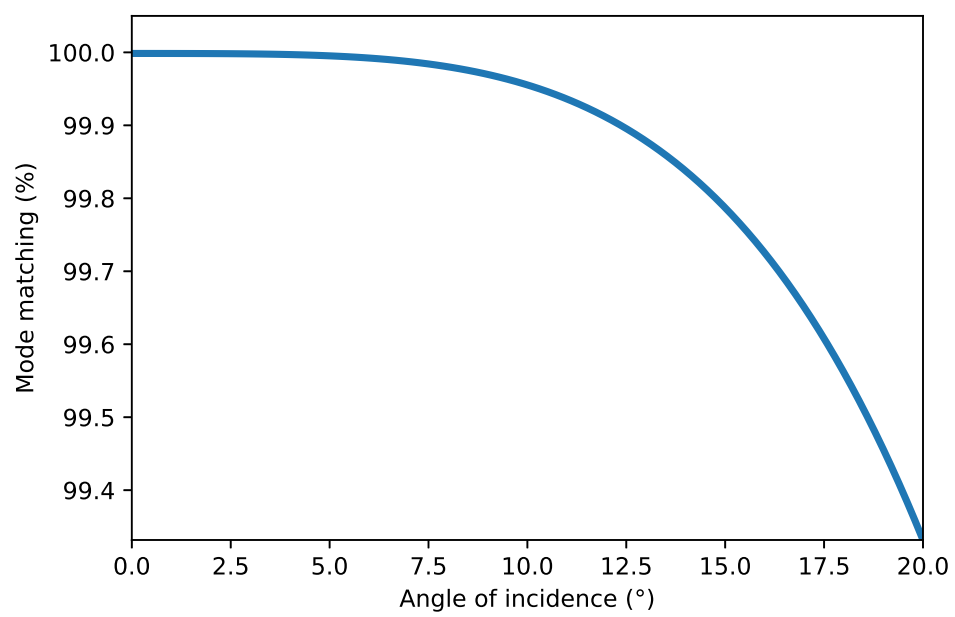


Figure 1.9: Mode matching degradation as a function of angle of incidence for OMx1 and OMx2.

1.5 Sensing and Control

1.5.1 Longitudinal Control

Homodyne Angle

One method of controlling the homodyne angle is using the so called ‘RF 36’ signal. LIGO uses 9 MHz and 45 MHz modulations on the light to detect various lengths within the interferometer that need to be controlled. The beat between these two will produce a 36 MHz signal. The homodyne angle determines the amplitude of this signal, and so by demodulating a photodiode measuring the light in reflection from the OMC at 36 MHz the homodyne angle may be controlled. This is detailed in (Tengs Thesis ref). The actuation may be provided by OM0, BHDBS2 or by BHDM1. Alternatively, a dither signal at a few kHz on OM0 could provide can provide a signal corresponding to the homodyne angle. **Cant the homodyne angle be set to 90° by subtracting the photodiode signals and requiring the DC to be zero, as in a Mach zehnder?**

OMC Length

Keeping the OMC length locked to the combined LO-AS beam can be done by actuating on the length of PZT mirrors in the OMC. A few kHz signal may be created by the modulation on a HRTS in either the LO or AS path, one of the HDS after BHDBS2, or event a dither on the other PZT within the OMC. These modulations will be measurable in transmission of the OMC. Alternatively, a PDH signal may be created by using the 9 MHz signal may be measured in reflection from the OMC.

Squeezing Angle to Measurement Phase

The squeezing and measurement phase may be controlled by measuring the 3,MHz signal transmitted through the OMC. This signal originates in the AOM in the squeezer, and the squeezing angle can be controoled with the PZT in the the squeezer layout in HAM7.

1.5.2 Alignment Control

LO and AS alignment

The alignment of the signal to the to the AS beam will be done with either OM0 or BHDM1, and BHDBS2. A 36 MHz signal measured in reflection of the OMC can be used to determine the overlap of the two beams. By having a Gouy Phase telescope in reflection of the the OMC, a signal proportional to displacement and angle may be obtained. Alternatively, a dither at a few Hz can be applied to BHDM1 and BHDBS2, and this signal will appear in the light transmitted by the OMC.

1.5.3 Alignment of the LO-AS beam to the OMC

A dither applied to a HRTS in either the LO or AS path will produce a signal in transmission through the OMC. The mirrors OMxS and OMx2 will be used to align the LO beam into the OMC, and as these are separated by $\sim 90^\circ$ of Gouy phase, orthogonal control of the input beam alignment will be achievable.

Squeezer to AS beam

The pick-off at OM0 will be used to align the squeezer beam to the AS beam. The squeezer light has 42 MHz sidebands, and so a pair of wavefront sensors separated by

$\sim 90^\circ$ of Gouy phase can be demodulated at this frequency to derive an alignment error signal. The squeezer beam will be aligned to the AS beam with optics between the filter cavity and the OFI. The signal and squeezer beam will be aligned onto these wavefront sensors using SR2 and a tip tilt in transmission of OM0.

Differential Hard Mode

The differential hard mode arises due to radiation pressure effects in the arm cavities. As the power in the cavity changes, the dynamics of the test mass changes. These dynamics result from the alignment of the cavity axis to the test masses due radiation pressure. This differential hard mode dynamic must be controlled. This signal will be detected with light that is transmitted through OM0, and actuated on with the test masses.

1.6 WS visulations as a tool for understanding mode matching problems

Hermite Gaussian beams will be explained earlier in the intro chapters, so don't need generic expansion, just use the 2nd order ones. Have a read of [10].

The mode-matching between two laser beam modes, or a laser mode and a cavity mode, describes how similar those two modes are. In general, the two modes can be mismatched by being misaligned or by having a different beam shape. Mode matching typically refers to the overlap of the two modes if they were perfectly aligned.

Mode-matching is usually, to first approximation, thought of as a difference in beam waist size and beam size location. This can be mathematically described by the $\text{HG}_{20} + \text{HG}_{02}$ mode. The effect of changing the waist location of the mode is equivalent to an in-phase change in HG20 content, whereas an change in waist location is orthogonal to this. [read up on this](#). Sensing the $\text{HG}_{20} + \text{HG}_{02}$ mode therefore gives a measure of the mode-matching between two lasers. As the $\text{HG}_{20} + \text{HG}_{02}$ acquires 3ϕ compared to a plane wave, and 2ϕ compared to the HG_{00} mode, spacing the actuators at 45° will give orthogonal control of the mode matching. This means that the beam size and beam waist can be independently controlled.

A curved mirror can only change the curvature of a Gaussian beam, meaning that at the mirrors surface the beams before and after reflection must have the same size. The process of a Gaussian beam described by q_1 being reflected from a mirror with power S_m to produce a new Gaussian beam, q_2 , can be written as

$$\frac{1}{q_2} = S_m + \frac{1}{q_1} = (S_m + S_1) - i\frac{\lambda}{\pi w_1^2}. \quad (1.5)$$

To visualise how a mode is changed by an optical layout, beam parameters can be represented in a 'WS space'. This space parametrises a beam in terms of its size, w , and its defocus, S . This has the advantage of showing the beam in terms of practical quantities. The downside to this representation is as the beam propagates through the layout, the path through the WS space is fairly complex. There are two other ways that a beam parameter could be graphically represented. As q is a complex number, the beam parameter could be represented in terms of its real and imaginary components. This makes seeing the effect of propagation straight

forward, but the effect of a focussing element is harder to visualise. Alternatively, plotting $1/q$ in terms of $\lambda/\pi w^2$ and s produces plots where the effect of a focussing elements and propagation is easy to visualise, as focussing is just a change in defocus and propagation follows a circular path. However, this technique obscures the beam size, and as these graphs are being used to visualise the beam, rather than design the optical layout, the WS representation was chosen.

To demonstrate how orthogonal actuators can be represented in WS space, consider the two lenses with variable power separated by 45° of Gouy phase. As the two lenses are orthogonal, the waist size and waist location of the mode exiting this layout will orthogonally controllable. In a WS space, the orthogonality of two actuators can be seen by the angle between the two vectors that represent the actuation. If the two lenses are orthogonal, then the actuation vectors will be orthogonal. Figure 1.10 is a sketch of the WS space representation for a simple optical layout consisting of two active lenses separated by 45° Gouy phase. If there is large amounts of astigmatism, it no longer makes sense to represent the beam with just one WS space diagram.

Two perfectly mode matched beams will have identical beam parameters. If the input mode and the target mode differ in beam size and defocus, then some light will be scattered into the $\text{HG}_{20} + \text{rmHG}_{02}$ mode. The mode matching can be calculated at any point along the optical axis of the layout, as the mode matching must be preserved, but it makes sense to choose a physically significant plane such as the input plane or the plane containing the waist of the target beam. The amount of

mode matching $\mathcal{M}$ between two astigmatic modes modes, $q_{1,2}$, is

$$\mathcal{M} = \frac{\sqrt{(q_{x1} - q_{x1}^*)(q_{y1} - q_{y1}^*)(q_{x2} - q_{x2}^*)(q_{y2} - q_{y2}^*)}}{|q_{x2} - q_{x1}^*||q_{y2} - q_{y1}^*|}. \quad (1.6)$$

It is useful to plot contours of the mode overlap in the WS space between a mode and a target mode. Note that these contours can only tell you about the overlap between a mode and the target mode, the mode matching between two arbitrary modes can not be deduced from these contours. An example of a situation where this is obvious is two different modes may be, say, 90% mode matched to the target. As they are different from each other, they cannot be 100% mode matched.

The mode matching requirement for LIGO is $> 98\%$. To visualise the effectiveness of the actuation provided by the active elements of the HAM6 layout, the region of the WS from which the target mode matching space achieved was computed. To do this, first the ring of modes in WS space that is 98% matched after reflection from the second active mirror, OMx2, was considered. These modes must be within $S_{\text{OMx2}} \pm \Delta S$, where S_{OMx2} is the static power of OMx2 and ΔS is the actuation range of the SAMS. If OMx2 had no actuation, then the effect of OMx2 would be to move the ring vertically in the WS plane. However, as power of OMx2 can be increased or decreased, the shape of the ring of modes that can be mode matched to 98% can be changed. Crudely, the shape of this space can be seen by applying $S_{\text{OMx2}} \pm \Delta S$ to the 98% ring, producing 2 new rings. If the ring is cut by a line which intersects the locations on the ring at the extrema of the beam size, then two regions of the 98% ring can be created. For one of these regions, to maximise the amount of WS space covered by the actuator, the actuation applied should be $+\Delta S$, whereas for

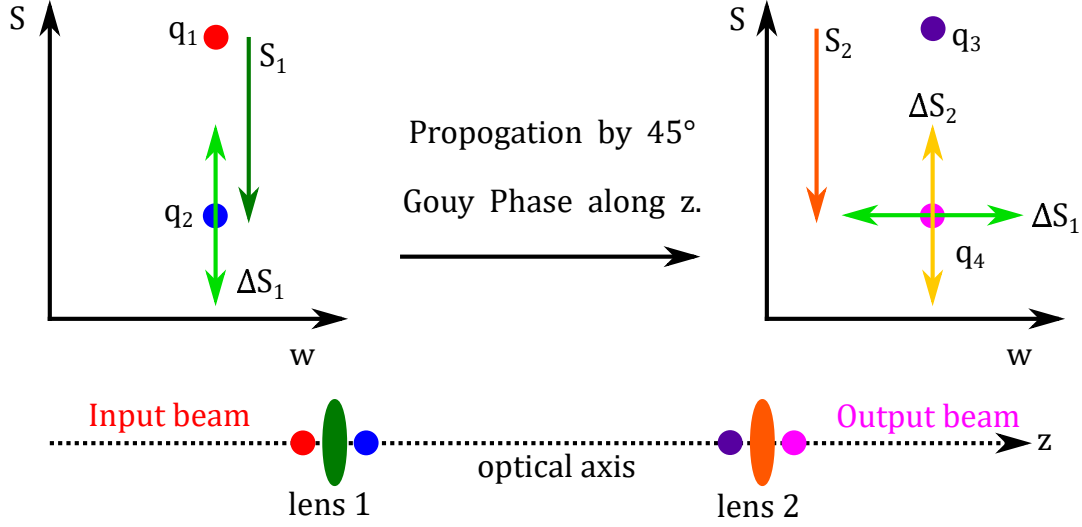


Figure 1.10: Sketches of the WS representation for a Gaussian beam interacting with different parts of a simple optical layout consisting of two active lenses with powers $S_{1,2} + \Delta S_{1,2}$. The left hand axis shows the WS plane at lens 1. The input beam q_1 is indicated by a red dot, and the effect of the lens on q_1 is shown by the dark green arrow S_1 . This results in a new mode q_2 , which is shown as a blue dot. A light green arrow indicates the actuation of lens 1. The right hand axis shows the WS plane at lens 2. The input mode at lens 2, q_3 , is shown as a purple dot, and the the output mode , q_4 , is shown as a pink dot. The static and dynamic power of lens 2 is indicated by the orange and yellow lines. As lens 1 and lens 2 are separated by 45° of Gouy Phase, the actuation provided by lens 1 results in a change in the beam parameter which is orthogonal to the actuation provide by lens 2, provided that the actuations are small enough.

the other region, the actuation should be $-\Delta S$. This gives a set of modes which can be propagated to the first mirror, OMx1, where the same procedure can be applied. This process shown in Figure 1.11.

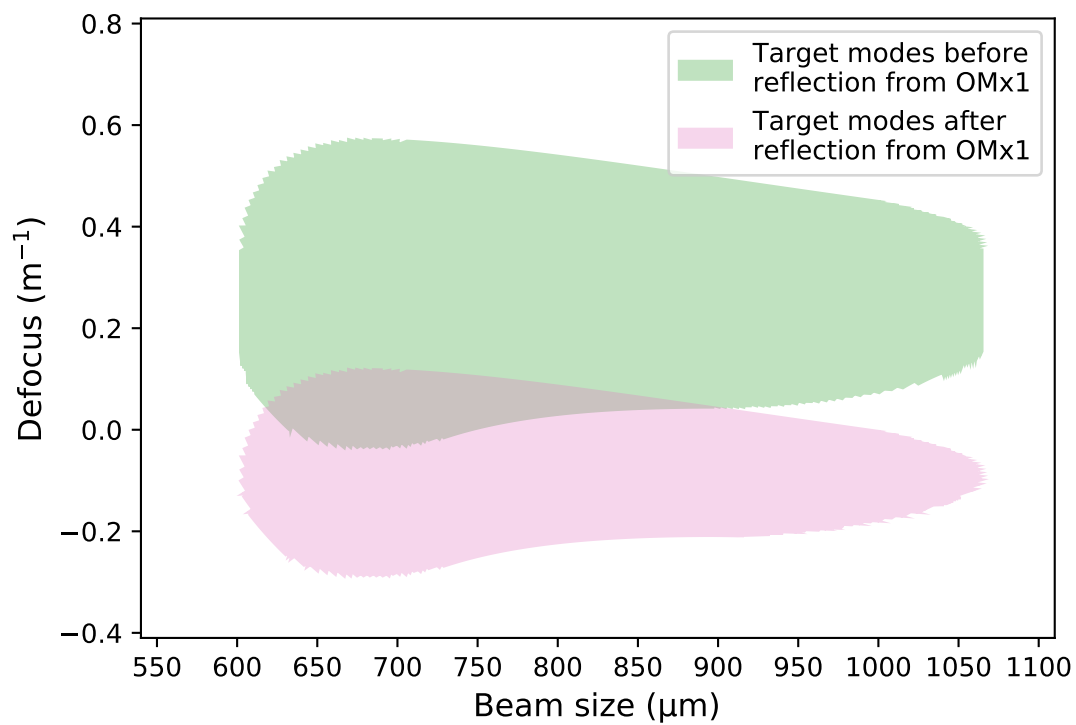
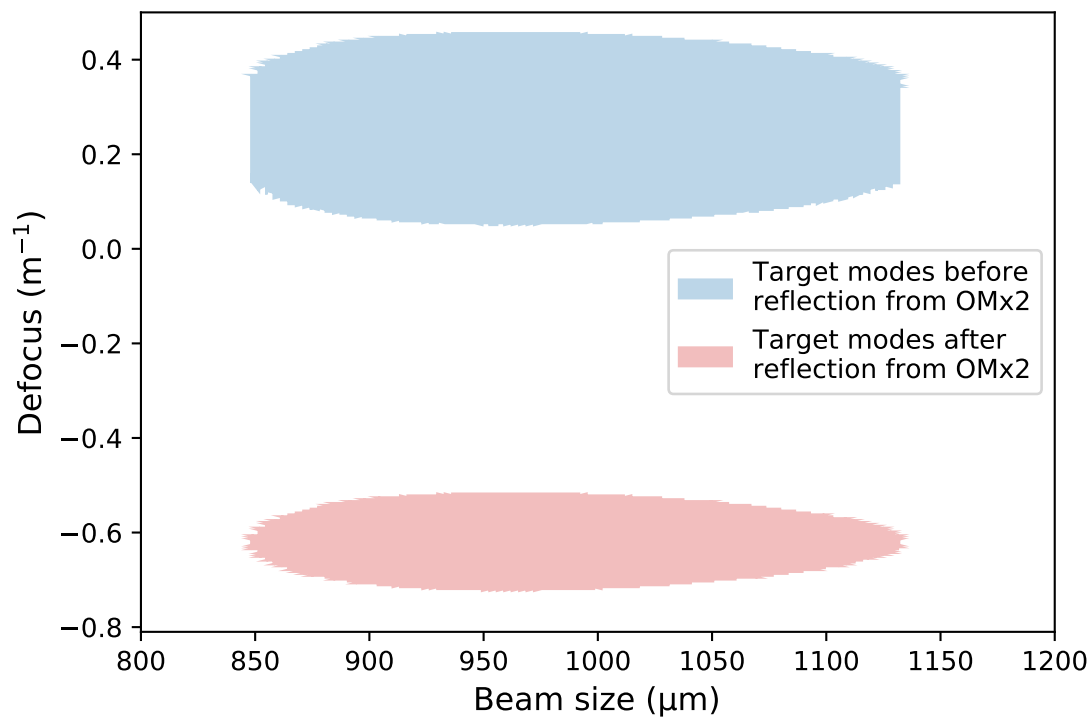


Figure 1.11 (*previous page*): Top panel: This is the WS space at the OMx2 plane. After reflection from OMx2, a mode must be at least 98% mode matched to the waist as there are no further active mode matching elements in the layout of HAM6. The target modes are shown by the red region. The blue region represents which modes can be reached from the red region by either $S_{\text{OMx2}} \pm \Delta S$, and was constructed by applying transformations to the modes in the red region. The red region was split into two parts, ‘upper’ and ‘lower’, which approximately corresponds to modes with a defocus greater than 0.6 or less than 0.6. The line that splits the red area into an upper and lower region corresponds to the line that connects the two extremes in width of the region, and does not have to be a horizontal line. To create the lower edge of the blue region, modes in the lower edge of the red region had the transformation corresponding to a mirror power of $S_{\text{OMx2}} - \Delta S$ applied to them. To construct the upper edge of the blue region, upper edge of the red region had the transformation corresponding to a mirror power of $S_{\text{OMx2}} + \Delta S$ applied to them. These regions were then joined by a vertical line that connects them.

Bottom panel: This is the WS space at the OMx1 plane. The pink mode represent the target modes that a mode must be able to reach by being reflected from OMx1. The blue region from the upper panel was propagated back to OMx1 to form the pink region. In a similar way as before, the pink region was split into an upper and lower region, and the green region was constructed from this. Modes in the green region are capable of being transformed to the pink region, which therefore means they can be transformed to the red region, meaning they satisfy the 98% mode matching requirement. The green region was propagated back to the through the layout to SRM, and this is as the purple region in Figure 1.12.

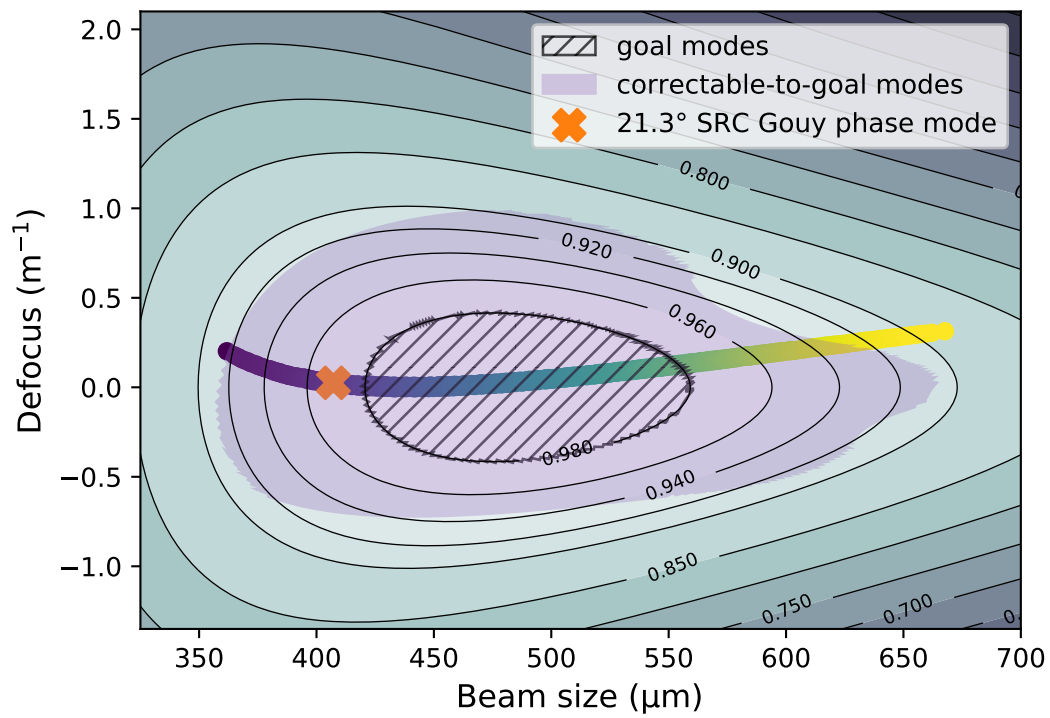
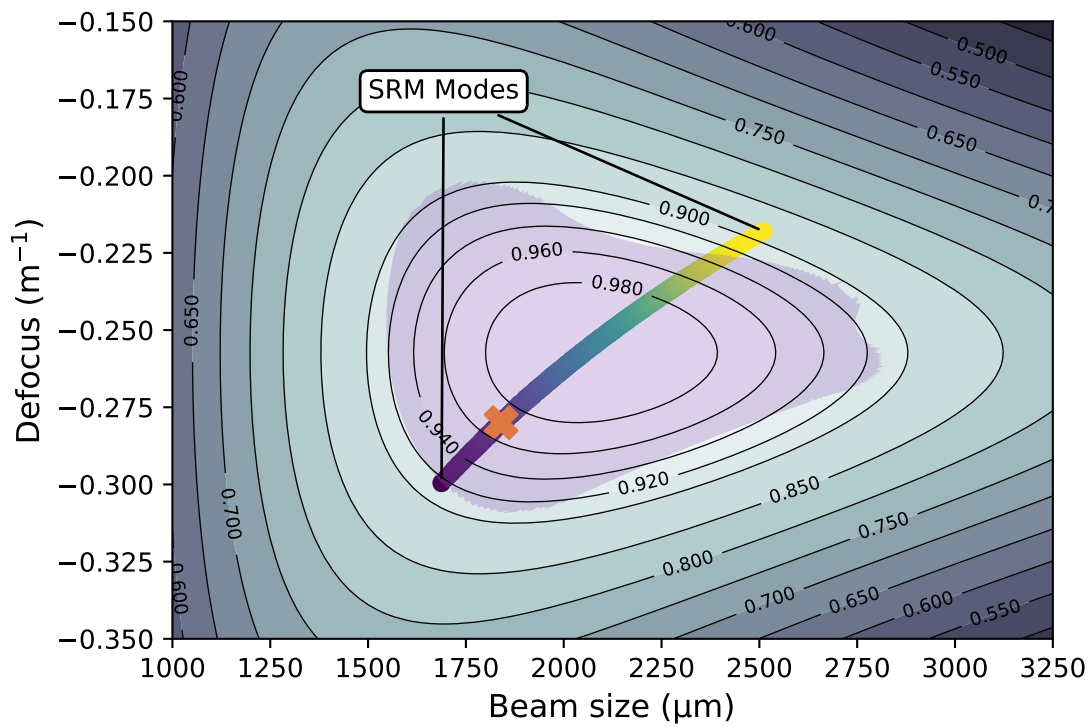


Figure 1.12 (*previous page*): Top panel: the set of modes that could be present at the SRM is shown by the purple-blue-green-yellow curve, as described in chapter ???. The purple region shows which modes can reach 98% mode matching by using the the AWC in HAM6. The orange cross indicates the mode that corresponds to the SRC having a single pass Gouy phase of 21.3° . The contours indicate the mode matching between the arm mode and the OMC mode. Bottom panel: this shows the same modes as the top panel, except they have been transformed to the plane of the OMC waist. The target region is highlighted with a hatched area.

The modes from the SRM that can be matched at to the target is shown in Figure 1.12. The visualise how successful the layout is at the handling likely modes from the arm described in Chapter ??, these modes were compared to the region of WS phase space from which the 98% mode matching requirement from a starting point of 92% mismatch. It was found that almost all likely modes will be covered by the layout, as the modes near the edge of this continuum are more unlikely to occur than the ones near the centre. For all layouts analysed, there were no major difference in the amount of modes that could be mode matched. Its worth noting that the in figure 1.12, modes at the yellow end of the spectrum may not be physical as they correspond to an unstable SRC. In principle, the requirement for having 45° of Gouy Phase separation between OMx1 and OMx2 doesn't maximise the amount of interferometer modes that can be mode matched. The shape that the purple region will have when HAM6 is constructed will depend on the optical powers of OMx1 and OMx2,

Nevertheless, Figure 1.12 is encouraging since it shows that the actuation provided by the OMx1 and OMx2 is very forgiving, so much so that the strict definition of the role of AWC in HAM6 may be relaxed in order for operators to use the AWC here to correct for other errors in the geometry of LIGO.

1.7 Conclusion about BHD for A+

One of the major changes to LIGO for A+ will be the implementation of BHD. Combined with frequency dependent squeezing, BHD offers the possibility to optimise the detector for different gravitational wave sources. Along with this, BHD

offers a way by which the coupling between the signal recycling cavity length noise and DARM can be reduced.

BHD presents some technical challenges over DC readout. The LO phase noise must be kept low enough as to not contaminate the signal at the AS port with LO path noise. The requirement for the phase noise is shown in figure 1.5. This requirement can be met by using triple suspensions to deliver to local oscillator and AS beams to the beam splitter they are combined on.

The functionality required from the BHD layout was discussed, and a proposed layout that satisfies these requirements is shown in figure 1.6. The optical properties of this layout were investigated, and by selection of the right combination of mode matching optics, near orthogonal control of the AS-LO beam alignment and mode matching to the OMC was achieved.

By plotting the $< 98\%$ mode matching requirement in WS space, the robustness to changes in the input beam parameter was investigated. The AWC provides a huge amount of mode matching range that the layout can tolerate very large changes in parameter at the SRM. It was found that almost all possible beams will be able to mode matched to the OMC. This is shown in figure 1.12.

Bibliography

- [1] Kiwamu Izumi and Daniel Sigg. Advanced LIGO: length sensing and control in a dual recycled interferometric gravitational wave antenna. *Classical and Quantum Gravity*, 34(1):015001, dec 2016.
- [2] Malik Rakhmanov. Transfer functions for fields in a 3-mirror nested cavity. In *AIP Conference Proceedings*. AIP, 2000.
- [3] T. Zhang. *Advanced techniques for future generation gravitational wave detectors*. PhD thesis, University of Glasgow, 2019.
- [4] C. Bond, P. Fulda, A. Freise, D. Brown, K. Kokeyama, L. Carbone, and A. Perreca. Finesse Input Files for the L1 Interferometer. LIGO Document T1300901-v5 <https://dcc.ligo.org/LIGO-T1300901>.
- [5] L. Barsotti, L. McCuller, M. Evans, and P. Fritschel. The A+ design curve. LIGO DCC, April 2018. LIGO Document T1800042-v5 <https://dcc.ligo.org/LIGO-T1800042/public>.
- [6] B. Lantz, R. Mittleman, J. Kissel, J. Warner, and A. Pele. Typical Motion of HAM Suspension Points in O2. LIGO Document T1800066-v2 <https://dcc.ligo.org/T1800066>.

- [7] Charlotte Bond, Daniel Brown, Andreas Freise, and Kenneth A. Strain. Interferometer techniques for gravitational-wave detection. *Living Reviews in Relativity*, 19(1), dec 2016.
- [8] G.S Monk. *LIGHT PRINCIPLES AND EXPERIMENTS*, pages 424–426. McGraw-Hill, 1937.
- [9] Evgenia Kochkina. *Stigmatic and Astigmatic Gaussian Beams in Fundamental Mode: Impact of Beam Model Choice on Interferometric Pathlength Signal Estimates*. PhD thesis, Hannover U., 2013.
- [10] Guido Mueller, Qi ze Shu, Rana Adhikari, D. B. Tanner, David Reitze, Daniel Sigg, Nergis Mavalvala, and Jordan Camp. Determination and optimization of mode matching into optical cavities by heterodyne detection. *Optics Letters*, 25(4):266, feb 2000.
- [11] Antonio Perreca, Aidan F. Brooks, Jonathan W. Richardson, Daniel Töyrä, and Rory Smith. Analysis and visualization of the output mode-matching requirements for squeezing in advanced LIGO and future gravitational wave detectors. *Physical Review D*, 101(10), may 2020.
- [12] V. Frolov. DARM Optical Gain and Losses. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=42231>.
- [13] L. McCuller. Frequency Dependence of Squeezing Loss and Angle, Power Measurement by Radiation Pressure. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=52718>.

- [14] L. McCuller. Frequency Dependent Squeezing effects in the LIGO Interferometers. LIGO Document G2000863-v2 <https://dcc.ligo.org/LIGO-G2000863>.
- [15] V. Frolov. Arm Cavity Power, Power Recycling Gain, IFO Reflectivity and Arm Cavity Losses. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=42639>.
- [16] J. Richardson, M. Tse, and C. Austin. Measurement of SRC Gouy Phase. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=39779>.
- [17] C. Blair. OMC Scans. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=37742>.
- [18] C. Blair and V. Frolov. 40W OMC Scans Method and Preliminary Data. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=45830>.
- [19] M. Kasprzack, A. Effler, A. Mullavey, and M. Tse. HAM6 Work - M12 Move. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=37291>.
- [20] A. Effler and M. Kasprzack. LLO Interferometer Output Beam Study. LIGO Document T1800089-v2 <https://dcc.ligo.org/LIGO-T1800089>.
- [21] C. Blair, V. Frolov, and A. Effler. SRM CO2 Chop. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=38689>.
- [22] C. Blair. Annular CO2 1W at Various IFO Power. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=43065>.
- [23] C. Blair, V. Frolov, and A. Effler. OMC Mode Matching in Single Bounce. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=38698>.

- [24] A. Effler, V. Frolov, and C. Blair. OMC Scans of Cooling Interferometer. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=41428>.
- [25] A. Green, A. Effler, P. Dupej, V. Frolov, P. Fulda, and H. Yu. Finesse Squeezing Mode Matching Study for LLO. LIGO Document T1900159-v1 <https://dcc.ligo.org/LIGO-T1900159>.
- [26] A. Effler, P. Dupej, H. Yu, A. Green, and C. Blair. SQZ SRM Bounce 98% Mode Matching. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=42187>.
- [27] Daniel David Brown and Andreas Freise. Pykat, July 2017. <http://www.gwoptics.org/pykat>.
- [28] C. Blair. PRC Gouy phase measurement. <https://alog.ligo-la.caltech.edu/aLOG/index.php?callRep=49409>.
- [29] A. A. Muzammil, C. Mueller, and G. Mueller. Optical Layout and Parameters for the Advanced LIGO Cavities. LIGO Document T0900043-v11 <https://dcc.ligo.org/LIGO-T0900043/public>.
- [30] LIGO Optics Database. <https://galaxy.ligo.caltech.edu/optics/>.
- [31] R. Martin and G. Billingsley. Measurement Uncertainties in Determining the Radius of Curvature for SR2-04. LIGO Document T1300653-v1 <https://dcc.ligo.org/LIGO-T1300653>.
- [32] G. Billingsley. SR301 Figure Measurement. LIGO Document E1101231-v1 <https://dcc.ligo.org/E1101231-v1>.

- [33] P. Fritschel and E. Gustafson. Advanced LIGO Optical Layout. LIGO Document D0902838-v5 <https://dcc.ligo.org/LIGO-D0902838>.
- [34] M. Smith and D. Coyne. Advanced LIGO L1 Optical Layout, ZEMAX. LIGO Document D0902216-v8 <https://dcc.ligo.org/LIGO-D0902216>.