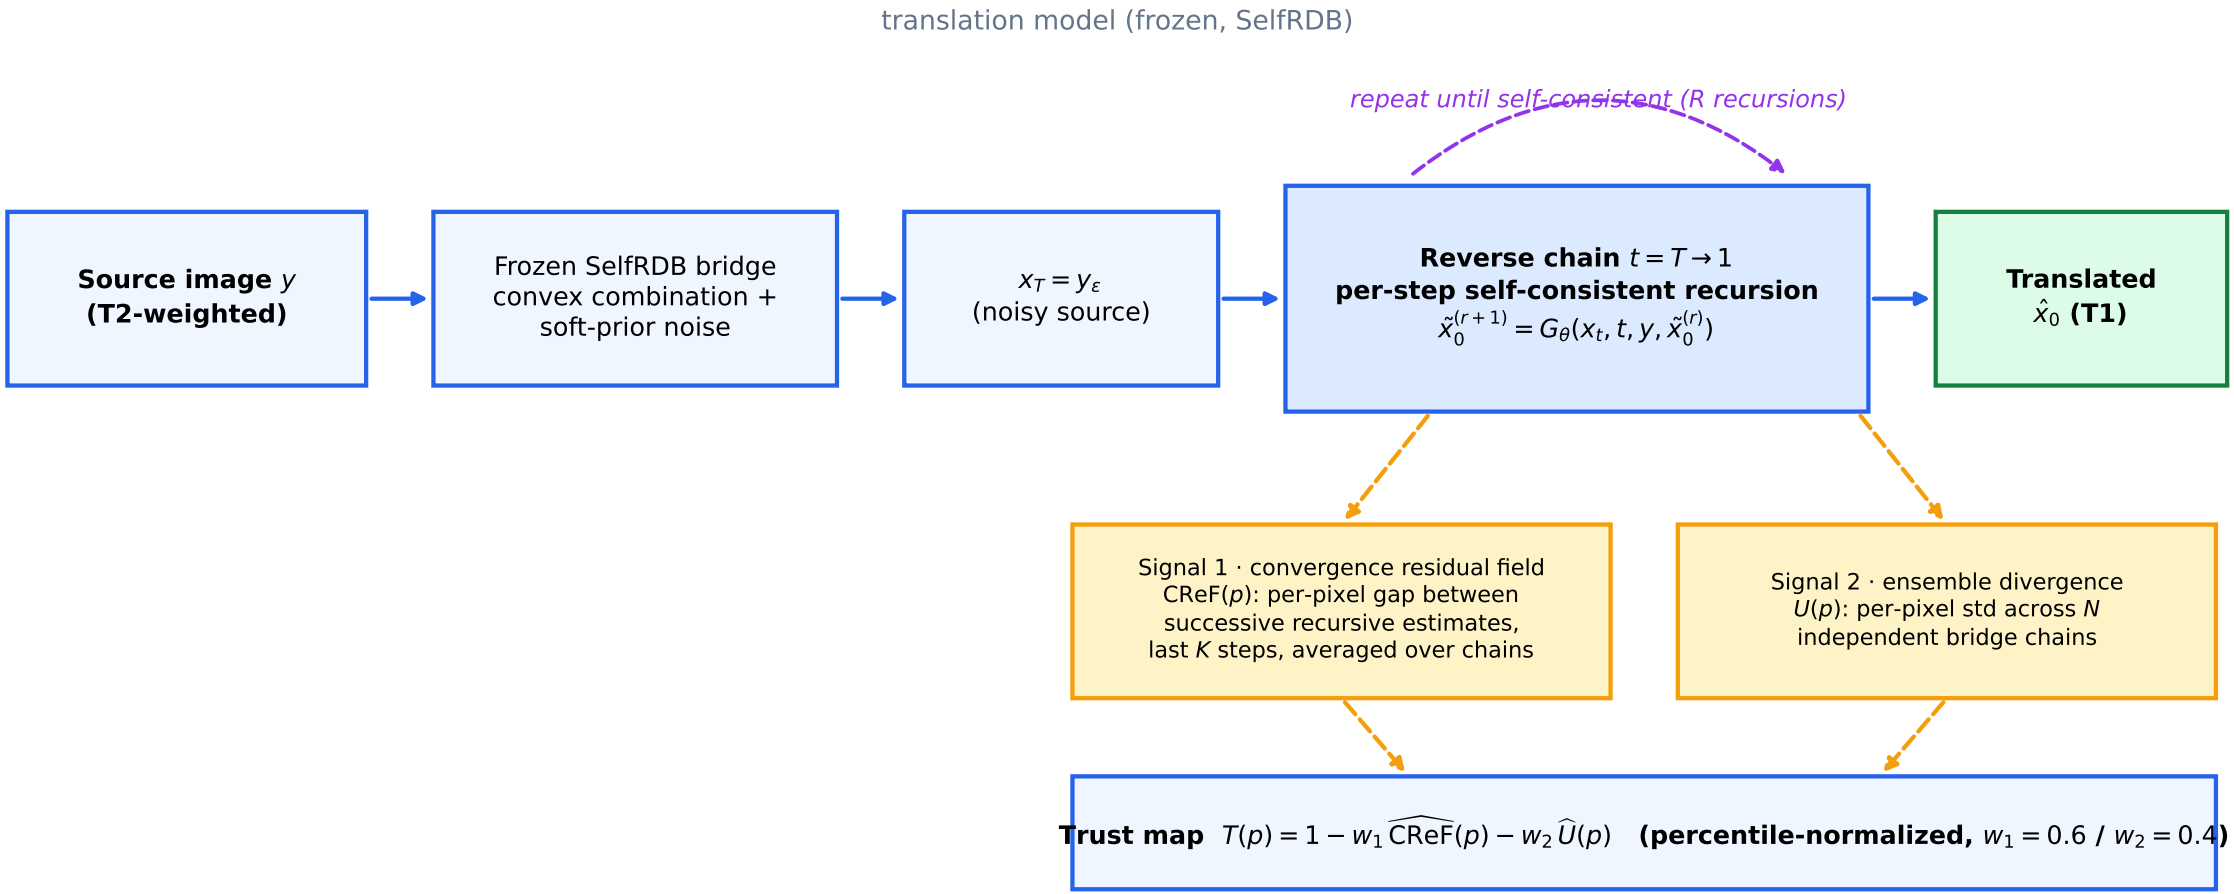

The two signals are already computed by the sampler; harvesting them adds no model, no training and no labels.
Endpoint noise and generator latents provide the ensemble diversity.