


DS	Session	Tree 2	Question Information	Level 1 Challenge 79
Problem Description: You are given a rooted tree that contains N nodes. Each node contains a lowercase alphabet. You are required to answer Q queries of type u, c, where u is an integer and c is a lowercase alphabet. The count of nodes in the subtree of the node u containing c is considered as the answer of all the queries. Constraints $1 \leq N, Q \leq 10^5$ $1 \leq u, v \leq N$ c is a lowercase alphabet s_i is a lowercase alphabet for all $1 \leq i \leq N$ 1 is the root node Input format - First line: Two space-separated integers N and Q respectively - Second line: A string s of length N (where the i^{th} character of s represents the character stored in node i) - Next $N - 1$ line: Two space-separated integers u and v denoting an edge between node u and node v - Next Q lines: An integer u and a space-separated character c Output format For each query, print the output in a new line. Note: It is guaranteed that the input generates a valid tree. Explanation for test case 1 Tree given in the sample input will look like that.				

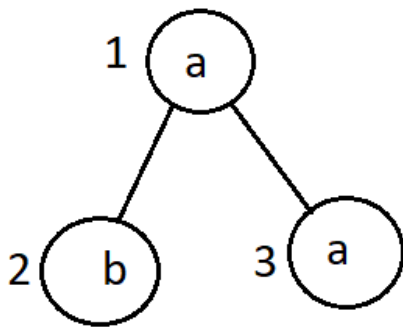

Number of nodes in the subtree of node 1 having 'a' stored in it is 2.

Logical Test Cases

Test Case 1

INPUT (STDIN)

```
3 1
aba
1 2
1 3
1 a
```

EXPECTED OUTPUT

2

Test Case 2

INPUT (STDIN)

```
4 1
WSX
1 2
1 3
1 1
1 w
```

EXPECTED OUTPUT

10

Mandatory Test Cases

Test Case 1

KEYWORD

```
while(Q--)
```

Test Case 2

KEYWORD

```
for(i = 0; i < N-1; i ++)
```

▼ Complexity Test Cases

Test Case 1

CYCLOMATIC COMPLEXITY

4

Test Case 2

TOKEN COUNT

330

Test Case 3

NLOC

49