

TCS Interview Question

Question description

Ravi participated in TCS off campus interview at reputed institution, one of the technical question he has to complete with in the given time, where you need to sort the array in the waveform. There might be multiple possible output of the program. the following pattern output is appreciated.

Function Description

This is a simple method of solving this question which contains basic 2 steps and they are as follow

Step : 1 – Sort the array in ascending order.

Step : 2 – Swap all adjacent elements of the array

Let us consider the input array be {3, 6, 5, 10, 7, 20}. After sorting, we get {3, 5, 6, 7, 10, 20}. After swapping adjacent elements, we get {5, 3, 7, 6, 20, 10}.


Brute Force Method : Step 1

Array

3 6 5 10 7 20

Step : 1

3 5 6 7 10 20

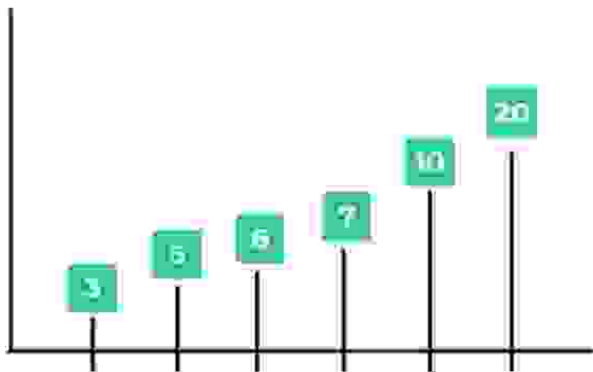


Brute Force Method : Step 2

Step : 1

3 5 6 7 10 20

Step : 2

5 3 7 6 20 10

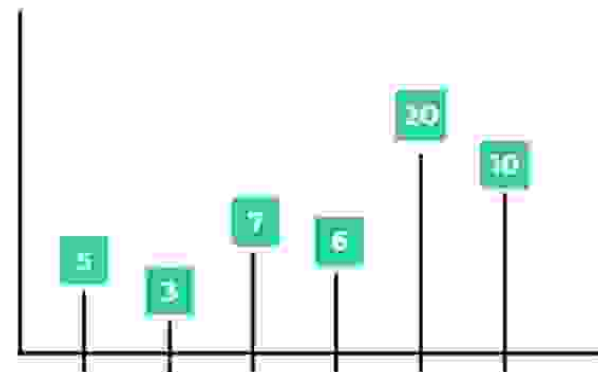

Constraints

$0 < n < 100$

$0 < arr[i] < 1000$

Input Format

First line contains the value of n that is the total number of elements in the array.

-Second line contains the space separated elements of array.

Output Format

-Output contains only line that is only the resultant array in the wave form fashion.

Logical Test Cases

Test Case 1

INPUT (STDIN)

6
3 6 5 10 7 20

EXPECTED OUTPUT

5 3 7 6 20 10

Test Case 2

INPUT (STDIN)

8
10 5 6 3 2 20 98 80

EXPECTED OUTPUT

3 2 6 5 20 10 98 80

Mandatory Test Cases

Test Case 1

KEYWORD

int array[n]

Test Case 2

KEYWORD

for(int i=0;i<n;i++)

Test Case 3

KEYWORD

if(array[i]>array[j])

Complexity Test Cases

Test Case 1

CYCLOMATIC COMPLEXITY

7

Test Case 2

TOKEN COUNT

225

Test Case 3

NLOC

38

```
1 #include <stdio.h>
2
3 int main() {
4     int n;
5     if (scanf("%d", &n) != 1) return 0;
6     int array[n];
7     for (int i = 0; i < n; i++) {
8         scanf("%d", &array[i]);
9     }
10    for (int i = 0; i < n; i++) {
11        for (int j = i + 1; j < n; j++) {
12            if (array[i] > array[j]) {
13                int temp = array[i];
14                array[i] = array[j];
15                array[j] = temp;
16            }
17        }
18    }
19    for (int i = 0; i < n - 1; i += 2) {
20        int temp = array[i];
21        array[i] = array[i + 1];
22        array[i + 1] = temp;
23    }
24    for (int i = 0; i < n; i++) {
25        printf("%d%c", array[i], (i == n - 1) ? '\n' : ' ');
```

```
26     }  
27     return 0;
```

28}

29

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>type t1.txt
```

```
6
```

```
3 6 5 10 7 20
```

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>Array4.exe
```

```
5 3 7 6 20 10
```

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>
```

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>type t2.txt
```

```
8
```

```
10 5 6 3 2 20 98 80
```

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>Array4.exe
```

```
3 2 6 5 20 10 98 80
```

```
C:\Users\CH.SC.U4CSE25225\Desktop\DSA Lab>
```