

goProfiles: an R package for the Statistical Analysis of Functional Profiles

Alex Sánchez, Jordi Ocaña and Miquel Salicrú

July 13, 2017

```
## Loading required package: goProfiles
## Loading required package: Biobase
## Loading required package: BiocGenerics
## Loading required package: parallel
##
## Attaching package: 'BiocGenerics'
## The following objects are masked from 'package:parallel':
##
##   clusterApply, clusterApplyLB, clusterCall,
##   clusterEvalQ, clusterExport, clusterMap,
##   parApply, parCapply, parLapply, parLapplyLB,
##   parRapply, parSapply, parSapplyLB
## The following objects are masked from 'package:stats':
##
##   IQR, mad, sd, var, xtabs
## The following objects are masked from 'package:base':
##
##   anyDuplicated, append, as.data.frame, cbind,
##   colMeans, colnames, colSums, do.call, duplicated,
##   eval, evalq, Filter, Find, get, grep, grepl,
##   intersect, is.unsorted, lapply, lengths, Map,
##   mapply, match, mget, order, paste, pmax,
##   pmax.int, pmin, pmin.int, Position, rank, rbind,
##   Reduce, rowMeans, rownames, rowSums, sapply,
##   setdiff, sort, table, tapply, union, unique,
##   unsplit, which, which.max, which.min
## Welcome to Bioconductor
##
##   Vignettes contain introductory material; view
##   with 'browseVignettes()'. To cite Bioconductor,
##   see 'citation("Biobase")', and for packages
##   'citation("pkgname")'.
## Loading required package: AnnotationDbi
## Loading required package: stats4
## Loading required package: IRanges
## Loading required package: S4Vectors
##
## Attaching package: 'S4Vectors'
## The following object is masked from 'package:base':
##
```

```
## expand.grid
## Loading required package: GO.db
##
```

1 Introduction

This document presents an introduction to the use of *goProfiles*, an R package for the analysis of lists of genes based on their projection at a given level of the Gene Ontology following the methodology developed by [2, 3].

2 Requirements

To use the package one must have R (2.7 or greater) installed. Bioconductor 2.2 or greater is also needed.

3 Quick start

For the impatient user the following lines provide a quick and simple example on the use of the package to explore and compare two experimental datasets obtained from two prostate cancer experiments ([4, 1]). Detailed explanations about the computations can be found in the following chapters and in the package help.

The analysis proceeds as follows:

- First a dataset is loaded into memory. This dataset contains several lists of genes, from two different studies, selected as being differentially expressed in prostate cancer. `help(prostateIds)` will provide extra information about the lists of genes.

```
require(goProfiles)
data(prostateIds)
```

- Next a functional profile is build for each list. For simplicity it is build for the MF ontology only.

```
welsh.MF <- basicProfile (welsh01EntrezIDs[1:100], onto="MF", level=2, orgPackage=org.Hs.eg.db)

##

singh.MF <- basicProfile (singh01EntrezIDs[1:100], onto="MF", level=2, orgPackage=org.Hs.eg.db)
welsh.singh.MF <-mergeProfilesLists(welsh.MF, singh.MF, profNames=c("Welsh", "Singh"))
printProfiles(welsh.singh.MF, percentage=TRUE)

## Functional Profile
## =====
## [1] "MF ontology"
##
##           Description      GOID  Welsh  Singh
## 13      antioxidant activity GO:0016209    1.0    2.1
## 9        binding          GO:0005488   94.8   91.7
## 4      catalytic activity  GO:0003824   25.8   41.7
## 18  chemorepellent activity... GO:0045499    0.0    1.0
## 20  molecular function regula... GO:0098772   13.4   11.5
## 19  molecular transducer acti... GO:0060089    8.2    5.2
## 3    nucleic acid binding tran... GO:0001071    5.2    4.2
```

```
## 5 signal transducer activit... GO:0004871 10.3 5.2
## 7 structural molecule activ... GO:0005198 16.5 15.6
## 2 transcription factor acti... GO:0000988 2.1 0.0
## 8 transporter activity GO:0005215 9.3 11.5
```

```
plotProfiles (welsh.MF, aTitle="Welsh (2001). Prostate cancer data")
```

Welsh (2001). Prostate cancer data. MF ontology

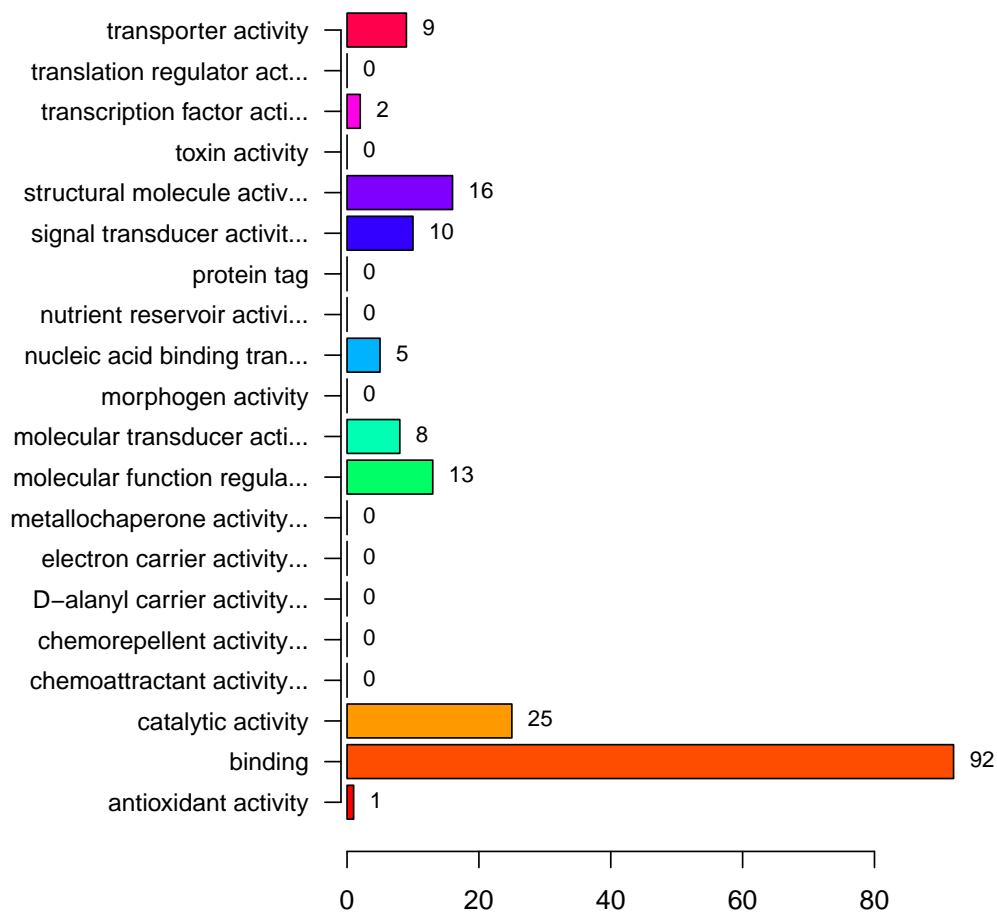


Figure 1: Basic profile for a dataset at the second level of the MF ontology

Changing the parameter `onto` to 'ANY' instead of 'MF' will compute profiles for the three ontologies.

```
welsh <- basicProfile (welsh01EntrezIDs[1:100], onto="ANY", level=2, orgPackage=
```

- A visual comparison of profiles can be useful to give hints about the difference between them.

```
plotProfiles (welsh.singh.MF, percentage=T, aTitle="Welsh vs Singh", legend=T)
```

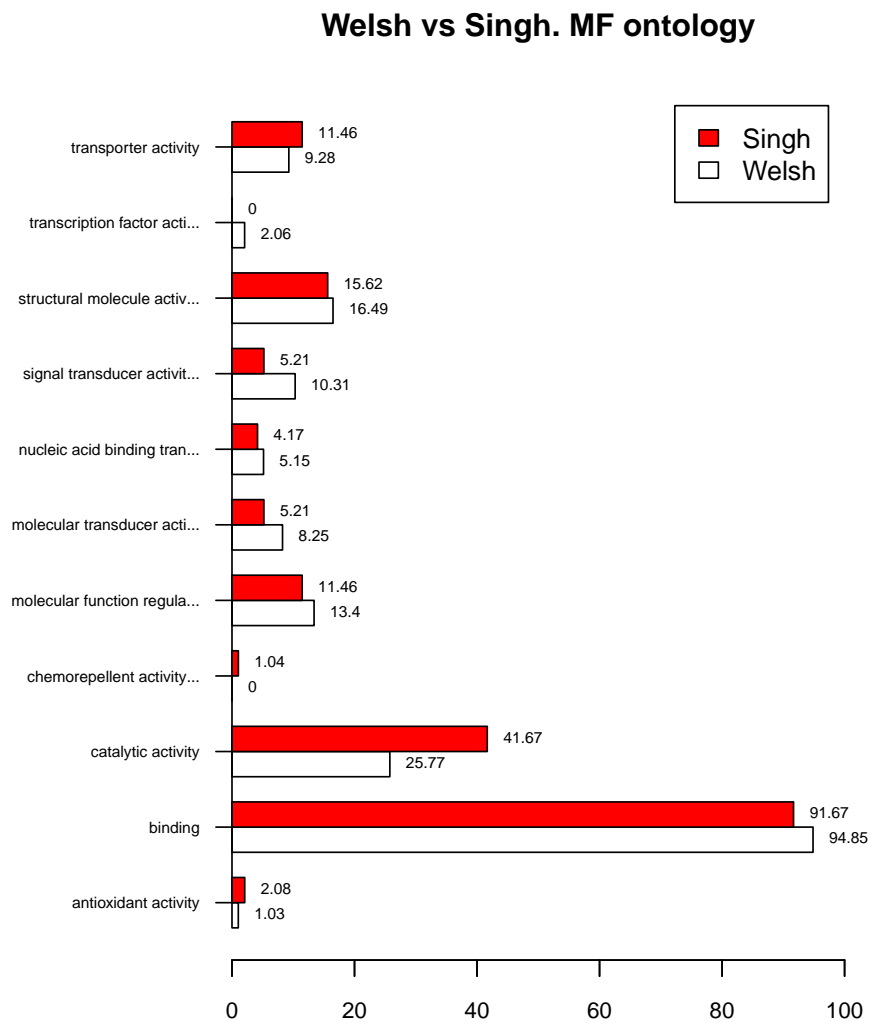


Figure 2: Comparison between two profiles at the second level of the MF ontology

- Finally a numerical comparison of both profiles is performed and its summary is printed. Notice that the comparison rebuilds the profiles, that is the input for the computation are the two lists of genes not the profiles.

```
compared.welsh.singh.01.MF <- compareGeneLists (welsh01EntrezIDs[1:100], singh01EntrezIDs[1:100])
print(compSummary(compared.welsh.singh.01.MF))

## Sqr.Euc.Dist      StdErr      pValue      0.95CI.low
##      0.032133      0.022006      0.056400      -0.010998
##      0.95CI.up
##      0.075264
```

- If one finds that the lists are globally different it may be interesting to check out to which categories may be this difference attributed. Recent versions of *goProfiles* (from 1.11.02) allow to do a Fisher test on every category in the level of the profile.

```
list1 <- welsh01EntrezIDs[1:100]
list2 <- singh01EntrezIDs[1:100]
commProf <- basicProfile(intersect(list1, list2), onto="MF", level=2, orgPackage="org.Hs.eg.db")
fisherGOProfiles(welsh.MF$MF, singh.MF$MF, commProf, method="holm")

## GO:0016209 GO:0005488 GO:0003824 GO:0045499 GO:0098772
##      1.00000      1.00000      0.22642      1.00000      1.00000
## GO:0060089 GO:0001071 GO:0004871 GO:0005198 GO:0000988
##      1.00000      1.00000      1.00000      1.00000      1.00000
## GO:0005215
##      1.00000
## attr(,"unadjusted")
## GO:0016209 GO:0005488 GO:0003824 GO:0045499 GO:0098772
##      0.497671      0.373836      0.020583      1.000000      1.000000
## GO:0060089 GO:0001071 GO:0004871 GO:0005198 GO:0000988
##      0.559674      0.742220      0.182086      0.839842      0.235467
## GO:0005215
##      0.631968
```

- The reason to compare two lists from similar studies may be to combine them. In this case what is more meaningful to do is an equivalence test, instead of a difference test as above.

```
data(prostateIds)
expandedWelsh <- expandedProfile(welsh01EntrezIDs[1:100], onto="MF",
                                level=2, orgPackage="org.Hs.eg.db")
expandedSingh <- expandedProfile(singh01EntrezIDs[1:100], onto="MF",
                                level=2, orgPackage="org.Hs.eg.db")
commonGenes <- intersect(welsh01EntrezIDs[1:100], singh01EntrezIDs[1:100])
commonExpanded <- expandedProfile(commonGenes, onto="MF", level=2, orgPackage="org.Hs.eg.db")

equivMF <- equivalentGOProfiles (expandedWelsh[['MF']],
                                qm = expandedSingh[['MF']],
                                pqn0 = commonExpanded[['MF']])
print(equivSummary(equivMF, decs=5))

##      Sqr.Euc.Dist      StdErr
```

##	0.03213	0.02201
##	pValue	CI.up
##	0.58337	0.06833
##	d0 Equivalent? (1=yes, 0=not)	
##	0.02750	0.00000

4 User guide

This introduction has simply shown the possibilities of the program. A more complete user guide can be found at the program's web site:

<http://estbioinfo.stat.ub.es/pubs/goProfiles-Usersguide.pdf>

References

- [1] Singh, Dinesh., William R Sellers, Philip K. Febbo, Kenneth Ross, Donald G Jackson, Judith Manola, Christine Ladd, Pablo Tamayo, Andrew A Renshaw, Anthony V D'Amico, Jerome P Richie, Eric S Lander, Massimo Loda, Philip W Kantoff, and Todd R Golub. Gene expression correlates of clinical prostate cancer behavior. *Cancer Cell*, 1(2):203–209, 2002.
- [2] A. Sánchez-Pla, M. Salicrú, and J. Ocaña. Statistical methods for the analysis of high-throughput data based on functional profiles derived from the gene ontology. *Journal of Statistical Planning and Inference*, 137(12):3975–3989, 2007.
- [3] M. Salicrú, J. Ocaña and A. Sánchez-Pla. Comparison of Gene Lists based on Functional Profiles. *BMC Bioinformatics*, DOI: 10.1186/1471-2105-12-401, 2011.
- [4] J.B. Welsh, Lisa M. Sapinoso, Andrew I. Su, Suzanne G. Kern, Jessica Wang-Rodriguez, Christopher A. Moskaluk-Jr., Henry F. Frierson, and Hampton Garret M. Analysis of gene expression identifies candidate markers and pharmacological targets in prostate cancer. *Cancer Res*, 61:5974–5978, 2001.