

OS Update Manual

This manual contains detailed information about the BE-300 update contained on this CD-ROM, and about the update procedure.

Important!

- CASIO COMPUTER CO., LTD. shall not be held liable for any loss of data, or economic damage or loss suffered by you arising from the use of this CD-ROM. Make sure you keep separate copies of important data.

- CASIO COMPUTER CO., LTD. assumes no responsibility for any damage or loss resulting from the use of this manual.
- CASIO COMPUTER CO., LTD. assumes no responsibility for any loss or claims by third parties that may arise through the use of this product.
- The operations described in this manual assume that you are already familiar with the basic operation of CASSIOPEIA. See the documentation that comes with CASSIOPEIA for full details on its operation.
- No part of this manual may be reproduced in any form without the express written consent of the manufacturer.
- Sample displays shown in this manual may differ somewhat from the displays actually produced by the product.

©2002 CASIO COMPUTER CO., LTD. All rights reserved.

Copyright Information

- Microsoft, Outlook, Windows, Windows NT, Windows Media, and the Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
Microsoft products are licensed to OEMs by Microsoft Licensing, Inc., a wholly owned subsidiary of Microsoft Corporation.
- Macromedia and Macromedia Flash are either registered trademarks or trademarks of Macromedia, Inc. in the United States and/or other countries.
- All other product and company names mentioned herein may be the trademarks of their respective owners.

Contents

- What This Update Does 3**
 - This update 3
- Getting Ready to Update 3**
 - Required Items 3
 - Preparation 4
- Updating the BE-300 5**
 - To update the BE-300 5
 - What to do if an error occurs during the update 13
- User Registration 13**
 - Registering as a User 13
- Returning the BE-300 to Its Pre-update State 14**

What This Update Does

Updating with this CD-ROM modifies your BE-300 as described below. Make sure you read this information before updating.

This update:

- Updates the BE-300 operating system from Windows CE 3.0 to Windows CE .NET.
- Installs the following applications: Pocket Internet Explorer, Windows Media Player, Flash Player.
- Deletes the current Internet browser application (which is replaced by Pocket Internet Explorer).
- Upgrades the following applications to newer versions: Top Menu, Calendar, Contacts, Mail, Connections, Photo Viewer. Update first, and then install Photo Viewer from this CD-ROM.
- Deletes all add-on applications you have installed on your BE-300.
- Deletes the following data from BE-300 memory: Bookmarks, Settings, Photo, Music, Movie, and additional applications data.

Note

- Data saved by the following applications in BE-300 main memory can be backed up during the update procedure: Calendar, Contacts, Notes (Text), Tasks, Mail, Web Page. Backed up data can be restored to BE-300 memory after the update procedure is complete.
- After performing this update, you will no longer be able to install programs from the CD-ROM that came bundled with your BE-300. If you need to install File Manager, Movie Player, or Photo Viewer, update first, and then install them from this CD-ROM.
- This CD-ROM does not contain a copy of Music Player, which is included on the CD-ROM that came bundled with your BE-300. Use Windows Media Player for music playback.

Getting Ready to Update

Prepare the following items and perform the steps below before starting the BE-300 update.

Required Items

- This CD-ROM
- BE-300
- Cradle (bundled with BE-300)
- CASSIOPEIA CD-ROM (bundled with BE-300)
- Computer that supports connected to the BE-300 *

* See "Minimum System Requirements for PC Connect" in the booklet that comes with this CD-ROM for information about compatible computers.

Preparation

- If you have just purchased your BE-300 and have not set it up yet, do so now. See “Setting Up Your CASSIOPEIA” in the “Quick Start Guide” that comes with your BE-300.
- If already have PC Connect installed on your computer, perform the following procedure to uninstall it.
 1. On your computer, click [Start], [Settings], and then [Control Panel].
 2. Double-click [Add/Remove Programs].
 3. Select [PC Connect] from the list on the dialog box, and then click [Add/Remove].
 4. Follow the instructions that appear on the screen to complete the uninstall operation.
- In order to update your BE-300, you need to install the new version of PC Connect on your computer from this CD-ROM. Perform the following steps to install PC Connect.
 1. Place the update CD-ROM into your computer's CD-ROM drive. This should cause a CD menu to appear on your computer screen.
 2. On the CD menu screen, click [PC Connect Update].
 3. Follow the instructions that appear on the screen to complete the PC Connect update procedure.

Important!

- Performing the update deletes certain data from BE-300 memory (“What This Update Does,” page 3). Before starting the update procedure, we highly recommend that you copy all of the data and files in your BE-300 memory to your computer's hard disk or to a memory card.
- Do not use the BE-300 backup operation to back up memory contents. Data backed up this way cannot be restored to BE-300 memory after the update. Also note that you will not be able to restore or use any BE-300 backup files that you created using an older version of PC Connect prior to the update. If, however, you think that you may need to later return an updated BE-300 to its previous, un-updated state, you can make a backup of BE-300 memory and keep it on hand for later use.
- Depending on your PC environment and operational conditions, OS Update may fail.
If that is the case, reboot the PC system and try OS Update again (Failures occur more frequently in the Windows XP environment).

Updating the BE-300

This section describes the procedure you need to perform to update your BE-300.


Important!

- Before performing this procedure, make sure you first read the information under “Getting Ready to Update” on page 3.
- The update procedure involves operations on both your computer and the BE-300. It is important to remember that if you skip any steps or perform a step incorrectly, you may not be able to update your BE-300 or your BE-300 may no longer operate correctly. Be sure to follow the procedure exactly as provided below.
- If you make a mistake or if something goes wrong during the update procedure, a message may appear on your computer screen suggesting that you retry a process. If this happens, check if the PC and BE-300 are connected correctly, and then click the [Retry] button. To restart the procedure from the beginning, click the [Cancel] button.
- After starting the update procedure, be sure to perform all of the steps up to the end. Interrupting the update procedure can render your BE-300 unusable.

To update the BE-300


Note

- In the following procedure, steps marked [BE] should be performed on the BE-300, while steps marked [PC] should be performed on your computer.
1. **[BE]:** Check to make sure that the BE-300 battery is fully charged. If it isn't, charge it before starting.
 2. **[PC]:** Shut down your computer and connect the cradle that comes with the BE-300 to your computer's USB port.

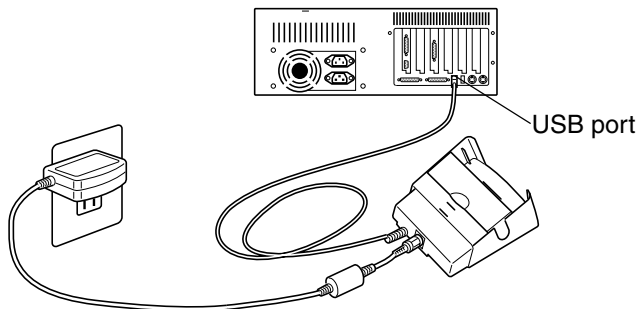


- Be sure also to connect the AC adapter to the cradle.


3. **[PC]:** Start up your computer.
4. **[BE]:** After your computer finishes its startup routine, place the BE-300 onto the cradle.

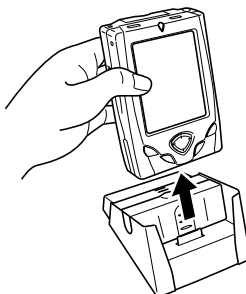


5. **[BE]:** Check to make sure that the  icon is shown in the lower left corner of the screen.



- This icon means that the BE-300 is connected correctly to your computer.
6. **[PC]:** Place the update CD-ROM into your computer's CD-ROM drive.
 - This should cause a CD menu to appear on your computer screen.

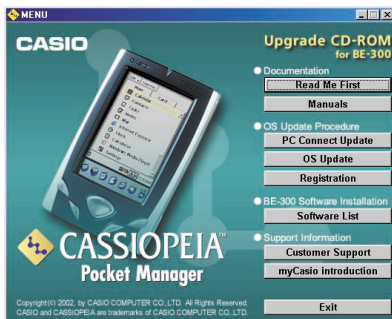


7. **[PC]:** On the CD menu, click **[OS Update]**.
- This displays the screen shown below.

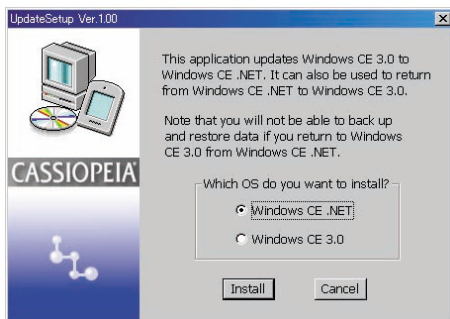


8. **[PC]:** Check to make sure that “Windows CE .NET” is selected, and then click **[Install]**.
- This displays the screen shown below.



- As instructed by the screen text, check your computer settings.
9. **[PC]:** Click **[Next]**.
- This displays the screen shown below.

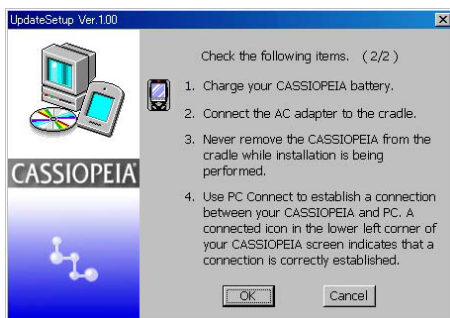

10. **[BE]:** As instructed by the screen text, double-check to make sure your BE-300 is ready.
11. **[PC]:** After checking everything, click [OK].
 - This displays the screen shown below.

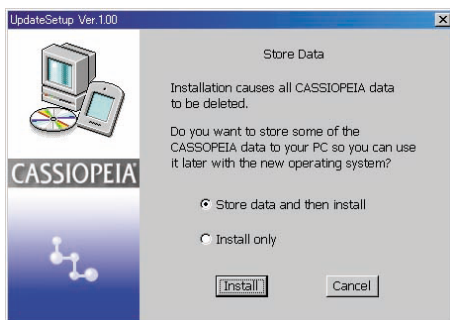


12. **[PC]:** If you want to store some of the CASSIOPEIA data on your computer so you can use it later with the new operating system, select "Store data and then install". Otherwise, select "Install only". After selecting the option you want, click the [Install] button.

Important!

- Note that if you select "Install only", all data (PIM data, files, etc.) currently in BE-300 memory will be destroyed by the update process.
- Even if you select "Store data and then install", all data is not backed up. See "What This Update Does" on page 3 for more information.

- Selecting "Store data and then install" and clicking [Install] causes the backup screen shown below to appear.

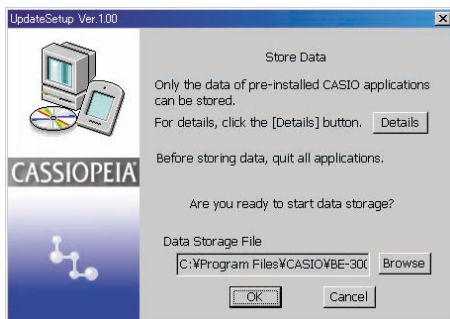


- If you select "Install only", skip to step 15.
13. **[PC]:** Specify the location and name of the data storage file as required.
 - You can leave the default settings as they are or change them, if you want.

Important!

- Clicking the [Details] button displays important precautions you should know about when saving data. Be sure to read the Details screen contents.

14. **[PC]:** Click [OK].


- This displays the screen shown below.

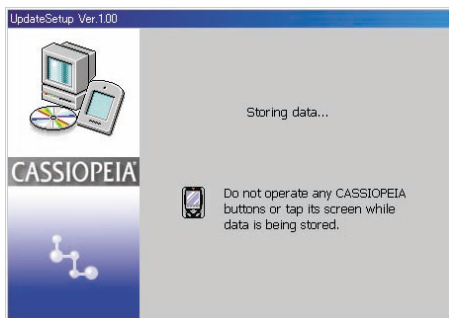


- Wait as the data storage procedure is performed. Do not perform any operation on your computer or BE-300 while backup is in progress.

15. **[PC]:** The screen below appears after storage is complete, or if you selected "Install only" in step 12.

- Do not click the [Start] button on this screen yet. Be sure to perform the BE-300 operation in step 16 first.

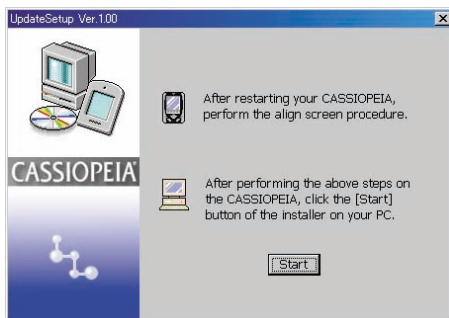

16. **[BE]:** Perform the Align Screen operation, following the instructions that appear on the BE-300 display.
- The BE-300 restarts when the screen shown in step 15 appears on your PC. After the BE-300 restarts and displays the screen shown below, perform the Align Screen operation.

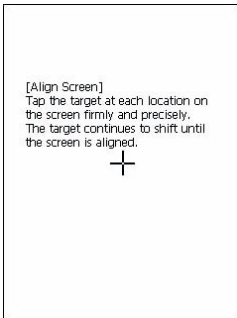


Important!

- The screen shown below appears after the Align Screen operation is complete. Note, however, that you should not tap the [OK] button on this screen. Instead, proceed to the next step.




17. **[PC]:** Click [Start].

- This starts installation of the OS to the BE-300, and displays the screen shown below. OS installation takes a few minutes. Do not perform any operation on your computer or BE-300 while installation is in progress.

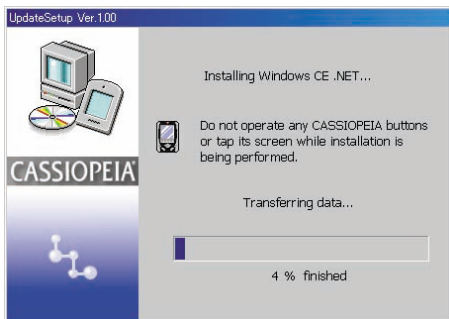

18. **[PC]:** The screen shown below appears when the update ends normally.

- Do not perform the operation as instructed by this screen yet. Be sure to perform the BE-300 operation in step 19 first.

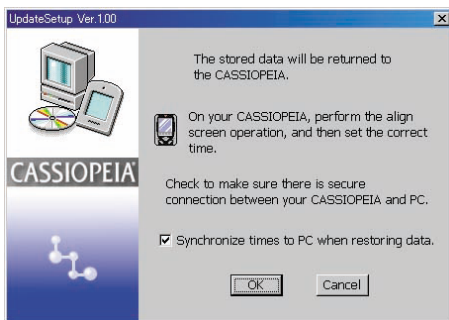


19. **[BE]:** Perform the Align Screen operation, following the instructions that appear on the BE-300 display.

- The BE-300 restarts when the screen shown in step 18 appears on your PC. After the BE-300 restarts, perform the Align Screen operation.
- The date and time setting screen appears after the Align Screen operation is complete.

20. **[BE]:** Set the current date and time, and then tap .

21. **[BE]:** Check to make sure that the icon is shown in the lower left corner of the screen.



Important!

Attention Serial Cable Users

Your BE-300 will not automatically connect to your PC if you are using a serial cable to connect to a computer for the operating system update. When using a serial cable, perform the following procedure on your BE-300 to establish a connection.

From the Top Menu, start up [Connections].


Tap the [PC Connect] button.

Specify "Serial Port" for [Connection method:].

Tap the [Connect Now] button.


This establishes a connection between your BE-300 and PC. Now you can perform the required steps to update your BE-300 operating system.

22. **[PC]:** After checking everything, click [OK] on your computer screen.
- This displays a screen like the one shown below, and starts writing of the data you stored up previously. Do not perform any operation on your computer or BE-300 while the data write operation is in progress.

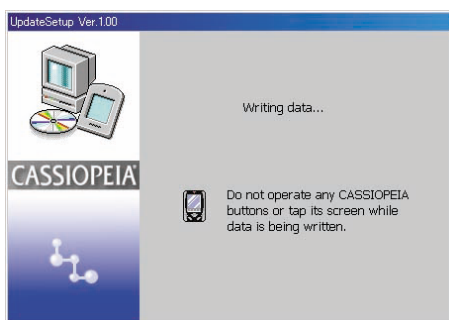

- The above screen does not appear if you selected "Install only" in step 12. In this case proceed directly to step 23.

23. **[PC]:** The screen shown below appears when the data write operation ends normally.

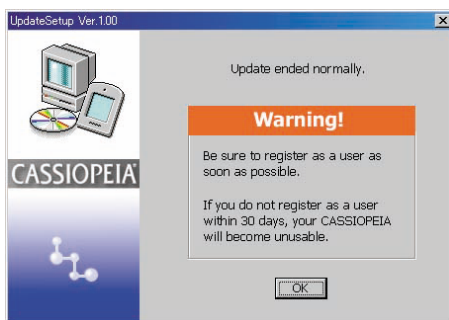

24. **[PC]:** Click [OK].

- This completes the update procedure.

Important!

- You must register your update within 30 days after performing the above operation. If you fail to do so, your BE-300 will stop working. Do not forget to register.
- See “User Registration” below for information about registering.

What to do if an error occurs during the update

- If the update procedure does not go well because of an operational mistake or some other reason, follow the instructions that appear on your computer screen to enter the BE-300 Safe Mode, and then perform the update procedure again.
- If the update operation is interrupted for some reason, immediately perform the update again. If the update operation is interrupted for some reason, do not try to return the BE-300 to its initial factory defaults, and do not try to reinstall the original OS by selecting [Windows CE 3.0] in step 7 of the installation procedure.

User Registration

You must perform the procedure below to register your update within 30 days after performing the update operation. If you fail to do so, your BE-300 will stop working.

Registering as a User

Important!

- Note that in order to register, your computer must be able to access the Internet, either through a dialup connection or a network.
1. **[BE]:** Check to make sure that the BE-300 battery is fully charged. If it isn't, charge it before starting.
 2. **[PC]:** Shut down your computer and connect the cradle that comes with the BE-300 to your computer's USB port.
 - Be sure also to connect the AC adapter to the cradle.
 3. **[PC]:** Start up your computer.
 4. **[BE]:** After your computer finishes its startup routine, place the BE-300 onto the cradle.
 5. **[BE]:** Check to make sure that the  icon is shown in the lower left corner of the screen.
 - This icon means that the BE-300 is connected correctly to your computer.

6. **[PC]:** Place the update CD-ROM into your computer's CD-ROM drive.
 - This should cause a CD menu to appear on your computer screen.
7. **[PC]:** On the CD menu, click [Registration].
8. **[PC]:** Follow the instructions that appear on your computer screen, which will take you to the Web page for user registration.

This will download software that removes the time limit on your BE-300 operating system. Install this software on your BE-300 to remove the time limit.

Important!

- Even after you install the software, keep it in a safe place and do not throw it away. If you ever uninstall Windows CE .NET for some reason, you will need to install it again after you update to Windows CE .NET again.

Returning the BE-300 to Its Pre-update State

You can return the BE-300 to its original, pre-update state if you need to.

Important!

- Unlike with the update procedure, you cannot save and reload data when returning the BE-300 to its pre-update state. Make sure you copy data and files in BE-300 memory to your computer hard disk or a memory card.

The procedure to return the BE-300 to its pre-update state is basically the same as that under “To update the BE-300” on page 5. The following describes the only points that are different.

- In step 7 (page 7), select “Windows CE 3.0” instead of “Windows CE .NET.”
- Steps 11 through 14 do not apply and should be skipped.