


PISTAS PADEL ALEJANDRO SAINZ SAINZ

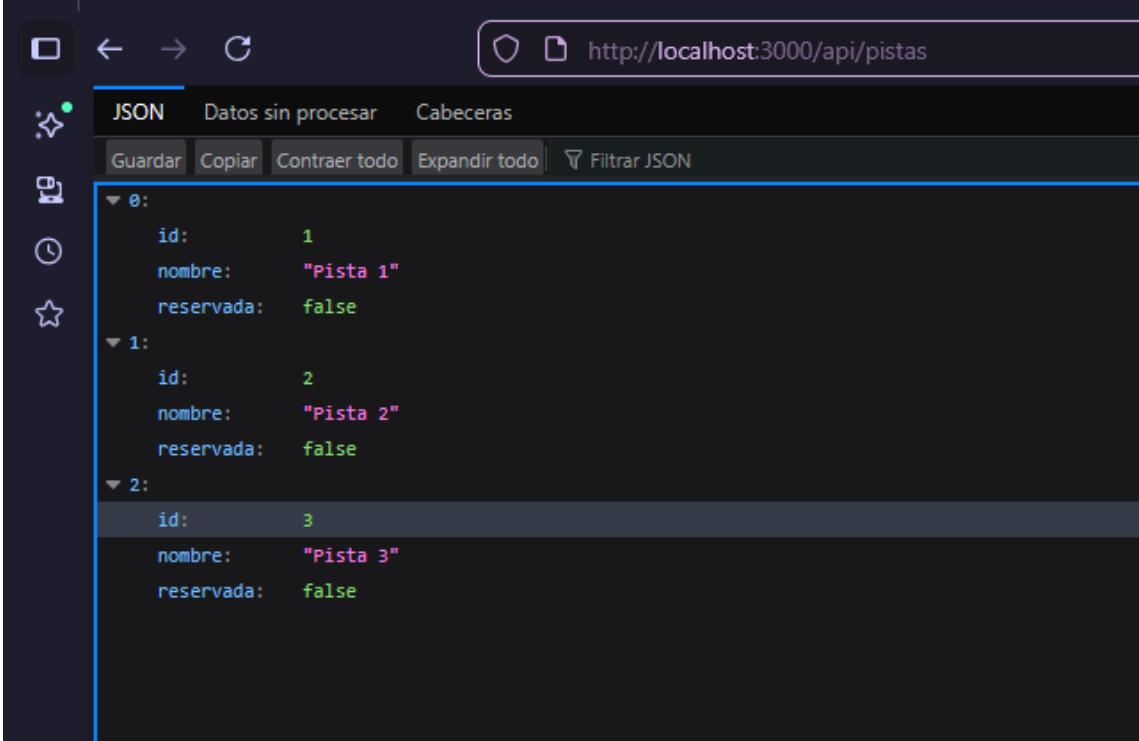

The screenshot shows a JSON viewer interface from a browser's developer tools. The URL in the address bar is `http://localhost:3000/api/pistas`. The JSON data is displayed as follows:

```
[{"id": 1, "nombre": "Pista 1", "reservada": false}, {"id": 2, "nombre": "Pista 2", "reservada": false}, {"id": 3, "nombre": "Pista 3", "reservada": false}]
```

The JSON viewer includes a toolbar with icons for copy, paste, and save, and a menu bar with options like JSON, Datos sin procesar, Cabeceras, Guardar, Copiar, Contraer todo, Expandir todo, and Filtrar JSON.

HTTP morosos... / PostAddMoroso Save View Documentation No Environment

POST http://localhost:3000/api/pistas/agregar Send

Params Authorization Headers (9) Body Scripts Settings Code Cookies

none form-data x-www-form-urlencoded raw binary GraphQL J Beautify

```
1 {
2   "id":4,
3   "nombre":"Pista Alex",
4   "reservada":false
5 }
```

Body Status: 201 Created Time: 21 ms Size: 288 B

Pretty Raw Preview JSON

```
1 [{"id":4,"nombre":"Pista Alex","reservada":false}]
```

The screenshot shows a browser developer tools Network tab with a single request listed. The URL is `http://localhost:3000/api/pistas`. The response is a JSON object containing four items (indices 0 to 3), each representing a track with properties `id`, `nombre`, and `reservada`.

```
[{"id": 1, "nombre": "Pista 1", "reservada": false}, {"id": 2, "nombre": "Pista 2", "reservada": false}, {"id": 3, "nombre": "Pista 3", "reservada": false}, {"id": 4, "nombre": "Pista Alex", "reservada": false}]
```

HTTP morososApi / PostAddMoroso Save View Documentation No Environment

PUT http://localhost:3000/api/pistas/reservar/4 Send

Params Authorization Headers (8) Body Scripts Settings Code Cookies

none form-data x-www-form-urlencoded raw binary GraphQL

This request does not have a body

Body Cookies Headers (7) Test Results Status: 200 OK Time: 5 ms Size: 282 B

Pretty Raw Preview JSON ↻

1 [{"id":4,"nombre":"Pista Alex","reservada":true}]

The screenshot shows a JSON viewer interface from a browser's developer tools. The URL in the address bar is `http://localhost:3000/api/pistas`. The JSON data is displayed as follows:

```
JSON Datos sin procesar Cabeceras  
Guardar Copiar Contraer todo Expandir todo Filtrar JSON  
0:  
  id: 1  
  nombre: "Pista 1"  
  reservada: false  
1:  
  id: 2  
  nombre: "Pista 2"  
  reservada: false  
2:  
  id: 3  
  nombre: "Pista 3"  
  reservada: false  
3:  
  id: 4  
  nombre: "Pista Alex"  
  reservada: true
```

HTTP morosoApi / PostAddMoroso Save View Documentation No Environment

PUT http://localhost:3000/api/pistas/cancelar/4 Send

Params Authorization Headers (8) **Body** Scripts Settings Code Cookies

none form-data x-www-form-urlencoded raw binary GraphQL

This request does not have a body

Body Cookies Headers (7) Test Results Status: 200 OK Time: 7 ms Size: 283 B

JSON Datos sin procesar Cabeceras

Guardar Copiar Contraer todo Expandir todo Filtrar JSON

```
[{"id": 1, "nombre": "Pista 1", "reservada": false}, {"id": 2, "nombre": "Pista 2", "reservada": false}, {"id": 3, "nombre": "Pista 3", "reservada": false}, {"id": 4, "nombre": "Pista Alex", "reservada": false}]
```