

Ex.No:	Implement Keyboard Event Monitoring
Date:	

AIM:

ALGORITHM:

231401102

CODE:

```
import tkinter as tk
from datetime import datetime
monitoring = False
def start_monitoring():
    global monitoring
    monitoring = True
    status_label.config(text="Status: Monitoring")
    input_box.focus_set()
def stop_monitoring():
    global monitoring
```

```
monitoring = False

status_label.config(text="Status: Stopped")

def monitor_key(event):

    if monitoring:

        key = event.keysym

        time = datetime.now().strftime("%H:%M:%S")

        output_box.config(state="normal")

        output_box.insert( tk.END

            D,

            f"{time} Key Pressed: {key}\n"

        )

        output_box.config(state="disabled")

root = tk.Tk()

root.title("Keyboard Event Monitoring")

root.geometry("600x450")

title =

    tk.Label( root,

        text="Keyboard Event Monitoring",

        font=("Arial", 18, "bold")

    )

title.pack(pady=15)

tk.Label(root, text="Type something here:").pack()

input_box = tk.Text(

    root,

    height=5,


    width=60

)
```

```
input_box.pack(pady=10)
input_box.bind("<KeyPress>", monitor_key)
start_button = tk.Button(
    root,
    text="Start Monitoring",
    command=start_monitoring
)
start_button.pack(pady=5)
stop_button = tk.Button(
    root,
    text="Stop Monitoring",
    command=stop_monitoring
)
stop_button.pack(pady=5)
status_label = tk.Label(
    root,
    text="Status: Stopped"
)
status_label.pack(pady=10)
tk.Label(root, text="Keyboard Events").pack()
output_box = tk.Text(
    root,
    height=10,
    width=65,
    state="disabled"
)
output_box.pack(pady=10)
```

```
root.mainloop()
```

OUTPUT:

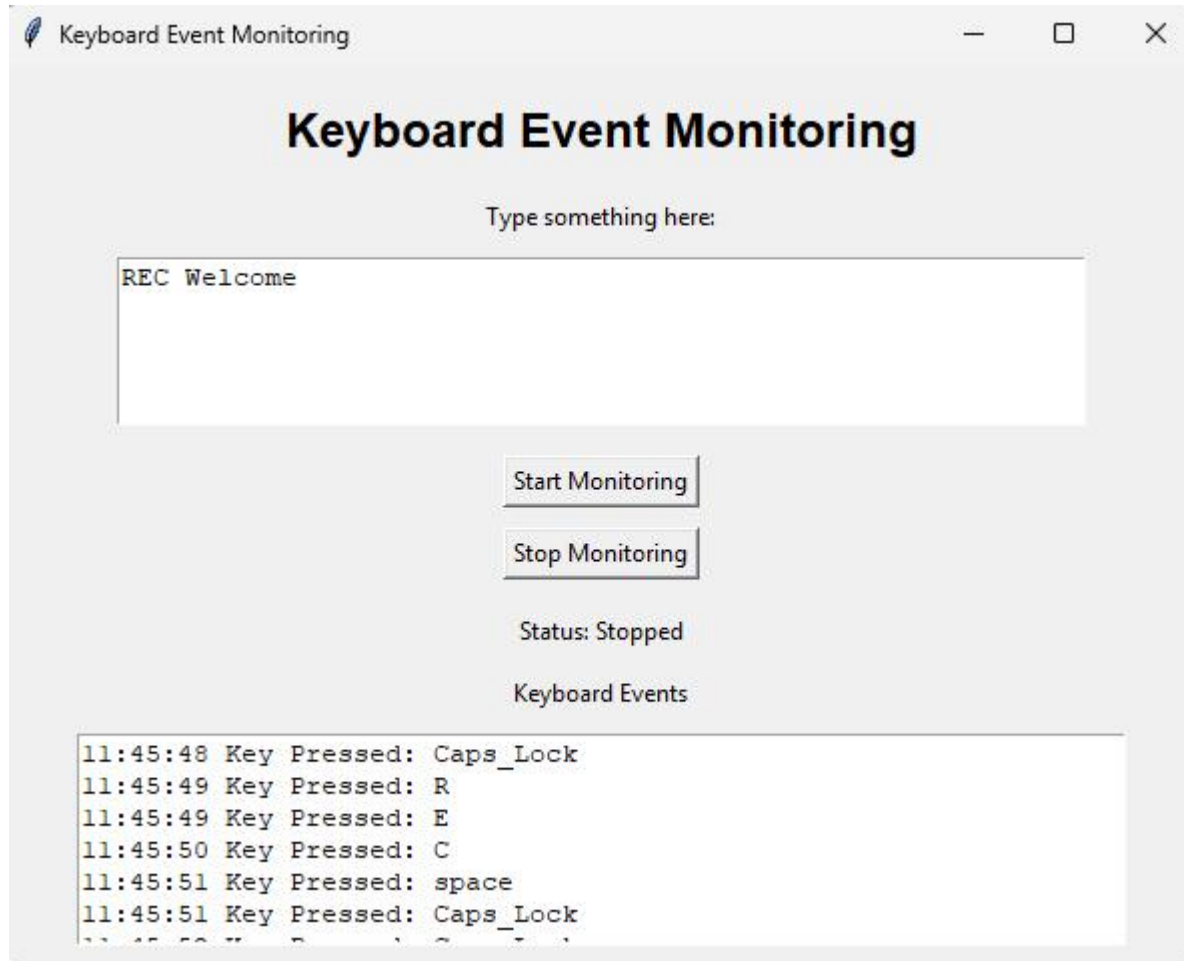

RESULT: