



Setup OAC Email delivery using OCI Email Delivery Service



20.02.2024, Version 1


Copyright © 2024, Oracle and/or its affiliates

Public


Setup OAC Email delivery using OCI Email Delivery Service

PART 1 – OCI Email Delivery Service Setup


1. Login to Oracle Cloud
2. Oracle Cloud Infrastructure Console, click Navigation menu in the top left corner -> Using Search type email:

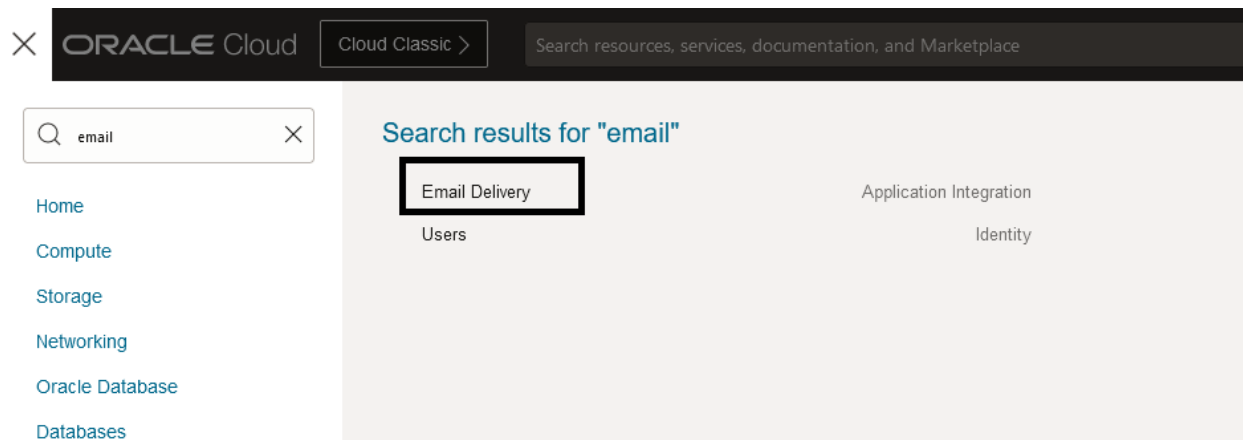

3. Click on Email Delivery
4. Select Approved Senders

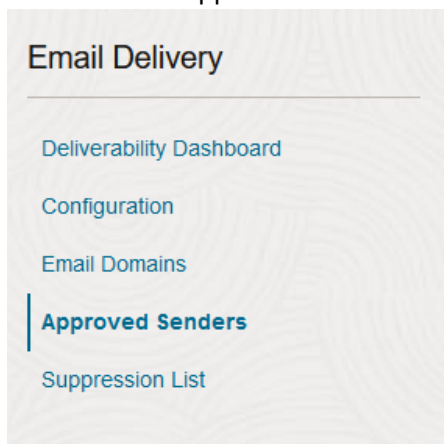

5. Click on Create Approved Sender

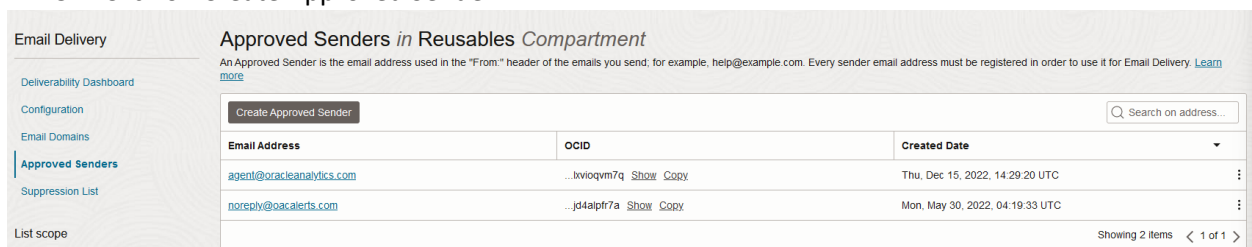

6. Type the email Address (eg. In this example we have used agent@oac.com)

Create Approved Sender

Email Address

agent@oac.com

Add tags to organize your resources. [What can I do with tagging?](#)

Tag namespace Tag key Tag value

None (add a free-form tag) X

☐ Add Another

[Cancel](#)

7. Press Create Approved Sender Button
8. Generate SMTP Credentials

SMTP credentials are necessary to send email through Email Delivery. Each user is limited to a maximum of two SMTP credentials. So, if you need more than two, create another user.

From Oracle Cloud Console and navigate to **User Settings**.

Approved Senders in Reusables *Compartment*

An Approved Sender is the email address used in the "From" header of the emails you send, for example, help@example.com. Every sender email address must be unique.

[Create Approved Sender](#)

Email Address	OCID	Created Date
agent@oracleanalytics.com	...lvioqvm7q Show Copy	Thu, Dec 15, 2022
noreply@oacalerts.com	...jd4lptr7a Show Copy	Mon, May 30, 2023

Profile

oracleidentitycloudservice/...
m

Tenancy: ...

[Service user Console](#)

[User settings](#)

[Console settings](#)

[Sign out](#)


Showing 2 items < 1 of 1 >

9. Locate under Resources – SMTP Credentials


Resources

- [Groups](#)
- [API Keys](#)
- [Auth Tokens](#)
- [Customer Secret Keys](#)
- [Database Passwords](#)
- [OAuth 2.0 Client Credentials](#)
- [SMTP Credentials](#)**


10. Press Generate SMTP Credentials:

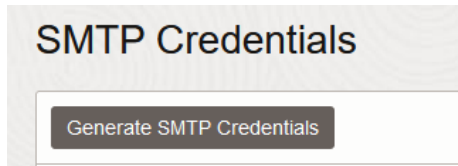

11. Add a description then generate the credentials

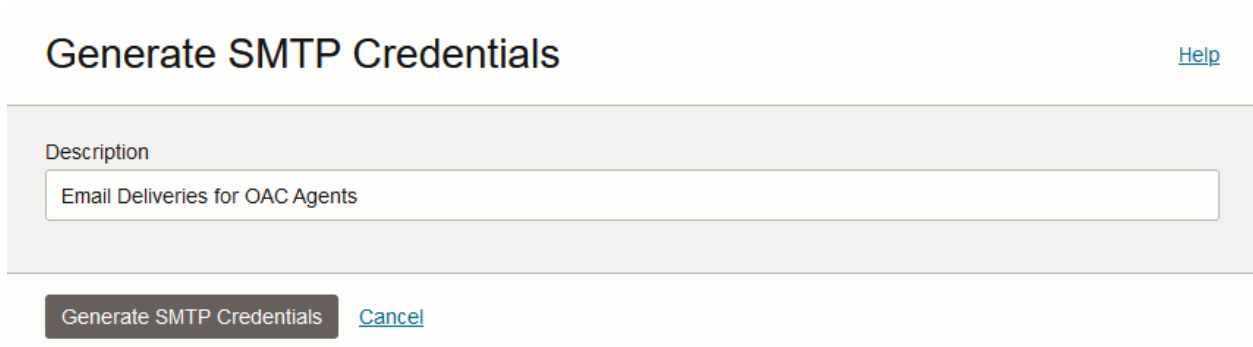

12. Copy the username and password. **For security reasons, you can't retrieve the password after closing the dialog box.**

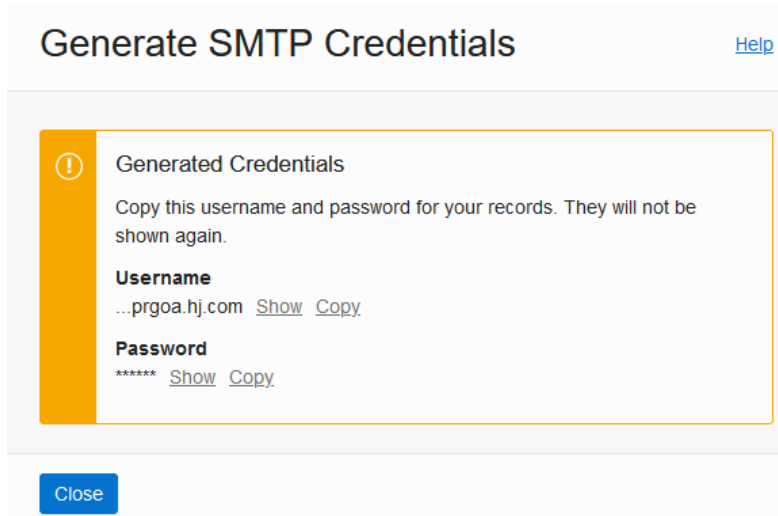

PART 2 – OAC Email Delivery Service Setup

In Oracle Analytics Cloud, configure the SMTP settings for your mail server.

1. Click Console.
2. Click Mail Settings, and configure SMTP settings for your mail server.
 - a. In SMTP Server, specify the name of your email server. For example, smtp.us-ashburn-1.oraclecloud.com.
 - b. In Port, specify 587.
 - c. In Display name of sender, specify the name you want to appear in the From field of your emails. For example, Oracle Analytics.

- d. In Email address of sender, specify the email address of the approved sender you configured for email delivery. For example, [your_login_account@example.com](#).
 - e. In Authenticated, select this option.
 - f. In Username, specify the username you recorded after generating SMTP credentials for the mail server. For example, ocid1.user.oc1.aaaaaaalgtwnjkell....
 - g. In Password, specify the password generated for this user.
 - h. In Connection Security, specify STARTTLS.
 - i. In TLS Certificate, specify Default Certificate.
3. Click Save.

* SMTP Server	<input type="text" value="smtp.email.eu-frankfurt-1.oci.oraclecloud.co"/>
* Port	<input type="text" value="587"/> ▼ ▲
* Display name of sender	<input type="text" value="AGENTS OAC"/>
* E-mail address of sender	<input type="text" value="agent@oac.com"/>
	<input checked="" type="checkbox"/> Authenticated
* Username	<input type="text" value="ocid1.user.oc1..aaaaaaaak66lnf274hj4m2ohc"/>
* Password	<input type="password" value="....."/>
Connection Security	<input type="text" value="STARTTLS"/> ▼
TLS Certificate	<input type="text" value="Default Certificate"/> ▼