


Aim: Design a webpage to handle asynchronous requests using AJAX.

1. Mouseover (Mouse Enter and Leave).

CODE:

```
<!DOCTYPE html>
<html>
<head>
  <title>Mouse Hover Example</title>
  <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>
</head>
<body>
<p id="demo">Hover over this text</p>
<script>
$(document).ready(function(){
  $("#demo").hover(
    function(){ // mouse enter
      $(this).text("Mouse Entered!");
    },
    function(){ // mouse leave
      $(this).text("Mouse Left!");
    }
  );
});
</script>
</body>
</html>
```

OUTPUT:

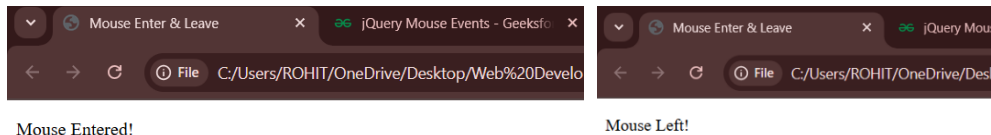


2. Button clicks.

CODE:

```
<!DOCTYPE html>
<html>
<head>
  <title>Mouse Events</title>
  <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>
</head>
<body>
<p id="demo">Click or Double-Click me</p>
<script>
$(document).ready(function(){
  $("#demo").click(function(){
    $(this).text("Single Click");
  });
  $("#demo").dblclick(function(){
    $(this).text("Double Click");
  });
});
</script>
```

```
$("#demo").contextmenu(function(e){  
    e.preventDefault();  
    $(this).hide();  
});  
});  
</script>  
</body>  
</html>
```

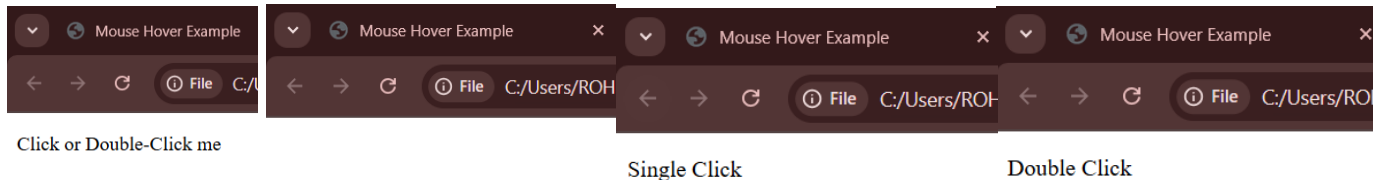OUTPUT:**3.Hide and Show.****CODE:**

```
<!DOCTYPE html>  
<html>  
<head>  
    <title>Hide and Show</title>  
    <script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>  
</head>  
<body>  
<p id="text">Hello, I will hide and show!</p>  
<button id="hideBtn">Hide</button>  
<button id="showBtn">Show</button>  
<script>  
$(document).ready(function(){  
    $("#hideBtn").click(function(){  
        $("#text").hide();  
    });  
    $("#showBtn").click(function(){  
        $("#text").show();  
    });  
});  
</script>  
</body>  
</html>
```

OUTPUT: