
Nexidia Real-Time Grid Site Readiness Tool File Generator Guide

Version 12.5.1

Copyright

PROPRIETARY AND CONFIDENTIAL INFORMATION

Information herein is proprietary information and trade secrets of NICE Ltd. and/or its affiliated companies (Affiliates). This document and the information herein is the exclusive property of NICE and its Affiliates and shall not be disclosed, in whole or in part, to any third party or utilized for any purpose other than the express purpose for which it has been provided.

IMPORTANT NOTICE

Subject always to any existing terms and conditions agreed between you and NICE or any Affiliate with respect to the products which are the subject matter of this document, neither NICE nor any of its Affiliates shall bear any responsibility or liability to a client or to any person or entity with respect to liability, loss or damage caused or alleged to be caused directly or indirectly by any product supplied or any reliance placed on the content of this document. This includes, but is not limited to, any interruption of service, loss of business or anticipatory profits or consequential damage resulting from the use or operation of any products supplied or the content of this document. Information in this document is subject to change without notice and does not represent a commitment on the part of NICE or any Affiliate.

All information included in this document, such as text, graphics, photos, logos and images, is the exclusive property of NICE or in Affiliate and is protected by United States and international copyright laws. Permission is granted to use, view and photocopy (or print) materials from this document only in connection with the products to which this document relates and subject to the terms of license applicable to such products. Any other use, copying, distribution, retransmission or modification of the information in this document without the express prior written permission of NICE or an Affiliate is strictly prohibited. In the event of any permitted copying, redistribution or publication of copyrighted material, no changes in, or deletion of, author attribution, trademark legend or copyright notice shall be made.

Products supplied may be protected by one or more of the US patents listed at www.nice.com/Patents. For the full list of trademarks of NICE and its Affiliates, visit www.nice.com/Nice-Trademarks. All other marks used are the property of their respective proprietors.

All contents of this document are: Copyright © 2025 NICE Ltd. All rights reserved.

For assistance, contact your local supplier or nearest NICE Customer Service Center:

EMEA Region (Europe, Middle East, Africa) Tel: +972-9-775-3800 Fax: +972-9-775-3000 email: support@nice.com	APAC Region (Asia/Pacific) Tel: +852-8338-9818 Fax: +852-2802-1800 email: support.apac@nice.com	North America Tel: 1-800-663-5601 Fax: +201-356-2197 email: na_sales@nice.com	International Headquarters-Israel Tel: +972-9-775-3100 Fax: +972-9-775-3070 email: info@nice.com
The Americas Region (North, Central, South America) Tel: 1-800-6423-611 Fax: +720-264-4012 email: support.americas@nice.com	Israel Tel: 09-775-3333 Fax: 09-775-3000 email: support@nice.com	France Tel: +33-(0)1-41-38-5000 Fax: +33-(0)1-41-38-5001	Hong-Kong Tel: +852-2598-3838 Fax: +852-2802-1800
United Kingdom Tel: +44-8707-22-4000 Fax: +44-8707-22-4500	Germany Tel: +49-(0)-69-97177-0 Fax: +49-(0)-69-97177-200		

NICE invites you to join the NICE User Group (NUG).

Visit the NUG Website at www.niceusergroup.org; and follow the instructions.

All queries, comments, and suggestions are welcome! Please email: nicebooks@nice.com.

For more information about NICE, visit www.nice.com

Overview

The Nexidia Real-Time Grid Silent Install file generator is a tool that generates the properties file required to run the Nexidia Real-Time Grid Silent Installer. The Silent Install file generator will also create the keystore and truststore files.

Starting the Nexidia Real-Time Grid Silent Install File Generator

1. If not unzipped, unzip the Nexidia Real-Time Grid Silent Installer zip file nexidia-realtimegrid-install-image-12.5.zip.
2. In the top level directory of the unzipped files, double-click the batch file SilentInstallFileGenerator.bat
3. If this is a new installation, the Telephony Settings dialog will be displayed.

Edit Telephony Settings

Telephony Environment: ☒ Engage ☐ Mattersight

Install Directory: C:\Program Files\Nexidia\Real-Time Grid

Data Directory: C:\ProgramData\Nexidia\Real-Time Grid

Encrypted Data Directory:

Service Account User:

Service Account Password: Service account password

☐ Show Password

Password Confirmation: Service account password

Note: User will be given 'Logon As Service' permission

Keystore/Truststore Password:

☐ Show Password

Keystore/Truststore Confirm Password:

Site Readiness Tool Internal Command Port: 8383

Site Readiness Tool Results Directory:

OK Cancel

Figure 1. Initial Telephony Settings

4. Enter the name of the Windows Service Account user and password. The Windows Service Account user will need to have the domain included (e.g. DOMAIN\username).
5. Enter the Keystore/Truststore password. This password will be used for any keystore or truststore created by the Silent Install file generator.

Edit Telephony Settings

Telephony Environment: ☒ Engage ☐ Mattersight

Install Directory: C:\Program Files\Nexidia\Real-Time Grid

Data Directory: C:\ProgramData\Nexidia\Real-Time Grid

Encrypted Data Directory: \\encrypted_server\test\Nexidia\Real-Time G

Service Account User: test_domain\test_user

Service Account Password: ••••

☐ Show Password

Password Confirmation: ••••

Note: User will be given 'Logon As Service' permission

Keystore/Truststore Password: ••••

☐ Show Password

Keystore/Truststore Confirm Password: ••••

Site Readiness Tool Internal Command Port: 8383

Site Readiness Tool Results Directory:

OK Cancel

Figure 2. Completed Telephony Settings

6. Click the "OK" button and the main Silent Install file generator screen will be displayed. The following files will also be created in the same directory as the Silent Install file generator:
 - **srt_basic_settings.json** - contains the basic settings for the Silent Install file generator including encrypted passwords
 - **generic.keystore** - the main keystore file in PKCS12 format with the encryption key used to encrypt any values in the properties file
 - **cacerts** - the truststore file in PKCS12 format
7. If the srt_basic_settings.json file exists, then the main Silent Install file generator screen will be displayed. If the silent_install_properties.json file exists, then any defined nodes will be displayed in the table in the main Silent Install file generator screen.

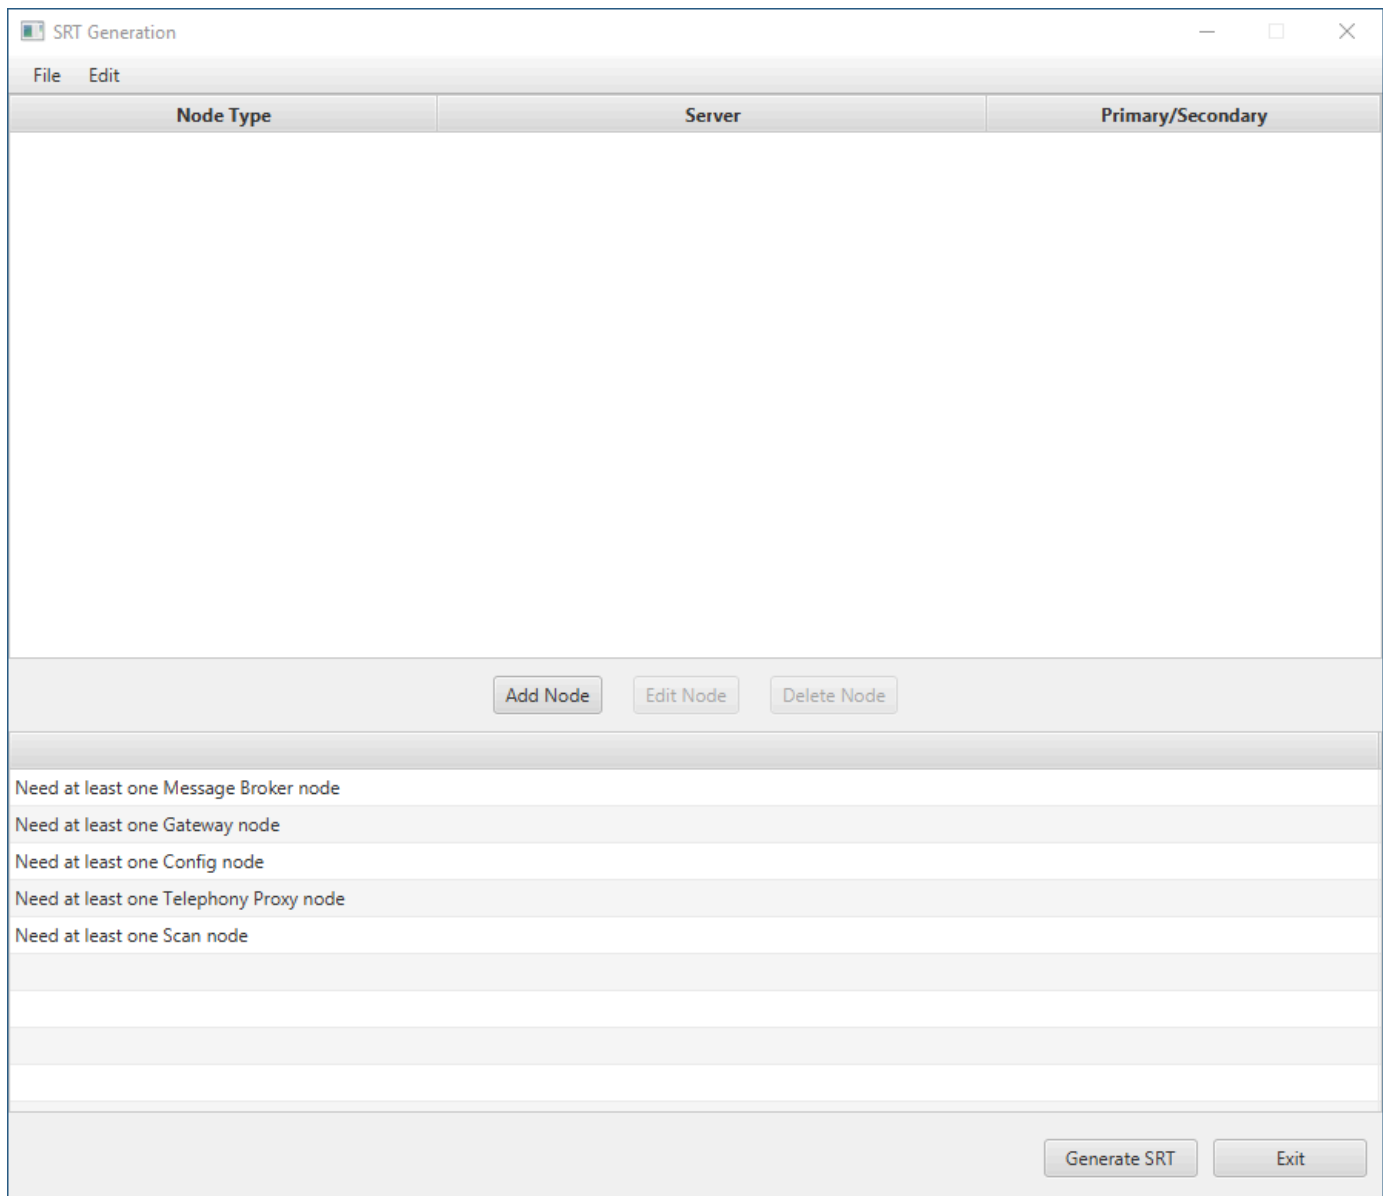


Figure 3. Main Silent Install File Generator Screen

Adding a Message Broker Node

1. Click the Add Node button.
2. In the **Node Type** drop-down, select *Message Broker*.

The 'Add Node' dialog box is shown with the following fields and options:

- Node Type:** Message Broker (dropdown)
- Host Name:** (text input)
- IP Address:** (text input)
- Port:** (text input)
- Node Level:** Primary (dropdown)
- Message Broker Settings** (selected tab)
 - Credentials Username:** admin (text input)
 - Credentials Password:** (text input)
 - ☐ Show Password
 - Confirm Password:** (text input)
- Key/Trust Store Settings** (unselected tab)
- Message Broker Connections**

Name	Protocol	Port	Enable SSL/TLS
No content in table			
- Buttons:** Add Connection, Edit Connection, Remove Connection, Save, Cancel

Figure 4. Initial Message Broker Settings


3. In the **Host Name**, enter the host name of the Message Broker.
4. In the **IP Address**, enter the IP address of the Message Broker.
5. In the **Node Level** drop-down, choose *Primary* if this is the primary Message Broker node or *Secondary* if this is a backup Message Broker node. Only one Primary Message Broker node is allowed and only one Message Broker node can be defined per host server.
6. In the **Message Broker Settings** tab, enter the username and password credentials that external nodes and software will use to connect to the Message Broker.
7. To add a new message broker connection, click the **Add Connection** button and follow these instructions.
8. To edit a message broker connection, select the connection in the table and click the **Edit Connection** button.
9. To delete a message broker connection, select the connections in the table and click the **Remove Connection** button.

NOTE

If using TLS/SSL for any of the defined connections, you will need to create a Keystore with the server's certificate. Go to the **Key/Trust Store Settings** tab and follow these instructions to create the Keystore.

Adding a Message Broker Connection

1. In the Connection Name, enter a unique name for the connection.
2. In the Protocol drop-down, select the protocol to use for the connection. The supported protocols are AMQP, NIO (default), and STOMP.
3. In the Port text box, enter the port number to use for the connection.
4. If the connection uses TLS/SSL, check the "Enable TLS/SSL" checkbox.
5. Click the "Save" button to save the connection settings.

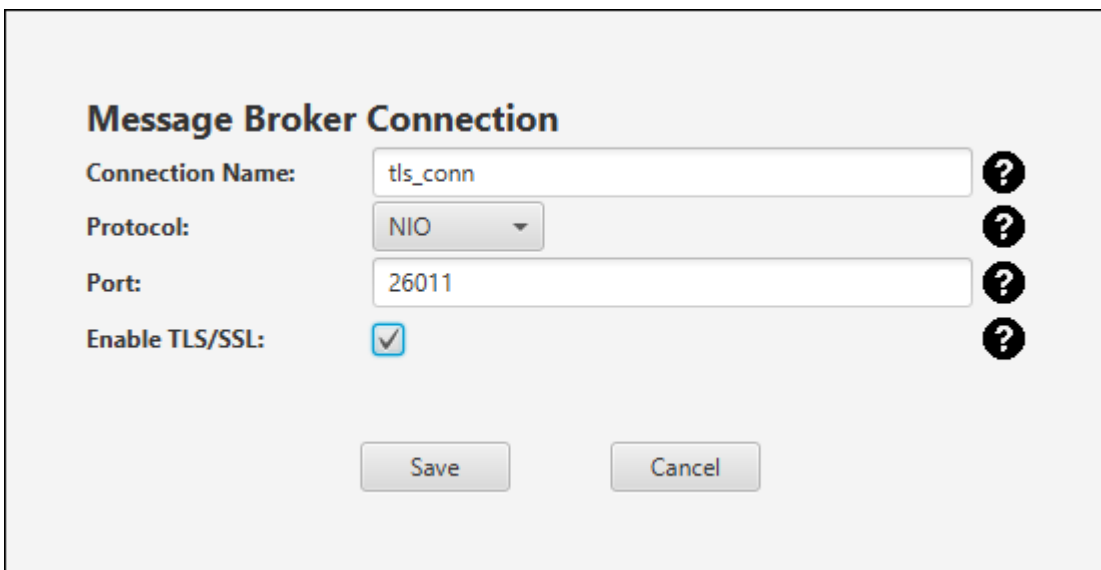

The screenshot shows a dialog box titled "Message Broker Connection". It contains four fields: "Connection Name" with the value "tls_conn", "Protocol" set to "NIO", "Port" with the value "26011", and "Enable TLS/SSL" which is checked. Each field has a help icon (a question mark in a circle) to its right. At the bottom of the dialog are two buttons: "Save" and "Cancel".

Figure 5. Message Broker Connection Completed

Adding a Gateway Service Node

1. Click the Add Node button
2. In the Node Type drop-down, select *Gateway*.

Add Node

Node Type: Gateway

Host Name:

IP Address:

Port: 26022

Node Level: Primary

Security Settings | **Key/Trust Store Settings**

Login Method: PasswordAndDomainLogin

Domain:

HTTPS Enabled: ☐

SIPS Enabled: ☐

Save **Cancel**

Figure 6. Initial Gateway Settings

3. In the **Host Name**, enter the host name of the Gateway.
4. In the **IP Address**, enter the IP address of the Gateway.
5. In the **Port**, enter the port number of the Gateway, the default is 26022.
6. In the **Node Level** drop-down, choose *Primary* if this is the primary Gateway node or *Secondary* if this is a backup Gateway node. Only one Primary Gateway node is allowed and only one Gateway node can be defined per host server.
7. In the **Security Settings** tab
 - In the **Login Method**, select the login method used to connect to the ConnectAPI server
 - If the login method is *PasswordAndDomainLogin*, enter the domain of the user that will connect to the ConnectAPI server
 - If HTTPS is needed for the Gateway connection, check the **HTTPS Enabled** checkbox

The screenshot shows a window titled "Add Node" with a close button (X) in the top right corner. The window is divided into two main sections. The top section contains the following fields:

- Node Type:** A dropdown menu with "Gateway" selected.
- Host Name:** A text box containing "vtest-rtg89.test-domain.com".
- IP Address:** A text box containing "10.1.89.89".
- Port:** A text box containing "26022".
- Node Level:** A dropdown menu with "Primary" selected.

The bottom section is titled "Security Settings" and "Key/Trust Store Settings". It contains the following fields:

- Login Method:** A dropdown menu with "PasswordAndDomainLogin" selected. To its right is a help icon (question mark in a circle).
- Domain:** A text box containing "TEST-DOMAIN". To its right is a help icon (question mark in a circle).
- HTTPS Enabled:** A checkbox that is currently unchecked. To its right is a help icon (question mark in a circle).
- SIPS Enabled:** A checkbox that is currently unchecked. To its right is a help icon (question mark in a circle).

At the bottom right of the window are two buttons: "Save" and "Cancel".

Figure 7. Completed Gateway Settings

Adding a Config Service Node

1. Click the Add Node button
2. In the **Node Type** drop-down, select *Config*.

The screenshot shows a window titled "Add Node" with a close button (X) in the top right corner. The window is divided into two main sections. The top section contains the following fields:

- Node Type:** A dropdown menu with "Config" selected.
- Host Name:** An empty text input field.
- IP Address:** An empty text input field.
- Port:** A text input field containing "26002".
- Node Level:** A dropdown menu with "Primary" selected.

The bottom section is titled "Security Settings" and "Key/Trust Store Settings". It contains the following fields:

- Login Method:** A dropdown menu with "PasswordAndDomainLogin" selected. To its right is a help icon (question mark in a circle).
- Domain:** An empty text input field. To its right is a help icon (question mark in a circle).
- HTTPS Enabled:** An unchecked checkbox. To its right is a help icon (question mark in a circle).
- SIPS Enabled:** An unchecked checkbox. To its right is a help icon (question mark in a circle).

At the bottom right of the window are two buttons: "Save" and "Cancel".

Figure 8. Initial Config Settings

3. In the **Host Name**, enter the host name of the Config.
4. In the **IP Address**, enter the IP address of the Config.
5. In the **Port**, enter the port number of the Config, the default is 26002.
6. In the **Node Level** drop-down, choose *Primary* if this is the primary Config node or *Secondary* if this is a backup Config node. Only one Primary Config node is allowed and only one Config node can be defined per host server.
7. In the **Security Settings** tab
 - In the **Login Method**, select the login method used to connect to the ConnectAPI server
 - If the login method is *PasswordAndDomainLogin*, enter the domain of the user that will connect to the ConnectAPI server
 - If HTTPS is needed for the Config connection, check the **HTTPS Enabled** checkbox

The screenshot shows a window titled "Add Node" with a close button (X) in the top right corner. The window is divided into two tabs: "Security Settings" (selected) and "Key/Trust Store Settings".

Security Settings:

- Node Type:** Config (dropdown menu)
- Host Name:** vtest-rtg89.test-domain.com (text field)
- IP Address:** 10.1.89.89 (text field)
- Port:** 26002 (text field)
- Node Level:** Primary (dropdown menu)
- Login Method:** PasswordAndDomainLogin (dropdown menu) with a help icon (?)
- Domain:** TEST-DOMAIN (text field) with a help icon (?)
- HTTPS Enabled:** ☐ with a help icon (?)
- SIPS Enabled:** ☐ with a help icon (?)

At the bottom right, there are "Save" and "Cancel" buttons.

Figure 9. Completed Config Settings

Adding a Telephony Proxy Service Node

1. Click the Add Node button
2. In the **Node Type** drop-down, select *Telephony Proxy*.

Add Node [X]

Node Type: Telephony Proxy

Host Name: [Text Field]

IP Address: [Text Field]

Port: 26004

Node Level: Primary

Engage Settings | Security Settings | Key/Trust Store Settings

ConnectAPI Host: [Text Field] ?

ConnectAPI User: [Text Field] ?

ConnectAPI Password: [Text Field] ?

☐ Show Password

Re-Enter Password: [Text Field]


Agent Type: Agent ?

[Save] [Cancel]

Figure 10. Initial Telephony Proxy Settings

3. In the **Host Name**, enter the host name of the Telephony Proxy.
4. In the **IP Address**, enter the IP address of the Telephony Proxy.
5. In the **Port**, enter the port number of the Telephony Proxy, the default is 26004.
6. In the **Node Level** drop-down, choose *Primary* if this is the primary Telephony Proxy node or *Secondary* if this is a backup Telephony Proxy node. Only one Primary Telephony Proxy node is allowed and only one Telephony Proxy node can be defined per host server.
7. In the **Engage Settings** tab
 - In the **ConnectAPI Host**, enter the host name of the ConnectAPI server.
 - In the **ConnectAPI User**, enter the username that will connect to the Engage server, without the domain.
 - In the **ConnectAPI Password**, enter the ConnectAPI user's password to connect to the Engage server.
 - In the **Agent Type**, select the agent type from the drop-down list.
 - Select *Agent* to use the agent's ID to subscribe to the ConnectAPI server to receive calls.
 - Select *Extension* type to use the agent's extension to subscribe to the ConnectAPI server to receive calls.
8. In the **Security Settings** tab

- In the **Login Method**, select the login method used to connect to the ConnectAPI server
- If the login method is *PasswordAndDomainLogin*, enter the domain of the user that will connect to the ConnectAPI server
- If HTTPS is needed for the Telephony Proxy connection, check the **HTTPS Enabled** checkbox

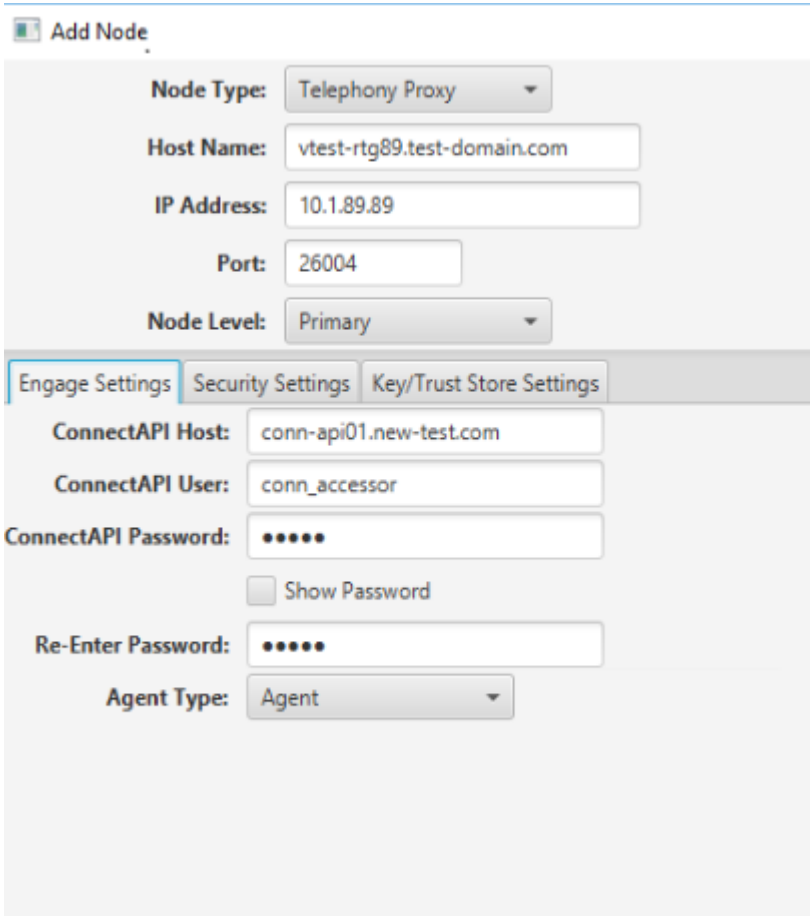

The screenshot shows the 'Add Node' configuration window. The 'Node Type' is set to 'Telephony Proxy'. The 'Host Name' is 'vtest-rtg89.test-domain.com', the 'IP Address' is '10.1.89.89', and the 'Port' is '26004'. The 'Node Level' is set to 'Primary'. Below these fields are three tabs: 'Engage Settings' (selected), 'Security Settings', and 'Key/Trust Store Settings'. Under 'Engage Settings', the 'ConnectAPI Host' is 'conn-api01.new-test.com', the 'ConnectAPI User' is 'conn_accessor', and the 'ConnectAPI Password' is masked with dots. There is a 'Show Password' checkbox which is unchecked. The 'Re-Enter Password' field is also masked with dots. The 'Agent Type' is set to 'Agent'.

Figure 11. Completed Telephony Proxy Settings

Adding a Scan Service Node

1. Click the Add Node button
2. In the **Node Type** drop-down, select *Scan*.

Figure 12. Initial Scan Settings

3. In the **Host Name**, enter the host name of the Scan.
4. In the **IP Address**, enter the IP address of the Scan.
5. In the **Port**, enter the port number of the Scan, the default is 26032.
6. In the **Scan Settings** tab
 - In the **Fully Qualified Domain Name**, enter the full name of the Scan server, i.e. *scan1.mytestdomain.com*.
 - In the **Max Active Calls** field, enter the maximum number of active calls that the Scan server can handle, max value is 5000.
 - Check the **Publish Enlighten Scores** to publish the enlighten scores to the message broker.
 - In the **Frequency** field, enter the number of seconds between publishes of the enlighten scores message to the message broker.
 - Check the **Publish Transcripts** to publish the transcripts to the message broker.

- In the **Frequency** field, enter the number of seconds between publishes of the transcript message to the message broker.
- Select the Workflow Streaming Mode
- If the Workflow Streaming Mode is **LOW_LATENCY_FINALIZING**, you can check the **Publish Finalizing Transcripts** to publish the finalizing transcripts to the message broker.
- In the **Frequency** field, enter the number of seconds between publishes of the finalizing transcript message to the message broker.

Figure 13 shows the 'Completed Scan Settings' dialog box. It features four tabs: 'Scan Settings', 'Engage Settings', 'Security Settings', and 'Key/Trust Store Settings'. The 'Scan Settings' tab is selected. The settings are as follows:

- Fully Qualified Domain Name:** vtest-scan01.test-domain.com
- Max Active Calls:** 110
- Publish Enlighten Scores:** ☒ Frequency (secs): 5
- Publish Transcripts:** ☒ Frequency (secs): 15
- Workflow Streaming Mode:** LOW_LATENCY
- Publish Finalizing Transcripts:** ☒ Frequency (secs): 10

Each field has a question mark icon to its right. At the bottom right are 'Save' and 'Cancel' buttons.

Figure 13. Completed Scan Settings

7. In the **Engage Settings** tab
 - In the **ConnectAPI Host**, enter the host name of the ConnectAPI server.
 - In the **ConnectAPI User**, enter the username that will connect to the Engage server, without the domain.
 - In the **ConnectAPI Password**, enter the ConnectAPI user's password to connect to the Engage server.
8. In the **Security Settings** tab
 - In the **Login Method**, select the login method used to connect to the ConnectAPI server
 - If the login method is *PasswordAndDomainLogin*, enter the domain of the user that will connect to the ConnectAPI server
 - If the Scan connection uses Secure SIP (SIPS), check the **SIPS Enabled** checkbox

Scan Settings Engage Settings **Security Settings** Key/Trust Store Settings

Login Method: PasswordAndDomainLogin ?

Domain: TEST-DOMAIN ?

HTTPS Enabled: ☒ ?

SIPS Enabled: ☒ ?

Save Cancel

Figure 14. Completed Scan Security Settings

NOTE

If SIPS is used for the Scan node, you will need to create a Keystore with the server's certificate. Go to the **Key/Trust Store Settings** tab and follow these instructions to create the Keystore.

Editing a Node

1. Select the node to edit in the table.
2. Click the Edit Node button.
3. Use the same instructions as adding a node for the node type selected.

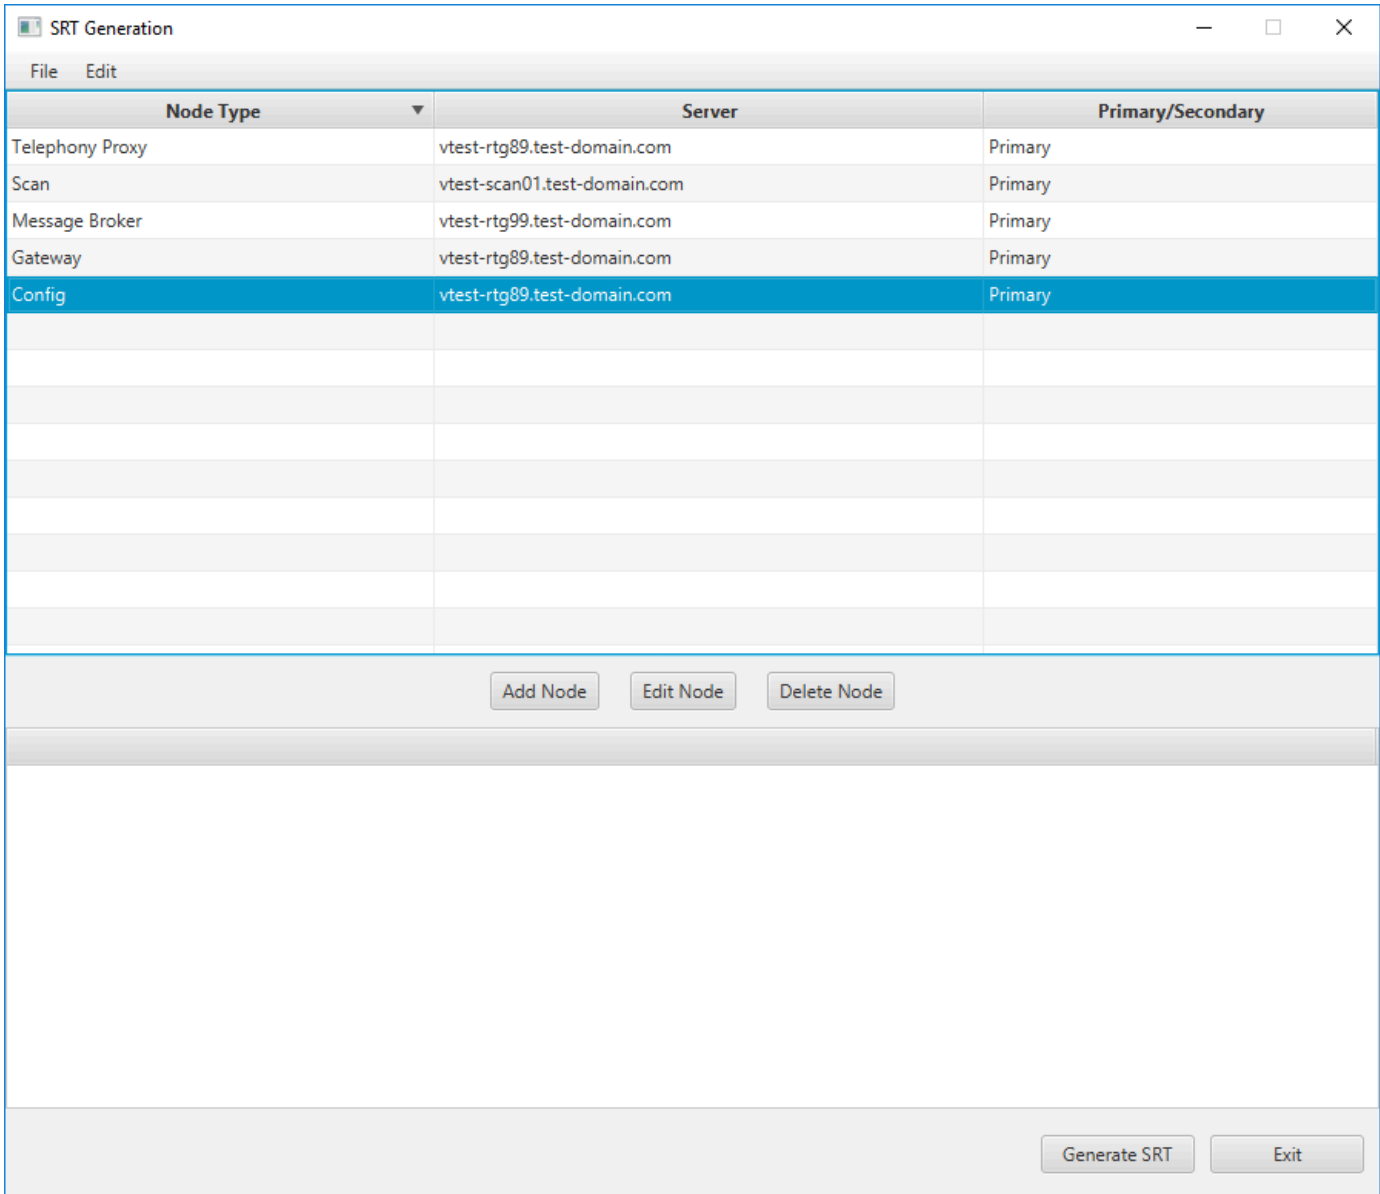


Figure 15. Editing a Node

Deleting a Node

1. Select the nodes to delete in the table.
2. Click the Delete Node button.

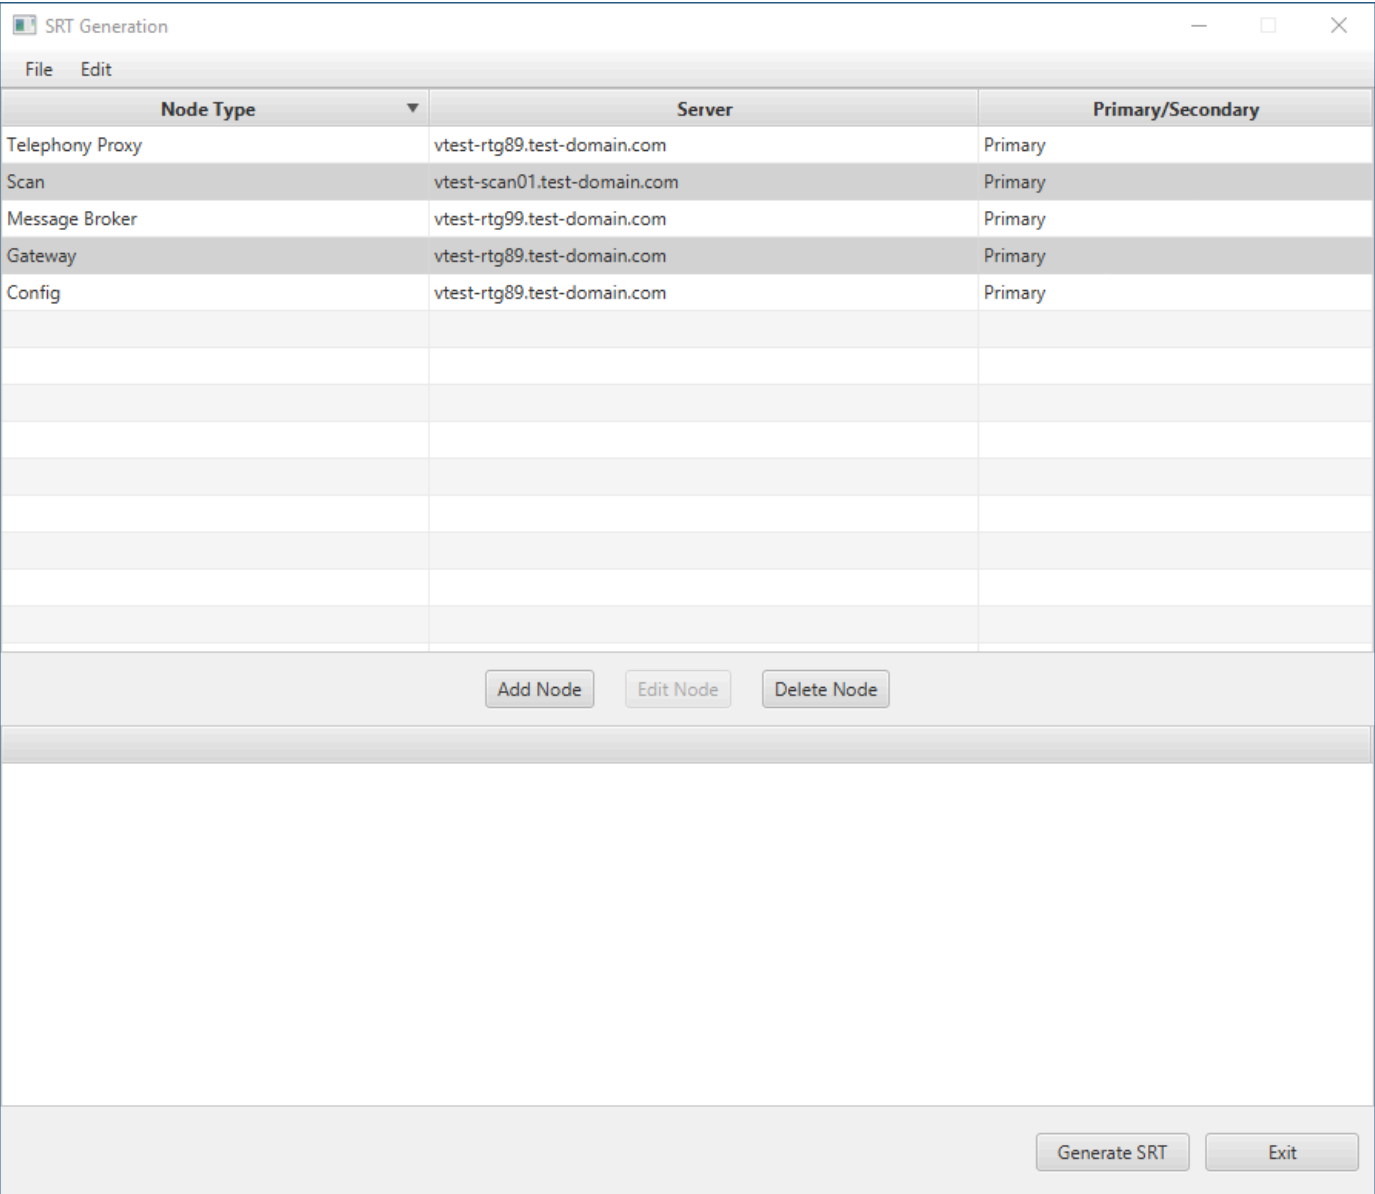


Figure 16. Deleting a Node

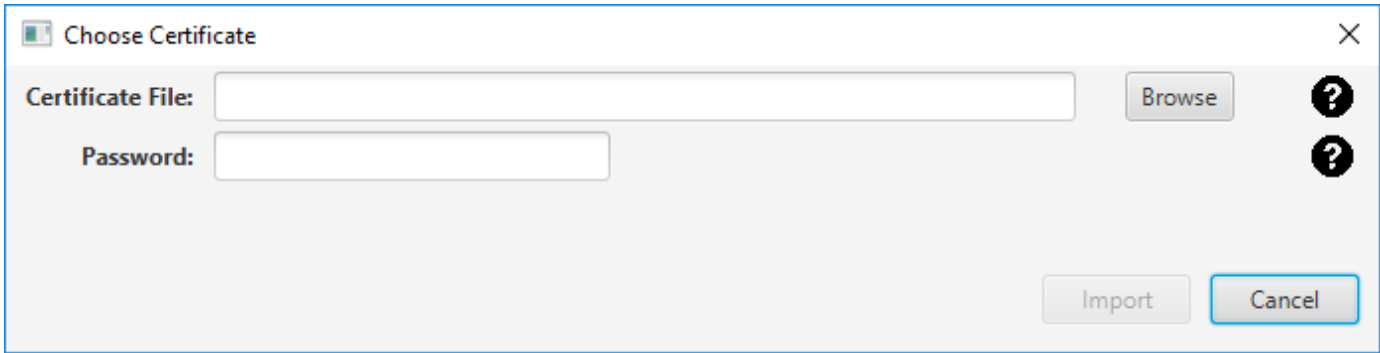


Figure 18. Import Certificate Screen

2. Click the **Browse** button to select the certificate file to import.
3. Enter the password for the certificate file.

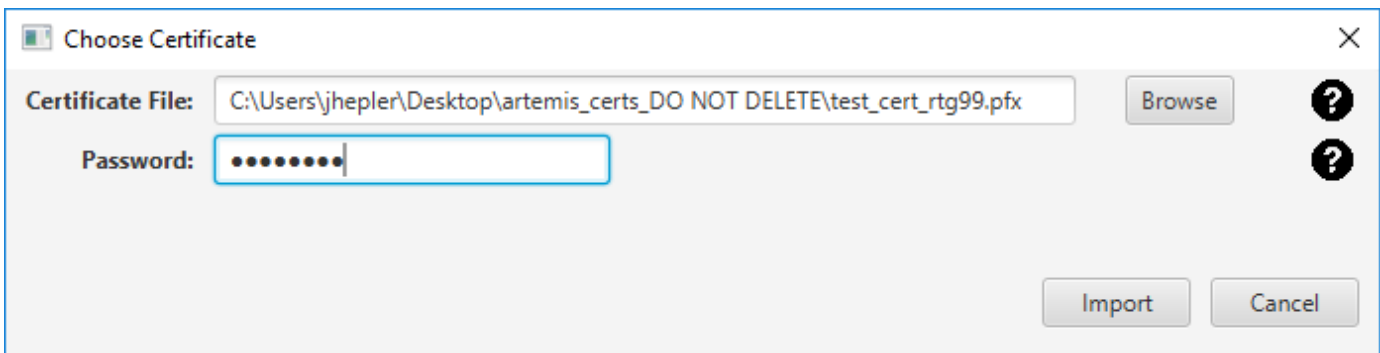


Figure 19. Import Certificate Screen with Certificate Selected

4. Click the **Import** button to import the certificate into the Keystore.
5. If successful, the certificate will be imported into the keystore file for the defined host, the name is automatically generated, ex. [host_name].keystore, and the signing certificates will be imported into the **cacerts** truststore file.

Adding a certificate's signer to the truststore

If a certificate for an external server needs to be trusted, the certificate's signer will need to be imported into the truststore.

1. Click the menu **Edit** → **Add Certificate CA to Trust Store**
2. The Import Certificate screen will be displayed.

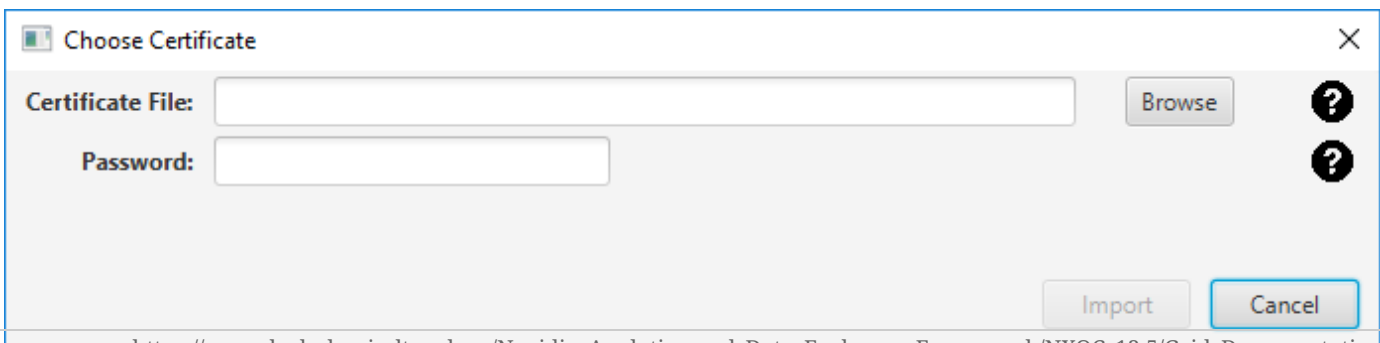


Figure 20. Import Certificate Screen

3. Click the **Browse** button to select the certificate file to import.
4. Enter the password for the certificate file.

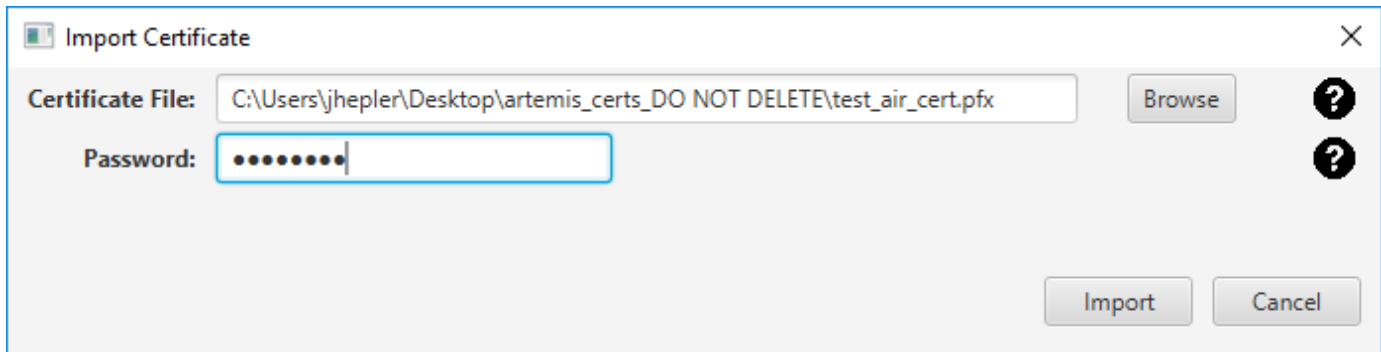


Figure 21. Import Certificate Screen with Certificate Selected

5. Click the **Import** button to import the certificate's signers into the Truststore.
6. The certificate's signers will be imported into the truststore file, **cacerts**.

Generating/Updating the *silent_install_properties.json* file

1. Click the **Generate Silent Installer File** button to generate or update the ***silent_install_properties.json*** file.
2. The ***silent_install_properties.json*** file will be created in the same directory as the Silent Install file generator.
3. If the Silent Install File Generation succeeds, a successful message dialog will display

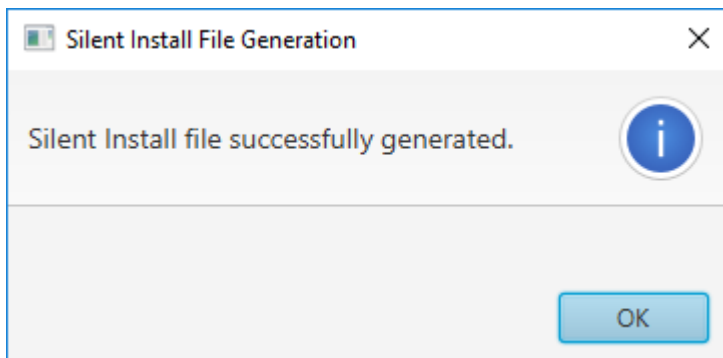


Figure 22. Successful Silent Install File Generation

4. If the Silent Install File Generation fails, the error message dialog will display

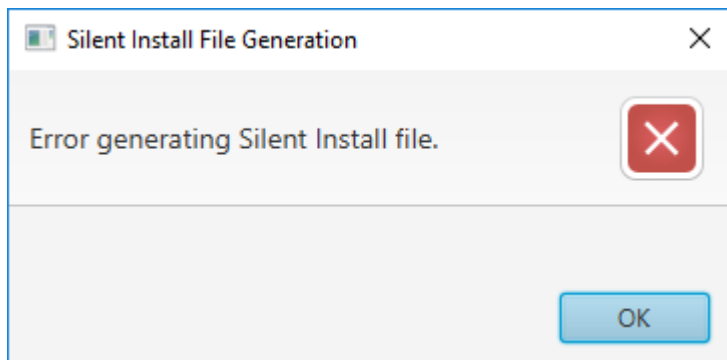


Figure 23. Failed Silent Install File Generation