Machine Translated by Google

HeyStar Cloud SDK Operation Guide v1.0.0

Documentation

The readers of this development document are: developers, maintenance or management personnel who have certain development capabilities and understand JAVA and other development languages

SDK Operation Guide

Environmental requirements

Currently the SDK only supports **Java** JDK

version requirement: 1.8+

Device cloud configuration


Before communicating with the cloud, you must first configure the server in **the** HeyStar management **interface .**

1. Click the Settings button




Machine Translated by Google

2. Enter your password

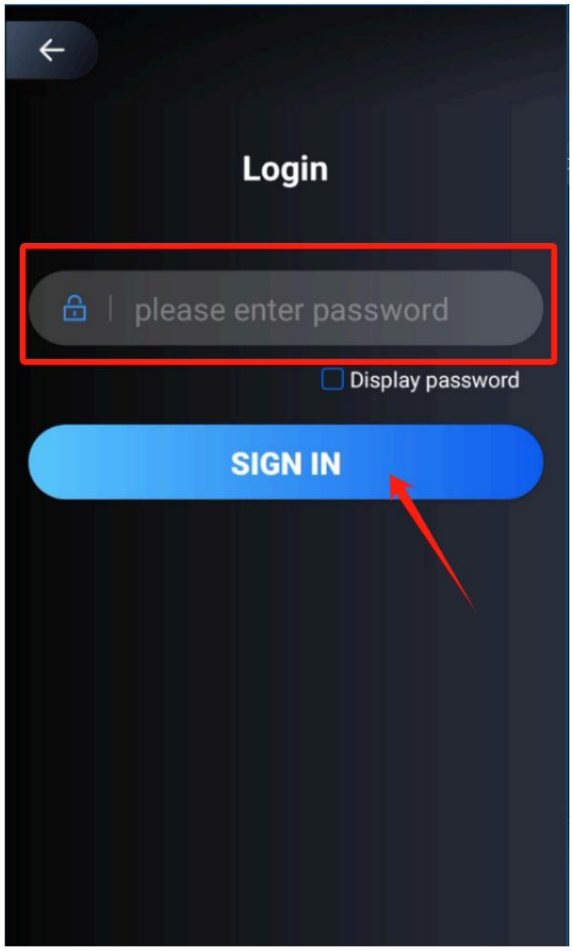


3. Enter the server settings

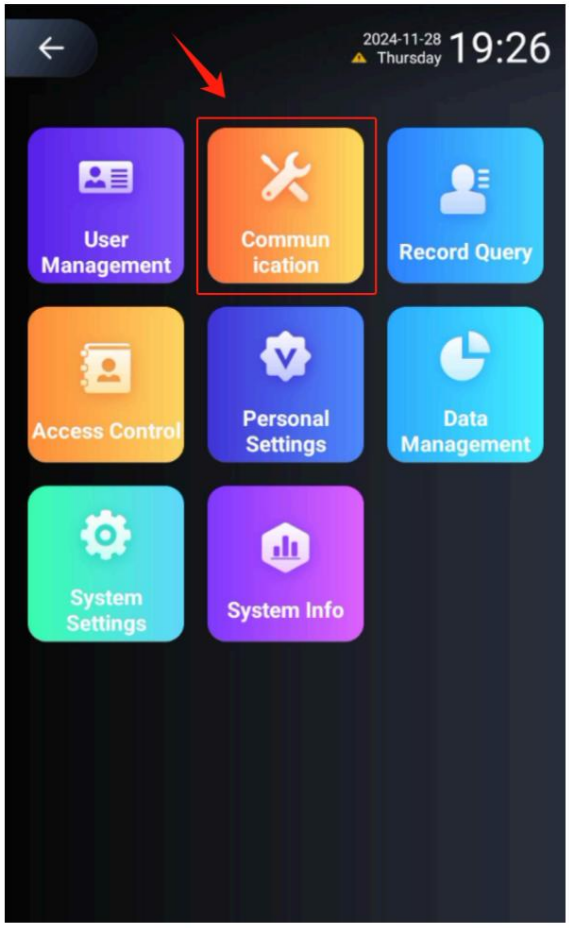

Machine Translated by Google

4. Configure server parameters

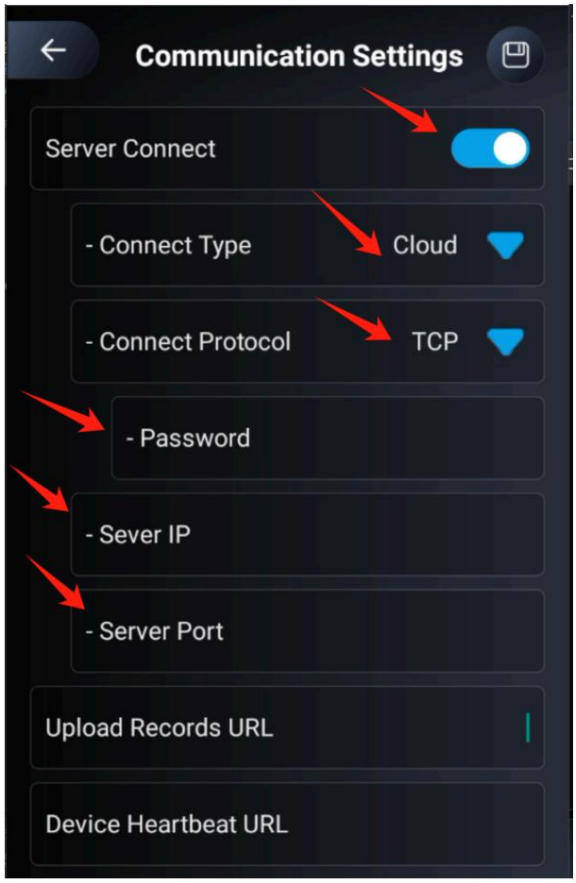

5. Save the configuration

SDK Installation

Add the following dependency packages to the project

```
hf-tcp-gateway-1.x.x.jar netty-
all-4.1.113.Final.jar fastjson-1.2.83.jar
```

If you use Maven, you can first **install the SDK (the installation script is in the bin directory in the demo),** and then import it:

```
<dependency>
        <groupId>com.hfims.boot</groupId>
        <artifactId>hf-tcp-gateway</artifactId> <version>1.x.x</
        version> </dependency>
<dependency>

        <groupId>io.netty</groupId>
        <artifactId>netty-all</artifactId>
        <version>4.1.113.Final</version>
</dependency>
<dependency>
        <groupId>com.alibaba</groupId>
        <artifactId>fastjson</artifactId>
        <version>1.2.83</version> </
dependency>
<dependency>
        <groupId>org.slf4j</groupId>
        <artifactId>slf4j-api</artifactId>
```

Machine Translated by Google

```
<version>${slf4j.version}</version> <scope>provided</
scope> </dependency>
```

Interface Description (HfDeviceClient.class)

Device related interfaces

Link test

```
// hostInfo cloud host
information // deviceKey device
serial number // secret device communication key
HfDeviceResp test(HostInfoDto hostInfo, String deviceKey, String secret)
```

Example:

```
host: 47.107.210.227 ,port: 10011 ,timeout: 5000 send++++++++++>

{"cmd":"test_req","deviceKey":"CE560A71B5383573","nonce":"4ylhk2","seqId":"a5e7ac 0e-0afc-43f4-b2fd-
b14b44cd9026","sign":"75a2cc3b3fea40cc664bcd9500b3e573"} ----------ÿÿÿ----------

recv++++++++++>
{"cmd":"test_resp","code":"000","msg":"success","seqId":"a5e7ac0e-0afc-43f4-b2fd-b14b44cd9026"} ##time.....94
```

Device restart

```
/** *
  Restart
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key */

HfDeviceResp deviceReboot(HostInfoDto hostInfo, String deviceKey, String secret)
```

Machine Translated by Google

Device upgrade apk

```
/** *
  Device upgrade apk
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  device upgrade apk transfer object */

HfDeviceResp deviceUpgradeApk(HostInfoDto hostInfo, String deviceKey, String secret, DeviceUpgradeApkReq req)
```

Get device information

```
/** *
  Get device information
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key */

HfDeviceResp deviceGet(HostInfoDto hostInfo, String deviceKey, String secret)
```

Device Reset

```
/**
  * Reset
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key device reset
  @param req */                    request object *

HfDeviceResp deviceReset(HostInfoDto hostInfo, String deviceKey, String secret,
DeviceResetReq req)
```

Machine Translated by Google

Get device configuration

```
/** *
    Get device configuration information
    *
    * @param hostInfo cloud host information
    * @param deviceKey device serial number
    * @param secret device key * @param
    req device configuration to obtain the transmission
object */
HfDeviceResp deviceGetConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceGetConfigReq req)
```

Send all device configurations

```
/** *
  Configure the device
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key device
  transmission                configuration
  object * @param req */
HfDeviceResp deviceSetConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetConfigReq req)
```

Send device identification configuration

```
/** *
  Identify configuration
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req device configuration transfer object */

HfDeviceResp deviceSetRecConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetRecConfigReq req)
```

Machine Translated by Google

Send device identification mode configuration

```
/**
 * Identification mode configuration
 *
 * @param hostInfo cloud host information
 * @param deviceKey device serial number
 * @param secret device key * @param
 req device configuration transfer object */

HfDeviceResp deviceSetRecModeConfig(HostInfoDto hostInfo, String deviceKey,
String secret, DeviceSetRecModeConfigReq req)
```

Send device peripheral configuration

```
/**
 * Device peripheral configuration
 *
 * @param hostInfo cloud host information
 * @param deviceKey device serial number
 * @param secret device key device
 transmission configuration
 object * @param req */
HfDeviceResp deviceSetPciConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetPciConfigReq req)
```

Send device UI configuration

```
/**
 * Device UI configuration
 *
 * @param hostInfo cloud host information
 * @param deviceKey device serial number
 * @param secret device key * @param
 req device configuration transfer object */

HfDeviceResp deviceSetUiConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetUiConfigReq req)
```

Machine Translated by Google

Send server communication configuration

```
/** *
   Device server communication configuration
   *
   * @param hostInfo cloud host information *
   @param deviceKey device serial number *
   @param secret device key * @param req
   device configuration transfer object */

HfDeviceResp deviceSetSevConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetSevConfigReq req)
```

Send custom configuration to devices

```
/** *
   Device custom configuration
   *
   * @param hostInfo cloud host information *
   @param deviceKey device serial number *
   @param secret device key device
   transmission object                configuration
   * @param req */
HfDeviceResp deviceSetCstConfig(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetCstConfigReq req)
```

Device remote control output

```
/** *
   Device remote control output
   *
   * @param hostInfo cloud host information *
   @param deviceKey device serial number *
   @param secret device key * @param req
   device remote control output transmission object */

HfDeviceResp deviceOutput(HostInfoDto hostInfo, String deviceKey, String secret,
DeviceOutputReq req)
```

Machine Translated by Google

Device setup wired network

```
/** *
    Device settings wired network
    *
    * @param hostInfo cloud host information
    * @param deviceKey device serial number
    * @param secret device key * @param
    req wired network configuration transmission object */

HfDeviceResp deviceSetNetwork(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetNetworkReq req)
```

Device settings wireless network

```
/** *
    Device settings for wireless network
    *
    * @param hostInfo cloud host information
    * @param deviceKey device serial number
    * @param secret device key wireless
    transmission network configuration
object * @param req */
HfDeviceResp deviceSetWiFi(HostInfoDto hostInfo, String deviceKey, String secret,
DeviceSetWifiReq req)
```

Device setting reporting address

```
/** *
    Device settings reporting address
    *
    * @param hostInfo cloud host information
    * @param deviceKey device serial number
    * @param secret device key * @param
    reqList device reported address transmission object list */

HfDeviceResp deviceSetUploadUrl(HostInfoDto hostInfo, String deviceKey, String secret, List<DeviceSetUploadUrlReq> reqList)
```

Machine Translated by Google

Equipment setup time

```
/** *
  Device setting time
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req device setting time transmission object */

HfDeviceResp deviceSetTime(HostInfoDto hostInfo, String deviceKey, String secret,
DeviceSetTimeReq req)
```

Request Description:

- After successful configuration, the device time will be changed to the currently set time.
- If the device is connected to the public network, the device itself has a network time calibration mechanism, which will calibrate the time online every 5 minutes to adjust the device time to the public network time.
- If you want the device to display the manually set time, the device must be in the local area network. If connected to the public network, the device will use the public network time by default when refreshing its own time.

Device local password setting

```
/** *
  Device local password settings
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req device set local password transmission object */

HfDeviceResp deviceSetLocalPwd(HostInfoDto hostInfo, String deviceKey, String secret, DeviceSetLocalPwdReq req)
```

Personnel related interface

Personnel creation

```
/** *
  Personnel creation
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key personnel
  object * @param create transfer
  req */
```

Machine Translated by Google

```
HfDeviceResp personCreate(HostInfoDto hostInfo, String deviceKey, String secret,
PersonCreateReq req)
```

Staff Update

```
/** *
  Personnel creation
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial
  number * @param secret device key
  transmission                personnel update
  object * @param req */
HfDeviceResp personUpdate(HostInfoDto hostInfo, String deviceKey, String secret,
PersonUpdateReq req)
```

Personnel creation or update

```
/** *
  Personnel creation or update
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial
  number * @param secret device key
  transfer object *           personnel create
  @param req */
HfDeviceResp personMerge(HostInfoDto hostInfo, String deviceKey, String secret,
PersonCreateReq req)
```

Personnel deletion

```
/** *
  Personnel deletion
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial
  number * @param secret device key
  transfer object *           personnel delete
  @param req */
HfDeviceResp personDelete(HostInfoDto hostInfo, String deviceKey, String secret,
PersonDeleteReq req)
```

Machine Translated by Google

Clearing of personnel

```
/** *
  Staff clearing
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key */

HfDeviceResp personEmpty(HostInfoDto hostInfo, String deviceKey, String secret)
```

People Search

```
/** *
  Person search
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  personnel search transfer object */

HfDeviceResp personFind(HostInfoDto hostInfo, String deviceKey, String secret,
PersonFindReq req)
```

Person list search

```
/** *
  Search for personnel list
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key personnel list
  * @param req */                    to find the transfer object

HfDeviceResp personFindList(HostInfoDto hostInfo, String deviceKey, String secret, PersonFindListReq req)
```

Machine Translated by Google

Add or update personnel time period

```
/** *
  Add or update personnel time period
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req personnel time period to add or update the transmission
  object */
HfDeviceResp personPasstimeMerge(HostInfoDto hostInfo, String deviceKey, String secret, PersonPasstimeMergeReq req)
```

Delete people through time limit

```
/** *
  Personnel time period deletion
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key personnel
  object * @param time period delete transfer
  req */
HfDeviceResp personPasstimeDelete(HostInfoDto hostInfo, String deviceKey, String secret, PersonPasstimeDeleteReq req)
```

Photo related interface

Add photos

```
/** *
  Add or update face
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req face add or update transmission object */

HfDeviceResp faceMerge(HostInfoDto hostInfo, String deviceKey, String secret,
FaceMergeReq req)
```

Request Description:

- You must register a person before you can add a photo
- If the faceId input content is empty, the system will automatically generate a 32-bit faceId and return it after the photo is successfully registered.
- The image format supports png, jpg, and jpeg; no header is added, such as: data:image/jpg;base64

Machine Translated by Google

Photo search

```
/** *
  Face search
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req face search transmission object */

HfDeviceResp faceFind(HostInfoDto hostInfo, String deviceKey, String secret,
FaceFindReq req)
```

Delete photos

```
/** *
  Face deletion
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key face
  transmission deletion
  object * @param req */
HfDeviceResp faceDelete(HostInfoDto hostInfo, String deviceKey, String secret,
FaceDeleteReq req)
```

Record related interfaces

Pass record list search

```
/** *
  Pass record list search
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key pass
  transmission record list to find the
  object * @param req */
HfDeviceResp recordFindList(HostInfoDto hostInfo, String deviceKey, String secret, RecordFindListReq req)
```

Machine Translated by Google

Communication record search

```
/** *
  Travel record search
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  pass record to find the transmission object */

HfDeviceResp recordFind(HostInfoDto hostInfo, String deviceKey, String secret,
RecordFindReq req)
```

Communication record deletion

```
/** *
  Delete the access record
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key pass record
  @param req */                    delete transfer object *

HfDeviceResp recordDelete(HostInfoDto hostInfo, String deviceKey, String secret,
RecordDeleteReq req)
```

Access control related interfaces

Add or update access control group

```
/** *
  Add or update access control group
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  access control group add or update transmission object */

HfDeviceResp acGroupMerge(HostInfoDto hostInfo, String deviceKey, String secret,
AcGroupMergeReq req)
```

Machine Translated by Google

Access control group list search

```
/** *
  Access control group list search
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  access control group list to find the transmission object */

HfDeviceResp acGroupFindList(HostInfoDto hostInfo, String deviceKey, String secret, AcGroupFindListReq req)
```

Access control group deletion

```
/** *
  Access control group deletion
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key access control
  object * @param group delete transfer
  req */
HfDeviceResp acGroupDelete(HostInfoDto hostInfo, String deviceKey, String secret,
AcGroupDeleteReq req)
```

Time period added or updated

```
/** *
  Add or update time period
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  time period to add or update the transmission object */

HfDeviceResp acTimezoneMerge(HostInfoDto hostInfo, String deviceKey, String secret, AcTimezoneMergeReq req)
```

Machine Translated by Google

Time period list search

```
/** *
  Time period list search
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  req time period list to find the transmission object */

HfDeviceResp acTimezoneFindList(HostInfoDto hostInfo, String deviceKey, String secret, AcTimezoneFindListReq req)
```

Time period deletion

```
/** *
  Time period deletion
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key time period
  @param req */                    delete transfer object *

HfDeviceResp acTimezoneDelete(HostInfoDto hostInfo, String deviceKey, String secret, AcTimezoneDeleteReq req)
```

Fingerprint related interfaces

Fingerprint addition or update

```
/** *
  Fingerprint addition or update
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial number
  * @param secret device key * @param
  reqList fingerprint to add or update the transmission
  object */
HfDeviceResp fingerMerge(HostInfoDto hostInfo, String deviceKey, String secret,
List<FingerMergeReq> reqList)
```

Machine Translated by Google

Fingerprint list search

```
/** *
  Fingerprint list search
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param req
  fingerprint list to find the transfer object */

HfDeviceResp fingerFindList(HostInfoDto hostInfo, String deviceKey, String secret, FingerFindListReq req)
```

Fingerprint Removal

```
/** *
  Fingerprint deletion
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key fingerprint
  * @param req */                    delete transfer object

HfDeviceResp fingerDelete(HostInfoDto hostInfo, String deviceKey, String secret,
FingerDeleteReq req)
```

Palm vein related interface

Palm vein addition or update

```
/** *
  Palm vein addition or update
  *
  * @param hostInfo cloud host information *
  @param deviceKey device serial number *
  @param secret device key * @param reqList
  palm vein add or update transmission object */

HfDeviceResp palmMerge(HostInfoDto hostInfo, String deviceKey, String secret,
List<PalmMergeReq> reqList)
```

Machine Translated by Google

Palm vein list search

```
/** *
  Palm vein list search
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial
  number * @param secret device key *
  @param req palm vein list to find the transmission
  object */
HfDeviceResp palmFindList(HostInfoDto hostInfo, String deviceKey, String secret,
PalmFindListReq req)
```

Palm vein removal

```
/** *
  Palm vein deletion
  *
  * @param hostInfo cloud host information
  * @param deviceKey device serial
  number * @param secret device key
  transmission                palm vein delete
  object * @param req */
HfDeviceResp palmDelete(HostInfoDto hostInfo, String deviceKey, String secret,
PalmDeleteReq req)
```

appendix

HfDeviceResp

```
/** *
  Return result
  */
public class HfDeviceResp { // ... private
        String
        cmd; // Commandprivate String seqId; //
        Serial ID private String code; // Return
        codeprivate String msg; // Return
        informationprivate Object data ; // Returned
        data object // ...

}
```

Machine Translated by Google

HostInfoDto

```
/** *
  Host
  information */
public class HostInfoDto { private String host; //
        Cloud IP address private int port; // Cloud port number private
        int timeout = 15000; // Interface connection timeout,
        default 15000 milliseconds // ...

}
```

DeviceResetReq

```
/** *
  Device reset interface request
  object */
public class DeviceResetReq {

        /** *
          Device reset type *
          Personnel registration information, personnel feature information, identification record
          *
              <p> *
          1 All data * 2
          Personnel registration
          information * 3 Personnel
          photo information * 4
          Personnel feature
          information * 5 Identification record */
        private Integer type; // ...

}
```

DeviceGetConfigReq

```
/** *
  Get the configuration interface request
  object */
public class DeviceGetConfigReq {

        /** *
          Configuration type
          * 1 Identification
          configuration * 2 Identification
          mode configuration * 3
          Peripheral configuration * 4 Display configuration
          * 5 Server Configuration
          * 6 Custom Configuration
          */
```

Machine Translated by Google

```
    private Integer type; // ...

}
```

DeviceSetConfigReq

```
/** *
  Device configuration interface request
  object */
public class DeviceSetConfigReq {

    //region recognition related

    configuration /** * 1vN portrait
      recognition
      threshold * 65 (default) * Actually all integers between
      0-100 are allowed. * Tip: Please enter an integer between
      50-100 . * The higher the score, the higher the recognition accuracy, but
      the recognition speed will be slower. */
    private Integer recThreshold1vN = 65; /** * 1v1 face recognition

    threshold * 65 (default) *
      Please enter an
      integer between 50-100. The higher the score, the higher the recognition accuracy, but the recognition

    speed will be slower. */ private Integer recThreshold1v1 = 60; /** *

    Recognition interval (the interval between callback notifications after consecutive successful
      recognitions of the same person), default 3 seconds */
    private Integer recInterval = 3; /** * Recognition

    distance:
      * 0: No limit (default) * 1:
      Within 0.5 meters * 2:
      Within 1 meter *
      3: Within 1.5 meters *
      4: Within 2
      meters * 5: Within
      3 meters * 6:
      Within 4 meters */
    private Integer recDistance = 0; /** * Level of liveness

    detection: * 1. No
      liveness detection (default) * 2.
      Monocular liveness
      * 3. Binocular liveness
      */
    private Integer recRank = 1; /** * Successful

    voice recognition mode: *
      1. No voice broadcast
      * 2. Name broadcast (default)
      * 100. Custom voice broadcast
```

Machine Translated by Google

```
     */
    private Integer recSucTtsMode = 2; /** * Customized voice

    content * If
      recSucTtsMode is 100, this field must be passed and cannot be empty * {name} is
      allowed. The field format is fixed, and other content only allows numbers, English and
      Chinese characters, * The length is limited to 255 characters. For
      example: {name} Welcome */
    private String recSucTtsCustom = "{name}"; /** * Display mode * 1: Name

    (default) * 2: No
      content displayed * 100:
      Custom display */


    private Integer recSucDisplayMode = 1; /** * Display custom content *
    If
      recSucDisplayMode is
      100, this field must be passed and cannot be empty * {name} is allowed. The field format
      is fixed, and other content only allows numbers, Chinese and English, and Chinese and English symbols, with a length limit of 255
characters. For example: {name}, sign in successfully!
     */
    private String recSucDisplayCustom = "{name}"; /** * Switch for identifying strangers:
    * 0.
      Do not identify strangers
      * 1. Identify strangers
      (default) */

    private Integer recStrangerEnable = 1; /** * How many times of

    identification failures will it be considered a
      stranger */
    private Integer recIsStrangerTimes = 2; /** * Stranger voice mode * 1:
    No
      voice broadcast (default)
      * 2: Voice broadcast "The person
      is not registered, please contact the administrator" * 100:
      Custom stranger voice */

    private Integer recStrangerTtsMode = 1; /** * Voice broadcast custom

    content. If recStrangerTtsMode is 100, this field must be passed and cannot be empty . * The content only allows numbers,
      English and Chinese characters, and the length is limited to 255 characters. For example: Be
      careful of strangers */
    private String recStrangerTtsCustom; /** * Stranger screen display
    text
      type * 1. Person is not registered
      (default) * 100. Custom */


    private Integer recStrangerDisplayMode = 1; /** * Customized text displayed on
    the
      stranger screen * If recStrangerDisplayMode
      is 100, this field must be passed and cannot be empty * The content only allows numbers, Chinese
      and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The
      person is not registered! */
```

Machine Translated by Google

```
    private String recStrangerDisplayCustom; /** * Non-living voice mode * 1: No
    voice
      broadcast (default) * 2:
      Voice broadcast "Do not try to use
      photos or videos for recognition" * 100: Custom non-living voice
      */

    private Integer recNotBioTtsMode = 1; /** * Voice broadcast custom

    content. If recNotBioTtsMode is 100, this field must be passed and cannot be empty. * The content only allows numbers,
      English and Chinese characters, and the length is limited to 255 characters. For example: Do not try to use photos or videos
      for recognition */
    private String recNotBioTtsCustom; /** * Non-living screen display
    text
      type * 1 Do not try to use photos or
      videos for recognition * 100 Custom */


    private Integer recNotBioDisplayMode = 1; /** * Customized text displayed on
    the
      non-living screen * If recNotBioDisplayMode is
      100, this field must be passed and cannot be empty * Only numbers, Chinese and English, and
      Chinese and English symbols are allowed, and the length is limited to 255 characters. For example: Do not try to use photos or videos for recognition
Don't!
      */
    private String recNotBioDisplayCustom; /** * Insufficient authority voice
    mode
      * 1: No voice broadcast * 2:
      Voice broadcast
      "Insufficient authority, please contact the administrator" (default) * 100:
      Custom insufficient authority voice */

    private Integer recNoPerTtsMode = 2; /** * Voice broadcast custom

    content. If recNoPerTtsMode is 100, this field must be passed and cannot be empty. * The content only allows numbers,
      English and Chinese characters, and the length is limited to 255 characters. If you do not have enough permissions,
      please contact the administrator. */
    private String recNoPerTtsCustom; /** * Insufficient permissions,

    screen display text type * 1 Insufficient
      permissions, please contact the
      administrator * 100
      Custom */
    private Integer recNoPerDisplayMode = 1; /** * Insufficient permissions to

    display custom text on the screen * If
      recNoPerDisplayMode is 100, this field must be passed and cannot be empty * The content only
      allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If you do not have
      enough permissions, please contact the administrator! */
    private String recNoPerDisplayCustom; /** * Identify whether a stranger

    opens the door * 0: Do not open
      the door * 1 :
      Open the door
      */
    private Integer recStrangerOpenDoor = 0;
```

Machine Translated by Google

```
        /** *
          Recognize multiple
          people * 0 Single person
          recognition * 1 Multiple people recognition
          */
        private Integer recMultiplayer = 0; /** * Recognize and
        save the snapshot *
          0: Do not
          save * 1 :
          Save */
        private Integer recSnapshotSave = 1; /** * Identify the
        saved record * 0
          Do not save
          * 1 Save
          */
        private Integer recRecordSave = 1; /** * Recognition
        record save days *
          Default save
          time is 7 days */
        private Integer recRecordSaveDays = 7; /** * Identify
        record upload mode * 1
          Real-time
          upload * 2
          Breakpoint resume */
        private Integer recRecordUploadMode = 1;

        /** *
          Whitelist switch for identity verification
          * 0: Off (default), after reading the ID card, the person-ID comparison process will be carried out
          directly * 1: On, the ID card number is read and compared with the ID card numbers of all personnel in the database. If it exists, the person-ID comparison will be carried out; if it does
not exist, it will prompt
          that the authority is insufficient */
        private Integer recWhitelistIdcard = 0; //endregion


        //region recognition mode

        configuration /** * Face
          recognition
          mode switch * 0.Off * 1.On (default)
          */
        private Integer recModeFaceEnable = 1; /** * Card swiping
        mode switch * 0
          off * 1
          on (default)
          */
        private Integer recModeCardEnable = 1; /** * Card number
        transmission
          interface * 1 Wiegand (default)
          * 2 TTL serial ports
```

Machine Translated by Google

```
     * 3 USB
     */
    private Integer recModeCardIntf = 1; /** * This field is effective

    when the card number transmission interface is configured
     as a serial port. * Port number
     of the serial
     port for card
     number transmission * 1
     ttyS1 * 2 ttyS2
     * 3 ttyS3 (default)
     * 4 ttyS4 * 100 custom */
    private Integer recModeCardIntfPort = 3; /** * This field takes effect when the
    card
     number transmission interface port is configured as 100. * Customize
     the port number of the card number transmission interface
     */
    private String recModeCardIntfPortCustom; /** * This field is effective when the card

    number transmission interface is configured as a serial port. * The
     baud rate of the serial port for transmitting the card number
     * 1 9600
     * 2 19200
     * 3 38400
     * 4 115200 (default)
     */
    private Integer recModeCardIntfBaudrate = 4; /** * Person-ID

    verification switch
     * 0 is off (default)
     * 1 is on
     */
    private Integer recModeIdcardEnable = 0; /** * ID card

    module transmission interface
     * 1 TTL serial port
     * 2 232 serial ports
     * 3 USB (default)
     */
    private Integer recModeIdcardIntf = 3; /** * This field is effective when
    the
     ID card transmission interface is configured as a serial port. *
     The port number of the ID card transmission serial port
     * 1 ttyS1 * 2
     ttyS2 (default) * 3
     ttyS3 * 4
     ttyS4 * 100
     custom
     */
    private Integer recModeIdcardIntfPort = 2; /** * This field takes effect when
    the
     ID card transmission interface port is configured as 100. *
     Customize the port number of the ID card transmission interface
     */
    private String recModeIdcardIntfPortCustom; /**
```

Machine Translated by Google

```
     * This field is effective when the ID card transmission interface is configured as a serial
     port. * The baud rate of the ID card transmission serial port
     * 1 9600
     * 2 19200
     * 3 38400
     * 4 115200 (default) */

    private Integer recModeIdcardIntfBaudrate = 4; /** * QR code

    scanning mode switch
     * 0: Disable
     (default)
     *
    1 : Enable */ private Integer recModeQrcodeEnable = 0; /
    ** *
     QR code
     transmission interface
     * 1.TTL serial port (default) * 2.232 serial port
     * 3.USB
     */
    private Integer recModeQrcodeIntf = 1; /** * This field is

    effective when the QR code transmission interface is
     configured as a serial port. *
     Port number
     of the QR code
     transmission
     serial port * 1
     ttyS1 * 2 ttyS2 (default) * 3 ttyS3 * 4 ttyS4 * 100 Custom
     */
    private Integer recModeQrcodeIntfPort = 2; /** * When the QR code

    transmission interface port is configured as 100 , this field takes
     effect . * Customize the port number of the
     QR code transmission interface */
    private String recModeQrcodeIntfPortCustom; /** * This field is effective when the
    QR
     code transmission interface is configured as a serial port. * The
     baud rate of the QR code transmission serial port
     * 1 9600
     * 2 19200
     * 3 38400
     * 4 115200 (default) */

    private Integer recModeQrcodeIntfBaudrate = 4; /** * Palmprint

    recognition
     switch * 0: Disable
     (default)
     * 1 : Enable */
    private Integer recModePalmEnable = 0; /** *

    Fingerprint
     recognition
     switch *
     0 is off (default) * 1 is on */
```

Machine Translated by Google

```
    private Integer recModeFingerEnable = 0; //endregion


    //region peripheral

    configuration /** *
      Relay output * 0 does not open the door
      * 1 Open door
      (default) */
    private Integer pciRelayOut = 1; /** * Relay mode * 1

    Normally open *
      2 Normally
      closed */

    private Integer pciRelayMode = 1; /** * Relay control
    time
      * 1000ms (default) *
      The time interval
      between the relay controlling the door opening and closing, the default is 1000ms. Please enter an integer between 100-25500, round down
For example, if you enter an integer between 101 and 199 , the actual time taken effect is 100ms.
      */
    private Integer pciRelayDelay = 1000; /** * Wiegand type * 1.

    Wiegand 26
      (default) * 2. Wiegand 34
      * 3. Wiegand 37


      */
    private Integer pciWgType = 1; /** * Wiegand

    output type * 0. No
      output (default) * 1.
      Output personnel ID *
      2. Output card
      number */
    private Integer pciWgOut = 0; /** * Serial port

    output type * 0. No
      output (default) * 1.
      Output personnel ID *
      2. Output card
      number * 3. Output
      ID card * 100. Custom
      */
    private Integer pciComOut = 0; /** * Serial port

    outputs custom content */

    private String pciComOutCustom; /** * Serial port

    output port * 1 ttyS1
      * 2 ttyS2 * 3
      ttyS3 * 4 ttyS4
```

Machine Translated by Google

```
     * 100 Custom
     */
    private Integer pciComOutPort = 4; /** * Custom

    serial port output port */

    private String pciComOutPortCustom; /** * Serial
    port
     output baud rate
     * 1 9600
     * 2 19200
     * 3 38400
     * 4 115200 (default) */

    private Integer pciComOutBaudrate = 4; /** * Fill light is

    always on * 0 is
     not always on
     (default) * 1 is always on
     */
    private Integer pciLedAlwaysEnable = 0; /** * Fill light

    color (stranger) * 1 Red light
     (default) * 2 Green
     light
     */
    private Integer pciLedColorStranger = 1; //endregion


    //region display configuration /
    ** *
     Company name displayed on the apk
     interface */
    private String uiCompanyName; /** * Whether
    the
     apk main interface displays the
     device IP *
     0 Hide * 1 Display
     (default) */
    private Integer uiShowIp = 1; /** * Whether the
    apk
     main interface displays the device
     serial
     number * 0 Hide * 1 Show (default)
     */
    private Integer uiShowSn = 1; /** * Whether
    the
     apk main interface displays the
     number of
     people * 0 Hide * 1 Show (default)
     */
    private Integer uiShowPersonCount = 1; /** * apk enters

    screen saver waiting time, unit is
     seconds */
    private Integer uiScreensaverWait = 60;
```

Machine Translated by Google

```
    //end region

    //region server related configuration /**
    * URL
      address for uploading identification
      records */
    private String sevUploadRecRecordUrl; /** * URL address
    for
      uploading device heartbeat */

    private String sevUploadDevHeartbeatUrl; /** * Device heartbeat

    interval, in seconds, default 60
      * 10 - 300
      */
    private Integer sevUploadDevHeartbeatInterval = 60; /** * URL address for

    uploading registered personnel data
      */
    private String sevUploadRegPersonUrl; /** * URL address
    for
      uploading registered fingerprint data
      */
    private String sevUploadRegFingerUrl; /** * URL address
    for
      uploading alarm data */

    private String sevUploadAlarmUrl; /** * URL address
    for
      uploading registered palmprint
      data */
    private String sevUploadRegPalmUrl; /** * Whether to

    upload stranger identification data
      switch * 0:
      Do not upload * 1 :
      Upload (default) */
    private Integer sevUploadRecStrangerDataEnable = 1; /** * Whether to upload
    the
      recognition of the scratched
      photo * 0: do
      not upload * 1 :
      upload (default) */
    private Integer sevUploadRecSnapshotEnable = 1; /** * Whether to upload
    the
      card swipe recognition data switch
      * 0: do not
      upload * 1 : upload
      (default) */
    private Integer sevUploadRecCardDataEnable = 1; /** * Switch whether to

    upload ID card data * 0: Do not upload
      * 1 : Upload
      (default) */

    private Integer sevUploadRecIdcardDataEnable = 1;
```

Machine Translated by Google

```
        /** *
          Switch whether to upload the QR code
          data * 0 Do not upload
          (default) * 1
          Upload */
        private Integer sevUploadRecQrcodeDataEnable = 0; //endregion // ...


}
```

DeviceSetRecConfigReq

```
/** *
  Device identification configuration interface
  request object */
public class DeviceSetRecConfigReq {

        //region recognition related

        configuration /** * 1vN portrait
          recognition
          threshold * 65 (default) * Actually all integers
          between 0-100 are allowed. * Tip: Please enter an
          integer between 50-100 . * The higher the score, the higher the

        recognition accuracy, but the recognition speed will be slower. */

        private Integer recThreshold1vN
          = 65; /** * 1v1 face
          recognition threshold * 65 (default) * Please enter an integer between 50-100. The higher the score, the
          higher the recognition accuracy, but the recognition speed will be slower. */
        private Integer recThreshold1v1 = 60; /** * Recognition interval (the

        interval between callback notifications after the same person is successfully recognized), default is 3
          seconds */
        private Integer recInterval = 3; /** * Recognition distance:


          * 0: No limit (default) * 1:
          Within 0.5 meters * 2:
          Within 1 meter * 3:
          Within 1.5 meters * 4:
          Within 2 meters *
          5: Within 3 meters
          * 6: Within 4 meters
          */
        private Integer recDistance = 0; /** * Level of liveness

        recognition: * 1. No
          liveness detection (default) * 2.
          Monocular liveness
          * 3. Binocular
          liveness */
```

Machine Translated by Google

```
    private Integer recRank = 1; /** * Voice mode: * 1.
    No
      voice broadcast
      * 2. Name broadcast
      (default) * 100. Custom voice
      broadcast */

    private Integer recSucTtsMode = 2; /** * Customized voice

    content * If
      recSucTtsMode is 100, this field must be passed and cannot be empty * {name}
      is allowed. The field format is fixed, and other content only allows numbers, English
      and Chinese characters, * The length is limited to 255 characters.
      For example: {name} Welcome */
    private String recSucTtsCustom = "{name}"; /** * Display mode * 1: Name

    (default) * 2: No
      content displayed * 100:
      Custom display */


    private Integer recSucDisplayMode = 1; /** * Display custom content
    * If
      recSucDisplayMode is
      100, this field must be passed and cannot be empty * {name} is allowed. The field
      format is fixed, and other content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters.
For example: {name}, check-in
      successful! */
    private String recSucDisplayCustom = "{name}"; /** * Switch for identifying

    strangers: * 0. Do not
      identify strangers * 1.
      Identify strangers (default) */

    private Integer recStrangerEnable = 1; /** * How many times the

    recognition fails before being judged as a

    stranger */ private Integer recIsStrangerTimes = 2; /** * Stranger voice
    mode
      * 1: No voice broadcast
      (default) * 2: Voice broadcast
      "The person is not registered, please contact the
      administrator" * 100: Custom stranger voice
      */
    private Integer recStrangerTtsMode = 1; /** * Voice broadcast of

    custom content. If recStrangerTtsMode is 100, this field must be passed and cannot be empty . * The content only allows
      numbers, English and Chinese characters, and the length is limited to 255 characters. For
      example: Be careful of strangers */
    private String recStrangerTtsCustom; /** * Stranger screen

    display text type * 1. Person is not
      registered (default) * 100.
      Custom */
```

Machine Translated by Google

```
    private Integer recStrangerDisplayMode = 1; /** * Customized text displayed on
    the
      stranger screen * If recStrangerDisplayMode
      is 100, this field must be passed and cannot be empty * The content only allows numbers, Chinese
      and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The
      person is not registered! */
    private String recStrangerDisplayCustom; /** * Non-living body voice mode
    * 1:
      No voice broadcast
      (default) * 2: Voice broadcast "Do
      not try to use photos or videos for recognition" * 100: Custom
      non-living body voice */ private

    Integer recNotBioTtsMode = 1; /** * Voice broadcast custom content.
    If
      recNotBioTtsMode is 100, this field must be passed and cannot be empty * The content only allows numbers, English
      and Chinese characters, and the length is limited to 255 characters. For example: Do not try to use photos or videos for
      recognition */
    private String recNotBioTtsCustom; /** * Non-living screen

    display text type * 1 Do not try to use
      photos or videos for recognition * 100 Custom


      */
    private Integer recNotBioDisplayMode = 1; /** * Customized text displayed
    on
      non-living screen * If recNotBioDisplayMode
      is 100, this field must be passed and cannot be empty * Only numbers, Chinese and English,
      and Chinese and English symbols are allowed, and the length is limited to 255 characters. For example: Do not try to use photos or videos for recognition
Don't!
      */
    private String recNotBioDisplayCustom; /** * Insufficient authority
    voice
      mode * 1: No voice
      broadcast * 2: Voice
      broadcast "Insufficient authority, please contact the administrator"
      (default) * 100: Custom insufficient

    authority voice */ private Integer recNoPerTtsMode = 2; /** * Voice

    broadcast custom content. If recNoPerTtsMode is 100, this field must be passed and cannot be empty * The content
      only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example:
      Insufficient authority, please contact the administrator */
    private String recNoPerTtsCustom; /** * Insufficient

    permissions. Screen display text type *
      1 Insufficient permissions, please
      contact the administrator * 100 Custom
      */
    private Integer recNoPerDisplayMode = 1; /** * Insufficient permissions to

    display custom text on the screen * If
      recNoPerDisplayMode is 100, this field must be passed and cannot be empty * The content only
      allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If you do not have
      enough permissions, please contact the administrator! */
    private String recNoPerDisplayCustom;
```

Machine Translated by Google

```
        /** *
           Identify whether a stranger opens the
           door * 0: Do not open
           the door * 1 : Open the door
           */
        private Integer recStrangerOpenDoor = 0; /** * Recognize multiple

        people * 0
           Recognize a single
           person * 1 Recognize multiple people
           */
        private Integer recMultiplayer = 0; /** * Recognize
        and
           save the snapshot
           * 0: Do not
           save * 1 : Save
           */
        private Integer recSnapshotSave = 1; /** * Identify the

        saved record * 0
           Do not save
           * 1 Save
           */
        private Integer recRecordSave = 1; /** * Recognition

        record save days *
           Default save
           time is 7 days */
        private Integer recRecordSaveDays = 7; /** * Identify

        record upload mode * 1
           Real-time
           upload * 2
           Breakpoint resume */
        private Integer recRecordUploadMode = 1;

        /** *
           Identity verification whitelist switch *
           0: Off (default), after reading the ID card, the identity verification process will be carried out
           directly * 1: On, the identity card number is read and compared with the identity card numbers of all people in the database. If it exists, the identity verification will be carried out;
if it does not exist, it
           will prompt that the authority is insufficient */
        private Integer recWhitelistIdcard = 0; //endregion


        // ...
}
```

Machine Translated by Google

DeviceSetRecModeConfigReq

```
/** *
   Device identification mode configuration interface
   request object */
public class DeviceSetRecModeConfigReq {

        //region recognition mode configuration

        /** *
           Face recognition mode
           switch * 0 Off
           * 1. On (default) */

        private Integer recModeFaceEnable = 1; /** * Card swiping mode

        switch * 0 off * 1 on
           (default)
           */

        private Integer recModeCardEnable = 1; /** * Card number

        transmission interface
           * 1 Wiegand (default)
           * 2 TTL serial ports
           * 3 USB
           */
        private Integer recModeCardIntf = 1; /** * This field is effective

        when the card number transmission interface is configured
           as a serial port. * Port number
           of the serial
           port for card
           number transmission * 1
           ttyS1 * 2 ttyS2
           * 3 ttyS3 (default)
           * 4 ttyS4 * 100 custom */
        private Integer recModeCardIntfPort = 3; /** * When the card number

        transmission interface port is configured as 100 , this field takes effect .
           * Customize the port number of the card
           number transmission interface */
        private String recModeCardIntfPortCustom; /** * This field is effective when the card

        number transmission interface is configured as a serial port. * The
           baud rate of the serial port for transmitting the card number
           * 1 9600
           * 2 19200
           * 3 38400
           * 4 115200 (default) */

        private Integer recModeCardIntfBaudrate = 4; /** * Person-ID verification

        switch * 0 Disable
           (default)
```

Machine Translated by Google

```
     * 1Open
     */
    private Integer recModeIdcardEnable = 0; /** * ID card module

    transmission interface
     * 1 TTL serial port
     * 2 232 serial ports
     * 3 USB (default) */

    private Integer recModeIdcardIntf = 3; /** * This field takes

    effect when the ID card transmission interface is
     configured as a serial port *
     Port number
     of the ID card
     transmission
     serial port * 1
     ttyS1 * 2 ttyS2
     (default) * 3 ttyS3 * 4 ttyS4 * 100 custom */
    private Integer recModeIdcardIntfPort = 2; /** * When the ID card

    transmission interface port is configured as 100 , this field takes
     effect . * Customize the port number of the
     ID card transmission interface */
    private String recModeIdcardIntfPortCustom; /** * This field is effective when
    the
     ID card transmission interface is configured as a serial port. *
     The baud rate of the ID card transmission serial port
     * 1 9600
     * 2 19200
     * 3 38400
     * 4 115200 (default) */

    private Integer recModeIdcardIntfBaudrate = 4; /** * QR code scanning

    mode switch * 0 off
     (default) * 1 on */


    private Integer recModeQrcodeEnable = 0; /** * QR code

    transmission interface
     * 1.TTL serial port
     (default) * 2.232 serial port
     * 3.USB
     */
    private Integer recModeQrcodeIntf = 1; /** * This field is effective when
    the
     QR code transmission interface is configured as a serial port. *
     The port number of the QR code transmission serial port
     * 1 ttyS1 * 2
     ttyS2 (default) * 3 ttyS3 *
     4 ttyS4 * 100
     custom */
```

Machine Translated by Google

```
    private Integer recModeQrcodeIntfPort = 2; /** * When the QR code

    transmission interface port is configured as 100 , this field takes
      effect . * Customize the port number of the
      QR code transmission interface */
    private String recModeQrcodeIntfPortCustom; /** * This field is effective when the
    QR
      code transmission interface is configured as a serial port. * The
      baud rate of the QR code transmission serial port
      * 1 9600
      * 2 19200
      * 3 38400
      * 4 115200 (default) */

    private Integer recModeQrcodeIntfBaudrate = 4; /** * Palmprint

    recognition switch
      * 0 Off (default) * 1
      On
      */
    private Integer recModePalmEnable = 0; /** * Fingerprint

    recognition switch
      * 0 Disable (default)
      * 1 Enable
      */
    private Integer recModeFingerEnable = 0; //endregion


    // ...

}
```

DeviceSetPciConfigReq

```
/** *
  Device peripheral configuration interface request object
  */
public class DeviceSetPciConfigReq {

    //region peripheral

    configuration /** *
      Relay output * 0 does not open the door
      * 1 Open door
      (default) */
    private Integer pciRelayOut = 1; /** * Relay

    mode * 1
      Normally
      open * 2
      Normally closed */
    private Integer pciRelayMode = 1;
```

Machine Translated by Google

```
        /** *
          Relay control time *
          1000ms (default) * The
          time interval between the relay controlling the door opening and closing, the default is 1000ms. Please enter an integer between 100-25500, round down
For example, if you enter an integer between 101 and 199 , the actual time taken effect is 100ms.
          */
        private Integer pciRelayDelay = 1000; /** * Wiegand

        type * 1.
          Wiegand 26 (default)
          * 2. Wiegand
          34 * 3. Wiegand
          37
        */ private Integer pciWgType = 1; /** *

        Wiegand output
          type * 0. No output
          (default) * 1. Output
          personnel ID * 2. Output card number
          */
        private Integer pciWgOut = 0; /** * Serial
        port
          output type * 0.
          No output (default) *
          1. Output personnel
          ID * 2. Output
          card number * 3.
          Output ID card * 100. Custom
          */
        private Integer pciComOut = 0; /** * Serial
        port
          outputs custom content
          */
        private String pciComOutCustom; /** * Serial
        port
          output port
          * 1 ttyS1 * 2
          ttyS2 * 3
          ttyS3 * 4
          ttyS4 * 100
          custom */

        private Integer pciComOutPort = 4; /** * Custom

        serial port output port */

        private String pciComOutPortCustom; /** * Serial
        port
          output baud rate
          * 1 9600
          * 2 19200
          * 3 38400
          * 4 115200 (default)
          */
        private Integer pciComOutBaudrate = 4; /**
```

Machine Translated by Google

```
        * Fill light is always
        on * 0 is not always on
        (default) * 1 is always on
        */
        private Integer pciLedAlwaysEnable = 0; /** * Fill light color

        (stranger) * 1 red light (default) *
        2 green light */


        private Integer pciLedColorStranger = 1; //endregion


        // ...

}
```

DeviceSetUiConfigReq

```
/** *
  Device interface display configuration

interface request object */ public class DeviceSetUiConfigReq {

        //region display configuration /
        ** *
          Company name displayed on the apk
          interface */
        private String uiCompanyName; /** * Whether
        the
          apk main interface displays the
          device IP *
          0 Hide * 1 Display
          (default) */
        private Integer uiShowIp = 1; /** * Whether the
        apk
          main interface displays the device
          serial
          number * 0 hide * 1
          show (default) */
        private Integer uiShowSn = 1; /** * Whether
        the
          apk main interface displays the
          number of
          people * 0 Hide * 1
          Show (default) */
        private Integer uiShowPersonCount = 1; /** * apk enters

        screen saver waiting time, unit is

        seconds */ private Integer uiScreensaverWait = 60; //endregion
```

Machine Translated by Google

```
        // ...

}
```

DeviceSetSevConfigReq

```
/** *
  Device server configuration interface request
  object */
public class DeviceSetSevConfigReq {

        //region server related configuration /**
        * URL
          address for uploading identification
          records */
        private String sevUploadRecRecordUrl; /** * URL address
        for
          uploading device heartbeat */

        private String sevUploadDevHeartbeatUrl; /** * Device heartbeat

        interval, in seconds, default 60
          * 10 - 300
          */
        private Integer sevUploadDevHeartbeatInterval = 60; /** * URL address for

        uploading registered personnel data
          */
        private String sevUploadRegPersonUrl; /** * URL address
        for
          uploading registered fingerprint data
          */
        private String sevUploadRegFingerUrl; /** * URL address
        for
          uploading alarm data */

        private String sevUploadAlarmUrl; /** * URL address
        for
          uploading registered palmprint
          data */
        private String sevUploadRegPalmUrl; /** * Whether to

        upload stranger identification data
          switch * 0:
          Do not upload * 1 :
          Upload (default) */
        private Integer sevUploadRecStrangerDataEnable = 1; /** * Whether to upload
        the
          recognition captured photo
          switch * 0
          does not upload * 1
          upload (default) */
        private Integer sevUploadRecSnapshotEnable = 1;
```

Machine Translated by Google

```
        /** *
          Whether to upload the card recognition
          data switch * 0:
          Do not upload * 1:
          Upload (default) */
        private Integer sevUploadRecCardDataEnable = 1; /** * Switch whether to
        upload ID card data * 0: Do not upload
          * 1 : Upload
          (default) */

        private Integer sevUploadRecIdcardDataEnable = 1; /** * Switch whether to
        upload the QR code data * 0 not
          upload (default) * 1
          upload
          */
        private Integer sevUploadRecQrcodeDataEnable = 0; //endregion


        // ...

}
```

DeviceSetCstConfigReq

```
/** *
  Device server configuration interface request object
  */
public class DeviceSetCstConfigReq {

        /** *
          json *
          {"key":"value"} */

        private String json; // ...

}
```

DeviceOutputReq

```
/** *
  Device remote control output interface request object
  */
public class DeviceOutputReq {

        /** *
          Device interaction type
          *
          * 1 Open door (default)
```

Machine Translated by Google

```
            * 2 serial ports
            * 3 Wiegand
            * 4 Custom text pop-up window, custom image pop-up window, custom voice broadcast
            */
        private Integer type = 1; /** * type=2:

        Serial port, only numbers, English and English characters are allowed, and the length is
          limited to 255 characters. * type=3:
          Wiegand, only numbers are allowed. * type=4: Custom text pop-up window,
          custom image pop-up window, custom voice broadcast, * content={"ttsContent":"Custom voice, no voice broadcast if not transmitted","displayCon
Text, if not uploaded, the text pop-up window will not be displayed", "imgContent": "Custom text, if not uploaded, the image pop-up window will not be displayed"}
            */
        private String content;

        //...
}
```

DeviceSetNetworkReq

```
/** *
  Device setting limited network

interface request object */ public class DeviceSetNetworkReq {

        /**
          * DHCP mode selection *
          0 Manually set IP mode. All parameters except subnetMask must be passed in and cannot be empty * 1
          Dynamically obtain IP mode. No other parameters need to be passed in.
          */
        private Integer dhcpEnable; /** * ip

        address */

        private String ip; /** *

        Gateway
          */
        private String gateway; /** *

        Subnet mask
          */
        private String subnetMask = "255.255.255.0"; /** * DNS server */



        private String dns;

        //...
}
```

Machine Translated by Google

DeviceSetWifiReq

```
/** *
  Request object for device to set wireless network
  interface */
public class DeviceSetWifiReq {

    /**
      * WiFi name, must be
      transmitted */
    private String ssid; /** * WiFi

    password, only numbers, English letters and English characters are allowed; if there is no
      password, pass in empty. */
    private String pwd = ""; /**

      * DHCP mode selection *
      0 Manually set IP mode. Except for subnetMask, other parameters must be passed in and cannot be empty *
      1 Dynamically obtain IP mode. No other parameters need to
      be passed in */
    private Integer dhcpEnable; /** * ip

    address */

    private String ip; /** *

    Gateway
      */
    private String gateway; /** *
    dns
      server */

    private String dns;

    //...
}
```

DeviceSetUploadUrlReq

```
/** *
  Interface request object for device data upload address
  setting */
public class DeviceSetUploadUrlReq {

    /** *
      Configure the type of reported data url *
      0 Clear all reported addresses *
      1 Heartbeat report *
      2 Identification record
      report * 3 Registered personnel
      data report * 4 Fingerprint
      registration data report * 5 Anti-tamper alarm data report
```

Machine Translated by Google

```
        */
        private Integer type; /** *

        Configuration url
        */
        private String url; // ...

}
```

###

DeviceUpgradeApkReq

```
/** *
  Device upgrade apk interface request
  object */
public class DeviceUpgradeApkReq {

        /** *
          apk version
          number */
        private Integer versionCode; /** *

        Channel
          number */
        private String channel; /** * apk

        upgrade address
        */
        private String apkUpgradeUrl;

        // ...
}
```

DeviceSetTimeReq

```
/** *
  Request object for device time setting interface
  */
public class DeviceSetTimeReq {

        /**
          * Unix millisecond timestamp
          */
        private String timestamp;

        // ...
}
```

Machine Translated by Google

DeviceSetLocalPwdReq

```
/** *
  Interface request object for setting local password of
  the device */
public class DeviceSetLocalPwdReq {

        /** *
          Old Password
          */
        private String oldPwd; /** * New

        password
          */
        private String newPwd;

        // ...
}
```

DeviceEventReq

```
/** *
  Device event interface request
  object */
public class DeviceEventReq {

        /** *
          Device event
          type */
        private String key; /** * To
        be
          determined
          */
        private String value;

        // ...
}
```

PersonCreateReq

```
/** *
  Personnel creation
  */
public class PersonCreateReq {

        /** *
          Personnel
          type * 1 Internal
          employee * 2 Visitor
```

Machine Translated by Google

```
     * 3 Blacklist
     */
    private Integer type = 1; /** *


    Employee number */
    private String sn; /** *

    Name */

    private String name; /** *

    Card
      number */
    private String cardNo; /** * ID

    number */

    private String idCard; /** *

    Phone number
      */
    private String mobile; /** *

    password
      */
    private String verifyPwd; /** *

    Voucher
      number */
    private String voucherCode; /** * Access

    control group
      number */
    private Integer acGroupNumber = 0; /** * Verification

    method * 0Face/
      Card/Fingerprint/Password (any one) * 1Face
      only * 10Face
      + Card + Fingerprint *
      2Card only *
      20Card + Face *
      21Card +
      Fingerprint *
      3Fingerprint only *
      30Fingerprint + Face * 4Password
      */
    private Integer verifyStyle = 0; /** * Expiration

    type * 0
      never expires
      * 1 time *
      2 times *
      3 time + times */

    private Integer expiredType = 0;
```

Machine Translated by Google

```
    /** *
      Effective time
      starts */
    private Long validTimeBegin; /** * Valid
    time
      ends */

    private Long validTimeEnd; /** * Valid

    times */

    private Integer validCount; /** * Travel

    period 1 number */

    private Integer acTzNumber1 = 1; /** * Traffic

    period 2 number
      */
    private Integer acTzNumber2 = 0; /** * Traffic

    period 3 number
      */
    private Integer acTzNumber3 = 0;

    // ...
}
```

PersonUpdateReq

```
/** *
  Personnel update interface request
  */
public class PersonUpdateReq {

    /** *
      Personnel
      type * 1 Internal
      employee
      * 2 Visitor * 3
      Blacklist */
    private Integer type; /** *

    Employee number
      */
    private String sn; /** *

    Name */

    private String name; /** *

    Card number
      */
```

Machine Translated by Google

```
    private String cardNo; /** * ID
    card
      number
      */
    private String idCard; /** * Mobile

    phone
      number */
    private String mobile; /** *

    password
      */
    private String verifyPwd; /** * Voucher

    number
      */
    private String voucherCode; /** * Access

    control group number
      */
    private Integer acGroupNumber = 0; /** *

    Authentication method
      */
    private Integer verifyStyle = 0; /** * Expiration
    type
      * 0 Never
      expires * 1
      Time
      * 2 times
      * 3 time + times */

    private Integer expiredType = 0; /** * Valid time

    starts
      */
    private Long validTimeBegin; /** * Valid
    time
      ends */

    private Long validTimeEnd; /** * Valid

    times
      */
    private Integer validCount; /** * Passage

    period 1 number
      */
    private Integer acTzNumber1 = 1; /** * Traffic

    period 2 number */

    private Integer acTzNumber2 = 0; /** * Traffic

    period 3 number */
```

Machine Translated by Google

```
    private Integer acTzNumber3 = 0;

    // ...
}
```

PersonDeleteReq

```
/**
 * Personnel deletion interface request object
 */
public class PersonDeleteReq {

    /**
     * Employee number to be
     * deleted */
    private List<String> sn;

    // ...
}
```

PersonFindReq

```
/**
 * Personnel search interface request
 * object */
public class PersonFindReq {

    /**
     * Search type *
     * 1Employee
     * number * 2ID
     * card * 3Card
     * number */
    private Integer type = 1; /** *

    Corresponding query data
     */
    private String key;

    // ...
}
```

Machine Translated by Google

PersonFindListReq

```
/** *
  Personnel search interface request
  object */
public class PersonFindListReq {

    /** *
      Page number, starting from 1
      */
    private Integer index = 1; /** * Page

    size, default 20 */

    private Integer length = 20;

    // ...
}
```

PersonPasstimeMergeReq

```
/** *
  Request object for creating or updating the interface for personnel passage
  time period */
public class PersonPasstimeMergeReq {

    /** *
      Employee
      number */
    private List<String> sn; /** * During
    the
      traffic period, up to 3 sets are allowed
      */
    private List<PasstimeDto> passtimeList;

    // ...
}
```

Machine Translated by Google

PersonPasstimeDeleteReq

```
/**
 * Request object for deleting the interface during the personnel
 * passage period
 */
public class PersonPasstimeDeleteReq {

    /**
     * Employee number to be
     * deleted
     */
    private List<String> sn;

    // ...
}
```

FaceMergeReq

```
/**
 * Request object for face creation or update
 * interface
 */
public class FaceMergeReq {

    /**
     * Personnel number, must register
     * personnel first
     */
    private String personSn; /** * Photo
    url */


    private String imgUrl; /** * Base64

    encoded string of the photo
     */
    private String imgBase64; /** * 0 Strict

    detection of photo quality
     * 1 Loose detection of
     * photo quality
     */
    private Integer easy = 0;

    // ...
}
```

Machine Translated by Google

FaceFindReq

```
/** *
  Request object of face search
  interface */
public class FaceFindReq {

    /** *
      Employee number
      */
    private String personSn;

    // ...
}
```

FaceDeleteReq

```
/** *
  Request object of face deletion
  interface */
public class FaceDeleteReq {

    /** *
      Employee number to be
      deleted */
    private List<String> sn;

    // ...
}
```

RecordFindListReq

```
/** *
  Identify the request object of the record search
  interface */
public class RecordFindListReq {

    /**
      * Pass record id
      */
    private Long recordId;

    /** *
      Query the specified personnel number
      * If empty, no query will be made
      */
    private String personSn; /** *

    Person type - 1 All 0 Unknown 1 Employee 2 Visitor 3 Blacklist
```

Machine Translated by Google

```
     */
    private Integer personType = -1; /** * Search

    type * 0All *
      1Face
      scan *
      2Card scan
      * 3 cards + face
      * 4
      fingerprints */
    private Integer recordType = 0; /** * The start

    timestamp of the query
     */
    private Long startTime = 0L; /** * End

    timestamp of the query
     */
    private Long endTime = 0L; /** * Page

    number, starting from 1
     */
    private Integer index = 1; /** * Page

    size, default 20
     */
    private Integer length = 20; /** * Sorting

    method
      * 1 is ascending
      order * other values are
      descending order */
    private Integer order = 0;

    // ...
}
```

RecordFindReq

```
/** *
  Identify the request object of the record search
  interface */
public class RecordFindReq {

    /** *
      Pass record id
     */
    private Long recordId;

    // ...
}
```

Machine Translated by Google

RecordDeleteReq

```
/** *
  Access control record deletion interface request
  object */
public class RecordDeleteReq {

    /**
      * Record id
      */
    private Long recordId; /** *

    Personnel
      number */
    private String personSn; /** * Person
    type
      - 1 All 0 Unknown 1 Employee 2 Visitor 3 Blacklist
      */
    private Integer personType = -1; /** * Search
    type
      * 0All *
      1Face
      scan *
      2Card
      scan * 3Card
      + face * 4Fingerprint
      */
    private Integer recordType = 0; /** * The start

    timestamp of the query
      */
    private Long startTime; /** * End

    timestamp of the query
      */
    private Long endTime;

    // ...
}
```

AcGroupMergeReq

```
/** *
  Access control group creation or
  update */
public class AcGroupMergeReq {

    /** *
      Access control group
      number */
    private Integer acGroupNumber; /**
```

Machine Translated by Google

```
     * Access control group
     name */
    private String name; /** *

    Verification
     method * 0 Face/card/fingerprint
     (any one) * 1 Face only
     * 2 card swipe
     only * 20 card +
     face * 3 fingerprint only
     */
    private Integer verifyStyle = 0; /** * Expiration
    type
     * 0 Never
     expires * 1
     Time * 2
     Number of
     times * 3 Time + number of times
     */
    private Integer expiredType = 0; /** * Valid time

    starts
     */
    private Long validTimeBegin; /** * Valid
    time
     ends */

    private Long validTimeEnd; /** * Valid

    times */

    private Integer validCount; /** * Travel

    period 1 number */

    private Integer acTzNumber1 = 1; /** * Traffic

    period 2 number */

    private Integer acTzNumber2 = 0; /** * Traffic

    period 3 number */

    private Integer acTzNumber3 = 0;

    // ...
}
```

Machine Translated by Google

AcGroupFindListReq

```
/** *
  Access control group list search interface
  request object */
public class AcGroupFindListReq {

    /** *
      Access control group to be
      queried */
    private List<Integer> acGroupNumber;

    // ...
}
```

AcGroupDeleteReq

```
/** *
  Access control group deletion interface
  request object */
public class AcGroupDeleteReq {

    /** *
      Access control group number to be
      deleted */
    private List<Integer> acGroupNumber;

    // ...
}
```

AcTimezoneMergeReq

```
/** *
  Request object for adding or updating the time period
  interface */
public class AcTimezoneMergeReq {

    /** *
      Time period number
      */
    private Integer acTzNumber; /** *

    Time period
      name */
    private String acTzName; /** *

    Sunday start time 00:00
      */
    private String sunStart;
```

Machine Translated by Google

```
    /** *
      End time on Sunday
      23:59 */
    private String sunEnd; /** *

    Monday start time
      */
    private String monStart; /** *

    Monday end time
      */
    private String monEnd; /** *

    Tuesday start
      time */
    private String tueStart; /** *

    Tuesday end time
      */
    private String tueEnd; /** *

    Wednesday start time
      */
    private String wedStart; /** * End

    time on
      Wednesday */
    private String wedEnd; /** *

    Thursday start
      time */
    private String thursStart; /** * End

    time on Thursday
      */
    private String thursEnd; /** * Friday

    start time */

    private String friStart; /** * Friday
    end
      time */

    private String friEnd; /** *

    Saturday start time
      */
    private String satStart; /** *

    Saturday end time
      */
    private String satEnd;

    // ...
}
```

Machine Translated by Google

AcTimezoneFindListReq

```
/** *
  Time period list search interface request
  object */
public class AcTimezoneFindListReq {

    /** *
      The time period to be queried
      */
    private List<Integer> acTzNumber;

    // ...
}
```

AcTimezoneDeleteReq

```
/** *
  Time period deletion interface request
  object */
public class AcTimezoneDeleteReq {

    /** *
      Time period number to be deleted
      */
    private List<Integer> acTzNumber;

    // ...
}
```

FingerMergeReq

```
/** *
  Request object for fingerprint creation or update interface
  */
public class FingerMergeReq {

    /** *
      Personnel number, must register
      personnel first */
    private String personSn; /** * The unique

    identifier of the characteristic value
      */
    private String fingerId; /** * Number of fingers,
    2
      digits * The first digit
      identifies the left or right hand, 1 is for the left hand , 2 is for the right hand
```

Machine Translated by Google

```
     * The second position identifies the finger: 1 thumb 2 index finger 3 middle finger 4 ring finger 5
       little finger */
    private Integer fingerNum; /** *
     Eigenvalue
       */
    private String feature;

    // ...
}
```

FingerFindListReq

```
/** *
   Request object for fingerprint search list
   interface */
public class FingerFindListReq {

    /** *
       Employee number to be
       searched */
    private String personSn;

    // ...
}
```

FingerDeleteReq

```
/** *
   Request object for fingerprint deletion interface
   */
public class FingerDeleteReq {

    /** *
       Employee number to be
       deleted */
    private String personSn; /** * The
     fingerprint id to be deleted
       */
    private String fingerId;

    // ...
}
```

Machine Translated by Google

PalmMergeReq

```
/** *
  Palmprint creation or update interface request
  object */
public class PalmMergeReq {

    /** *
      Personnel number, must register
      personnel first */
    private String personSn; /** * Unique

    identifier of the
      characteristic value */
    private String palmId; /** *

    Palm number
      * 1 left hand 2
      right hand */
    private Integer palmNum; /** *

    Eigenvalue
      */
    private String feature;

    // ...
}
```

PalmFindListReq

```
/** *
  Request object for palmprint search list interface
  */
public class PalmFindListReq {

    /** *
      Employee ID to be searched
      */
    private String personSn;

    // ...
}
```

PalmDeleteReq

```
/** *
  Request object for palmprint deletion
  interface */
public class PalmDeleteReq {
```

Machine Translated by Google

```
    /**
     * Employee number of the person to be deleted
     */
    private String personSn;
    /**
     * The palm print ID to be deleted
     */
    private String palmId;

    // ...
}
```