catalogue

1. Document Description 4

1.1 Server Preparation 4

1.2 Service Startup 4

2. Interface Description 7

2.1 Interface Specification 7

2.2 Interface Return 8

2.3 Notes 9

3. Device Management Interface 10

3.1 Get device information 10

3.2 Device Restart 13

3.3 Device Reset 14

3.4 Device Configuration 16

3.5 Identification Configuration 33

3.6 Identification Mode Configuration 41

3.7 Peripheral Configuration 47

3.8 Interface Display Configuration 51

3.9 Server Configuration 53

3.10 Remote control output (including door opening) 57

3.11 Setting up a wired network 59

.....62

3.12 Set the upload address 62

3.13 APK Upgrade 69

3.14 Setting the time 71

3.15 Setting custom configuration 72

3.18 Get the door sensor status 73

4. Personnel Management Interface 75

4.1 Personnel Creation 75

4.2 Personnel Update 79

4.3 Personnel Deletion 83

4.4 Clearing out personnel 85

4.5 Person Search 86

4.6 Personnel List Search 88

.....90

4.7 Creation or update of personnel passage time period 90

4.8 Deletion of personnel passage time 93

4.9 Personnel creation or update 95

5. Face Management Interface 99

5.1 Face creation or update 99

5.2 Face Removal 101

5.3 Face Search 102

6. Record Management Interface 104

6.1 Search the Pass Record List 104

..... 错误！未定义书签。

6.2 Deletion of Pass Records 109

6.3 Pass record search 111

7. Time period management interface 114

7.1 Creating or updating a time period 115

7.2 Time period deletion 117

7.3 Time period list query 119

8. Access control group management interface 121

8.1 Create or update access control group 121

8.2 Access Control Group Deletion 124

8.3 Access Control Group List Query 126

9. Fingerprint Management Interface 129

9.1 Fingerprint creation or update 129

9.2 Fingerprint Deletion 131

9.3 Fingerprint Search 133

10. Palm print/palm vein management interface 134

10.1 Palm print/palm vein creation or update 134

10.2 Palm print/palm vein deletion 138

10.3 Palm print/palm vein search 139

Schedule 142

1. Document Description

This document is mainly used for the middleware HTTP interface docking of the face recognition machine and is suitable for system developers and maintenance personnel.


1.1 Server Preparation

1. Ports **10010** , **10011** , and **8190** need to be open
2. Support **Windows** and **Linux** systems
3. Install the **JDK 1.8** version environment supported by Windows and Linux


1.2 Service Startup

If the Windows Gateway middleware crashes during operation, please first install JDK and configure the Java environment variable for Windows before running it.

Java JDK configuration:

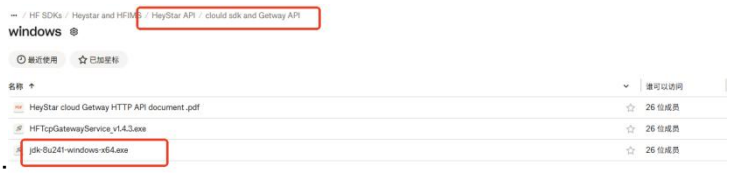

https://www.runoob.com/w3cnote/windows10-java-setup.html

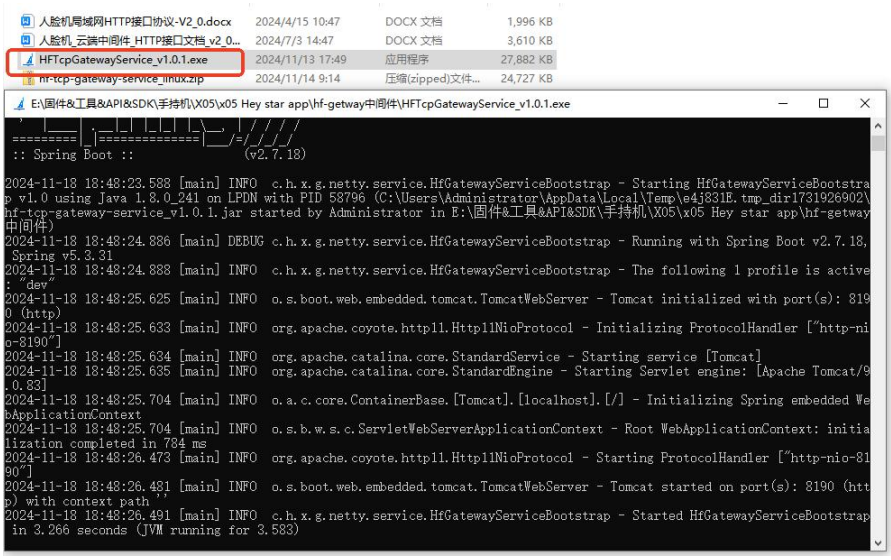


Note:

The HeyStar app must be run before start HFTcpGetwayService.


Linux system use hf-tcp-gateway-service_linux

1. Click the settings , enter the password and click login to enter the settings page

Enter Password: HFSecurity

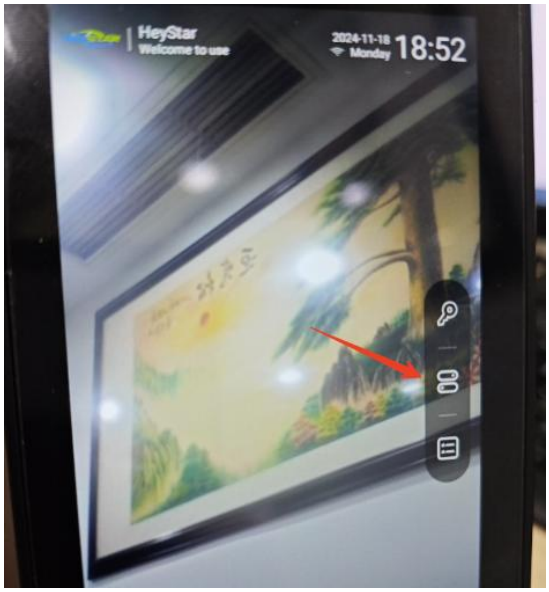


1. Click to enter the communication settings and configure the server information

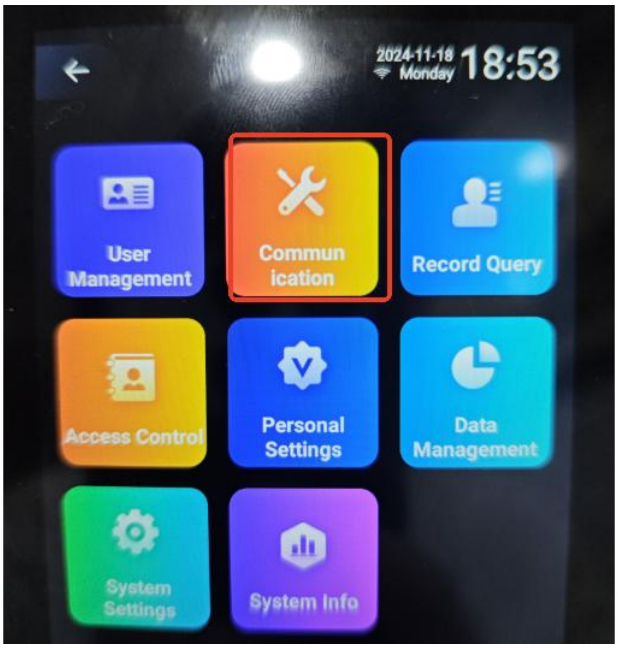

1. Communication Settings

- Turn on the server switch
- Select Cloud as the connection method
- Select TCP as the connection protocol
- The password you set should be consistent with the following interface parameter secret
- Server IP: fill in the server IP where the middleware is deployed
- The server port is set to 10010

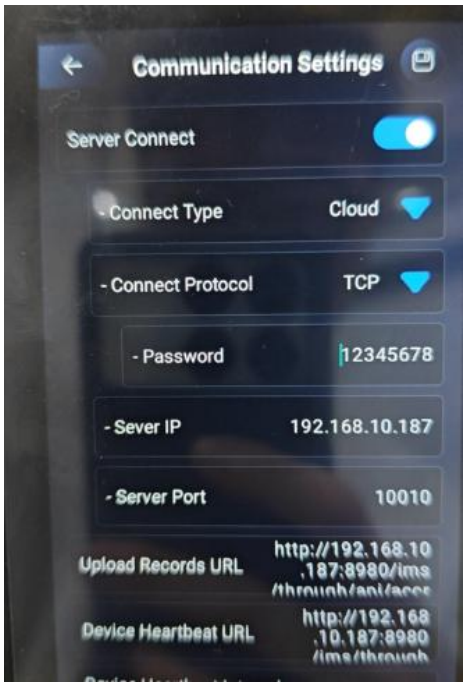

2. Interface Description

2.1 Interface Specification

- Interface syntax: **http://{middleware server IP}:8190/api/{module}/{action}**
  - **{middleware server IP} :** The IP address of the requested **middleware server**
  - **{module}** : module name
  - **{action}** : interface name
- Interface form **: Providing external services by converting TCP to HTTP**
- Character encoding: **UTF-8** format is used uniformly
- Request header: **Content-Type = application/x-www-form-urlencoded**
- Request method: Use **POST** method uniformly

2.2 Interface Return

The data returned by all interfaces and the interface return examples involved in the document may be slightly adjusted for the return data of individual interfaces. The actual return results shall prevail.

```
{
  "code": "000",    // 返回码，对照表见附录说明
  "msg": "请求成功",   // 返回信息
  "ts": 1679576928465, // 时间戳
  "data": null,      // 返回的数据对象
  "success": true    // 操作是否成功，成功为 true，失败为 false
}
```

Fields	describe	type	Must be transmitted	illustrate
code	Return Code	String	Y	Normal operations use a unified return code, and each abnormal operation has a separate return code
msg	Return information	String	Y	Information returned by the interface, usually error information
data	Return data	Int / String / Object / List	N	The data returned by the interface may be a value, string, object or collection
ts	Return time	Long	Y	Unix millisecond timestamp (13 bits)
success	Execution Results	boolean	Y	Whether the operation is successful, true for success and false for failure


2.3 Notes


- When calling a device interface, do not call the interface of the same device on other client servers at the same time.
- If the call to the interface returns a message "Parameter abnormality", please check according to the following steps:
  - Check whether the parameter name is misspelled, contains spaces or carriage returns.
  - Check whether the parameter value meets the specification, such as Int value is undefined, id contains illegal characters other than numbers and letters, etc.
  - Check whether there are spaces in the Json string (if you use the Json string returned by the interface directly, you need to remove the spaces), whether there are too many or too few " symbols, please check the postman examples of each interface carefully.
- If the call interface returns empty, it means the URL is wrong (wrong IP, spelling error, field missing, etc.)
- If the call to the interface returns Could not get any response, possible reasons include: incorrect IP address, incorrect or omitted port number, incorrect parameter transmission format, etc.

3. Device Management Interface

3.1 Get device information

deviceKey is here：

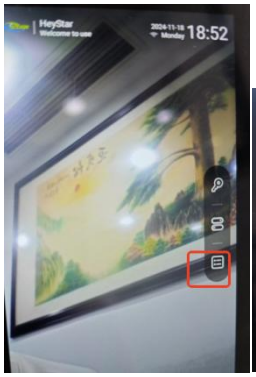

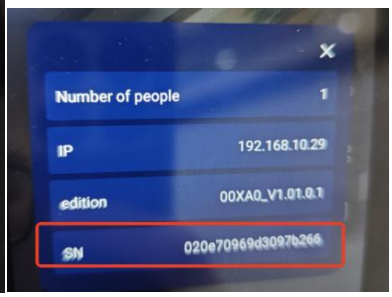

Description : Get the device information of the face recognition machine.

Method	URL
GET / POST	http://middleware server IP:8190/api/device/get

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

Postman Example



Return to example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679624594176,
    "data": {
        "channel": "01DA0",
        "cpu": "[armeabi-v7a, armeabi]", //CPU 架构
        "deviceKey": "15E5754C846279A4", //设备序列号
        "faceAlgorithmVersion": "V3.8.2", //算法版本
        "firmwareVersion": "rk3288-userdebug 7.1.2 NHG47K eng.silence.20211221.163026 test-keys",
//固件版本
        "manufacturer": "mb_ys_3288",
        "os": "Android", //系统
        "osVersion": "7.1.2", //系统版本
        "ram": "1536798720/2093146112", //内存大小
        "rom": "4065255424/5207228416", //硬盘空间
        "versionCode": 20000, //版本号
        "wanMac": "30:1f:9a:87:f1:95", //wan 口的 mac 地址
        "wifiMac": "70:f7:54:23:59:ce" //wifi 的 mac 地址
    },
    "success": true
}
```

3.2 Device Restart

Description : Restart the face recognition device.

Method	URL
POST	http://middleware server IP:8190/api/device/reboot


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

Postman Example

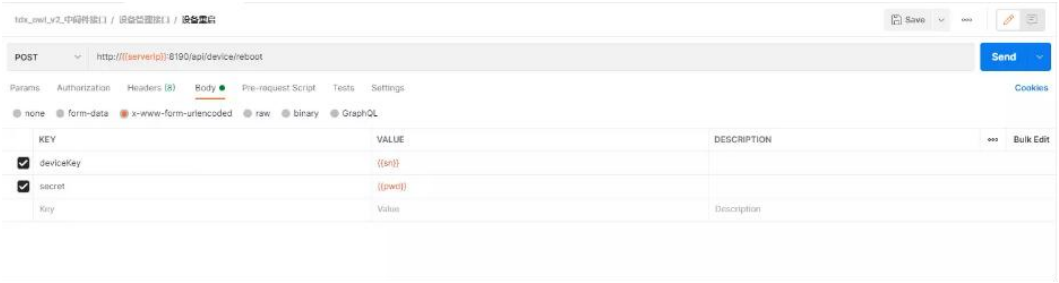

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679624962917,
    "data": null,
    "success": true
}
```


code code description

code	msg
100201	Device reboot failed, not rooted

3.3 Device Reset

Description : Reset the face recognition device.

Method	URL
POST	http://middleware server IP:8190/api/device/reset

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
secret	password	String	Y	● The server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
type	Device reset type	Int	Y	Device reset type, reset the corresponding type of information on the device, and cannot be restored after reset ● 1 : All data ● 2: Personnel registration information ● 3 : Photo information ● 4: Personnel characteristic information ● 5: Identify records

Postman Example



Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679624962917,
  "data": null,
  "success": true
}
```


3.4 Device Configuration

Description : Configure the recognition parameters, recognition mode parameters, peripheral parameters, UI display parameters, server parameters, etc. of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
secret	password	String	Y	The server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
recThreshold1vN	1vN face recognition threshold	Int	N	The default is 65. Please enter an integer between 50 and 100. The higher the score, the higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	Same as above
recInterval	Identification interval time	Int	N	The default is 3 seconds. Recognition interval (the interval between callback notifications after consecutive successful recognitions of the same person).
recDistance	Identification distance	Int	N	Identification distance: ● 0: No limit (default) ● 1: within 0.5 meters ● 2: Within 1 meter ● 3: within 1.5 meters ● 4: Within 2 meters ● 5: Within 3 meters ● 6: Within 4 meters
recRank	Identify live level	Int	N	Identify the level of living body: ● 1. No liveness detection (default) ● 2. Monocular liveness

				● 3. Binocular liveness
recSucTtsMode	Voice Mode	Int	N	Voice Mode: ● 1. No voice broadcast ● 2. Announce name (default) ● 100. Customized voice broadcast
recSucTtsCustom	Customized voice content	String	N	Customized voice content ● Default *{name}* ● If *recSucTtsMode* is 100, this field must be passed and cannot be empty ● *{name}* is allowed . The field format is fixed, and other contents only allow numbers, English and Chinese characters. ● The length limit is 255 characters. For example: *{name}* Welcome
recSucDisplayMode	Display Mode	Int	N	Display Mode ● 1: Name (default) ● 2: Do not display content ● 100: Custom display
recSucDisplayCustom	Display custom content	Int	N	Display custom content ● Default *{name}* ● If *recSucDisplayMode* is 100, this field must be passed and cannot be empty ● *{name}* is allowed . The field format is fixed. Other content only allows numbers, Chinese

				and English, and Chinese and English symbols. The length is limited to 255 characters. For example: *{name}* , check-in successful!
recStrangerEnable	Identify strangers switch	Int	N	Identify stranger switch: ● 0. Do not identify strangers ● 1. Identify strangers (default)
recIsStrangerTimes	Number of recognition failures	Int	N	How many times of identification failure is considered a stranger. Default is 2 times
recStrangerTtsMode	Stranger Voice Mode	Int	N	Stranger Voice Mode ● 1: Do not play voice (default) ● 2: Voice broadcast "The user is not registered, please contact the administrator" ● 100: Customize stranger voice
recStrangerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, ● If *recStrangerTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Beware of strangers

recStrangerDisplayMode	Stranger screen display text type	Int	N	Stranger screen display text type ● 1. The person is not registered (default) ● 100. Customization
recStrangerDisplayCustom	Text content displayed on stranger screen	String	N	Customized text displayed on stranger screen ● If *recStrangerDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The person is not registered!
recNotBioTtsMode	Non-live voice mode	Int	N	Non-live voice mode ● 1: Do not play voice (default) ● 2: Voice announcement "Do not try to use photos or videos for recognition" ● 100: Custom non-living voice
recNotBioTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, ● If *recNotBioTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for

				recognition
recNotBioDisplayMode	Non-living screen display text type	Int	N	Non-living screen display text type ● 1 : Do not try to use photos or videos for recognition (default) ● 100 : Custom
recNotBioDisplayCustom	Non-living screen displays text content	String	N	Non-living screen displays text custom content ● If *recNotBioDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition!
recNoPerTtsMode	Insufficient permissions Voice mode	Int	N	Insufficient permissions Voice mode ● 1: Do not play voice ● 2: Voice broadcast "Insufficient permissions, please contact the administrator" (default) ● 100: Insufficient custom permissions for voice

recNoPerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content ● If *recNoPerTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. If you do not have enough permissions, please contact the administrator
recNoPerDisplayMode	Insufficient permissions screen display text type	Int	N	Insufficient permissions screen display text type ● 1 Insufficient permissions, please contact the administrator (default) ● 100 Custom
recNoPerDisplayCustom	Insufficient permissions to display text content on the screen	String	N	Insufficient permissions to display custom text on the screen ● If *recNoPerDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If: insufficient permissions, please contact the administrator!
recStrangerOpenDoor	Identify whether a stranger	Int	N	Identify whether a stranger opens the door ● 0: Do not open the door

	opens the door			(default) ● 1 : Open the door
recMultiplayer	Identify multiple people	Int	N	Identify multiple people ● 0: Single person recognition (default) ● 1: Multi-person recognition
recSnapshotSave	Identify and save snapshots	Int	N	Identify and save snapshots ● 0 : Do not save ● 1 : Save (default)
recRecordSave	Identify and save records	Int	N	Identify and save records ● 0 : Do not save ● 1 : Save (default)
recRecordSaveDays	Identification Record Retention Days	Int	N	Identification record retention days, default retention is 7 days
recRecordUploadMode	Identify record upload mode	Int	N	Identify record upload mode ● 1: Real-time upload (default) ● 2: Resume download
recWhitelistIdcard	Whitelist switch for identity verification	Int	N	Whitelist switch for identity verification ● 0: Off (default), directly perform the ID verification process after reading the ID card ● 1: On, read the ID number and compare it with the ID numbers of all people in the database. If it exists, perform a person-document comparison; if it does not exist, prompt insufficient authority

recModeFaceEnable	Face recognition mode switch	Int	N	Face recognition mode switch ● 0 : Off ● 1 : On (default)
recModeCardEnable	Card swipe mode switch	Int	N	Card swipe mode switch ● 0 : Off ● 1 : On (default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface ● 1 : Wiegand (default) ● 2 : TTL serial port ● 3 : USB
recModeCardIntfPort	Card number transmission serial port number	Int	N	Card number transmission serial port number This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port .* ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 (default) ● 4 : ttyS4 ● 100 : Custom
recModeCardIntfPortCustom	Customize the card number transmission interface port number	String	N	Customize the port number of the card number transmission interface ● This field takes effect when the card number transmission interface port *recModeCardIntfPort* is configured as *100*

recModeCardIntfBaudrate	Card number transmission serial port baud rate	Int	N	Card number transmission serial port baud rate This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port .* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModeIdcardEnable	Person-ID verification switch	Int	N	Person-ID verification switch ● 0 : Disable (default) ● 1 : Open
recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface ● 1: TTL serial port ● 2: 232 serial port ● 3 : USB (default)
recModeIdcardIntfPort	ID card transmission serial port number	Int	N	ID card transmission serial port number This field is effective when the ID card transmission interface is configured as *a serial port .* ● 1 : ttyS1 ● 2 : ttyS2 (default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface This field takes effect when the ID card transmission interface port *recModeIdcardIntfPort is configured*

				as 100
recModeIdcardIntfBaudrate	ID card transmission serial port baud rate	Int	N	ID card transmission serial port baud rate This field is effective when the ID card transmission interface is configured as a serial port. ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModeQrcodeEnable	QR code scanning mode switch	Int	N	QR code scanning mode switch ● 0 : Disable (default) ● 1 : Open
recModeQrcodeIntf	QR code transmission interface	Int	N	QR code transmission interface ● 1: TTL serial port (default) ● 2: 232 serial port ● 3 : USB
recModeQrcodeIntfPort	QR code transmission serial port number	Int	N	The port number of the QR code transmission serial port This field is effective when the QR code transmission interface *recModeQrcodeIntf is configured as a serial port.* ● 1 : ttyS1 ● 2 : ttyS2 (default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom

recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface This field takes effect when the QR code transmission interface port *recModeQrcodeIntfPort is configured as 100*
recModeQrcodeIntfBaudrate	QR code transmission serial port baud rate	Int	N	Baud rate of the serial port for QR code transmission This field is effective when the QR code transmission interface *recModeQrcodeIntfPort is configured as a serial port.* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModePalmEnable	Palmprint recognition switch	Int	N	Palmprint recognition switch ● 0 : Disable (default) ● 1 : Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch ● 0 : Disable (default) ● 1 : Open
pciRelayOut	Relay output	Int	N	Relay output ● 0 : Do not open the door ● 1: Open the door (default)
pciRelayMode	Relay Mode	Int	N	Relay Mode ● 1 : Normally open ● 2 : Normally closed

pciRelayDelay	Relay control time	Int	N	Relay control time ● 1000ms (default) ● The time interval between the door opening and door closing controlled by the relay is 1000ms by default. Please enter an integer between 100-25500, rounded down to the nearest hundred. For example, if you enter an integer between 101-199, the actual effective time is 100ms.
pciWgType	Wiegand Type	Int	N	Wiegand Type ● 1: Wiegand 26 (default) ● 2 : Wiegand 34 ● 3 : Wiegand 37
pciWgOut	Wiegand output type	Int	N	Wiegand output type ● 0: No output (default) ● 1: Output personnel id ● 2: Output card number ● 100 : Custom
pciWgOutCustom	Wiegand output custom content	String	N	Wiegand output custom content This field is effective when the Wiegand output type *pciWgOut is configured as 100*
pciComOut	Serial port output type	Int	N	Serial port output type ● 0: No output (default) ● 1: Output personnel id ● 2: Output card number ● 3: Output ID card ● 100 : Custom

pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type *pciComOut is configured as 100*
pciComOutPort	Serial output port	Int	N	Serial output port ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom
pciComOutPortCustom	Serial output port customization	String	N	Serial output port customization This field takes effect when the serial port output port *pciComOutPort is configured as 100*
pciComOutBaudrate	Serial port output baud rate	Int	N	Serial port output baud rate ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
pciLedAlwaysEnable	Fill light is always on	Int	N	Fill light is always on ● 0: Not always on (default) ● 1: Always on
pciLedColorStranger	Fill light color (stranger)	Int	N	Fill light color (stranger) ● 1: Red light (default) ● 2 : Green light
uiCompanyName	The interface displays the company name	String	N	Whether the apk main interface displays the middleware server IP ● 0 : Hide ● 1 : Show (default)
uiShowSn	The main interface displays the device serial	Int	N	Whether the device serial number is displayed on the apk main interface ● 0 : Hide ● 1 : Show (default)

	number			
uiShowIp	Whether the main interface displays the middleware server IP	Int	N	Whether the apk main interface displays the middleware server IP ● 0 : Hide ● 1 : Show (default)
uiShowPersonCount	Whether the main interface displays the number of people	Int	N	Whether the number of people is displayed on the main interface of apk ● 0 : Hide ● 1 : Show (default)
uiScreensaverWait	Screen saver waiting time	Int	N	apk enters screen saver waiting time, unit is seconds
sevUploadRecRecordUrl	The URL address to upload the identification record	String	N	
sevUploadDevHeartbeatUrl	Upload the URL address of the device heartbeat	String	N	
sevUploadDevHeartbeatInterval	Device heartbeat interval	Int	N	Device heartbeat interval, in seconds, default 60, 10 - 300
sevUploadRegPersonUrl	Upload the url address of the registered personnel data	String	N	

sevUploadRecStrangerDataEnable	Upload stranger identification data switch	Int	N	Whether to upload stranger identification data switch ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecSnapshotEnable	Upload recognition capture photo switch	Int	N	Whether to upload the switch for identifying stolen photos ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecCardDataEnable	Upload card swipe data switch	Int	N	Whether to upload data to identify card swipe ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecIdcardDataEnable	Upload ID card identification data switch	Int	N	Whether to upload ID card identification data switch ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecQrcodeDataEnable	Upload and identify QR code data switch	Int	N	Whether to upload the QR code data switch ● 0: Do not upload (default) ● 1 : Upload

Postman Example



Return to example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679625821375,
    "data": {
        "recModeQrcodeIntfPort": 2,
        "uiScreensaverWait": 60,
        "recModeIdcardIntfPort": 2,
        "sevUploadRecQrcodeDataEnable": 0,
        "uiShowSn": 1,
        "pciLedColorStranger": 1,
        "recModeIdcardIntf": 3,
        "recStrangerTtsMode": 1,
        "pciComOutBaudrate": 4,
        "pciRelayDelay": 1000,
        "pciComOut": 0,
        "recStrangerOpenDoor": 0,
        "recModePalmEnable": 0,
        "pciWgOut": 0,
        "pciWgType": 1,
        "recModeQrcodeIntf": 1,
        "recNoPerDisplayMode": 1,
        "pciRelayOut": 1,
        "recRank": 1,
        "recSucDisplayMode": 1,
        "sevUploadRecSnapshotEnable": 1,
        "sevUploadRecStrangerDataEnable": 1,
        "recSnapshotSave": 1,
        "recMultiplayer": 0,
        "recSucDisplayCustom": "{name}",
        "recModeIdcardIntfBaudrate": 4,
        "pciLedAlwaysEnable": 0,
        "sevUploadRecIdcardDataEnable": 1,
        "recRecordSaveDays": 7,
        "recNotBioDisplayMode": 1,
        "recStrangerEnable": 1,
        "recThreshold1v1": 60,
        "recModeQrcodeIntfBaudrate": 4,
        "recInterval": 3,
        "recIsStrangerTimes": 2,
        "recStrangerDisplayMode": 1,
        "uiShowIp": 1,
        "uiShowPersonCount": 1,
        "sevUploadDevHeartbeatInterval": 60,
        "pciRelayMode": 1,
        "recRecordSave": 1,
        "recModeCardEnable": 1,
        "recSucTtsMode": 2,
        "recModeFaceEnable": 1,
        "recRecordUploadMode": 1,
        "sevUploadRecCardDataEnable": 1,
        "recNotBioTtsMode": 1,
        "recWhitelistIdcard": 0,
        "recThreshold1vN": 50,
```

3.5 Identification Configuration

Description : Configure the recognition parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setRecConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
secret	password	String	Y	The server password set in the communication settings on the face device

deviceKey	Device serial number	String	Y	Device serial number, 18 digits
recThreshold1vN	1vN face recognition threshold	Int	N	The default is 65. Please enter an integer between 50 and 100. The higher the score, the higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	Same as above
recInterval	Identification interval time	Int	N	The default is 3 seconds. Recognition interval (the interval between callback notifications after consecutive successful recognitions of the same person).
recDistance	Identification distance	Int	N	Identification distance: ● 0: No limit (default) ● 1: within 0.5 meters ● 2: Within 1 meter ● 3: within 1.5 meters ● 4: Within 2 meters ● 5: Within 3 meters ● 6: Within 4 meters
recRank	Identify live level	Int	N	Identify the level of living body: ● 1. No liveness detection (default) ● 2. Monocular liveness ● 3. Binocular liveness
recSucTtsMode	Voice Mode	Int	N	Voice Mode: ● 1. No voice broadcast ● 2. Announce name (default) ● 100. Customized voice broadcast

recSucTtsCustom	Customized voice content	String	N	Customized voice content ● Default *{name}* ● If *recSucTtsMode* is 100, this field must be passed and cannot be empty ● *{name}* is allowed . The field format is fixed, and other contents only allow numbers, English and Chinese characters. ● The length limit is 255 characters. For example: *{name}* Welcome
recSucDisplayMode	Display Mode	Int	N	Display Mode ● 1: Name (default) ● 2: Do not display content ● 100: Custom display
recSucDisplayCustom	Display custom content	Int	N	Display custom content ● Default *{name}* ● If *recSucDisplayMode* is 100, this field must be passed and cannot be empty ● *{name}* is allowed . The field format is fixed. Other content only allows numbers, Chinese and English, and Chinese and English symbols. The length is limited to 255 characters. For example: *{name}* , check-in successful!
recStrangerEnable	Identify strangers switch	Int	N	Identify stranger switch: ● 0. Do not identify strangers ● 1. Identify strangers (default)
recIsStrangerTimes	Number of recognition failures	Int	N	How many times of identification failure is considered a stranger. Default is 2 times

recStrangerTtsMode	Stranger Voice Mode	Int	N	Stranger Voice Mode ● 1: Do not play voice (default) ● 2: Voice broadcast "The user is not registered, please contact the administrator" ● 100: Customize stranger voice
recStrangerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, ● If *recStrangerTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Beware of strangers
recStrangerDisplayMode	Stranger screen display text type	Int	N	Stranger screen display text type ● 1. The person is not registered (default) ● 100. Customization
recStrangerDisplayCustom	Text content displayed on stranger screen	String	N	Customized text displayed on stranger screen ● If *recStrangerDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The person is not registered!


recNotBioTtsMode	Non-live voice mode	Int	N	Non-live voice mode ● 1: Do not play voice (default) ● 2: Voice announcement "Do not try to use photos or videos for recognition" ● 100: Custom non-living voice
recNotBioTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, ● If *recNotBioTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition
recNotBioDisplayMode	Non-living screen display text type	Int	N	Non-living screen display text type ● 1 : Do not try to use photos or videos for recognition (default) ● 100 : Custom
recNotBioDisplayCustom	Non-living screen displays text content	String	N	Non-living screen displays text custom content ● If *recNotBioDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition!

recNoPerTtsMode	Insufficient permissions Voice mode	Int	N	Insufficient permissions Voice mode ● 1: Do not play voice ● 2: Voice broadcast "Insufficient permissions, please contact the administrator" (default) ● 100: Insufficient custom permissions for voice
recNoPerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content ● If *recNoPerTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. If you do not have enough permissions, please contact the administrator
recNoPerDisplayMode	Insufficient permissions screen display text type	Int	N	Insufficient permissions screen display text type ● 1 Insufficient permissions, please contact the administrator (default) ● 100 Custom
recNoPerDisplayCustom	Insufficient permissions to display text content on the screen	String	N	Insufficient permissions to display custom text on the screen ● If *recNoPerDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If: insufficient

				permissions, please contact the administrator!
recStrangerOpenDoor	Identify whether a stranger opens the door	Int	N	Identify whether a stranger opens the door ● 0: Do not open the door (default) ● 1 : Open the door
recMultiplayer	Identify multiple people	Int	N	Identify multiple people ● 0: Single person recognition (default) ● 1: Multi-person recognition
recSnapshotSave	Identify and save snapshots	Int	N	Identify and save snapshots ● 0 : Do not save ● 1 : Save (default)
recRecordSave	Identify and save records	Int	N	Identify and save records ● 0 : Do not save ● 1 : Save (default)
recRecordSaveDays	Identification Record Retention Days	Int	N	Identification record retention days, default retention is 7 days
recRecordUploadMode	Identify record upload mode	Int	N	Identify record upload mode ● 1: Real-time upload (default) ● 2: Resume download
recWhitelistIdcard	Whitelist switch for identity verification	Int	N	Whitelist switch for identity verification ● 0: Off (default), directly perform the ID verification process after reading the ID card ● 1: On, read the ID number and compare it with the ID numbers of

				all people in the database. If it exists, perform a person-document comparison; if it does not exist, prompt insufficient authority

Postman Example

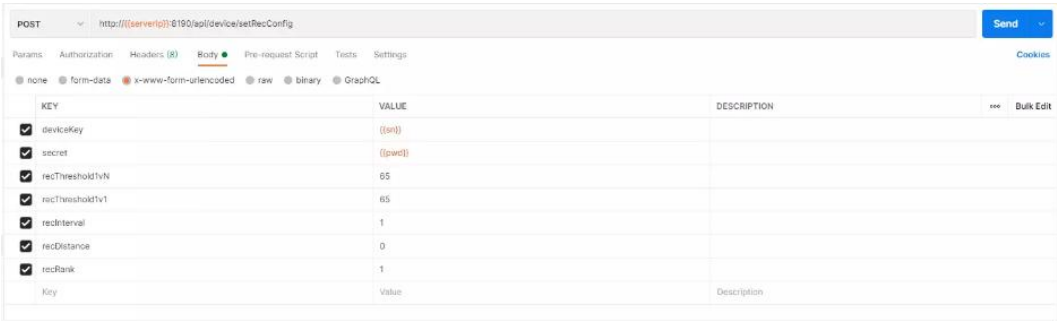

Return to example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679626078822,
    "data": {
        "recRecordSave": 1,
        "recSucTtsMode": 2,
        "recRank": 1,
        "recRecordUploadMode": 1,
        "recRecordSaveDays": 7,
        "recNotBioDisplayMode": 1,
        "recNotBioTtsMode": 1,
        "recSucDisplayMode": 1,
        "recWhitelistIdcard": 0,
        "recStrangerEnable": 1,
        "recStrangerTtsMode": 1,
        "recThreshold1vN": 65,
        "recThreshold1v1": 65,
        "recDistance": 0,
        "recNoPerTtsMode": 2,
        "recInterval": 1,
        "recSnapshotSave": 1,
        "recStrangerOpenDoor": 0,
        "recSucTtsCustom": "{name}",
        "recIsStrangerTimes": 2,
        "recStrangerDisplayMode": 1,
        "recMultiplayer": 0,
        "recNoPerDisplayMode": 1,
        "recSucDisplayCustom": "{name}"
    },
    "success": true
}
```


3.6 Identification Mode Configuration

Description : Configure the parameters related to the face recognition mode.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setRecModeConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
secret	password	String	Y	● The server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
recModeFaceEnable	Face recognition mode switch	Int	N	Face recognition mode switch ● 0 : Off ● 1 : On (default)
recModeCardEnable	Card swipe mode switch	Int	N	Card swipe mode switch ● 0 : Off ● 1 : On (default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface ● 1 : Wiegand (default) ● 2 : TTL serial port ● 3 : USB ● 4 : NFC


recModeCardIntfPort	Card number transmission serial port number	Int	N	Card number transmission serial port number This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 (default) ● 4 : ttyS4 ● 100 : Custom
recModeCardIntfPortCustom	Customize the card number transmission interface port number	String	N	Customize the port number of the card number transmission interface This field takes effect when the card number transmission interface port *recModeCardIntfPort* is configured as *100*
recModeCardIntfBaudrate	Card number transmission serial port baud rate	Int	N	Card number transmission serial port baud rate This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModeIdcardEnable	Person-ID verification switch	Int	N	Person-ID verification switch ● 0 : Disable (default) ● 1 : Open

recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface ● 1: TTL serial port ● 2: 232 serial port ● 3 : USB (default)
recModeIdcardIntfPort	ID card transmission serial port number	Int	N	ID card transmission serial port number This field is effective when the ID card transmission interface is configured as *a serial port* . ● 1 : ttyS1 ● 2 : ttyS2 (default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface This field takes effect when the ID card transmission interface port *recModeIdcardIntfPort is configured as 100*
recModeIdcardIntfBaudrate	ID card transmission serial port baud rate	Int	N	ID card transmission serial port baud rate This field is effective when the ID card transmission interface is configured as a serial port. ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)

recModeQrcodeEnable	QR code scanning mode switch	Int	N	QR code scanning mode switch ● 0 : Disable (default) ● 1 : Open
recModeQrcodeIntf	QR code transmission interface	Int	N	QR code transmission interface ● 1: TTL serial port (default) ● 2: 232 serial port ● 3 : USB
recModeQrcodeIntfPort	QR code transmission serial port number	Int	N	The port number of the QR code transmission serial port This field is effective when the QR code transmission interface *recModeQrcodeIntf is configured as a serial port.* ● 1 : ttyS1 ● 2 : ttyS2 (default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom
recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface This field takes effect when the QR code transmission interface port *recModeQrcodeIntfPort is configured as 100*
recModeQrcodeIntfBaudrate	QR code transmission serial port baud rate	Int	N	Baud rate of the serial port for QR code transmission This field is effective when the QR code transmission interface *recModeQrcodeIntfPort is configured as a serial port.* ● 1 : 9600 ● 2 : 19200

				● 3 : 38400 ● 4 : 115200 (default)
recModePalmEnable	Palmprint recognition switch	Int	N	Palmprint recognition switch ● 0 : Disable (default) ● 1 : Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch ● 0 : Disable (default) ● 1 : Open

Postman Example

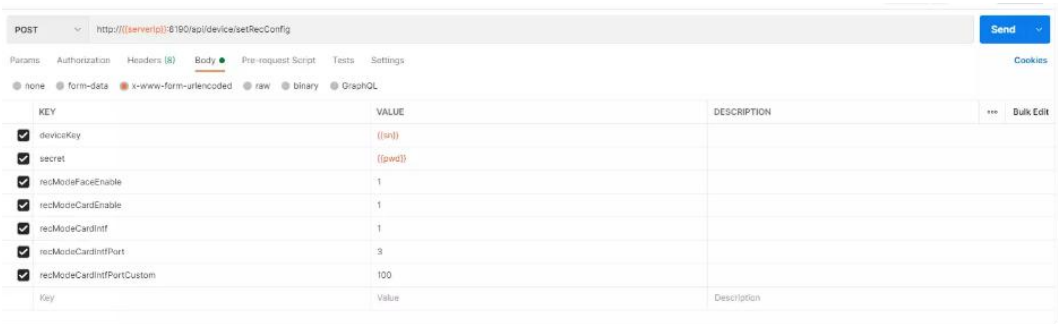

Return to example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679626231715,
    "data": {
        "recRecordSave": 1,
        "recSucTtsMode": 2,
        "recRank": 1,
        "recRecordUploadMode": 1,
        "recRecordSaveDays": 7,
        "recNotBioDisplayMode": 1,
        "recNotBioTtsMode": 1,
        "recSucDisplayMode": 1,
        "recWhitelistIdcard": 0,
        "recStrangerEnable": 1,
        "recStrangerTtsMode": 1,
        "recThreshold1vN": 65,
        "recThreshold1v1": 60,
        "recDistance": 0,
        "recNoPerTtsMode": 2,
        "recInterval": 3,
        "recSnapshotSave": 1,
        "recStrangerOpenDoor": 0,
        "recSucTtsCustom": "{name}",
        "recIsStrangerTimes": 2,
        "recStrangerDisplayMode": 1,
        "recMultiplayer": 0,
        "recNoPerDisplayMode": 1,
        "recSucDisplayCustom": "{name}"
    },
    "success": true
}
```


code code description

code	msg
100201	Device reboot failed, not rooted

3.7 Peripheral Configuration

Description : Configure the parameters related to the peripheral mode of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setPciConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
pciRelayOut	Relay output	Int	N	Relay output ● 0 : Do not open the door ● 1: Open the door (default)
pciRelayMode	Relay Mode	Int	N	Relay Mode ● 1 : Normally open ● 2 : Normally closed

pciRelayDelay	Relay control time	Int	N	Relay control time ● 1000ms (default) ● The time interval between the door opening and door closing controlled by the relay is 1000ms by default. Please enter an integer between 100-25500, rounded down to the nearest hundred. For example, if you enter an integer between 101-199, the actual effective time is 100ms.
pciWgType	Wiegand Type	Int	N	Wiegand Type ● 1: Wiegand 26 (default) ● 2 : Wiegand 34 ● 3 : Wiegand 37
pciWgOut	Wiegand output type	Int	N	Wiegand output type ● 0: No output (default) ● 1: Output personnel id ● 2: Output card number
pciComOut	Serial port output type	Int	N	Serial port output type ● 0: No output (default) ● 1: Output personnel id ● 2: Output card number ● 3: Output ID card ● 100 : Custom
pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type *pciComOut is configured as 100*

pciComOutPort	Serial output port	Int	N	Serial output port ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 ● 4 : ttyS4 ● 100 : Custom
pciComOutPortCustom	Serial output port customization	String	N	Serial output port customization This field takes effect when the serial port output port *pciComOutPort is configured as 100*
pciComOutBaudrate	Serial port output baud rate	Int	N	Serial port output baud rate ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
pciLedAlwaysEnable	Fill light is always on	Int	N	Fill light is always on ● 0: Not always on (default) ● 1: Always on
pciLedColorStranger	Fill light color (stranger)	Int	N	Fill light color (stranger) ● 1: Red light (default) ● 2 : Green light

Postman Example

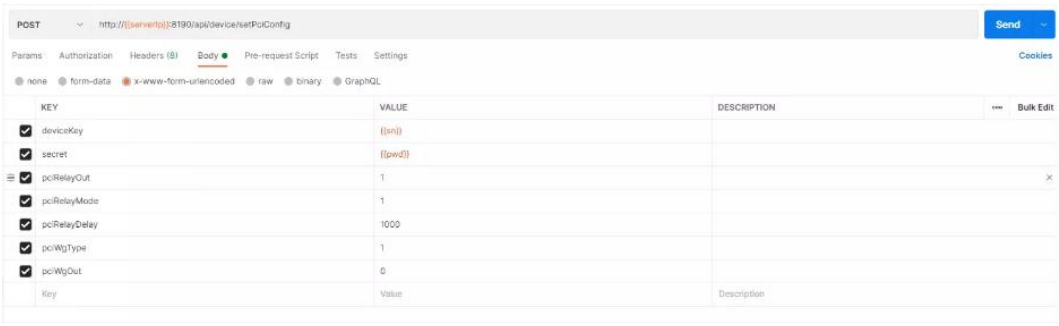

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626704622,
  "data": {
    "pciLedAlwaysEnable": 0,
    "pciRelayMode": 1,
    "pciComOutBaudrate": 4,
    "pciRelayDelay": 1000,
    "pciComOut": 0,
    "pciRelayOut": 1,
    "pciComOutPort": 4,
    "pciWgOut": 0,
    "pciLedColorStranger": 1,
    "pciWgType": 1
  },
  "success": true
}
```


3.8 Interface Display Configuration

Description : Configure the interface display parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setUiConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request	String	Y	application/x-www-form-urlencoded


	body type			

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
uiCompanyName	The interface displays the company name	String	N	The company name displayed on the apk interface
uiShowSn	The main interface displays the device serial number	Int	N	Whether the device serial number is displayed on the apk main interface ● 0 : Hide ● 1 : Show (default)
uiShowIp	Whether the main interface displays the middleware server IP	Int	N	Whether the apk main interface displays the middleware server IP ● 0 : Hide ● 1 : Show (default)
uiShowPersonCount	Whether the main interface displays the number of people	Int	N	Whether the number of people is displayed on the main interface of apk ● 0 : Hide ● 1 : Show (default)
uiScreensaverWait	Screen saver waiting time	Int	N	● apk enters screen saver waiting time, unit is seconds
uiLogoUrl	Logo url	string	N	picture address

uiScreenSaverEnble	ScreenSaver button	Int	N	0:Hide 1:Show(default)
uiScreenSaverUrl	ScreenSaverUrl	string	N	ScreenSaverUrl

Postman Example

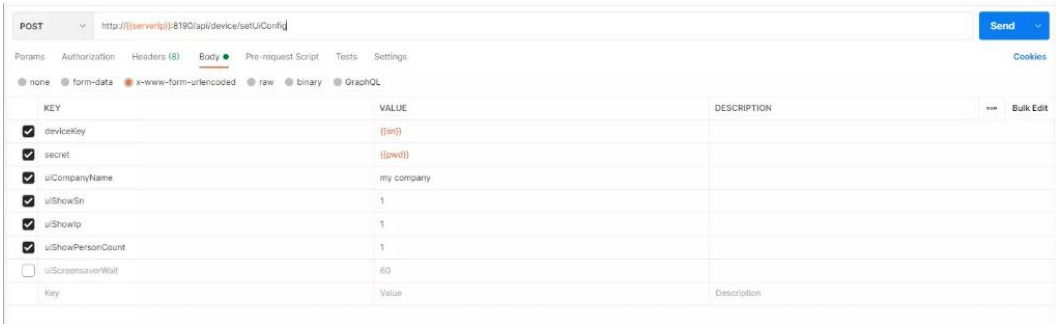

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679626662705,
    "data": {
        "pciLedAlwaysEnable": 0,
        "pciRelayMode": 1,
        "pciComOutBaudrate": 4,
        "pciRelayDelay": 1000,
        "pciComOut": 0,
        "pciRelayOut": 1,
        "pciComOutPort": 4,
        "pciWgOut": 0,
        "pciLedColorStranger": 1,
        "pciWgType": 1
    },
    "success": true
}
```


3.9 Server Configuration

Description : Configure the server-related parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://middleware server IP:8190/api/device/setSevConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
sevUploadRecRecordUrl	The URL address to upload the identification record	String	N	The callback address must conform to the regular expression: **((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

sevUploadDevHeartbeatUrl	Upload the URL address of the device heartbeat	String	N	Same as above
sevUploadRegPersonUrl	Upload the url address of the registered personnel data	String	N	Same as above
sevUploadRegFingerUrl	URL address for uploading registered fingerprint data	String	N	Same as above
sevUploadAlarmUrl	URL address for uploading alarm data	String	N	Same as above
sevUploadRegPalmUrl	The URL address to upload the palm data	String	N	Same as above
sevUploadDevHeartbeatInterval	Device heartbeat interval	Int	N	● Device heartbeat interval, in seconds, default 60, 10 - 300
sevUploadRecStrangerDataEnable	Upload stranger identification data switch	Int	N	Whether to upload stranger identification data switch ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecSnapshotEnable	Upload recognition capture photo switch	Int	N	Whether to upload the recognition snapshot switch ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecCardDataEnable	Upload card swipe data switch	Int	N	Whether to upload data to identify card swipe ● 0 : Do not upload

				● 1: Upload (default)
sevUploadRecIdcardDataEnable	Upload ID card identification data switch	Int	N	Whether to upload ID card identification data switch ● 0 : Do not upload ● 1: Upload (default)
sevUploadRecQrcodeDataEnable	Upload and identify QR code data switch	Int	N	Whether to upload the QR code data switch ● 0: Do not upload (default) ● 1 : Upload

Postman Example

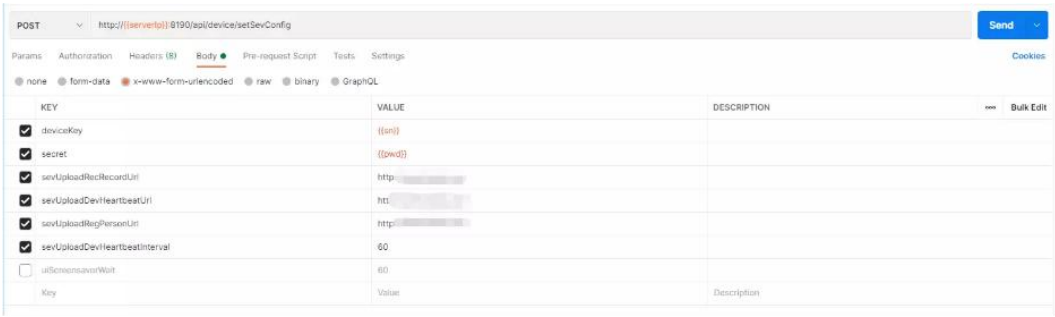

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626662705,
  "data": {
    "sevUploadDevHeartbeatInterval": 60,
    "sevUploadDevHeartbeatUrl": "http://localhost:8080/heartbeatUrl",
    "sevUploadRecCardDataEnable": 1,
    "sevUploadRecIdcardDataEnable": 1,
    "sevUploadRecQrcodeDataEnable": 0,
    "sevUploadRecRecordUrl": "http://localhost:8080/recordUrl",
    "sevUploadRecSnapshotEnable": 1,
    "sevUploadRecStrangerDataEnable": 1,
    "sevUploadRegPersonUrl": "http://localhost:8080/regPersonUrl"
  },
  "msg": "请求成功"
}
```


3.10 Remote control output (including door opening)

Description : Remote control face recognition device to open the door, serial port output, Wiegand output, custom pop-up window, voice broadcast

Method	URL
POST	http://middleware server IP:8190/api/device/output

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
type	Remote output interaction type	Int	Y	Device interaction type ● 1: Open the door (default) ● 2: Serial port ● 3 : Wiegand ● 4: Custom text pop-up window, custom voice broadcast
content	Remote output content	String	N	● Interaction type is set to 1: when *opening the door* , no setting is required ● the interaction type is set to 2: *serial port* , only numbers, English and English characters are allowed in the content, and the length is limited to 255 characters. ● the Interaction Type is set to 3: *Wiegand* , only numbers are allowed. ● the interaction type is set to 4: *custom pop-up window and voice broadcast* , the content is set to JSON string

When the output type is set to 4, the remote output content *JSON* string example:

```
{
  "ttsContent":"自定义语音,不传则不进行语音播报", //语音播报内容
  "displayContent":"自定义文字,不传则弹窗后显示内容为空" //弹窗显示内容
}
```

Postman Example



Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679638286576,
  "data": {
    "type": 4,
    "content": "{\"ttsContent\":\"你好\",\"displayContent\":\"你好\"}"
  },
  "success": true
}
```

code code description

code	msg
100501	The value of content cannot be empty
100502	The length of content is limited to 255 characters
100503	The value of content is only allowed to be numbers
100504	The value of content is not defined by the interface. Please refer to the interface documentation.

3.11 Setting up a wired network

Note : Set the *DHCP* mode of the face recognition device and other wired network configurations. The fixed IP set on this interface is suitable for network cable connection.

Method	URL
POST	http://middleware server IP:8190/api/device/setNetwork

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
dhcpEnable	DHCP Mode Selection	Int	Y	DHCP Mode Selection ● 0: Manually set IP mode. Except subnetMask, all other parameters must be passed in and cannot be empty. ● 1: Dynamically obtain IP mode, no need to pass in other

				parameters
ip	IP address	String	N	Set a static IP address for the face recognition device
gateway	Gateway	String	N	Setting up the gateway
subnetMask	Subnet Mask	String	N	Setting the Subnet Mask
DNS	DNS Server	String	N	Setting up DNS servers

Postman Example

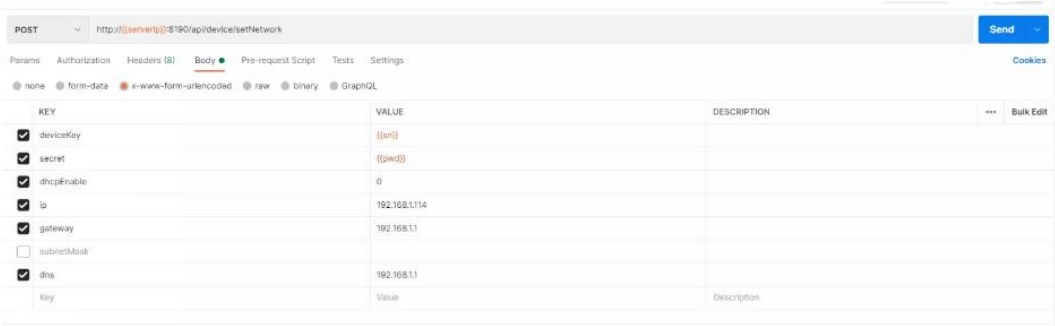

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679638685598,
    "data": {
        "dhcpEnable": 0,
        "ip": "192.168.1.114",
        "dns": "192.168.1.1",
        "pwd": "",
        "gateway": "192.168.1.1"
    },
    "success": true
}
```

3.12 Set the upload address

Description : Set the reporting address configuration of the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/device/setUploadUrl

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
data	List<Object>	List<Object>	Y	Reporting address parameters

Object.type	Configure the type of the reported data URL	Int	Y	Configure the type of the reported data URL ● 0: Clear all reported addresses ● 1: Heartbeat report ● 2: Identify and report records ● 3: Registered personnel data reporting ● 4: Fingerprint registration data reporting ● 5: Anti-tampering alarm data reporting ● 6: Palmprint registration data reporting
Object.url	Configured URL	String	N	The upload address must conform to the regular expression: **((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

data request parameter description:

```
// data 请求参数为数组格式
[
  {"type": 1, url: "http://www.baidu.com"},
  {"type": 2, url: "http://www.baidu.com"},
  ...
]
```

Postman Example



Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679640322132,
  "data": [
    {
      "type": 1,
      "url": "http://www.baidu.com"
    },
    {
      "type": 2,
      "url": "http://www.baidu.com"
    }
  ],
  "success": true
}
```


Identification record reporting request parameter description:

Parameter name	type	Additional Notes
deviceKey	String	Device serial number, 18 digits
recordId	String	Identify the unique ID of the record
personSn	String	Personnel Number
personType	Int	Person Type0: Unknown1: Employee2: Visitor3: Blacklist
verifyStyle	Int	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face

checkImgUrl	String	Snap photo LAN path
checkImgBase64	String	Snapshot photo imgBase64 string
cardNo	String	card number
idCard	String	ID number
voucherCode	String	Voucher Number
temperature	String	body temperature
attach	String	Additional Information
maskFlag	Int	Mask identification 0: No mask 1: With mask
capFlag	Int	Hat mark 0: No hat 1: With hat
faceFlag	Int	Face ID0: No1: Yes
cardFlag	Int	Card swipe identification0: No1: Yes
fingerFlag	Int	Fingerprint identification0: No1: Yes
idCardFlag	Int	ID card identification0: No1: Yes
pwdFlag	Int	Password ID0: No1: Yes
palmFlag	Int	Palmprint ID0: No1: Yes
resultFlag	Int	Identification result mark 1: Success 2: Failure 3: Insufficient authority

strangerFlag	Int	Stranger ID0: No1: Yes
openDoorFlag	Int	Door open flag0: No1: Yes
recordTime	Long	Passage time, Unix millisecond timestamp (13 bits)

Identify the report request response string :

Note: If you do not respond with the correct string, the record will be uploaded repeatedly

```
{"result":1,"code":"000"}
```

Heartbeat reporting request parameter description:

- The device will report heartbeat information to the heartbeat address every minute.
- No information is required to be returned, and the device will not process it.

Parameter name	type	Additional Notes
deviceKey	String	Device serial number, 18 digits
time	Long	Request time, Unix millisecond timestamp (13 bits)
ip	String	Device IP
personCount	Int	Number of staff

faceCount	Int	Number of photos
version	String	Device version number
freeDiskSpace	String	Remaining disk space unit: M

Personnel registration report request parameter description:

- When the device creates a person, it will register the person and report the address POST person information
- No information is required to be returned, and the device will not process it.

Parameter name	type	Additional Notes
deviceKey	String	Device serial number, 18 digits
personType	Int	Personnel Type ● 1 Internal staff ● 2 Visitors ● 3 Blacklist
personSn	String	Personnel number/employment number
name	String	Personnel Name
mobile	String	Phone number
cardNo	String	card number
idCard	String	ID number

verifyPwd	String	password
voucherCode	String	Voucher Number
acGroupNumber	Int	Access control group number
verifyStyle	Int	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face
expiredType	Int	Expiration Type ● 0 Never expires ● 1 Time ● 2 times ● 3 Time + Repetitions
validCount	Int	Valid times
validTimeBegin	Long	Valid time start , Unix millisecond timestamp (13 bits)
validTimeEnd	Long	Valid time end, Unix millisecond timestamp (13 bits)
acTzNumber1	Int	Passage time 1 number
acTzNumber2	Int	Passage time 2 number
acTzNumber3	Int	Passage time 3 number

updateTime	Long	Update time, Unix millisecond timestamp (13 bits)
createTime	Long	Creation time, Unix millisecond timestamp (13 bits)

Fingerprint registration report request parameter description:

- When the device creates a person, if the person has registered a fingerprint, the fingerprint information will be POSTed to the person registration reporting address
- No information is required to be returned, and the device will not process it.

Parameter name	type	Additional Notes
deviceKey	String	Device serial number, 18 digits
personSn	String	Personnel number/employment number
fingerId	String	Unique identifier of fingerprint feature value
fingerNum	Int	Finger number, which finger, 2 digits ● The first digit indicates the left and right hands, 1 for left hand and 2 for right hand ● The second finger is marked, 1 thumb 2 index finger 3 middle finger 4 ring finger 5 little finger
feature	String	Fingerprint feature value
time	Long	Registration time, Unix millisecond timestamp (13 bits)

3.13 APK Upgrade

Description : Set the reporting address configuration of the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/device/upgradeApk

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
versionCode	apk version number	Int	Y	Upgraded APK version number
channel	Channel Number	String	Y	Channel number of the device
apkUpgradeUrl	apk upgrade address	String	Y	The apk upgrade address needs to conform to the regular expression: ((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?

3.14 Setting the time

Description : Set the time of the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/device/setTime


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
timestamp	Timestamp	String	Y	13-bit timestamp

Postman Example

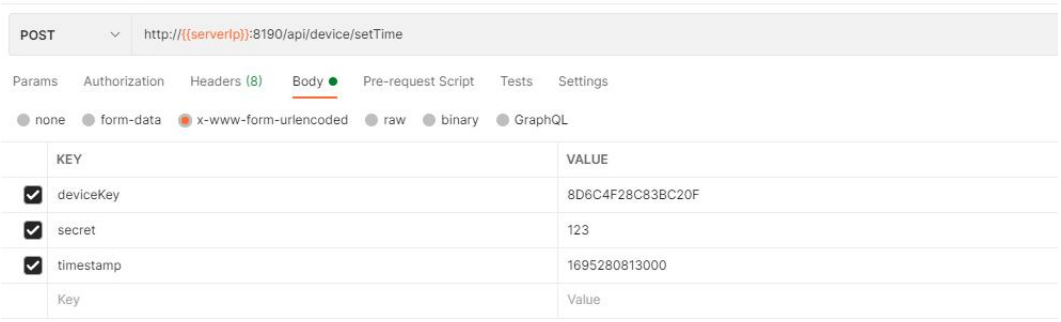

3.15 Setting custom configuration

Description : Set custom configuration settings for face recognition

Method	URL
POST	http://middleware server IP:8190/api/device/setCstConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
json	Custom configuration JSON	String	Y	Custom configuration JSON


json parameter example

{


// Custom Key: Custom value

"delay_time_for_alarm_activation" : 5

}

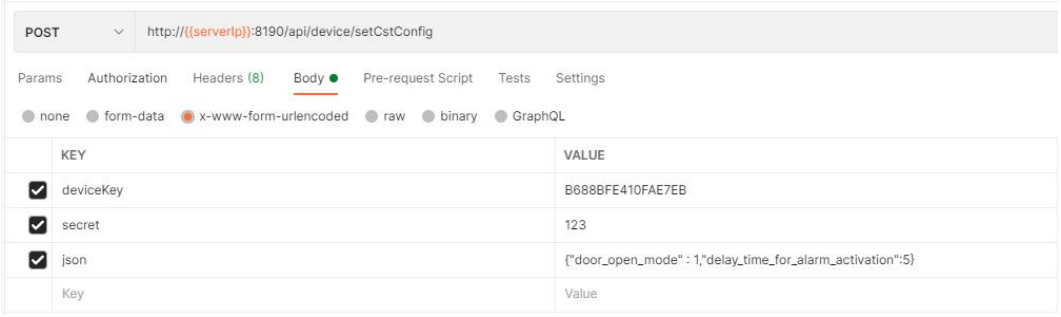

Postman Example

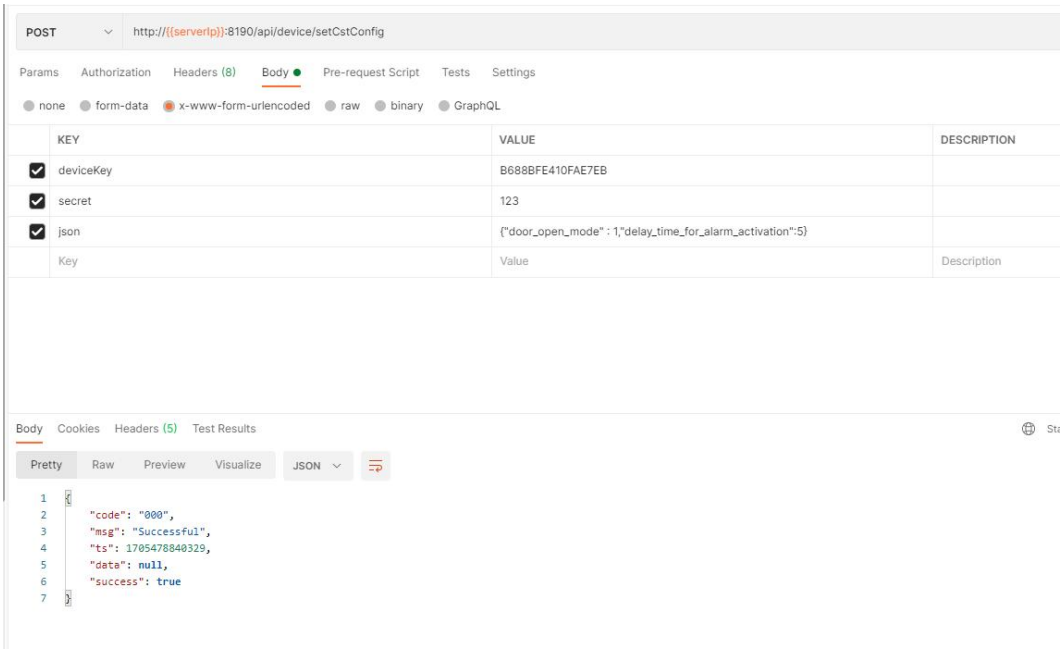

3.18 Get the door sensor status

Description : Set the door magnetic closed state of the device connected

Method	URL
POST	http://middleware server IP:8190/api/device/setCstConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes

Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

Return parameter description

{

"code": "000",

"msg": "Successful",

"ts": 1705478552329,


//Door sensor status 0: Closed 1: Open -1: No status obtained


"data": 1,

"success": true

}

Postman Example

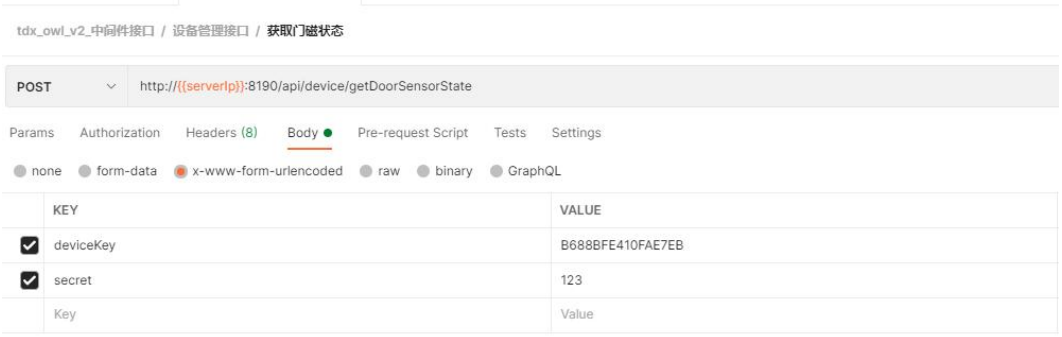

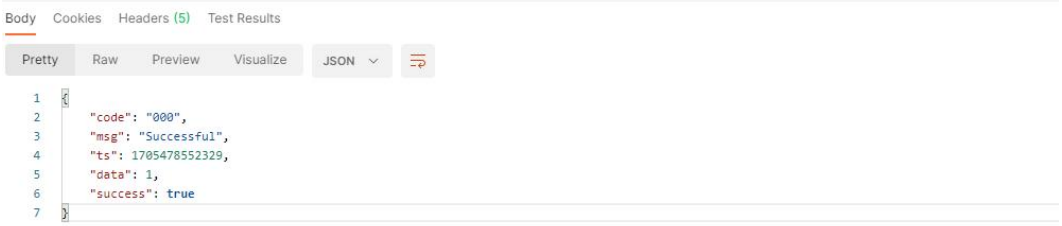

4. Personnel Management Interface

4.1 Personnel Creation

Description : Create different types of users on the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/person/create

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
type	Personnel Type	Int	Y	Personnel Type ● 1: Internal staff ● 2 : Visitors ● 3 : Blacklist
s	Work No.	String	Y	Personnel unique identification When creating a person, the employee number cannot be repeated with other employee numbers. Only numbers and English letters are allowed, case sensitive
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for

				identification, and the screen will also display the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	Phone number	String	N	
verifyPwd	password	String	N	TODO
voucherCode	Voucher Number	String	N	TODO
acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face

expiredType	Expiration Type	Int	N	Expiration type of personnel ● 0: Never expire (default) ● 1: Time period ● 2: Number of TODOs ● 3: Time + times TODO
validTimeBegin	Effective time starts	Long	N	The start time of the personnel's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the personnel, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

Postman Example

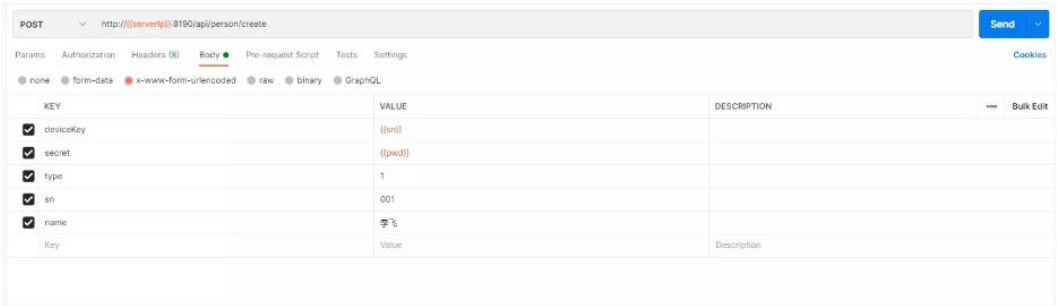

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679640539761,
  "data": {
    "acGroupNumber": 0,
    "expiredType": 0,
    "name": "李飞",
    "sn": "001",
    "type": 1,
    "verifyStyle": 0
  },
  "success": true
}
```


4.2 Personnel Update

Description : Update user information on the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/person/update

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes

deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
type	Personnel Type	Int	Y	Personnel Type ● 1: Internal staff ● 2 : Visitors ● 3 : Blacklist
s	Work No.	String	Y	Personnel unique identification, When updating, modify the database information in the device according to the work number. If the corresponding work number does not exist, the modification will fail. Only numbers and English letters are allowed, case sensitive
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for identification, and the screen will also display the name of the person corresponding to the card number
idCard	ID number	String	N	

mobile	Phone number	String	N	
verifyPwd	password	String	N	TODO
voucherCode	Voucher Number	String	N	TODO
acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face
expiredType	Expiration Type	Int	N	Expiration type of personnel ● 0: Never expire (default) ● 1: Time period ● 2: Number of TODOs ● 3: Time + times TODO

validTimeBegin	Effective time starts	Long	N	The start time of the personnel's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the personnel, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

Postman Example

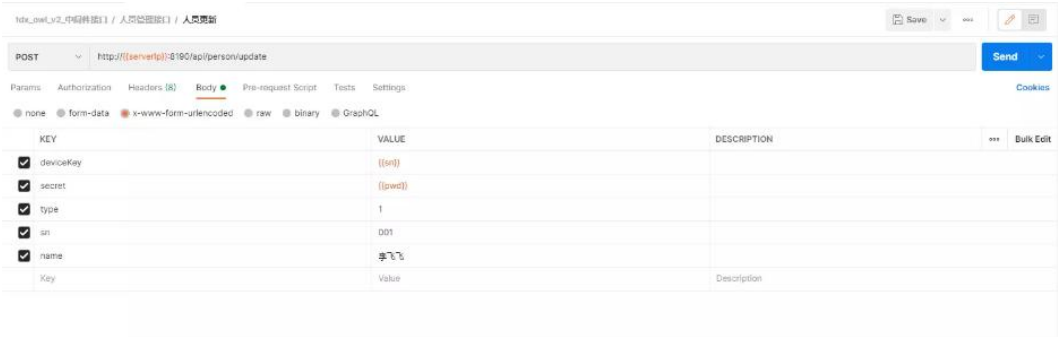

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679640632356,
  "data": {
    "acGroupNumber": 0,
    "expiredType": 0,
    "name": "李飞飞",
    "sn": "001",
    "type": 1,
    "verifyStyle": 0
  },
  "success": true
}
```


4.3 Personnel Deletion

Description : Delete the personnel information corresponding to the employee number on the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/person/delete

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmi	Additional Notes

			tted	
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
s	Work No.	List<String>	Y	To delete a set of employee IDs, separate multiple numbers with commas.

Postman Example

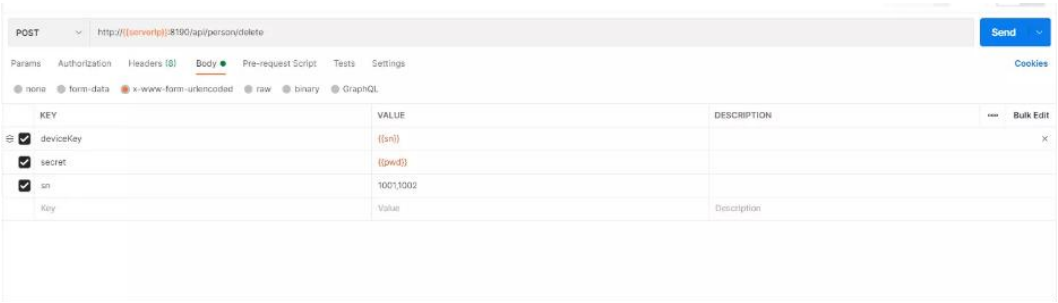

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679641700568,
    "data": {
        "sn": [
            "1001",
            "1002"
        ]
    },
    "success": true
}
```

4.4 Clearing out personnel

Description : Clear all user information on the device

Method	URL
POST	http://middleware server IP:8190/api/person/empty


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

Postman Example

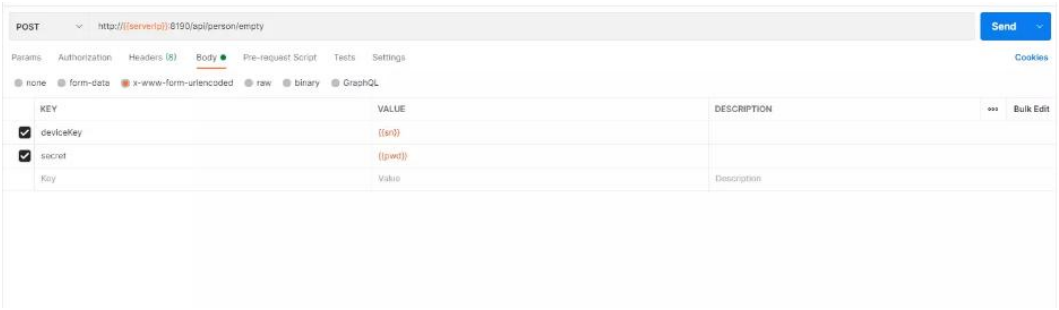

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679641778969,
    "data": null,
    "success": true
}
```


4.5 Person Search

Description : Find the corresponding user information according to the user's work number, ID number, and card number

Method	URL
POST	http://middleware server IP:8190/api/person/find


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device
type	Find Type	Int	Y	Find Type ● 1 : Work number ● 2 : ID card ● 3 : Card number
key	Corresponding query data	String	Y	

Postman Example

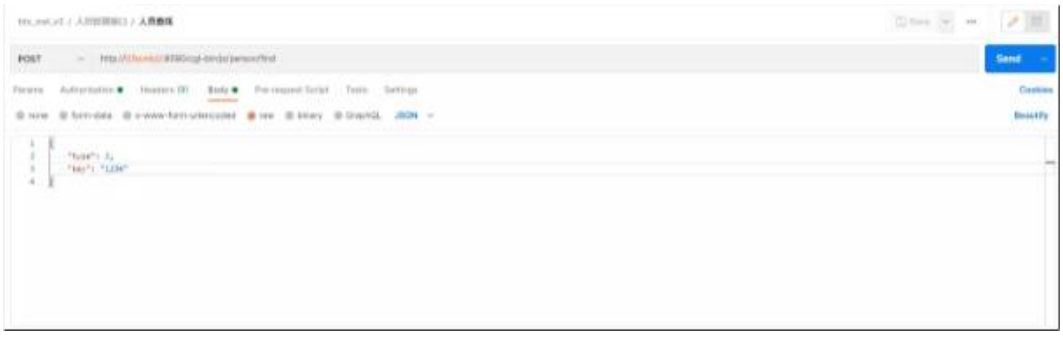

Return to example

```
{
  "code": "000",
  "data": {
    "acGroupNumber": 1, //对应门禁权限组编号
    "cardNo": "123",   //卡号
    "idCard": "1234",   //身份证号
    "mobile": "",       //手机号
    "name": "001",      // 用户名
    "sn": "001",        //工号
    "type": 1,          //用户类型 1：员工 2：访客 3：黑名单
    "updateTime": 1678851969615,  //用户信息修改日期
    "verifyPwd": ""     //用户密码
  },
  "msg": "请求成功"
}
```


4.6 Personnel List Search

Description : Query all user information by page

Method	URL
POST	http://middleware server IP:8190/api/person/findList

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes

deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
index	page number	Int	Y	Page number, starting from 1
length	Query quantity	Int	N	The number of users queried per page, the default is 20

Postman Example

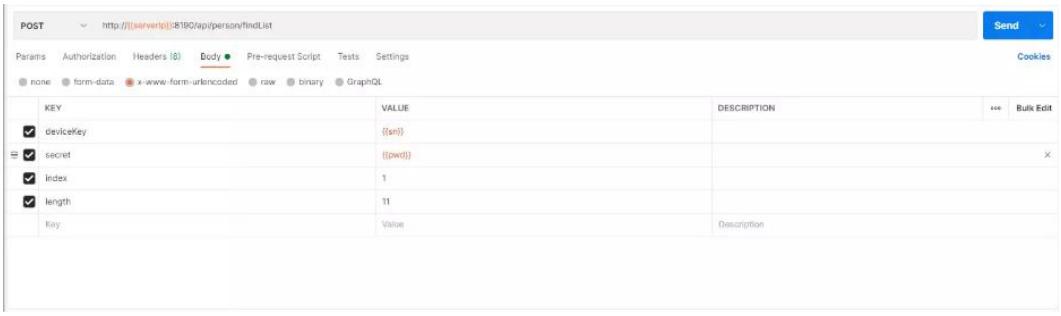

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679642006310,
  "data": [
    {
      "acGroupNumber": 0,
      "expiredType": 0,
      "name": "李飞",
      "updateTime": 1679642033160,
      "sn": "001",
      "type": 1,
      "verifyStyle": 0
    }
  ],
  "success": true
}
```


4.7 Creation or update of personnel passage time period

Note : Set the access time for the corresponding user from Monday to Sunday. Users who pass outside the access time will be displayed as insufficient authority and verification failed.

Method	URL
POST	http://middleware server IP:8190/api/person/passtime/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
s	Work No.	List<String>	Y	Employee ID collection, multiple employee IDs are separated by commas
passtimeList	Traffic time	String	N	Passing time Json string A maximum of 3 sets are allowed. If only 1 segment is set, the last two segments do not need to be transmitted. Passing time string, the format is **start time - end time** , the time format is HH:mm, for example: 00:00-23:59, separated by **-**

passtimeList **Request parameter example:**

```
[  //通行时段字符串,格式为 开始时间 短横线 结束时间, 时间格式为 HH:mm, 例 : 00:00 23:59 中间用 - 分隔
    {
      "sun": "00:00-23:59", // 星期日通行时间段
      "mon": "00:00-23:59", // 星期一时间段
      "tue": "00:00-23:59", // 星期二时间段
      "wed": "00:00-23:59", // 星期三时间段
      "thurs": "00:00-23:59", // 星期四时间段
      "fri": "00:00-23:59", // 星期五时间段
      "sat": "00:00-23:59" // 星期六时间段
    },
    {
      "sun": "00:00 23:59", // 星期日通行时间段
      "mon": "00:00 23:59", // 星期一时间段
      "tue": "00:00 23:59", // 星期二时间段
      "wed": "00:00 23:59", // 星期三时间段
      "thurs": "00:00 23:59", // 星期四时间段
      "fri": "00:00 23:59", // 星期五时间段
      "sat": "00:00 23:59" // 星期六时间段
    },
]
```

Postman Example

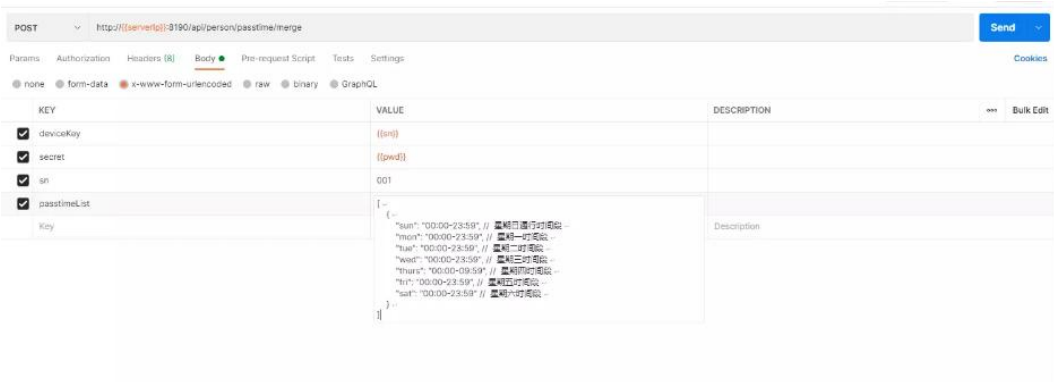

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679645474676,
  "data": {
    "passtimeList": [
      {
        "thurs": "00:00-09:59",
        "tue": "00:00-23:59",
        "sat": "00:00-23:59",
        "wed": "00:00-23:59",
        "fri": "00:00-23:59",
        "mon": "00:00-23:59",
        "sun": "00:00-23:59"
      }
    ],
    "sn": [
      "001"
    ]
  },
  "success": true
}
```


4.8 Deletion of personnel passage time

Description : Remove the time limit for the user's access

Method	URL
POST	http://middleware server IP:8190/api/person/passtime/delete


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
s	page number	List<String>	Y	Employee ID collection, multiple IDs are separated by commas

Postman Example

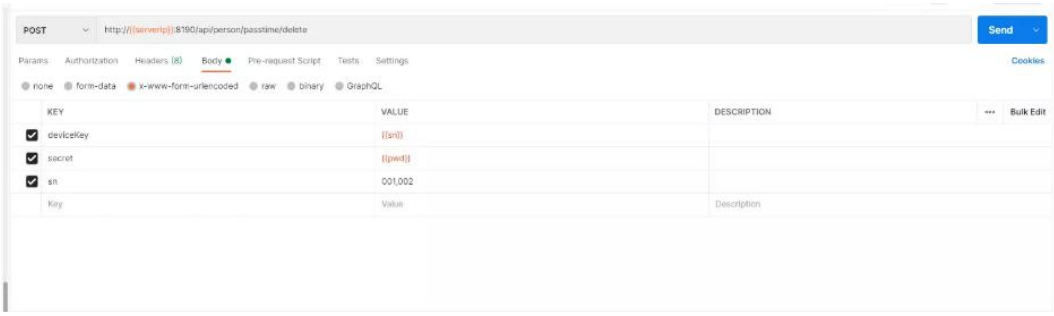

Return to example


```
{
    "code": "000",
    "data": {
        "sn": [
            "001",
            "002"
        ]
    },
    "msg": "请求成功"
}
```

4.9 Personnel creation or update

Description : Create different types of users on the face recognition device. If the person already exists, update the person information.

Method	URL
POST	http://deviceIP:8190/api/js/person/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	● Device serial number, 18 digits
secret	password	String	Y	● The server password set in the communication settings on the face device

type	Personnel Type	Int	Y	Personnel Type ● 1: Internal staff ● 2 : Visitors ● 3 : Blacklist
s	Work No.	String	Y	Personnel unique identification When creating a person, the employee number cannot be repeated with other employee numbers. Only numbers and English letters are allowed, case sensitive If it already exists, update the personnel information
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for identification, and the screen will also display the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	Phone number	String	N	

verifyPwd	password	String	N	
voucherCode	Voucher Number	String	N	
acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face
expiredType	Expiration Type	Int	N	Expiration type of personnel ● 0: Never expire (default) ● 1: Time period ● 2: Number of TODOs ● 3: Time + times TODO
validTimeBegin	Effective time starts	Long	N	The start time of the personnel's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen

				will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the personnel, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

Postman Example

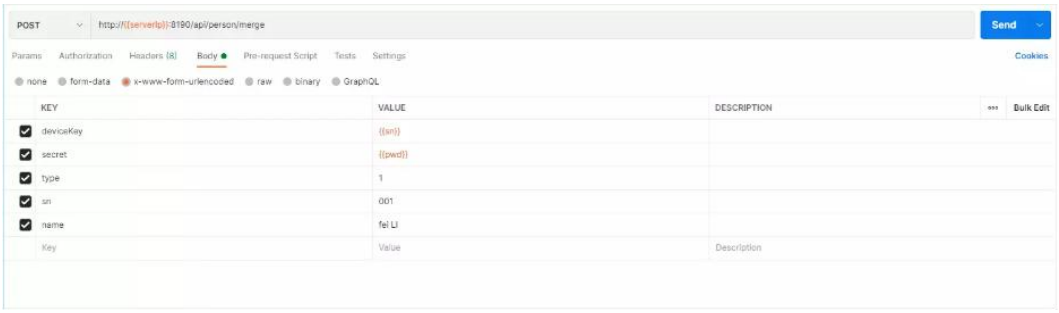

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679970273258,
    "data": {
        "acGroupNumber": 0,
        "expiredType": 0,
        "name": "fei LI",
        "sn": "001",
        "type": 1,
        "verifyStyle": 0
    },
    "success": true
}
```

5. Face Management Interface

5.1 Face creation or update

Description : Register the facial recognition photo of the corresponding person by work number

Method	URL
POST	http://middleware server IP:8190/api/face/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
personSn	Staff number	String	Y	Personnel number, must first register personnel
imgUrl	Work No.	String	Y	The LAN URL address of the photo Photos only support images stored in

				http protocol locations
imgBase64	Name	String		● Base64 encoded string of the photo ● The photo formats supported are PNG, JPG, JPEF; ● imgBase64 needs to remove the header such as: data:image/jpeg;base64
easy	card number	Int	N	Detect photo quality level ● 0: Strictly check the photo quality ● 1: Relaxed detection of photo quality

Request Instructions

- You must add people before adding pictures
- imgUrl and imgBase64 parameters are required
- The photo formats supported are PNG, JPG, JPEF;

Postman Example

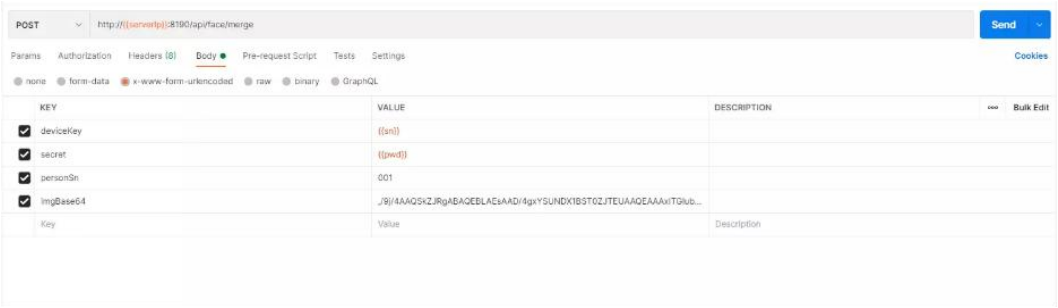

Return to example

```
{
  "code": "000",
  "data": {
    "easy": 0,
    "imgBase64": "./9j/4AAQSkZJRgABAQEBLAEsAAD/4g.....",
    "personSn": "001"
  },
  "msg": "请求成功",
  "ts": 1679645940300,
}
```


5.2 Face Removal

Description : Delete the facial recognition photo of the corresponding person by work number

Method	URL
POST	http://middleware server IP:8190/api/face/delete

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits

secret	password	String	Y	The server password set in the communication settings on the face device
s	Staff ID Collection	List<String>	Y	Personnel number set, multiple personnel are separated by commas

Postman Example

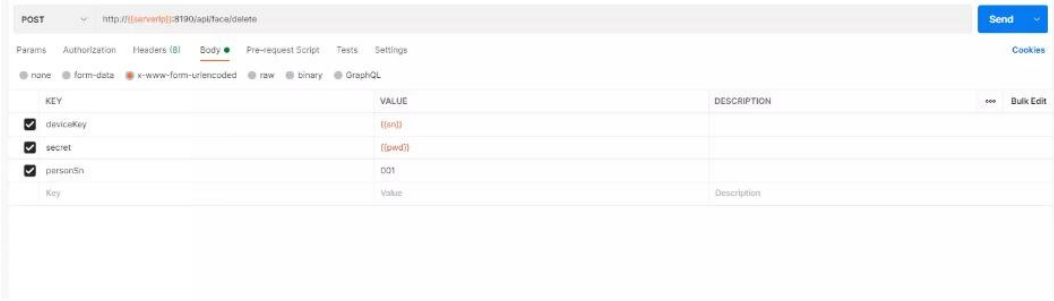

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679645672842,
    "data": {
        "sn": [
            "001",
            "002"
        ]
    },
    "success": true
}
```


5.3 Face Search

Description : Query the imgBase64 encoding of the photo of the corresponding person on the face recognition device

Method	URL
POST	http://middleware server IP:8190/api /face/find


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
personSn	Personnel Number	String	Y	Personnel Number

Postman Example

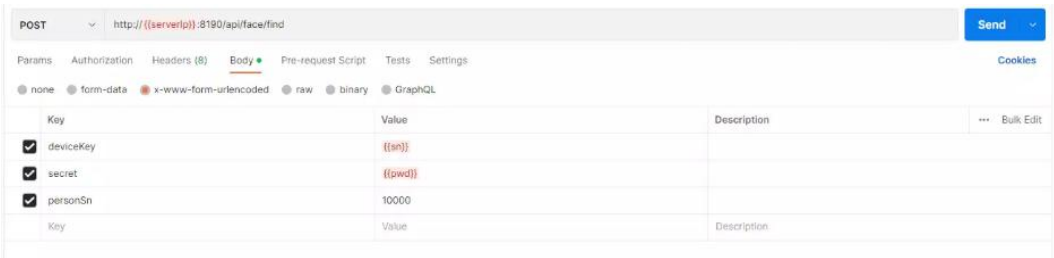

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970540525,
  "data": {
    "imgBase64": "/9j/4AAQSkZJRgABAQAAAQABAAD/2wBDAA0JC",
    "personSn": "10000",
    "featureData": "xxxxx"
  },
  "success": true
}
```


Return parameter data Description:

Parameter name	type	Additional Notes
personSn	String	Personnel's work number
imgBase64	String	imgbase64 encoding of the photo
featureData	String	Face feature value

6. Record Management Interface

6.1 Search the Pass Record List

Description : Query the access records of the corresponding person on the face recognition device

Method	URL
POST	http://middleware server IP:8190/api/record/findList

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
startTime	The start timestamp of the query	Long	Y	Unix millisecond timestamp (13 bits)
endTime	The end timestamp of the query	Long	Y	Same as above
personSn	Work No.	String	N	Query the specified user ID. If this parameter is not passed, query all users.
personType	Personnel Type	Int	N	Query the personnel type of the record ● -1 : all (default) ● 0 : Unknown ● 1 : Employee ● 2 : Visitors ● 3 : Blacklist

recordType	Find Type	Int	N	The type of record to be queried ● 0 : All (default) ● 1: Face recognition ● 2 : Swipe card ● 3: Card + Face ● 4 : Fingerprint
index	page number	Int	N	Page number, starting from 1
length	Query the number of records	Int	N	The number of records to query each time, the default is 20
order	sort by	Int	N	sort by ● 0 : Descending (default) ● 1 : Ascending

Postman Example

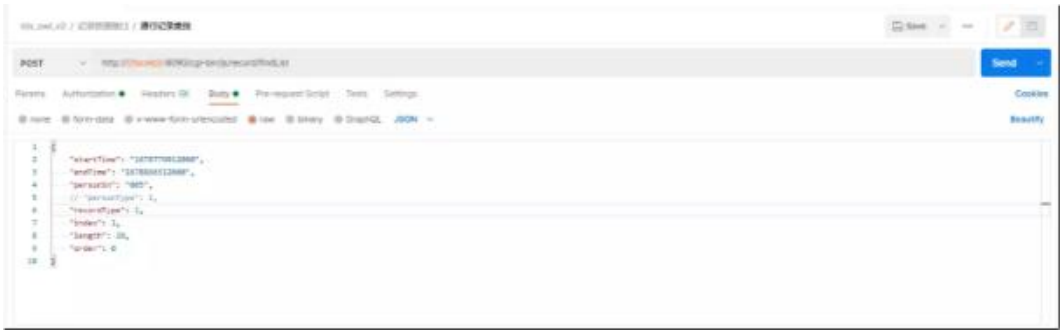

Return to example

```
{
  "code": "000",
  "data": [
    {
      "cardNo": "",  //卡号
      "checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848139154.jpg", //抓拍照片路径
      "createTime": 1678848139228,  //通行
      "faceFlag": 1, //是否是刷脸通行 1: 是 0 : 否
      "id": 153,  // 记录 ID
      "idCard": "", //身份证号
      "openDoorFlag": 1,  //是否通行 1: 是 0 : 否
      "personName": "005",  //用户名
      "personSn": "005",  //工号
      "resultFlag": 1,  //
      "strangerFlag": 0 //是否陌生人通行 1 : 是 0 : 否
    },
    {
      "cardNo": "",
      "checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848138631.jpg",
      "createTime": 1678848138754,
      "faceFlag": 1,
      "id": 152,
      "idCard": "",
      "openDoorFlag": 1,
      "personName": "005",
      "personSn": "005",
      "resultFlag": 1,
      "strangerFlag": 0
    }
  ],
  "msg": "请求成功"
}
```


Return parameter data array description:

Parameter name	type	Additional Notes
id	Long	Record unique identifier
personSn	String	The employee number of the person taking the photo
personName	String	Name of the person taking the photo

personType	Int	Query the personnel type of the record ● 0 : Unknown ● 1 : Employee ● 2 : Visitor ● 3 : Blacklist
checkImgUrl	String	Snap photo LAN address
cardNo	String	card number
idCard	String	ID number
temperature	String	body temperature
attach	String	Additional Information
maskFlag	Int	Wearing a mask1: Yes0: No
capFlag	Int	Wearing a helmet? 1: Yes 0: No
faceFlag	Int	Is it a face scan pass? 1: Yes 0: No
cardFlag	Int	Is it a card swipe pass? 1: Yes 0: No
fingerFlag	Int	Is fingerprint access required? 1: Yes 0: No
idCardFlag	Int	Is it to scan the ID card to pass 1: Yes 0: No
pwdFlag	Int	Is it to verify the password? 1: Yes 0: No
resultFlag	Int	Identification result mark 1: Success 2: Failure 3: Insufficient authority
strangerFlag	Int	Is it a stranger? 1: Yes 0: No

openDoorFlag	Int	Open the door 1: Yes 0: No
createTime	Long	Passing time,
direction	Int	0:close; 1:check_in; 2:break-out 3:break-in; 4.check-out

6.2 Deletion of Pass Records

Description : Delete the pass records of the corresponding period on the personnel identification device

Method	URL
POST	http://middleware server IP:8190/api/record/delete

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

startTime	Start timestamp	Long	Y	Unix millisecond timestamp (13 bits)
endTime	End timestamp	Long	Y	Same as above
personSn	Work No.	String	N	Delete the records of the specified user ID. If this parameter is not passed, all records will be deleted.
personType	Personnel Type	Int	N	Type of person who deleted the record ● -1 : all (default) ● 0 : Unknown ● 1 : Employee ● 2 : Visitors ● 3 : Blacklist
recordType	Find Type	Int	N	Type of deleted records ● 0 : All (default) ● 1: Face recognition ● 2 : Swipe card ● 3: Card + Face ● 4 : Fingerprint
recordId	Record unique identifier	Int	N	Record unique identifier The id in the data parameter in the response information of the corresponding access record search interface

Postman Example

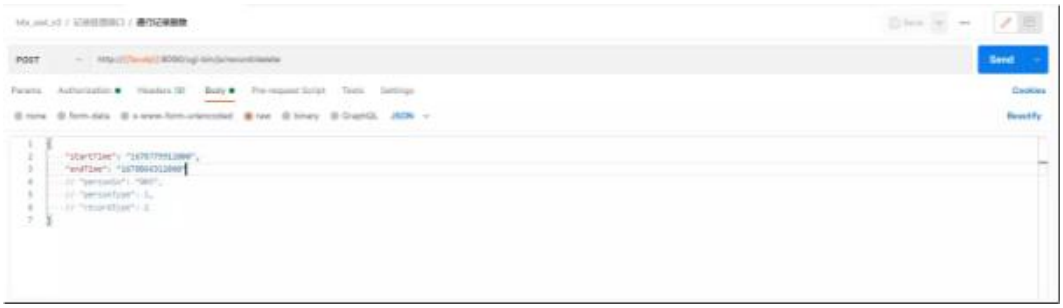

Return to example


```
{
    "code": "000",
    "data": {
        "endTime": 1678866312000,
        "personType": -1,
        "recordType": 0,
        "startTime": 1678779912000
    },
    "msg": "请求成功"
}
```


6.3 Pass record search

Description : Query the access record of the corresponding person on the face recognition device, including the imgBase64 encoding of the captured photo

Method	URL
POST	http://middleware server IP:8190/api/record/find

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
recordId	Pass record id	Long	Y	The unique identifier of the record in the information returned by the access record list search interface

Interface Description

- Compared with the return information of the access record list search interface, there is one more **checkImgBase64** snapshot photo imgBase64 encoding

Postman Example

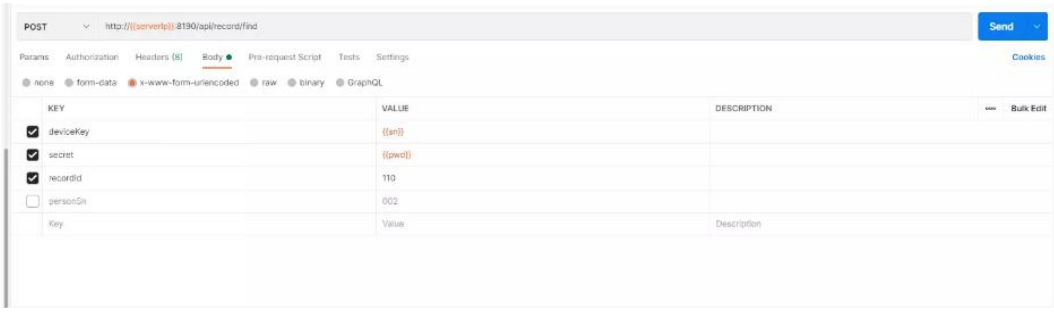

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970540525,
  "data": {
    "checkImgBase64": "/9j/4AAQSkZJRgABAQAAAQABAAD/2wBDAA0JC",
    "createTime": 1679904178974,
    "strangerFlag": 1,
    "resultFlag": 2,
    "id": 110,
    "personType": 2,
    "faceFlag": 1,
    "openDoorFlag": 0
  },
  "success": true
}
```


Return parameter data array description:

Parameter name	type	Additional Notes
id	Long	Record unique identifier
personSn	String	The employee number of the person taking the photo
personName	String	Name of the person taking the photo
personType	Int	Query the personnel type of the record ● 0 : Unknown ● 1 : Employee ● 2 : Visitors ● 3 : Blacklist
checkImgUrl	String	Snap photo LAN address
checkImgBase64	String	Imgbase64 encoding of captured photos
cardNo	String	card number

idCard	String	ID number
voucherCode	String	Voucher Number
temperature	String	body temperature
attach	String	Additional Information
maskFlag	Int	Wearing a mask1: Yes0: No
capFlag	Int	Wearing a helmet? 1: Yes 0: No
faceFlag	Int	Is it a face scan pass? 1: Yes 0: No
cardFlag	Int	Is it a card swipe pass? 1: Yes 0: No
fingerFlag	Int	Is fingerprint access required? 1: Yes 0: No
idCardFlag	Int	Is it to scan the ID card to pass 1: Yes 0: No
pwdFlag	Int	Is it to verify the password? 1: Yes 0: No
resultFlag	Int	Identification result mark 1: Success 2: Failure 3: Insufficient authority
strangerFlag	Int	Is it a stranger? 1: Yes 0: No
openDoorFlag	Int	Open the door 1: Yes 0: No
createTime	Long	Passing time,

7. Time period management interface

7.1 Creating or updating a time period

Description : Create a time period on the face recognition machine

Method	URL
POST	http://middleware server IP:8190/api/ac_timezone/merge

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acTzNumber	Time period number	Int	Y	Time period number ● Please enter an integer between 1 and 100. If a time period with this number exists on the device, the information of the corresponding time period will be updated.

acTzName	Time period name	String	Y	Time period name
sunStart	Sunday start time	String	N	● The format is HH:mm. Default: 00:00
sunEnd	Sunday End Time	String	N	● The format is HH:mm. Default: 23:59
monStart	Monday start time	String	N	The format is HH:mm. Default: 00:00
monEnd	Monday End Time	String	N	● The format is HH:mm. Default: 23:59
tueStart	Tuesday start time	String	N	● The format is HH:mm. Default: 00:00
tueEnd	Tuesday End Time	String	N	● The format is HH:mm. Default: 23:59
wedStart	Wednesday start time	String	N	The format is HH:mm. Default: 00:00
wedEnd	Wednesday End Time	String	N	The format is HH:mm. Default: 23:59
thursStart	Thursday start time	String	N	The format is HH:mm. Default: 00:00
thursEnd	Thursday End Time	String	N	The format is HH:mm. Default: 23:59
friStart	Friday start time	String	N	The format is HH:mm. Default: 00:00
friEnd	Friday End Time	String	N	The format is HH:mm. Default: 23:59
satStart	Saturday start time	String	N	The format is HH:mm. Default: 00:00
satEnd	Saturday End Time	String	N	The format is HH:mm. Default: 23:59

Postman Example

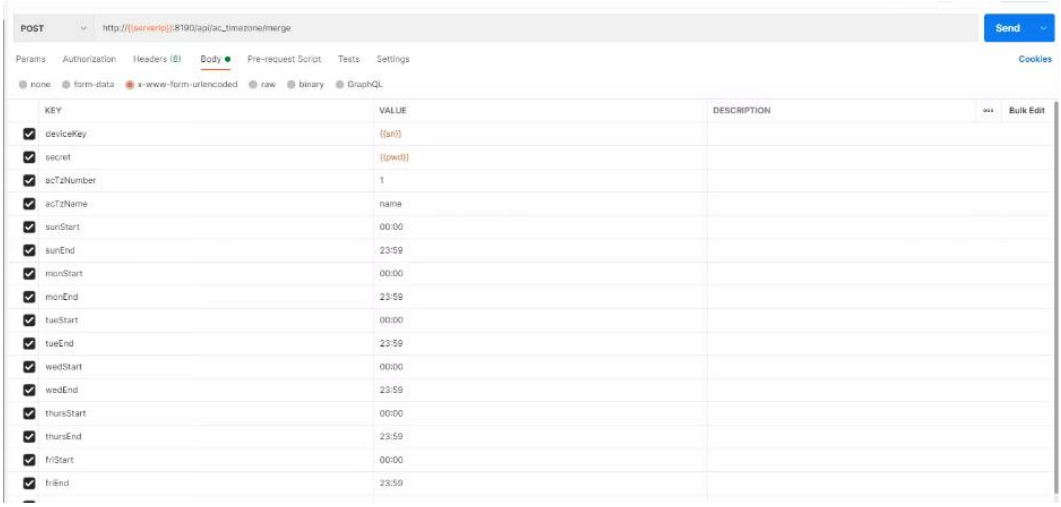

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679970802384,
    "data": {
        "monEnd": "23:59",
        "satStart": "00:00",
        "wedStart": "00:00",
        "monStart": "00:00",
        "tueEnd": "23:59",
        "thursStart": "00:00",
        "thursEnd": "23:59",
        "sunStart": "00:00",
        "wedEnd": "23:59",
        "sunEnd": "23:59",
        "acTzNumber": 1,
        "friStart": "00:00",
        "friEnd": "23:59",
        "tueStart": "00:00",
        "acTzName": "name",
        "satEnd": "23:59"
    },
    "success": true
}
```


7.2 Time period deletion

Description : Delete the corresponding time period on the personnel identification device

Method	URL
POST	http://middleware server IP:8190/api/ac_timezone/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acTzNumber	Time period number	String	Y	Time period number , multiple numbers are separated by commas

Postman Example



Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679970970587,
    "data": {
        "acTzNumber": [
            2
        ]
    },
    "success": true
}
```


7.3 Time period list query

Description : Query the access control group list information on the device

Method	URL
POST	http://middleware server IP:8190/api/ac_timezone/findList

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acTzNumber	Time period number	String	N	Time period number, multiple time period numbers are separated by commas If this parameter is not filled, all time period information on the device will be returned.

Postman Example



Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971159699,
  "data": [
    {
      "monEnd": "23:59",
      "satStart": "00:00",
      "wedStart": "00:00",
      "monStart": "00:00",
      "tueEnd": "23:59",
      "thursStart": "00:00",
      "thursEnd": "23:59",
      "sunStart": "00:00",
      "wedEnd": "23:59",
      "sunEnd": "23:59",
      "acTzNumber": 1,
      "friStart": "00:00",
      "friEnd": "23:59",
      "tueStart": "00:00",
      "satEnd": "23:59"
    }
  ],
  "success": true
}
```


8. Access control group management interface

8.1 Create or update access control group

Description : Create a door access control group on the facial recognition machine

Method	URL
POST	http://middleware server IP:8190/api/ac_group/merge

Header Field

Parameter name	describe	type	Must be transm	Additional Notes

			itted	
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acGroupNumber	Access control group number	Int	Y	Access control group number ● Please enter an integer between 2 and 50. If there is an access control group with this number on the device, the corresponding access control group information will be updated.
name	Access control group name	String	Y	Access control group name
verifyStyle	Verification	Int	N	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face

expiredType	Expiration Type	Int	N	Expiration Type ● 0 Never expires ● 1 Time ● 2 times ● 3 Time + Repetitions
validTimeBegin	Effective time starts	Long	N	The start time of the personnel's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the personnel, Unix millisecond timestamp (13 bits) ● If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validCount	Valid times	Int	N	● TODO
acTzNumber1	Passage time 1 number	Int	N	Passage time 1 number ● Please enter an integer between 0 and 100, corresponding to the time period number

acTzNumber2	Passage time 2 number	Int	N	Same as above
acTzNumber3	Passage time 3 number	Int	N	Same as above

Postman Example



Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679714577770,
    "data": {
        "acGroupNumber": 2,
        "expiredType": 1,
        "name": "门禁组一",
        "acTzNumber2": 2,
        "acTzNumber1": 2,
        "acTzNumber3": 2,
        "verifyStyle": 1
    },
    "success": true
}
```


8.2 Access Control Group Deletion

Description : Delete the corresponding access control group on the personnel identification device.

Method	URL

POST	http://middleware server IP:8190/api/ac_group/delete


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acGroupNumber	Access control group number	String	Y	Access control group number, multiple access control group numbers are separated by commas

Postman Example

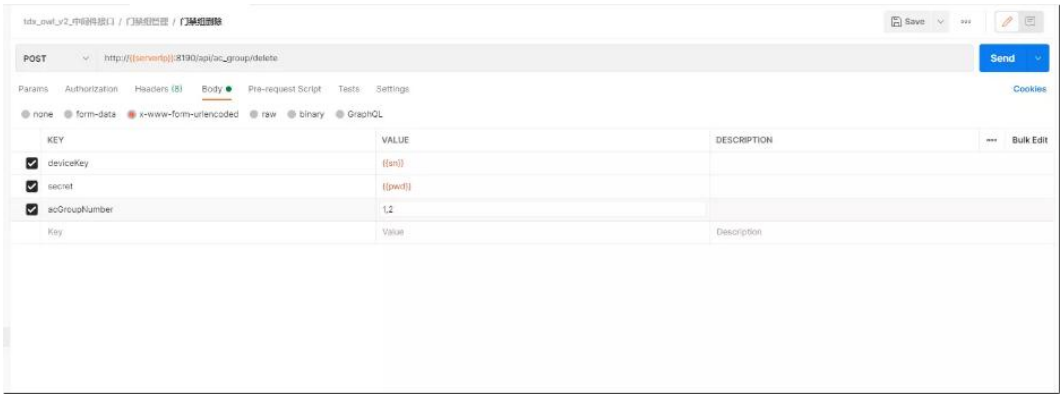

Return to example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679715749289,
  "data": {
    "acGroupNumber": [
      1,
      2
    ]
  },
  "success": true
}
```


8.3 Access Control Group List Query

Description : Query the access control group list information on the device

Method	URL
POST	http://middleware server IP:8190/api/ac_group/findList

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
acGroupNumber	Access control group number	String	N	Access control group number, multiple access control group numbers are separated by commas If this parameter is not filled, all access control group information on the device will be returned.

Postman Example



Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679715937035,
  "data": [
    {
      "acGroupNumber": 1, //门禁组编号
      "expiredType": 1,   //过期类型 0 永不过期 1 时间 2 次数 3 时间+次数
      "name": "门禁组一",  //门禁组名称
      "acTzNumber2": 2,   //通行时段 2 编号
      "acTzNumber1": 2,   //通行时段 1 编号
      "acTzNumber3": 2,   //通行时段 3 编号
      "verifyStyle": 1    //验证方式 0 人脸/刷卡/指纹(任意一种) 1 仅人脸 2 仅刷卡 20 卡+人脸 3 仅指纹
    },
    {
      "acGroupNumber": 2,
      "expiredType": 1,
      "name": "门禁组二",
      "acTzNumber2": 2,
      "acTzNumber1": 2,
      "acTzNumber3": 2,
      "verifyStyle": 1
    }
  ],
  "success": true
}
```


code code description

code	msg
101101	The value of personType is an integer between -1 and 3
101102	The value of findType is an integer greater than 0
101103	The value of startTime is in the wrong format
101104	The value of endTime is in the wrong format
101105	The value of endTime should be greater than startTime
101106	The value of recordId should be greater than 0

9. Fingerprint Management Interface

9.1 Fingerprint creation or update

Description : Register the facial recognition photo of the corresponding person by work number

Method	URL
POST	http://middleware server IP:8190/api/finger/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
fingerMergeList	Fingerprint parameters	List<Object>	Y	Fingerprint parameter array
Object.personSn	Staff number	String	Y	Personnel number, must first register personnel

Object.fingerId	Unique identifier of feature value	String	Y	Unique identifier of feature value
Object.fingerNum	Which finger? 2	Int	Y	The number of fingers, 2 digits, for example: 12 means the left thumb ● The first position indicates the left and right hands ○ 1 : left hand 2 : right hand ● Second finger marker 1: thumb 2: index finger 3: middle finger 4: ring finger 5: pinky finger
Object.feature	Eigenvalue	String	Y	

fingerMergeList Parameter Description:

```
// 参数为 List<Object> 类型
[
  {
    "personSn": "004", // 人员编号，必须先注册人员
    "fingerId": "001", // 特征值的唯一标识
    "fingerNum": 21,  // 手指数 右手大拇指
    "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..." // feature
  },
  {
    "personSn": "004",
    "fingerId": "001",
    "fingerNum": 22,
    "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."
  }
]
```

Postman Example

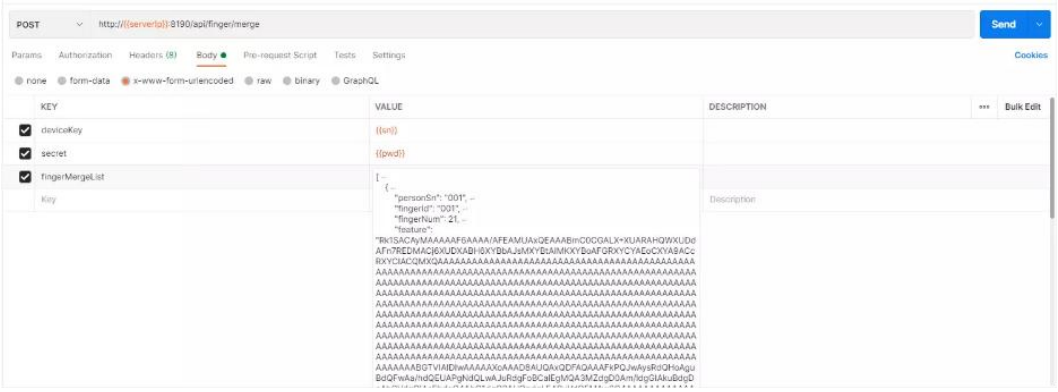

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679971461163,
    "data": [
        {
            "fingerId": "001",
            "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CG",
            "fingerNum": 21,
            "personSn": "001"
        }
    ],
    "success": true
}
```


9.2 Fingerprint Deletion

Description : Delete the corresponding access control group on the personnel identification device.

Method	URL
POST	http://middleware server IP:8190/api/finger/delete

Header Field


Parameter name	describe	type	Must be	Additional Notes

			transmitted	
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
personSn	Staff number	String	Y	Personnel unique identification
fingerId	Fingerprint ID	String	Y	Fingerprint unique identification

Postman Example

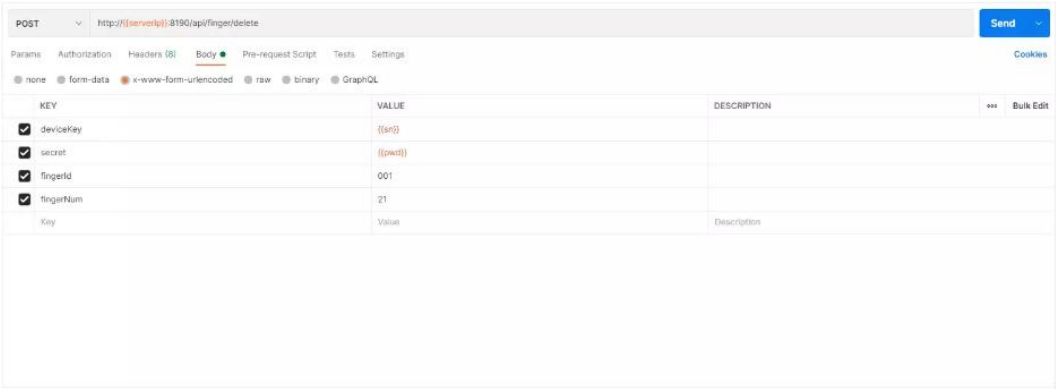

Return to example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971548362,
  "data": {
    "fingerId": "001"
  },
  "success": true
}
```


9.3 Fingerprint Search

Description : Query the access control group list information on the device

Method	URL
POST	http://middleware server IP:8190/api/finger/find

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device

personSn	Staff number	String	Y	Personnel unique identification

Postman Example

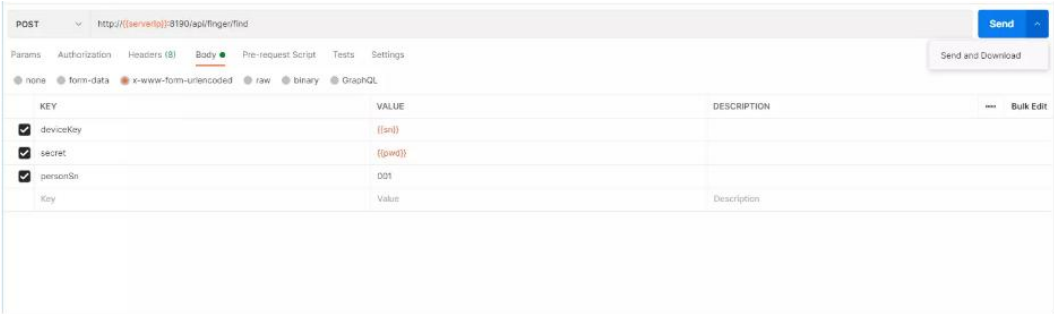

Return to example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679971777203,
    "data": [
        {
            "fingerId": "001",
            "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0C",
            "createTime": 1679971781649,
            "fingerNum": 21,
            "personSn": "001"
        }
    ],
    "success": true
}
```


10. Palm print/palm vein management interface

10.1 Palm print/palm vein creation or update

Description : Register the palm print/palm vein data of the corresponding person through the work number

Method	URL
POST	http://middleware server IP:8190/api / palm /merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
palmMergeList	Palm print parameters	List<Object>	Y	Palmprint parameter array
Object.personSn	Staff number	String	Y	Personnel number, must first register personnel
Object.fingerId	Unique identifier of	String	Y	Unique identifier of feature value

	feature value			
Object.fingerNum	Which palm	Int	Y	1 left hand 2 right hand
Object.feature	Eigenvalue	String	Y	

palmMergeList Parameters:

// The parameter is of type List<Object>

[

{

"personSn": "004", // Personnel number, must be registered first

"palmId": "001", // unique identifier of the characteristic value

"palmNum": 21, // 1 left hand 2 right hand

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..." // feature

},

{

"personSn": "004",

"palmId": "001",

"palmNum": 22,

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."

}

]

Postman Example



Return to example

{

"code": "000",

"data": [

{

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAA...",

"palmId": "001",

"palmNum": 21,

"personSn": "004"

}

],

"msg": "Request successful"

}

10.2 Palm print/palm vein deletion

Description : Delete the palm print/palm vein data of the corresponding person by work number

Method	URL
POST	http://middleware server IP:8190/api /palm/delete


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
personSn	Staff number	String	Y	Personnel unique identification
palmId	Palmprint ID	String	Y	Palm print unique identification

Postman Example

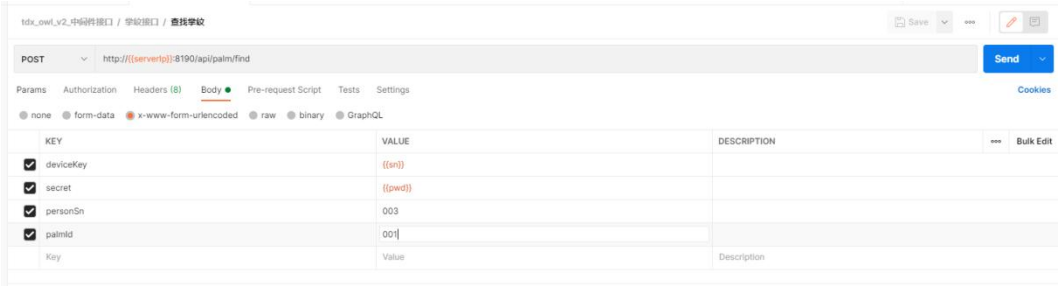

Return to example

{

"code": "000",

"data": {

"palmId": "001",

"personSn": "003"

},

"msg": "Request successful"

}

10.3 Palm print/palm vein search

Description : Search for the palm print/palm vein data of the corresponding person by work number

Method	URL
POST	http://middleware server IP:8190/api /palm/findList


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
deviceKey	Device serial number	String	Y	Device serial number, 18 digits
secret	password	String	Y	The server password set in the communication settings on the face device
personSn	Staff number	String	Y	Personnel unique identification

Postman Example

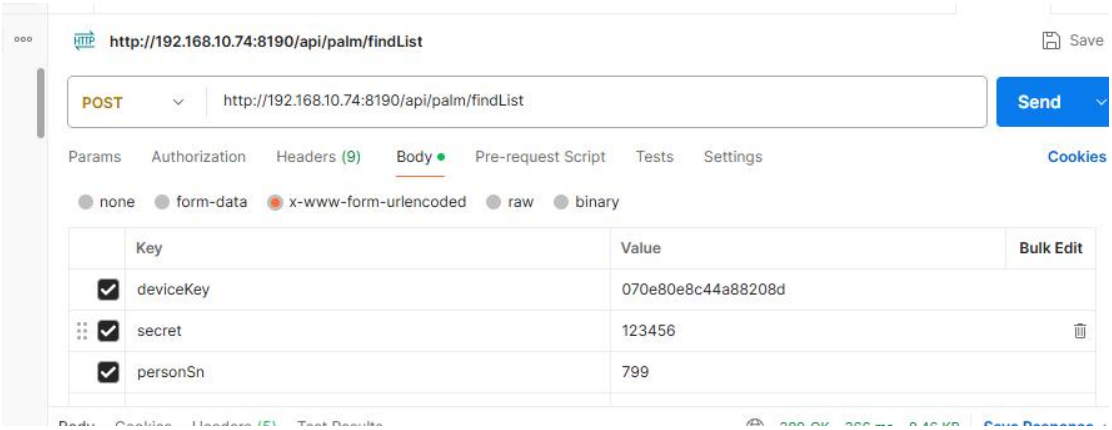

Return to example

{

"code": "000",

"data": [

{

"createTime": 1879731214951, // creation time

"feature":

"Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CGALX+XUARAHQWXUDd

AF...", // feature value

"palmId": "a194ef00d89643eb9500e31b7f2aade6", // Palm print/palm vein unique

identifier

"palmNum": 1, // 1 left hand 2 right hand

"personSn": "004" // Personnel number

}

],

"msg": "Request successful"

}

Schedule

1. **code code description**

code	msg
-1	The device is busy, please try again later
000	Request Success
401	Illegal request, authentication failed
1000	Request parameter error
1001	The value of length is an integer between 0 and 1000.

1. **Supported languages/time zones**