catalogue

1. Document Description 4

2. Interface Description 4

2.1 Interface Specification 4

2.2 Interface Return 4

2.3 Interface Security 5

2.4 Notes 7

3. Device Management Interface 8

3.1 Set device password 8

3.2 Get device information 10

3.3 Device Configuration 12

3.4 Identification Configuration 34

3.5 Identification Mode Configuration 43

3.6 Peripheral Configuration 50

3.7 Interface Display Configuration 54

3.8 Server Configuration 57

~~3.9 Get device configuration TODO~~ 60

3.10 Device Reset 61

3.11 Device Restart 63

3.12 Remote control output (including door opening) 64

3.13 Setting up a wired network 67

~~3.14 Setting up wireless network TODO~~ 69

3.15 Set the upload address 71

3.16 APK Update 81

3.17 Setting the time 82

4. Personnel Management Interface 84

4.1 Personnel Creation 84

4.2 Personnel Update 88

4.3 Personnel creation or update 93

4.4 Personnel Deletion 97

4.5 Clearing out personnel 99

4.6 Person Search 100

4.7 Personnel List Search 102

4.8 Creation or update of personnel passage time period 104

4.9 Deletion of personnel passage time 108

5. Face Management Interface 110

5.1 Face creation or update 110

5.2 Face Removal 112

5.3 Face Search 114

6. Record Management Interface 115

6.1 Search the Pass Record List 115

6.2 Pass record search 120

6.3 Deletion of Pass Records 124

7. Fingerprint Management Interface 126

7.1 Fingerprint creation or update 126

7.2 Fingerprint Search 129

7.3 Fingerprint Deletion 131

8. Time period management interface 133

8.1 Creating or updating a time period 133

8.2 Time period deletion 137

8.3 Time period list query 139

9. Access control group management interface 142

9.1 Create or update access control group 142

9.2 Access Control Group Deletion 146

9.3 Access Control Group List Query 148

10. Palm print/palm vein management interface 150

10.1 Palm print/palm vein creation or update 151

10.2 Palm print/palm vein search 153

10.3 Palm print/palm vein deletion 155

Schedule 157

1. code code description 157

2. Supported languages/time zones 157

1. Document Description

This document is mainly used for HTTP interface docking of face recognition machine and is suitable for system development and maintenance personnel.

2. Interface Description

2.1 Interface Specification

- Interface syntax: **http://{deviceIP}:8090/cgi-bin/js/{module}/{action}**
  - **{deviceIP}** : the IP address of the requested facial recognition device
  - **{module}** : module name
  - **{action}** : interface name
- Character encoding: **UTF-8** format is used uniformly
- Request header: **ContentType = application/json**
- Request method: Use **POST** method uniformly
- Data exchange: unified **JSON** format

2.2 Interface Return

The data returned by all interfaces contains at least two fields, **code** and **msg** , which represent the return code and return information respectively.

{

"code":"Return result code", // The result code is defined at the end of the document

"msg":"Return result prompt information", // The result information returned by the interface, usually the error prompt information

"data":{} // Returned data object

}

Fields	describe	type	Must be transmitted	illustrate
code	Return Code	String	Y	Normal operations use a unified return code, and each abnormal operation has a separate return code
msg	Return information	String	Y	Information returned by the interface, usually error information
data	Return data	Int / String / Object / List	N	The data returned by the interface may be a value, string, object or collection

2.3 Interface Security

Note: To ensure the security of data transmission, use the **Basic** method for interface authentication.

- Example:

  The user name of the face recognition machine is fixed to " **admin** "

  The communication password of the face recognition machine is "123456"

  The string after base64 encoding of **admin:123456 is "YWRtaW46MTIzNDU2"**

The request is parsed as follows:


```
POST /test HTTP/1.1
Authorization: Basic YWRtaW46MTIzNDU2
User-Agent: PostmanRuntime/7.30.0
Accept: */*
Postman-Token: 910e1cb7-1ca4-461d-a0b8-b11c0c82f349
Host: 192.168.2.87:8090
Accept-Encoding: gzip, deflate, br
Connection: keep-alive
Content-Type: application/x-www-form-urlencoded
Content-Length: 16

personId=test001

HTTP/1.1 200 OK
Date: Thu, 22 Dec 2022 10:25:27 GMT+00:00
Server: AndServer/2.1.10
Content-Length: 52
Content-Type: text/plain;charset=UTF-8
Connection: keep-alive

{"msg":"Success!","ts":"1671704727977","code":"000"}
```

If you use the Postman debugging interface, select Basic Auth under Authorization, enter the username and password, and click the Send button. Postman will automatically encrypt the username and password and add them to the Headers for the request, as shown in the figure:

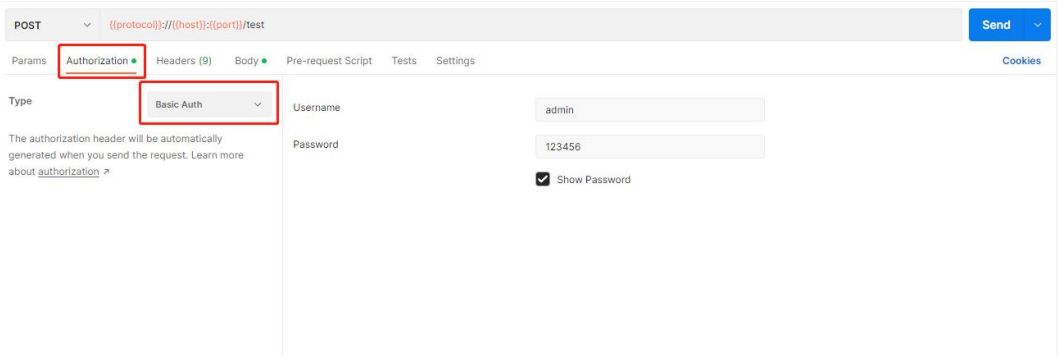

2.4 Notes

- When calling a device interface, do not call the interface of the same device on other client servers at the same time.
- If the call to the interface returns a message "Parameter abnormality", please check according to the following steps:
  - Check whether the parameter name is misspelled, contains spaces or carriage returns.
  - Check whether the parameter value complies with the specification, such as the Int value is undefined, the id contains illegal characters other than numbers and letters, etc.
  - Check whether there are spaces in the Json string (if you use the Json string returned by the interface directly, you need to remove the spaces), whether there are too many or too few " symbols, please check the postman examples of each interface carefully.
- If the call interface returns empty, it means the URL is wrong (wrong IP, spelling error, field missing, etc.)

● If the call interface returns Could not get any response, possible reasons include: incorrect IP address, incorrect or missing port number, incorrect parameter transmission format (POST request parameters are placed in the body, the format is x-www-urlencoded), etc.

3. Device Management Interface

3.1 Set device password

Description : Set the communication password of the face recognition machine. For a new device or after the device is reset (restored and initialized), before calling other interfaces, you need to set the initial password first. Just pass the same value to oldPwd and newPwd.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setPwd

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
oldPwd	Old Password	String	Y	Maximum length: 64 characters
newPwd	New Password	String	Y	The maximum length is 64 characters, and the password cannot contain spaces.

Postman Example

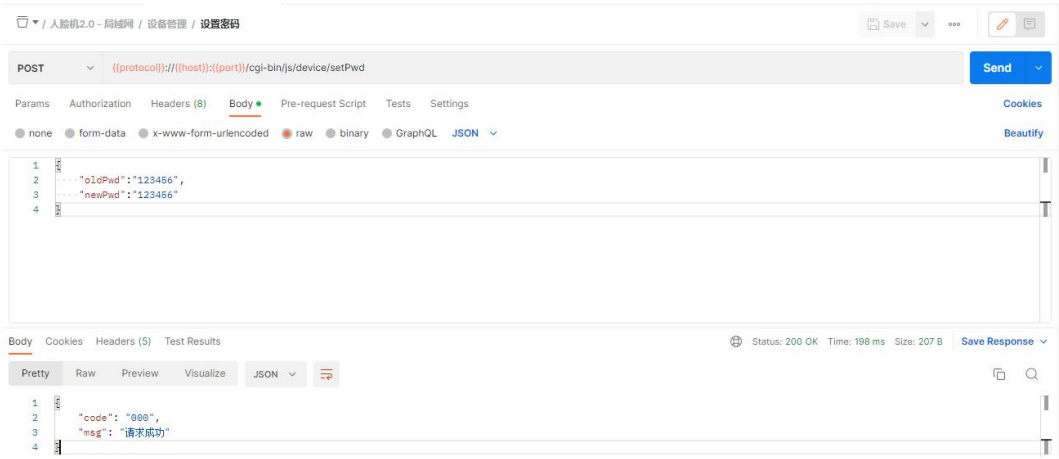

Return to example

{

"code": "000",

"msg": "Request successful"

}

code code description

code	msg
100301	When setting a password for the first time, the new password must be the same as the old password
100302	oldPwd verification failed

100303	The newPwd parameter cannot be empty

3.2 Get device information


Description : Get the device information of the face recognition machine.

Method	URL
GET / POST	http://Device IP:8090 /cgi-bin/js/device/get

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Postman Example

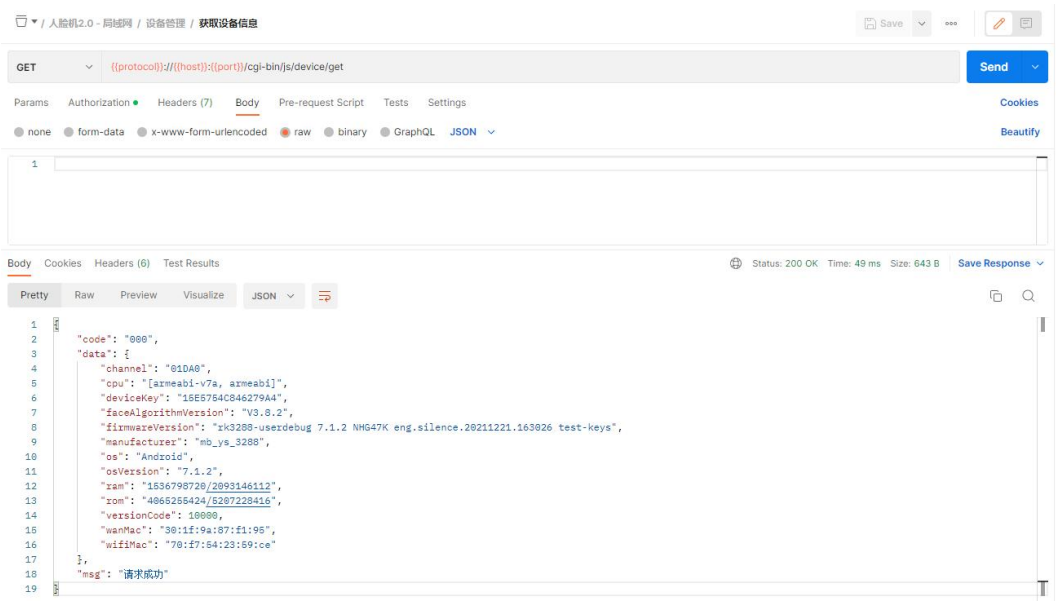

Return to example

{

"code": "000",

"data": {

"channel": "01DA0",

"cpu": "[armeabi-v7a, armeabi]", // CPU architecture

"deviceKey": "15E5754C846279A4", // Device serial number

"faceAlgorithmVersion": "V3.8.2", // Algorithm version

"firmwareVersion": "rk3288-userdebug 7.1.2 NHG47K eng.silence.20211221.163026

test-keys", // Firmware version

"manufacturer": "mb_ys_3288",

"os": "Android", // System

"osVersion": "7.1.2", // System version

"ram": "1536798720/2093146112", // Memory size

"rom": "4065255424/5207228416", // Hard disk space

"versionCode": 20000, // version number

"wanMac": "30:1f:9a:87:f1:95", // mac address of wan port

"wifiMac": "70:f7:54:23:59:ce" // wifi mac address

},

"msg": "Request successful"

}

3.3 Device Configuration

Description : Configure the recognition parameters, recognition mode parameters, peripheral parameters, UI display parameters, server parameters, etc. of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
recThreshold1vN	1vN face recognition threshold	Int	N	The default value is 65. Please enter an integer between 50 and 100. The higher the score, the

				higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	Default is 60. Same as above
recInterval	Identification interval time	Int	N	The default is 3 seconds. Recognition interval (the interval between callback notifications after consecutive successful recognitions of the same person).
recDistance	Identification distance	Int	N	Identification distance: • 0: No limit (default) • 1: within 0.5 meters • 2: Within 1 meter • 3: within 1.5 meters • 4: within 2 meters • 5: within 3 meters • 6: within 4 meters
recRank	Identify live level	Int	N	Identify the level of living body: • 1. No liveness detection (default) • 2. Monocular liveness • 3. Binocular liveness
recSucTtsMode	Voice Mode	Int	N	Voice Mode: • 1. No voice broadcast • 2. Announce name (default)

				• 100. Customized voice broadcast
recSucTtsCustom	Customized voice content	String	N	Customized voice content • Default *{name}* • If *recSucTtsMode* is 100, this field must be passed and cannot be empty • *{name}* is allowed . The field format is fixed, and other contents only allow numbers, English and Chinese characters. • The length limit is 255 characters. For example: *{name}* Welcome
recSucDisplayMode	Display Mode	Int	N	Display Mode • 1: Name (default) • 2: Do not display content • 100: Custom display
recSucDisplayCustom	Display custom content	Int	N	Display custom content • Default *{name}* • If *recSucDisplayMode* is 100, this field must be passed and cannot be empty • *{name}* is allowed . The field format is fixed. Other content only allows numbers, Chinese and English, and Chinese and

				English symbols. The length is limited to 255 characters. For example: *{name}* , check-in successful!
recStrangerEnable	Identify strangers switch	Int	N	Identify stranger switch: • 0. Do not identify strangers • 1. Identify strangers (default)
recIsStrangerTimes	Number of recognition failures	Int	N	How many times of identification failure is considered a stranger. Default is 2 times
recStrangerTtsMode	Stranger Voice Mode	Int	N	Stranger Voice Mode • 1: Do not play voice (default) • 2: Voice broadcast "The user is not registered, please contact the administrator" • 100: Custom stranger voice
recStrangerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, • If *recStrangerTtsMode* is 100, this field must be passed and cannot be empty.

				• The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Beware of strangers
recStrangerDisplayMode	Stranger screen display text type	Int	N	Stranger screen display text type • 1. The person is not registered (default) • 100. Customization
recStrangerDisplayCustom	Text content displayed on stranger screen	String	N	Customized text displayed on stranger screen • If *recStrangerDisplayMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The person is not registered!
recNotBioTtsMode	Non-live voice mode	Int	N	Non-live voice mode • 1: Do not play voice (default) • 2: Voice announcement "Please do not try to use

				photos or videos for recognition" ● 100: Custom non-live voice
recNotBioTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, ● If *recNotBioTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition
recNotBioDisplayMode	Non-living screen display text type	Int	N	Non-living screen display text type ● 1: Do not try to use photos or videos for recognition (default) ● 100 : Custom
recNotBioDisplayCustom	Non-living screen displays text content	String	N	Non-living screen displays text custom content ● If *recNotBioDisplayMode* is 100, this field must be passed and cannot be empty. ● The content only allows

				numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition!
recNoPerTtsMode	Insufficient permissions Voice mode	Int	N	Insufficient permissions Voice mode ● 1: Do not play voice ● 2: Voice broadcast "Insufficient permissions, please contact the administrator" (default) ● 100: Insufficient custom permissions for voice
recNoPerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content ● If *recNoPerTtsMode* is 100, this field must be passed and cannot be empty. ● The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. If you do not have enough permissions, please contact the administrator

recNoPerDisplayMode	Insufficient permissions screen display text type	Int	N	Insufficient permissions screen display text type • 1 Insufficient permissions, please contact the administrator (default) • 100 Custom
recNoPerDisplayCustom	Insufficient permissions to display text content on the screen	String	N	Insufficient permissions to display custom text on the screen • If *recNoPerDisplayMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If: insufficient permissions, please contact the administrator!
recStrangerOpenDoor	Identify whether a stranger opens the door	Int	N	Identify whether a stranger opens the door • 0: Do not open the door (default) • 1: Open the door
recMultiplayer	Identify multiple people	Int	N	Identify multiple people • 0: Single person recognition (default) • 1: Multi-person recognition

recSnapshotSave	Identify and save snapshots	Int	N	Identify and save snapshots • 0 : Do not save • 1: Save (default)
recRecordSave	Identify and save records	Int	N	Identify and save records • 0 : Do not save • 1: Save (default)
recRecordSaveDays	Identification Record Retention Days	Int	N	Identification record retention days, default retention is 7 days
recRecordUploadMode	Identify record upload mode	Int	N	Identify record upload mode • 1: Real-time upload (default) • 2: Resume download
recWhitelistIdcard	Whitelist switch for identity verification	Int	N	Whitelist switch for identity verification • 0: Off (default), the ID card will be directly compared with the ID card after reading it. • 1: On, read the ID number and compare it with the ID numbers of all people in the database. If it exists, perform a person-document comparison; if it does not exist, prompt that the authority is insufficient.

recModeFaceEnable	Face recognition mode switch	Int	N	Face recognition mode switch • 0 : Off • 1: On (default)
recModeCardEnable	Card swipe mode switch	Int	N	Card swipe mode switch • 0 : Off • 1: On (default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface • 1: Wiegand (default) • 2: TTL serial port • 3 : USB
recModeCardIntfPort	Card number transmission serial port number	Int	N	Card number transmission serial port number This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . • 1 : ttyS1 • 2 : ttyS2 • 3 : ttyS3 (default) • 4 : ttyS4 • 100 : Custom
recModeCardIntfPortCustom	Customize the card number transmission interface port number	String	N	Customize the port number of the card number transmission interface • This field takes effect when the card number transmission interface

				port *recModeCardIntfPort* is configured as *100*
recModeCardIntfBaudrate	Card number transmission serial port baud rate	Int	N	Card number transmission serial port baud rate This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModeIdcardEnable	Person-ID verification switch	Int	N	Person-ID verification switch ● 0 : Disable (default) ● 1 : Open
recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface ● 1: Wiegand ● 2: TTL serial port ● 3 : USB (default)
recModeIdcardIntfPort	ID card transmission serial port number	Int	N	ID card transmission serial port number This field is effective when the ID card transmission interface is configured as *a serial port* . ● 1 : ttyS1 ● 2 : ttyS2 (default)

				• 3 : ttyS3 • 4 : ttyS4 • 100 : Custom
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface This field takes effect when the ID card transmission interface port *recModeIdcardIntfPort is configured as 100*
recModeIdcardIntfBaudrate	ID card transmission serial port baud rate	Int	N	ID card transmission serial port baud rate This field is effective when the ID card transmission interface is configured as a serial port. • 1 : 9600 • 2 : 19200 • 3 : 38400 • 4 : 115200 (default)
recModeQrcodeEnable	QR code scanning mode switch	Int	N	QR code scanning mode switch • 0 : Disable (default) • 1 : Open

recModeQrcodeIntf	QR code transmission interface	Int	N	QR code transmission interface • 1: TTL serial port (default) • 2: 232 serial port • 3 : USB
recModeQrcodeIntfPort	QR code transmission serial port number	Int	N	The port number of the QR code transmission serial port This field is effective when the QR code transmission interface *recModeQrcodeIntf is configured as a serial port.* • 1 : ttyS1 • 2 : ttyS2 (default) • 3 : ttyS3 • 4 : ttyS4 • 100 : Custom
recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface This field takes effect when the QR code transmission interface port *recModeQrcodeIntfPort is configured as 100*

recModeQrcodeIntfBaudrate	QR code transmission serial port baud rate	Int	N	Baud rate of the serial port for QR code transmission This field is effective when the QR code transmission interface *recModeQrcodeIntfPort is configured as a serial port.* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)
recModePalmEnable	Palmprint recognition switch	Int	N	Palmprint recognition switch ● 0 : Disable (default) ● 1 : Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch ● 0 : Disable (default) ● 1 : Open
pciRelayOut	Relay output	Int	N	Relay output ● 0: Do not open the door ● 1: Open the door (default)
pciRelayMode	Relay Mode	Int	N	Relay Mode ● 1: Normally open (default) ● 2: Normally closed

pciRelayDelay	Relay control time	Int	N	Relay control time • 1000ms (default) • The time interval between the relay control opening and closing of the door is 1000ms by default. Please enter an integer between 100-25500, round down to the nearest hundred. For example, if you enter an integer between 101-199, the actual effective time is 100ms.
pciWgType	Wiegand Type	Int	N	Wiegand Type • 1: Wiegand 26 (default) • 2 : Wiegand 34 • 3 : Wiegand 37
pciWgOut	Wiegand output type	Int	N	Wiegand output type • 0: No output (default) • 1: Output personnel id • 2: Output card number • 100 : Custom
pciWgOutCustom	Wiegand output custom content	String	N	Wiegand output custom content This field is effective when the Wiegand output type *pciWgOut is configured as 100*


pciComOut	Serial port output type	Int	N	Serial port output type • 0: No output (default) • 1: Output personnel id • 2: Output card number • 3: Output ID card • 100 : Custom
pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type *pciComOut is configured as 100*
pciComOutPort	Serial output port	Int	N	Serial output port • 1 : ttyS1 • 2 : ttyS2 • 3 : ttyS3 • 4 : ttyS4 (default) • 100 : Custom
pciComOutPortCustom	Serial output port customization	String	N	Serial output port customization This field takes effect when the serial port output port *pciComOutPort is configured as 100*
pciComOutBaudrate	Serial port output baud rate	Int	N	Serial port output baud rate • 1 : 9600 • 2 : 19200 • 3 : 38400 • 4 : 115200 (default)

pciLedAlwaysEnable	Fill light is always on	Int	N	Fill light is always on • 0: Not always on (default) • 1: Always on
pciLedColorStranger	Fill light color (stranger)	Int	N	Fill light color (stranger) • 1: Red light (default) • 2 : Green light
uiCompanyName	The interface displays the company name	String	N	apk main interface whether to display the device IP • 0 : Hide • 1: Display (default)
uiShowSn	The main interface displays the device serial number	Int	N	apk main interface whether to display the device serial number • 0 : Hide • 1: Display (default)
uiShowIp	Whether the main interface displays the device IP	Int	N	apk main interface whether to display the device IP • 0 : Hide • 1: Display (default)
uiShowPersonCount	Whether the main interface displays the number of people	Int	N	apk main interface whether to display the number of people • 0 : Hide • 1: Display (default)
uiScreensaverWait	Screen saver waiting time	Int	N	apk Enter screen saver waiting time, unit is seconds

sevUploadRecRecordUrl	The URL address to upload the identification record	String	N	
sevUploadDevHeartbeatUrl	Upload the URL address of the device heartbeat	String	N	
sevUploadDevHeartbeatInterval	Device heartbeat interval	Int	N	Device heartbeat interval, in seconds, default 60, 10 - 300
sevUploadRegPersonUrl	Upload the url address of the registered personnel data	String	N	
sevUploadRegFingerUrl	URL address to upload registered fingerprint data	String	N	
sevUploadAlarmUrl	URL address for uploading alarm data	String	N	
sevUploadRecStrangerDataEnable	Upload stranger identification data switch	Int	N	Whether to upload stranger identification data switch • 0 : Do not upload • 1: Upload (default)

sevUploadRecSnapshotEnable	Upload recognition capture photo switch	Int	N	Whether to upload the switch for identifying stolen photos • 0 : Do not upload • 1: Upload (default)
sevUploadRecCardDataEnable	Upload card swipe data switch	Int	N	Whether to upload data to identify card swipe • 0 : Do not upload • 1: Upload (default)
sevUploadRecIdcardDataEnable	Upload ID card identification data switch	Int	N	Whether to upload ID card identification data switch • 0 : Do not upload • 1: Upload (default)
sevUploadRecQrcodeDataEnable	Upload and identify QR code data switch	Int	N	Whether to upload the QR code data switch • 0: Do not upload (default) • 1 : Upload

Postman Example

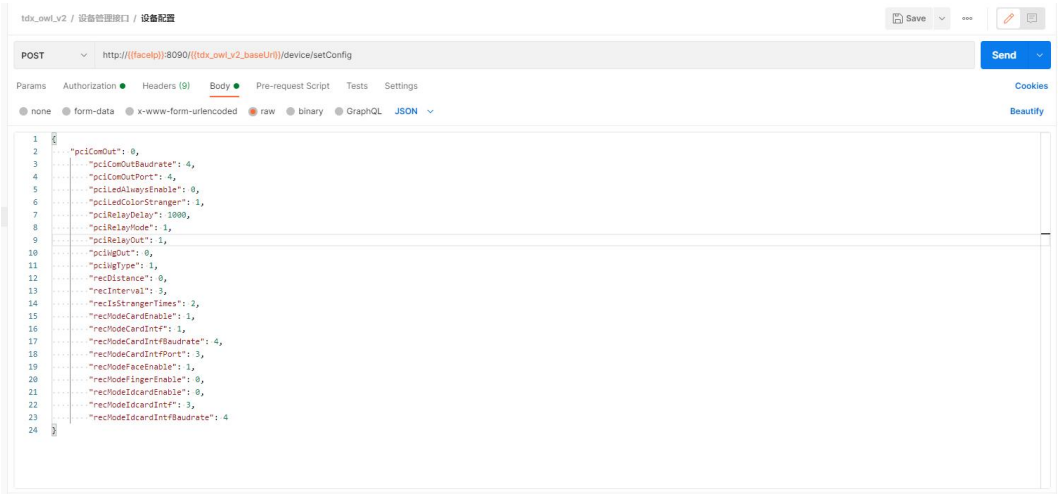

Return to example

{

"code": "000",

"data": {

"pciComOut": 0,

"pciComOutBaudrate": 4,

"pciComOutPort": 4,

"pciLedAlwaysEnable": 0,

"pciLedColorStranger": 1,

"pciRelayDelay": 1000,

"pciRelayMode": 1,

"pciRelayOut": 1,

"pciWgOut": 0,

"pciWgType": 1,

"recDistance": 0,

"recInterval": 3,

"recIsStrangerTimes": 2,

"recModeCardEnable": 1,

"recModeCardIntf": 1,

"recModeCardIntfBaudrate": 4,

"recModeCardIntfPort": 3,

"recModeFaceEnable": 1,

"recModeFingerEnable": 0,

"recModeIdcardEnable": 0,

"recModeIdcardIntf": 3,

"recModeIdcardIntfBaudrate": 4,

"recModeIdcardIntfPort": 2,

"recModePalmEnable": 0,

"recModeQrcodeEnable": 0,

"recModeQrcodeIntf": 1,

"recModeQrcodeIntfBaudrate": 4,

"recModeQrcodeIntfPort": 2,

"recMultiplayer": 0,

"recNoPerDisplayMode": 1,

"recNoPerTtsMode": 2,

"recNotBioDisplayMode": 1,

"recNotBioTtsMode": 1,

"recRank": 1,

"recRecordSave": 1,

"recRecordSaveDays": 7,

"recRecordUploadMode": 1,

"recSnapshotSave": 1,

"recStrangerDisplayMode": 1,

"recStrangerEnable": 1,

"recStrangerOpenDoor": 0,

"recStrangerTtsMode": 1,

"recSucDisplayCustom": "{name}",

"recSucDisplayMode": 1,

"recSucTtsCustom": "{name}",

"recSucTtsMode": 2,

"recThreshold1v1": 60,

"recThreshold1vN": 65,

"recWhitelistIdcard": 0,

"sevUploadDevHeartbeatInterval": 60,

"sevUploadRecCardDataEnable": 1,

"sevUploadRecIdcardDataEnable": 1,

"sevUploadRecQrcodeDataEnable": 0,

"sevUploadRecSnapshotEnable": 1,

"sevUploadRecStrangerDataEnable": 1,

"uiScreensaverWait": 60,

"uiShowIp": 1,

"uiShowPersonCount": 1,

"uiShowSn": 1

},

"msg": "Request successful"

}

3.4 Identification Configuration

Description : Configure the recognition parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setRecConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes

recThreshold1vN	1vN face recognition threshold	Int	N	The default value is 65. Please enter an integer between 50 and 100. The higher the score, the higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	Default 60 Same as above
recInterval	Identification interval time	Int	N	The default is 3 seconds. Recognition interval (the interval between callback notifications after consecutive successful recognitions of the same person).
recDistance	Identification distance	Int	N	Identification distance: • 0: No limit (default) • 1: within 0.5 meters • 2: Within 1 meter • 3: within 1.5 meters • 4: within 2 meters • 5: within 3 meters • 6: within 4 meters
recRank	Identify live level	Int	N	Identify the level of liveness: • 1. No liveness detection (default) • 2. Monocular liveness • 3. Binocular liveness
recSucTtsMode	Voice Mode	Int	N	Voice Mode: • 1. No voice broadcast • 2. Announce name (default) • 100. Customized voice

				broadcast
recSucTtsCustom	Customized voice content	String	N	Customized voice content • Default *{name}* • If *recSucTtsMode* is 100, this field must be passed and cannot be empty • *{name}* is allowed . The field format is fixed, and other contents only allow numbers, English and Chinese characters. • The length limit is 255 characters. For example: *{name}* Welcome
recSucDisplayMode	Display Mode	Int	N	Display Mode • 1: Name (default) • 2: Do not display content • 100: Custom display
recSucDisplayCustom	Display custom content	Int	N	Display custom content • Default *{name}* • If *recSucDisplayMode* is 100, this field must be passed and cannot be empty • *{name}* is allowed . The field format is fixed. Other content only allows numbers, Chinese and English, and Chinese and English symbols. The length is limited to 255 characters. For example: *{name}* , check-in successful!

recStrangerEnable	Identify strangers switch	Int	N	Identify stranger switch: • 0. Do not identify strangers • 1. Identify strangers (default)
recIsStrangerTimes	Number of recognition failures	Int	N	How many times of identification failure is considered a stranger. Default is 2 times
recStrangerTtsMode	Stranger Voice Mode	Int	N	Stranger Voice Mode • 1: Do not play voice (default) • 2: Voice broadcast "The user is not registered, please contact the administrator" • 100: Custom stranger voice
recStrangerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, • If *recStrangerTtsMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Beware of strangers
recStrangerDisplayMode	Stranger screen display text type	Int	N	Stranger screen display text type • 1. The person is not registered (default) • 100. Customization
recStrangerDisplayCustom	Text content displayed on stranger screen	String	N	Customized text displayed on stranger screen • If *recStrangerDisplayMode* is 100, this field must be passed and cannot be empty. • The content only allows


				numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: The person is not registered!
recNotBioTtsMode	Non-live voice mode	Int	N	Non-live voice mode • 1: Do not play voice (default) • 2: Voice announcement "Please do not try to use photos or videos for recognition" • 100: Custom non-live voice
recNotBioTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content, • If *recNotBioTtsMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition
recNotBioDisplayMode	Non-living screen display text type	Int	N	Non-living screen display text type • 1: Do not try to use photos or videos for recognition (default) • 100 : Custom

recNotBioDisplayCustom	Non-living screen displays text content	String	N	Non-living screen displays text custom content • If *recNotBioDisplayMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. For example: Please do not try to use photos or videos for recognition!
recNoPerTtsMode	Insufficient permissions Voice mode	Int	N	Insufficient permissions Voice mode • 1: Do not play voice • 2: Voice broadcast "Insufficient permissions, please contact the administrator" (default) • 100: Insufficient custom permissions for voice
recNoPerTtsCustom	Voice broadcast of customized content	String	N	Voice broadcast of customized content • If *recNoPerTtsMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, English and Chinese characters, and the length is limited to 255 characters. If you do not have enough permissions, please contact the administrator

recNoPerDisplayMode	Insufficient permissions screen display text type	Int	N	Insufficient permissions screen display text type • 1 Insufficient permissions, please contact the administrator (default) • 100 Custom
recNoPerDisplayCustom	Insufficient permissions to display text on the screen	String	N	Insufficient permissions to display custom text on the screen • If *recNoPerDisplayMode* is 100, this field must be passed and cannot be empty. • The content only allows numbers, Chinese and English, and Chinese and English symbols, and the length is limited to 255 characters. If: insufficient permissions, please contact the administrator!
recStrangerOpenDoor	Identify whether a stranger opens the door	Int	N	Identify whether a stranger opens the door • 0: Do not open the door (default) • 1: Open the door
recMultiplayer	Identify multiple people	Int	N	Identify multiple people • 0: Single person recognition (default) • 1: Multi-person recognition
recSnapshotSave	Identify and save snapshots	Int	N	Identify and save snapshots • 0 : Do not save • 1: Save (default)

recRecordSave	Identify and save records	Int	N	Identify and save records • 0 : Do not save • 1: Save (default)
recRecordSaveDays	Identification Record Retention Days	Int	N	Identification record retention days, default retention is 7 days
recRecordUploadMode	Identify record upload mode	Int	N	Identify record upload mode • 1: Real-time upload (default) • 2: Resume download
recWhitelistIdcard	Whitelist switch for identity verification	Int	N	Whitelist switch for identity verification • 0: Off (default), the ID card will be directly compared with the ID card after reading it. • 1: On, read the ID number and compare it with the ID numbers of all people in the database. If it exists, perform a person-document comparison; if it does not exist, prompt that the authority is insufficient.

Postman Example

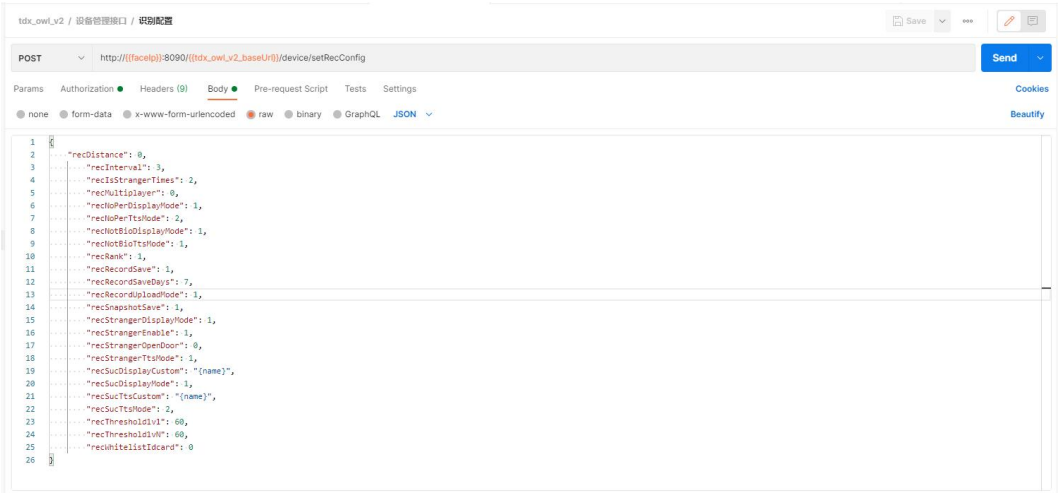

Return to example

{

"code": "000",

"data": {

"recDistance": 0,

"recInterval": 3,

"recIsStrangerTimes": 2,

"recMultiplayer": 0,

"recNoPerDisplayMode": 1,

"recNoPerTtsMode": 2,

"recNotBioDisplayMode": 1,

"recNotBioTtsMode": 1,

"recRank": 1,

"recRecordSave": 1,

"recRecordSaveDays": 7,

"recRecordUploadMode": 1,

"recSnapshotSave": 1,

"recStrangerDisplayMode": 1,

"recStrangerEnable": 1,

"recStrangerOpenDoor": 0,

"recStrangerTtsMode": 1,

"recSucDisplayCustom": "{name}",

"recSucDisplayMode": 1,

"recSucTtsCustom": "{name}",

"recSucTtsMode": 2,

"recThreshold1v1": 60,

"recThreshold1vN": 60,

"recWhitelistIdcard": 0

},

"msg": "Request successful"

}

3.5 Identification Mode Configuration

Description : Configure the parameters related to the face recognition mode.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setRecModeConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
recModeFaceEnable	Face recognition mode switch	Int	N	Face recognition mode switch • 0 : Off • 1: On (default)
recModeCardEnable	Card swipe mode switch	Int	N	Card swipe mode switch • 0 : Off • 1: On (default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface • 1: Wiegand (default) • 2: TTL serial port • 3 : USB


recModeCardIntfPort	Card number transmission serial port number	Int	N	Card number transmission serial port number This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 (default) ● 4 : ttyS4 ● 100 : Custom
recModeCardIntfPortCustom	Customize the card number transmission interface port number	String	N	Customize the port number of the card number transmission interface This field takes effect when the card number transmission interface port *recModeCardIntfPort* is configured as *100*
recModeCardIntfBaudrate	Card number transmission serial port baud rate	Int	N	Card number transmission serial port baud rate This field is effective when the card number transmission interface *recModeCardIntf* is configured as *a serial port* . ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4 : 115200 (default)

recModeIdcardEnable	Person-ID verification switch	Int	N	Person-ID verification switch • 0 : Disable (default) • 1 : Open
recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface • 1: Wiegand • 2: TTL serial port • 3 : USB (default) • 4 : NFC
recModeIdcardIntfPort	ID card transmission serial port number	Int	N	ID card transmission serial port number This field is effective when the ID card transmission interface is configured as *a serial port* . • 1 : ttyS1 • 2 : ttyS2 (default) • 3 : ttyS3 • 4 : ttyS4 • 100 : Custom
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface This field takes effect when the ID card transmission interface port *recModeIdcardIntfPort is configured as 100*

recModeIdcardIntfBaudrate	ID card transmission serial port baud rate	Int	N	ID card transmission serial port baud rate This field is effective when the ID card transmission interface is configured as a serial port. • 1 : 9600 • 2 : 19200 • 3 : 38400 • 4 : 115200 (default)
recModeQrcodeEnable	QR code scanning mode switch	Int	N	QR code scanning mode switch • 0 : Disable (default) • 1 : Open
recModeQrcodeIntf	QR code transmission interface	Int	N	QR code transmission interface • 1: TTL serial port (default) • 2: 232 serial port • 3 : USB
recModeQrcodeIntfPort	QR code transmission serial port number	Int	N	The port number of the QR code transmission serial port This field is effective when the QR code transmission interface *recModeQrcodeIntf is configured as a serial port.* • 1 : ttyS1 • 2 : ttyS2 (default) • 3 : ttyS3 • 4 : ttyS4 • 100 : Custom

recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface This field takes effect when the QR code transmission interface port *recModeQrcodeIntfPort is configured as 100*
recModeQrcodeIntfBaudrate	QR code transmission serial port baud rate	Int	N	Baud rate of the QR code transmission serial port This field is effective when the QR code transmission interface *recModeQrcodeIntfPort is configured as a serial port.* • 1 : 9600 • 2 : 19200 • 3 : 38400 • 4 : 115200 (default)
recModePalmEnable	Palmprint recognition switch	Int	N	Palmprint recognition switch • 0 : Disable (default) • 1 : Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch • 0 : Disable (default) • 1 : Open

Postman Example

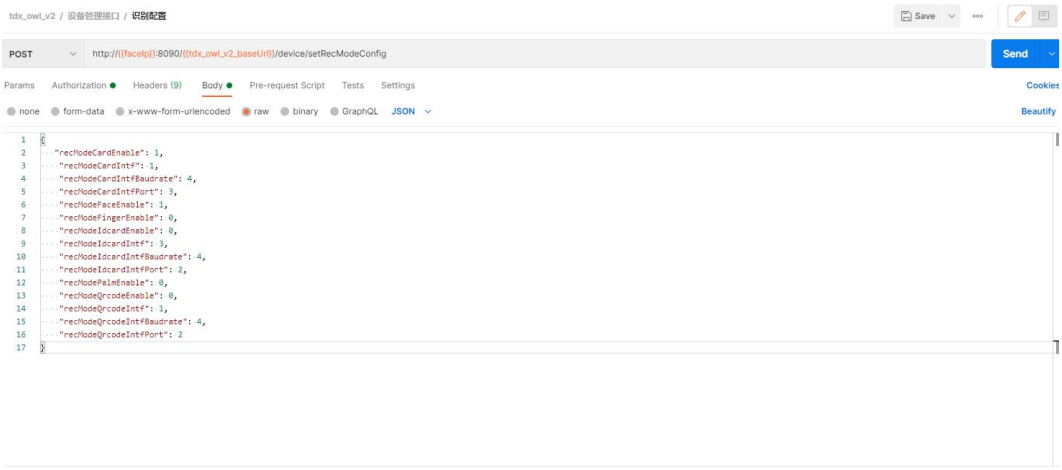

Return to example

{

"code": "000",

"data": {

"recModeCardEnable": 1,

"recModeCardIntf": 1,

"recModeCardIntfBaudrate": 4,

"recModeCardIntfPort": 3,

"recModeFaceEnable": 1,

"recModeFingerEnable": 0,

"recModeIdcardEnable": 0,

"recModeIdcardIntf": 3,

"recModeIdcardIntfBaudrate": 4,

"recModeIdcardIntfPort": 2,

"recModePalmEnable": 0,

"recModeQrcodeEnable": 0,

"recModeQrcodeIntf": 1,

"recModeQrcodeIntfBaudrate": 4,

"recModeQrcodeIntfPort": 2

},

"msg": "Request successful"

}

code code description

code	msg
100201	Device reboot failed, not rooted

3.6 Peripheral Configuration

Description : Configure the parameters related to the peripheral mode of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/ setPciConfig

Header Field

Parameter name	describe	type	Must be trans	Additional Notes

			mitted	
Content-Type	Request body type	String	Y	application/json


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
pciRelayOut	Relay output	Int	N	Relay output ● 0: Do not open the door ● 1: Open the door (default)
pciRelayMode	Relay Mode	Int	N	Relay Mode ● 1: Normally open (default) ● 2: Normally closed
pciRelayDelay	Relay control time	Int	N	Relay control time ● 1000ms (default) ● The time interval between the relay control opening and closing of the door is 1000ms by default. Please enter an integer between 100-25500, round down to the nearest hundred. For example, if you enter an integer between 101-199, the actual effective time is 100ms.
pciWgType	Wiegand Type	Int	N	Wiegand Type ● 1: Wiegand 26 (default) ● 2 : Wiegand 34 ● 3 : Wiegand 37

pciWgOut	Wiegand output type	Int	N	Wiegand output type • 0: No output (default) • 1: Output personnel id • 2: Output card number
pciComOut	Serial port output type	Int	N	Serial port output type • 0: No output (default) • 1: Output personnel id • 2: Output card number • 3: Output ID card • 100 : Custom
pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type *pciComOut is configured as 100*
pciComOutPort	Serial output port	Int	N	Serial output port • 1 : ttyS1 • 2 : ttyS2 • 3 : ttyS3 • 4 : ttyS4 (default) • 100 : Custom
pciComOutPortCustom	Serial output port customization	String	N	Serial output port customization This field takes effect when the serial port output port *pciComOutPort is configured as 100*
pciComOutBaudrate	Serial port output baud rate	Int	N	Serial port output baud rate • 1 : 9600 • 2 : 19200 • 3 : 38400

				• 4 : 115200 (default)
pciLedAlwaysEnable	Fill light is always on	Int	N	Fill light is always on • 0: Not always on (default) • 1: Always on
pciLedColorStranger	Fill light color (stranger)	Int	N	Fill light color (stranger) • 1: Red light (default) • 2 : Green light

Postman Example

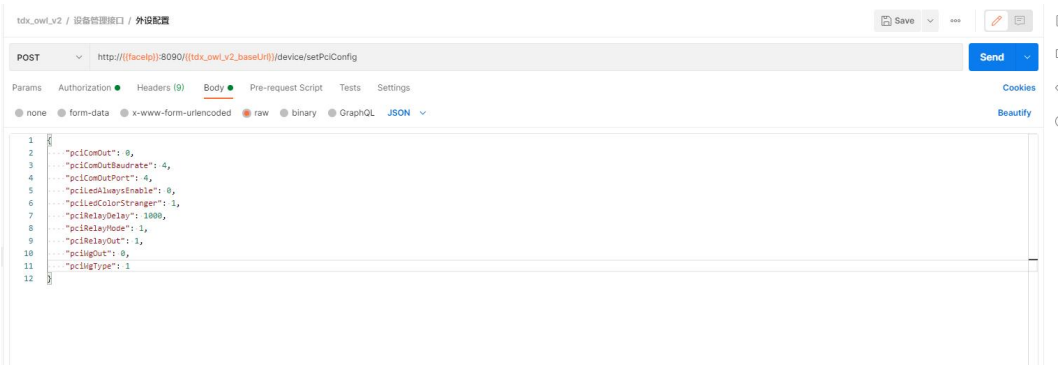

Return to example

{

"code": "000",

"data": {

"pciComOut": 0,

"pciComOutBaudrate": 4,

"pciComOutPort": 4,

"pciLedAlwaysEnable": 0,

"pciLedColorStranger": 1,

"pciRelayDelay": 1000,

"pciRelayMode": 1,

"pciRelayOut": 1,

"pciWgOut": 0,

"pciWgType": 1

},

"msg": "Request successful"

}

3.7 Interface Display Configuration

Description : Configure the interface display parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

The variables "uiLogoUrl" and "uiCompanyLogo" can only be chosen from one of them.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/ setUiConfig

Header Field

Parameter name	describe	type	Must be trans	Additional Notes

			mitted	
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
uiCompanyName	The interface displays the company name	String	N	The company name displayed on the apk interface
uiShowIp	Whether the main interface displays the device IP	Int	N	apk main interface whether to display the device IP • 0 : Hide • 1: Display (default)
uiShowSn	The main interface displays the device serial number	Int	N	apk main interface whether to display the device serial number • 0 : Hide • 1: Display (default)
uiShowPersonCount	Whether the main interface displays the number of people	Int	N	apk main interface whether to display the number of people • 0 : Hide • 1: Display (default)

uiScreensaverWait	Screen saver waiting time	Int	N	• apk screen saver waiting time, in seconds
uiLogoUrl	Logo url	string	N	picture address
uiCompanyLogo	Logo base64	string	N	String apk displays the company logo in base64 format （The base64 prefix needs to be removed.）
uiScreenSaverEnble	ScreenSaver button	Int	N	0:Hide 1:Show(default)
uiScreenSaverUrl	ScreenSaverUrl	string	N	ScreenSaverUrl

Postman Example



Return to example

{

"code": "000",

"data": {

"uiCompanyName": "My Company",

"uiScreensaverWait": 60,

"uiShowIp": 1,

"uiShowPersonCount": 1,

"uiShowSn": 1

},

"msg": "Request successful"

}

3.8 Server Configuration

Description : Configure the server-related parameters of the face recognition machine.

When calling the interface, if the corresponding parameters are not filled in, the system default parameters will be used for setting.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/ setSevConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes


Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
sevUploadRecRecordUrl	The URL address to upload the identification record	String	N	● The callback address must conform to the regular expression：**((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**
sevUploadDevHeartbeatUrl	Upload the URL address of the device heartbeat	String	N	Same as above
sevUploadRegPersonUrl	Upload the url address of the registered personnel data	String	N	Same as above
sevUploadRegFingerUrl	URL address to upload registered fingerprint data	String	N	Same as above
sevUploadAlarmUrl	URL address for uploading alarm data	String	N	Same as above

sevUploadDevHeartbeatInterval	Device heartbeat interval	Int	N	• Device heartbeat interval, in seconds, default 60, 10 - 300
sevUploadRecStrangerDataEnable	Upload stranger identification data switch	Int	N	Whether to upload stranger identification data switch • 0 : Do not upload • 1: Upload (default)
sevUploadRecSnapshotEnable	Upload recognition capture photo switch	Int	N	Whether to upload the recognition snapshot switch • 0 : Do not upload • 1: Upload (default)
sevUploadRecCardDataEnable	Upload card swipe data switch	Int	N	Whether to upload data to identify card swipe • 0 : Do not upload • 1: Upload (default)
sevUploadRecIdcardDataEnable	Upload ID card identification data switch	Int	N	Whether to upload ID card identification data switch • 0 : Do not upload • 1: Upload (default)
sevUploadRecQrcodeDataEnable	Upload and identify QR code data switch	Int	N	Whether to upload the QR code data switch • 0: Do not upload (default) • 1 : Upload

Postman Example

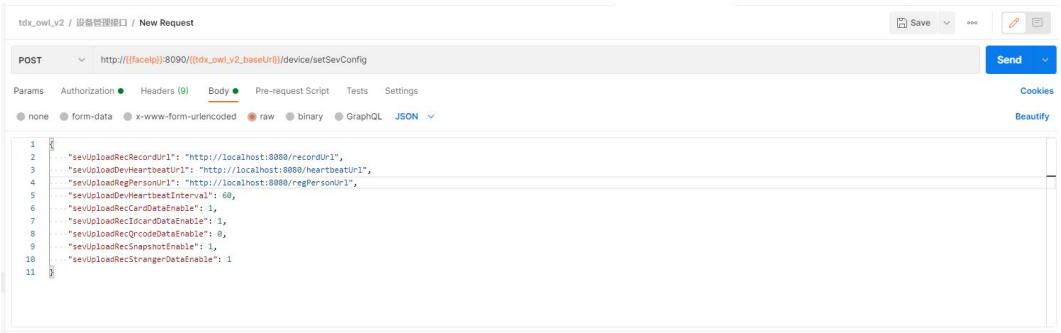

Return to example

{

"code": "000",

"data": {

"sevUploadDevHeartbeatInterval": 60,

"sevUploadDevHeartbeatUrl": "http://localhost:8080/heartbeatUrl",

"sevUploadRecCardDataEnable": 1,

"sevUploadRecIdcardDataEnable": 1,

"sevUploadRecQrcodeDataEnable": 0,

"sevUploadRecRecordUrl": "http://localhost:8080/recordUrl",

"sevUploadRecSnapshotEnable": 1,

"sevUploadRecStrangerDataEnable": 1,

"sevUploadRegPersonUrl": "http://localhost:8080/regPersonUrl"

},

"msg": "Request successful"

}

~~3.9 Get device configuration TODO~~

Description : Get the recognition parameters, recognition mode parameters, peripheral parameters, UI display parameters, server parameters, etc. of the face recognition machine for related configuration.

Method	URL
GET / POST	http://device IP:8090/cgi-bin/js/device/getConfig

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

3.10 Device Reset

Description : Reset the face recognition device.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/reset

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be trans	Additional Notes

			mitted	
type	Device reset type	Int	Y	Device reset type, reset the corresponding type of information on the device, and cannot be restored after reset • 1 : All data • 2: Personnel registration information • 3: Photo information • 4: Personal characteristics information • 5: Identification Record

Postman Example

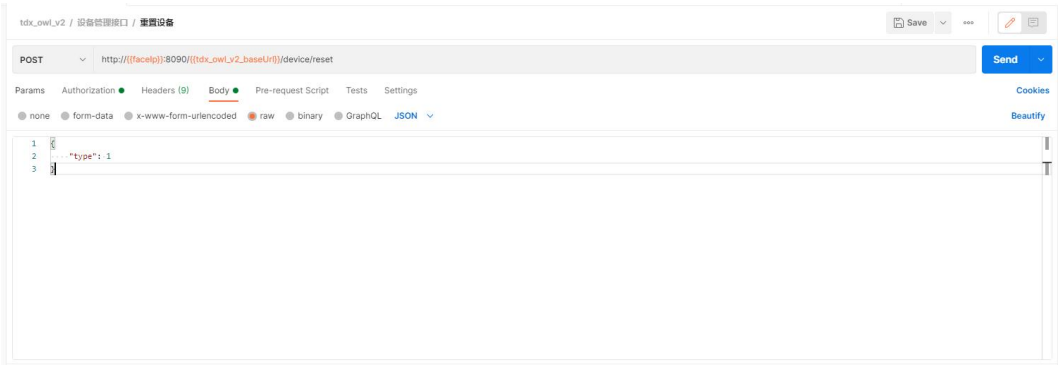

Return to example

{

"code": "000",

"data": {

"type": 1

},

"msg": "Request successful"

}

3.11 Device Restart


Description : Restart the face recognition device.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/restart

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Postman Example

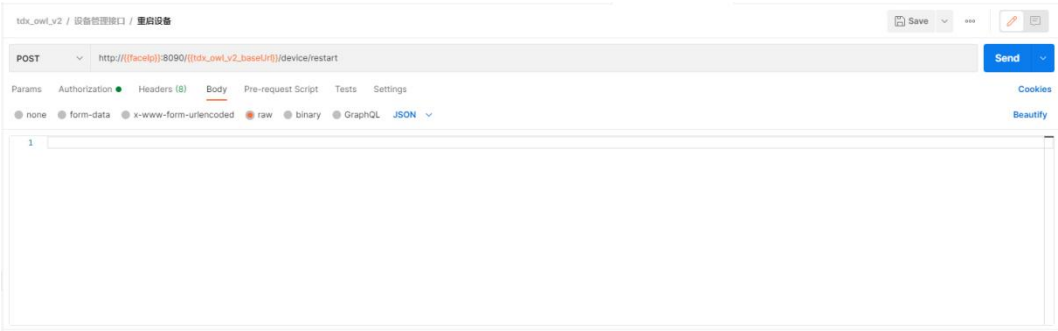

Return to example

{

"code": "000",

"msg": "Request successful"

}

code code description

code	msg
100201	Device reboot failed, not rooted

3.12 Remote control output (including door opening)

Description : Remote control face recognition device to open the door, serial port output, Wiegand output, custom pop-up window, voice broadcast

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/ output

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes

type	Remote output interaction type	Int	Y	Device interaction type • 1: Open the door (default) • 2: Serial port • 3 : Wiegand • 4: Customized text pop-up window, customized voice broadcast
content	Remote output content	String	N	• Interaction type is set to 1: when *opening the door* , no setting is required • When the interaction type is set to 2: *serial port* , only numbers, English and English characters are allowed in the content, and the length is limited to 255 characters. • When the Interaction Type is set to 3: *Wiegand* , only numbers are allowed. • When the interaction type is set to 4: *custom pop-up window and voice broadcast* , the content is set to JSON string

When the output type is set to 4, the remote output content *JSON* string example:


{

"ttsContent":"Custom voice, no voice broadcast if not passed", // Voice broadcast content

"displayContent": "Custom text, if not passed, the content displayed after the pop-up window will be empty" // Pop-up window display content

}

Postman Example

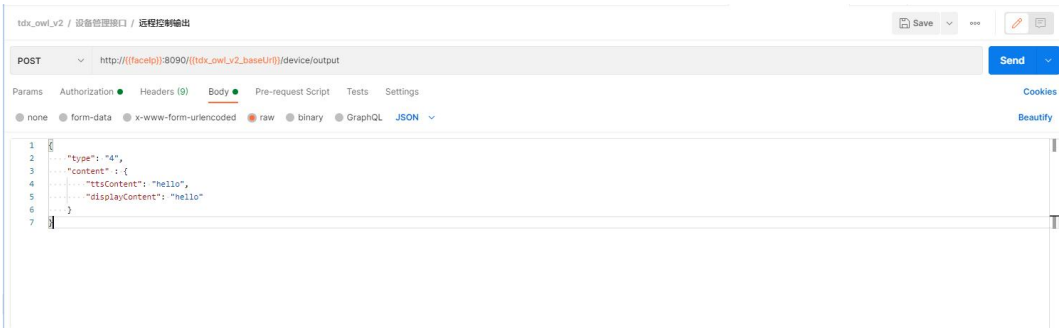

Return to example

{

"code": "000",

"data": {

"content": "{\"ttsContent\":\"hello\",\"displayContent\":\"hello\"}",

"type": 4

},

"msg": "Request successful"

}

code code description

code	msg
100501	The value of content cannot be empty
100502	The length of content is limited to 255 characters
100503	The value of content is only allowed to be

	numbers
100504	The value of content is not defined by the interface. Please refer to the interface documentation.

3.13 Setting up a wired network

Description : Set the *DHCP* mode of the face recognition device and other wired network configurations. The fixed IP set on this interface is suitable for network cable connection.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/ setNetwork

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes

dhcpEnable	DHCP Mode Selection	Int	Y	DHCP Mode Selection ● 0: Manually set IP mode. Except subnetMask, all other parameters must be passed in and cannot be empty. ● 1: Dynamic IP acquisition mode, no need to pass in other parameters (default)
ip	IP address	String	N	Set a static IP address for the face recognition device
gateway	Gateway	String	N	Setting up the gateway
subnetMask	Subnet Mask	String	N	Set the subnet mask (default 255.255.255.0)
DNS	DNS Server	String	N	Setting up DNS servers

Postman Example

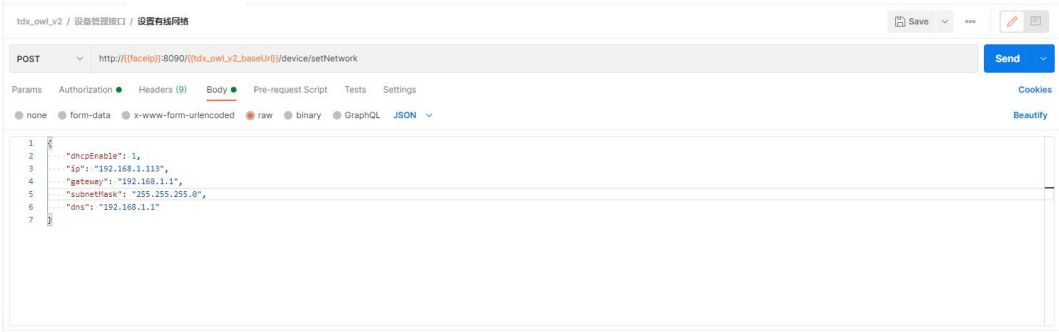

Return to example

{

"code": "000",

"data": {

"dhcpEnable": 1,

"dns": "192.168.1.1",

"gateway": "192.168.1.1",

"ip": "192.168.1.113",

"subnetMask": "255.255.255.0"

},

"msg": "Request successful"

}

~~3.14 Setting up wireless network TODO~~

Note : Set the WIFI configuration of the face recognition device. The device only supports connecting to 2.4G Wi-Fi, not 5G Wi-Fi, Wi-Fi that requires web page authentication, or Wi-Fi that requires certificate authentication.

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setWifi

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
ssid	WiFi Name	String	Y	WiFi name, must be transmitted
pwd	WiFi Password	String	N	WiFi password, only numbers, English letters and English characters are allowed; if there is no password, pass in empty string.
dhcpEnable	DHCP Mode Selection	Int	Y	DHCP Mode Selection • 0: Manual IP setting mode • 1: Dynamic IP acquisition mode, no need to pass in other parameters (default)
ip	IP address	String	N	Setting IP Address
gateway	Gateway	String	N	Setting up the gateway
DNS	DNS Server	String	N	Setting up DNS servers

Postman Example

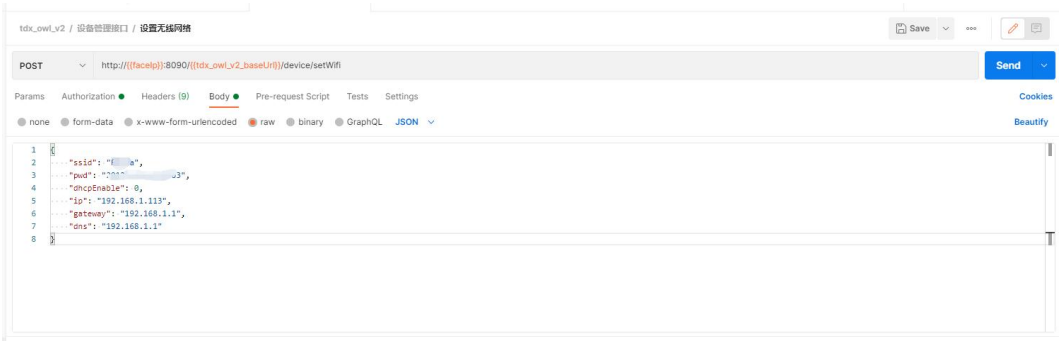

Return to example

{

"code": "000",

"data": {

"dhcpEnable": 0,

"dns": "192.168.1.1",

"gateway": "192.168.1.1",

"ip": "192.168.1.***",

"pwd": "****123",

"ssid": "****WIFI"

},

"msg": "Request successful"

}

3.15 Set the upload address

Description : Set the WIFI configuration of the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setUploadUrl

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
type	Configure the type of the reported data url	Int	Y	Configure the type of the reported data url • 0: Clear all reported addresses • 1: Heartbeat reporting • 2: Identify and report records • 3: Registered personnel data reporting • 4: Fingerprint registration data reporting • 5: Anti-dismantle alarm data reporting
url	Configured URL	String	N	The upload address must conform to the regular expression: **((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

Request parameter description:

// Request parameters are in array format

[


{"type": 1, url: "http://www.baidu.com"},

{"type": 2, url: "http://www.baidu.com"},

...

]

Postman Example

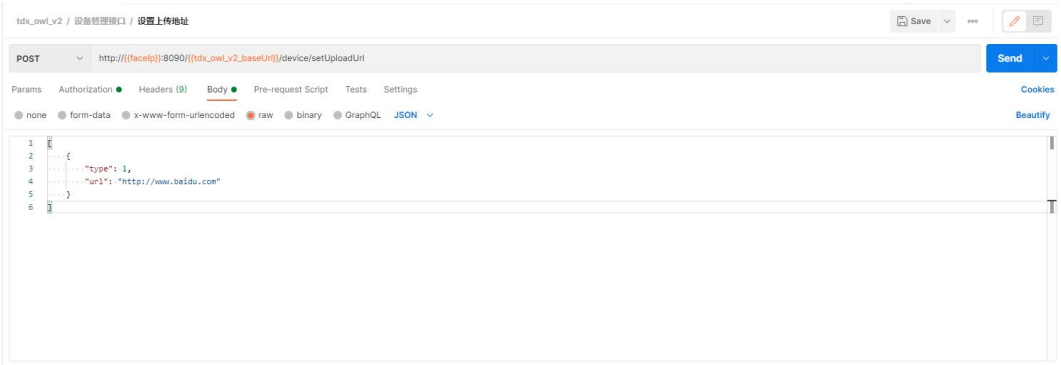

Return to example

{

"code": "000",

"data": [

{

"type": 1,

"url": "http://www.baidu.com"

}

],

"msg": "Request successful"

}

The parameters reported by the device to the server are in form format.

Identification record reporting request parameter description:

Parameter name	type	Must be transmitted	Additional Notes
deviceKey	String	Y	Device serial number, 16 digits
recordId	String	Y	Identify the unique ID of the record
personSn	String	N	Personnel Number
personType	Int	Y	Person Type0: Unknown1: Employee2: Visitor3: Blacklist
verifyStyle	Int	Y	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4 : Password only
checkImgUrl	String	N	Snap photo LAN path
checkImgBase64	String	N	Snapshot photo imgBase64 string
cardNo	String	N	card number
idCard	String	N	ID number
voucherCode	String	N	Voucher Number


temperature	String	N	body temperature
attach	String	N	Additional Information
maskFlag	Int	N	Mask identification 1 : w i t h mask 2 : n o mask
capFlag	Int	N	Hat mark 0: No hat 1: With hat
faceFlag	Int	N	Face ID0: No1: Yes
cardFlag	Int	N	Card swipe identification0: No1: Yes
fingerFlag	Int	N	Fingerprint identification0: No1: Yes
idCardFlag	Int	N	ID card identification0: No1: Yes
pwdFlag	Int	N	Password ID0: No1: Yes
palmFlag	Int	N	Palmprint ID0: No1: Yes
resultFlag	Int	N	Identification result mark 1: Success 2: Failure 3: Insufficient authority
strangerFlag	Int	N	Stranger ID0: No1: Yes
openDoorFlag	Int	N	Door open flag0: No1: Yes
recordTime	Long	Y	Passage time, Unix millisecond timestamp (13 bits)

Identify the report request response string :

Note: If you do not respond with the correct string, the record will be uploaded repeatedly

{"result":1,"code":"000"}

Postman Example

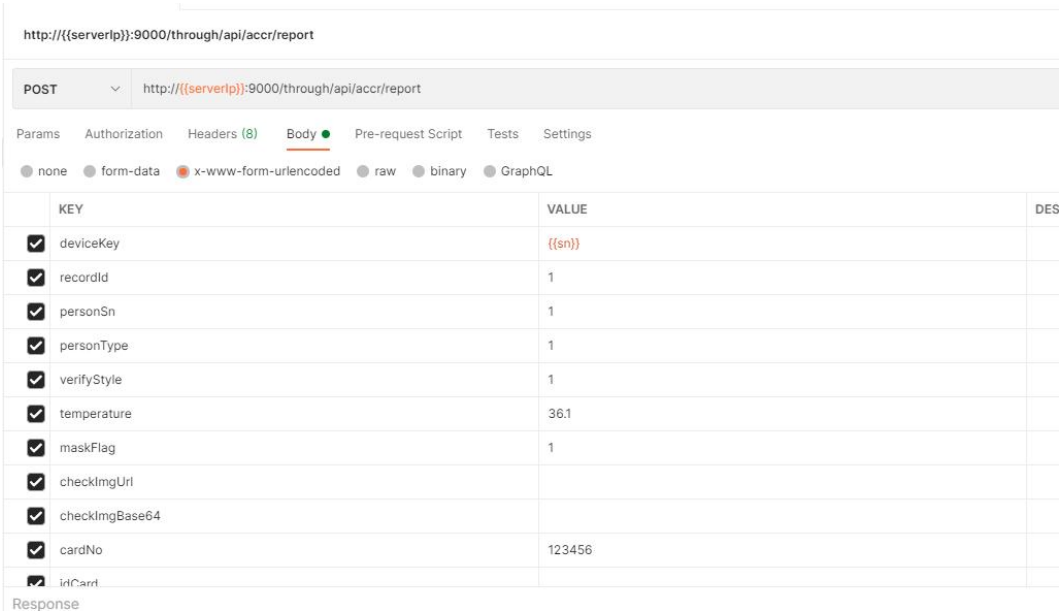


Heartbeat reporting request parameter description:

- The device will report heartbeat information to the heartbeat address every minute.
- No information is required to be returned, and the device will not process it.

Parameter name	type	Must be transmitted	Additional Notes

deviceKey	String	Y	Device serial number, 16 digits
time	Long	Y	Request time, Unix millisecond timestamp (13 bits)
ip	String	Y	Device IP
personCount	Int	Y	Number of staff
faceCount	Int	Y	Number of photos
version	Int	Y	Device version number
freeDiskSpace	Int	Y	Remaining disk space unit: M

Postman example:

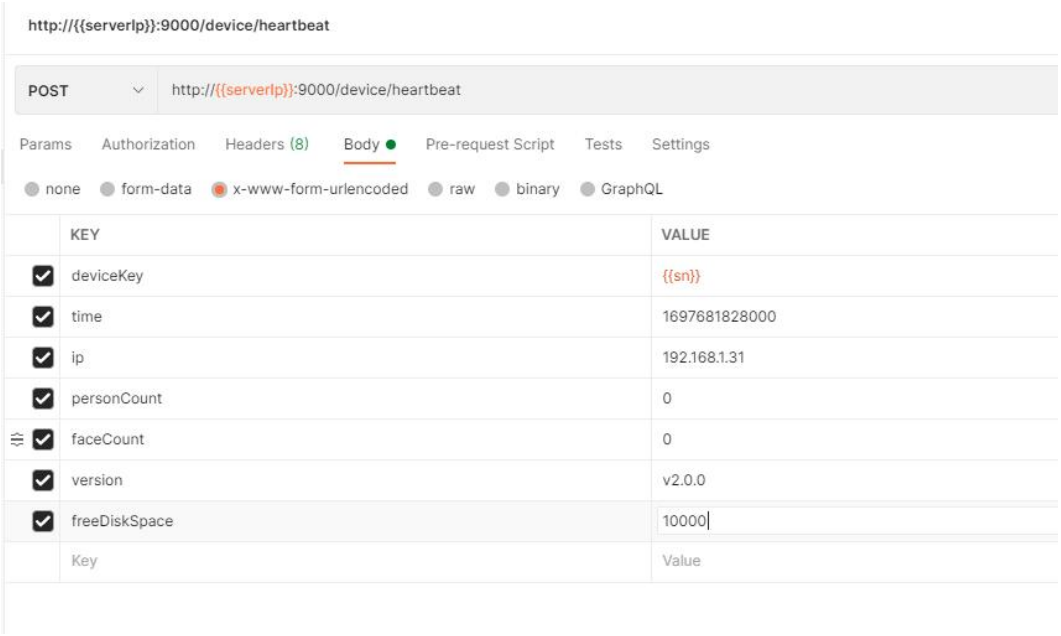

Personnel registration report request parameter description:


- When the device creates a person, it will register the person and report the address POST person information

- No information is required to be returned, and the device will not process it.

Parameter name	type	Must be transmitted	Additional Notes
deviceKey	String	Y	Device serial number, 16 digits
personType	Int	Y	Personnel Type • 1 Internal employee • 2 visitors • 3 Blacklist
personSn	String	Y	Personnel number/employment number
name	String	Y	Personnel Name
mobile	String	N	Phone number
cardNo	String	N	card number
idCard	String	N	ID number
verifyPwd	String	N	password
voucherCode	String	N	Voucher Number
acGroupNumber	Int	N	Access control group number

verifyStyle	Int	Y	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4: Password only
expiredType	Int	Y	Expiration Type ● 0 Never expires ● 1 Time ● 2 times ● 3 times + times
validCount	Int	N	Valid times
validTimeBegin	Long	N	Valid time start , Unix millisecond timestamp (13 bits)
validTimeEnd	Long	N	End of valid time, Unix millisecond timestamp (13 bits)
acTzNumber1	Int	N	Passage time 1 No.
acTzNumber2	Int	N	Passage time 2 No.
acTzNumber3	Int	N	Passage time 3 No.
updateTime	Long	Y	Update time, Unix millisecond timestamp (13 digits)
createTime	Long	Y	Creation time, Unix millisecond timestamp (13 digits)

Postman example:

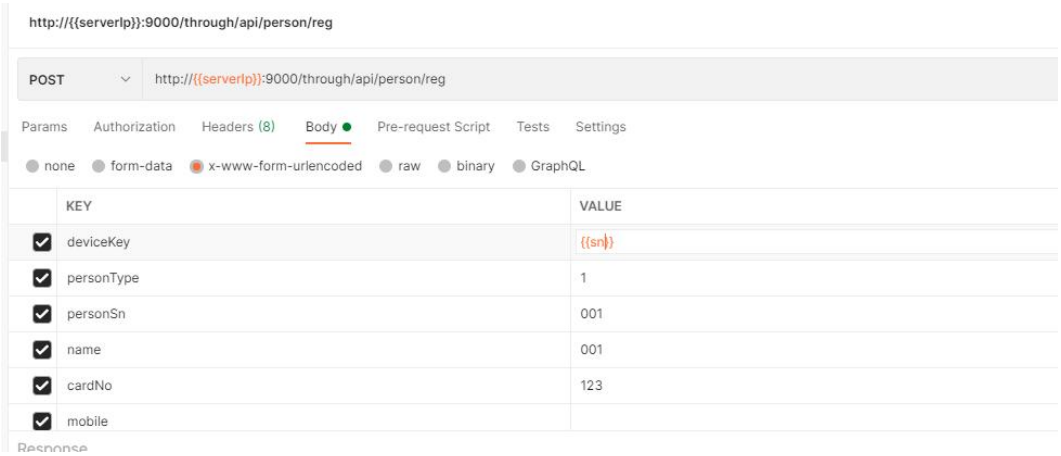


Fingerprint registration report request parameter description:

- When the device creates a person, if the person has registered a fingerprint, the fingerprint information will be POSTed to the person registration reporting address
- No information is required to be returned, and the device will not process it.

Parameter name	type	Must be transmitted	Additional Notes
deviceKey	String	Y	Device serial number, 16 digits
personSn	String	Y	Personnel number/employment number
fingerId	String	Y	Unique identifier of fingerprint feature value
fingerNum	Int	Y	Finger number, which finger, 2 digits • The first digit indicates the left and right hand, 1 is left hand and 2 is right hand • The second finger is

			marked: 1 thumb 2 index finger 3 middle finger 4 ring finger 5 little finger
feature	String	Y	Fingerprint feature value
time	Long	Y	Registration time, Unix millisecond timestamp (13 bits)

Postman example:

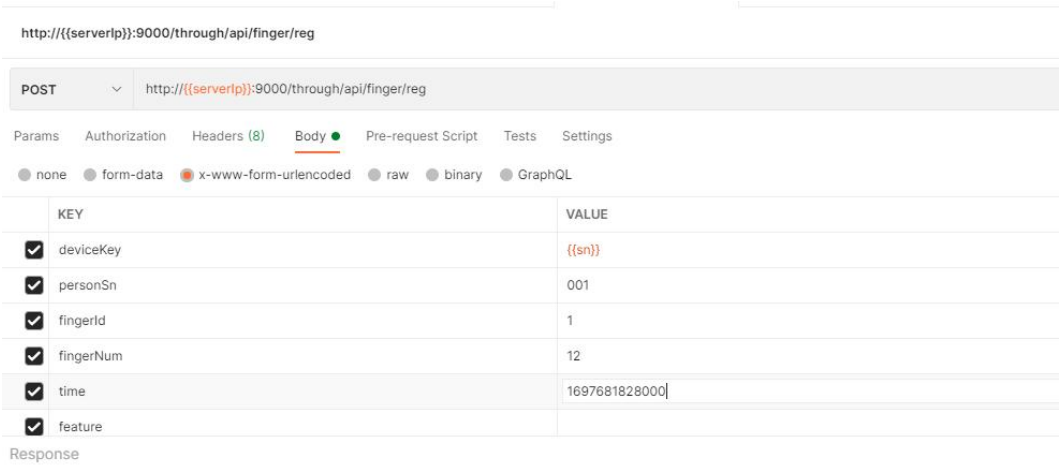

3.16 APK Update

Description : Set the reporting address configuration of the face recognition device

Method	URL
POST	http://deviceIP:8090/cgi-bin/js/device/upgradeApk

Header Field


Parameter name	describe	type	Must be trans	Additional Notes

			mitted	
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
versionCode	apk version number	Int	Y	Upgraded APK version number
channel	Channel Number	String	Y	Channel number of the device
apkUpgradeUrl	apk upgrade address	String	Y	The apk upgrade address needs to conform to the regular expression: **((http|https)://)((a-zA-Z0-9\._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

Postman Example

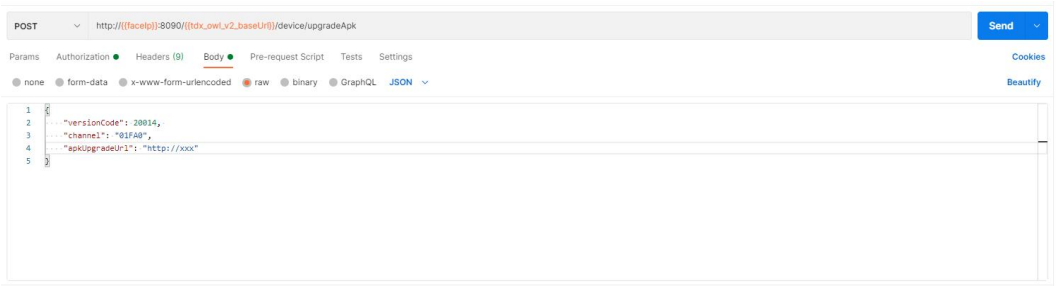

3.17 Setting the time

Description : Set the time of the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js/device/setTime


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
time	Timestamp	Int	Y	16-bit timestamp

Postman Example

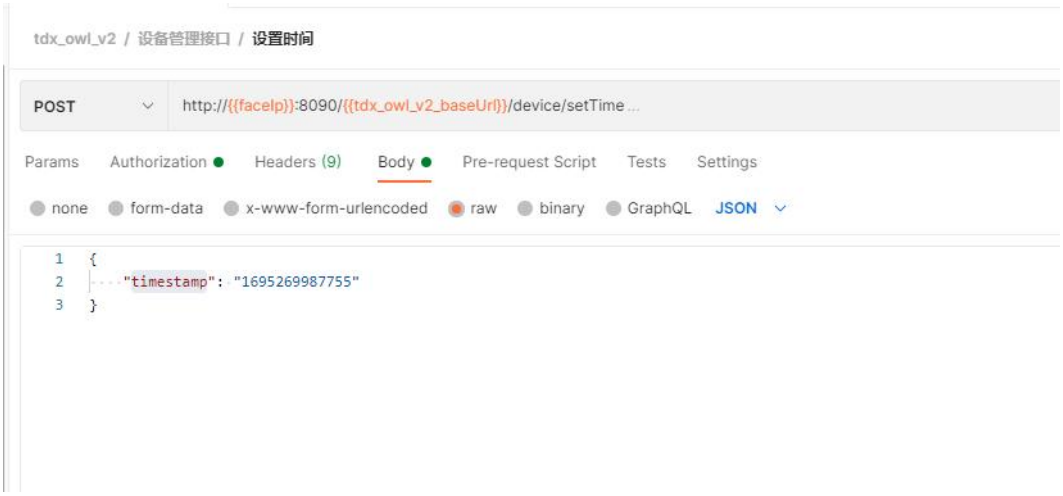

4. Personnel Management Interface

4.1 Personnel Creation

Description : Create different types of users on the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js/person/create

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
type	Personnel Type	Int	Y	Personnel Type ● 1: Internal staff ● 2 : Visitors ● 3: Blacklist
sn	Work No.	String	Y	Personnel unique identification When creating a person, the employee number cannot be

				repeated with other employee numbers. Only numbers and English letters are allowed, case sensitive
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for identification, and the screen will also display the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	Phone number	String	N	
country	country	String	N	
verifyPwd	password	String	N	

voucherCode	Voucher Number	String	N	
acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4: Password only
expiredType	Expiration Type	Int	N	Expiration type of personnel ● 0: Never expire (default) ● 1: Time period ● 2: Number of TODOs ● 3: Time + times TODO
validTimeBegin	Effective time starts	Long	N	The start time of the person's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the

				device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the employee, in Unix millisecond timestamp (13 digits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validCount	Valid times	Int	N	TODO

Postman Example

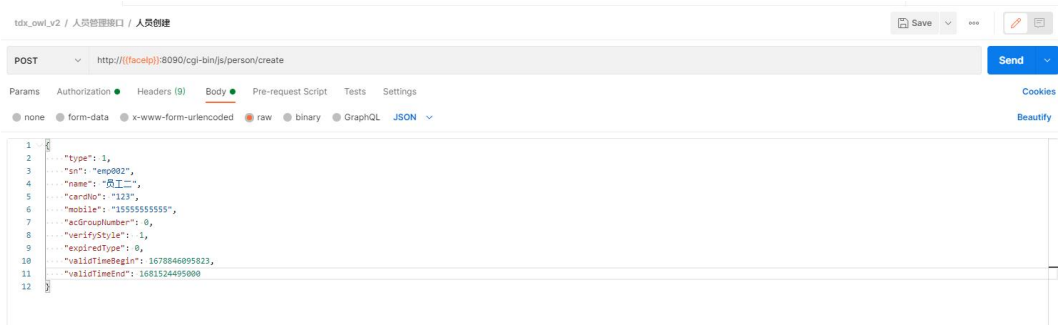

Return to example

{

"code": "000",

"data": {

"acGroupNumber": 0,

"cardNo": "123",

"expiredType": 0,

"mobile": "15555555555",

"name": "Employee 2",

"sn": "emp002",

"type": 1,

"validTimeBegin": 1678846095823,

"validTimeEnd": 1681524495000,

"verifyStyle": 1

},

"msg": "Request successful"

}

4.2 Personnel Update

Description : Update user information on the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js/person/update

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
type	Personnel Type	Int	Y	Personnel Type • 1: Internal staff • 2 : Visitors • 3: Blacklist
s	Work No.	String	Y	Personnel unique identification, When updating, modify the database information in the device according to the work number. If the corresponding work number does not exist, the modification will fail. Only numbers and English letters are allowed, case sensitive
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for identification, and the screen will also display the

				name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	Phone number	String	N	
verifyPwd	password	String	N	TODO
voucherCode	Voucher Number	String	N	TODO
acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4: Password only

expiredType	Expiration Type	Int	N	Expiration type of personnel • 0: Never expire (default) • 1: Time period • 2: Number of TODOs • 3: Time + times TODO
validTimeBegin	Effective time starts	Long	N	The start time of the person's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the employee, in Unix millisecond timestamp (13 digits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validCount	Valid times	Int	N	TODO

Postman Example

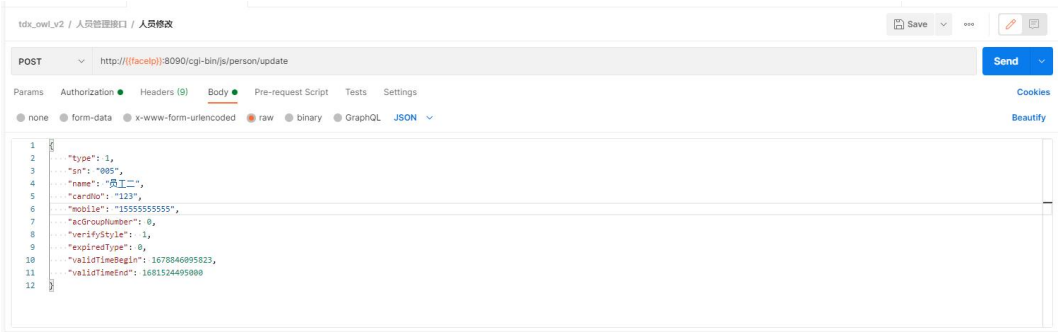

Return to example

{

"code": "000",

"data": {

"acGroupNumber": 0,

"cardNo": "123",

"expiredType": 0,

"mobile": "15555555555",

"name": "Employee 2",

"sn": "005",

"type": 1,

"validTimeBegin": 1678846095823,

"validTimeEnd": 1681524495000,

"verifyStyle": 1

},

"msg": "Request successful"

}

4.3 Personnel creation or update

Description : Create different types of users on the face recognition device. If the person already exists, update the person information.

Method	URL
POST	http://device IP:8090/cgi-bin/js/ person/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
type	Personnel Type	Int	Y	Personnel Type • 1: Internal staff • 2 : Visitors • 3: Blacklist
s	Work No.	String	Y	Personnel unique identification When creating a person, the employee number cannot be repeated with other employee numbers.

				Only numbers and English letters are allowed, case sensitive If it already exists, update the personnel information
name	Name	String	Y	Personnel Name
cardNo	card number	String	N	Card number, which can be left blank when creating a card. There is no length limit. If you fill in the card number when registering a person, you can directly swipe the card with the corresponding card number for identification, and the screen will also display the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	Phone number	String	N	
verifyPwd	password	String	N	
voucherCode	Voucher Number	String	N	

acGroupNumber	Access control group number	Int	N	Access control group number corresponding to the personnel When set to 0, it means that the person does not set the access control permission group (default)
verifyStyle	Verification	Int	N	When the access control permission group is set to 0, this field takes effect ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4: Password only
expiredType	Expiration Type	Int	N	Expiration type of personnel ● 0: Never expire (default) ● 1: Time period ● 2: Number of TODOs ● 3: Time + times TODO
validTimeBegin	Effective time starts	Long	N	The start time of the person's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

validTimeEnd	Validity period ends	Long	N	The expiration date of the employee, in Unix millisecond timestamp (13 digits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

Postman Example

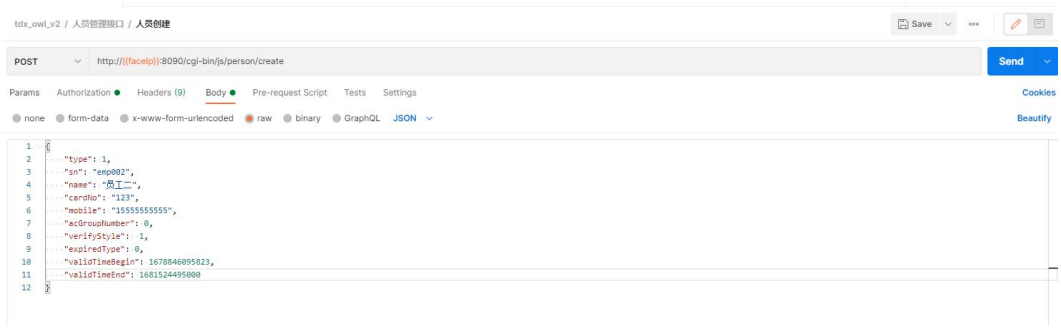

Return to example

{

"code": "000",

"data": {

"acGroupNumber": 0,

"cardNo": "123",

"expiredType": 0,

"mobile": "15555555555",

"name": "Employee 2",

"sn": "emp002",

"type": 1,

"validTimeBegin": 1678846095823,

"validTimeEnd": 1681524495000,

"verifyStyle": 1

},

"msg": "Request successful"

}

4.4 Personnel Deletion

Description : Delete the personnel information corresponding to the employee number on the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js/person/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be tran	Additional Notes

			smitted	
s	Work No.	List<String>	Y	To delete a collection of employee IDs


Parameter Examples

{

"sn": ["001", "002",...]

}

Postman Example

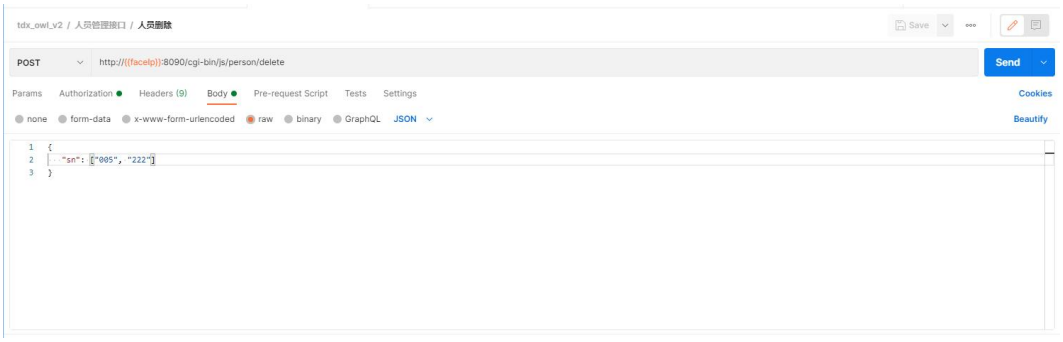

Return to example

{

"code": "000",

"data": {

"sn": [

"005",

"222"

]

},

"msg": "Request successful"

}

4.5 Clearing out personnel


Description : Clear all user information on the device

Method	URL
POST	http://deviceIP:8090/cgi-bin/js/person/empty

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Postman Example

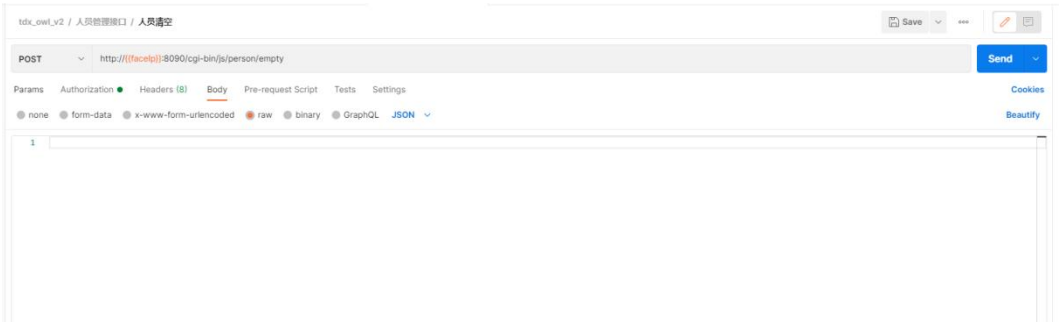

Return to example

{

"code": "000",

"msg": "Request successful"

}

4.6 Person Search

Description : Find the corresponding user information according to the user's work number, ID number, and card number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ person/find

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
type	Find Type	Int	Y	Find Type • 1: Work number • 2 : ID card • 3 : Card number

key	Corresponding query data	String	Y	

Postman Example

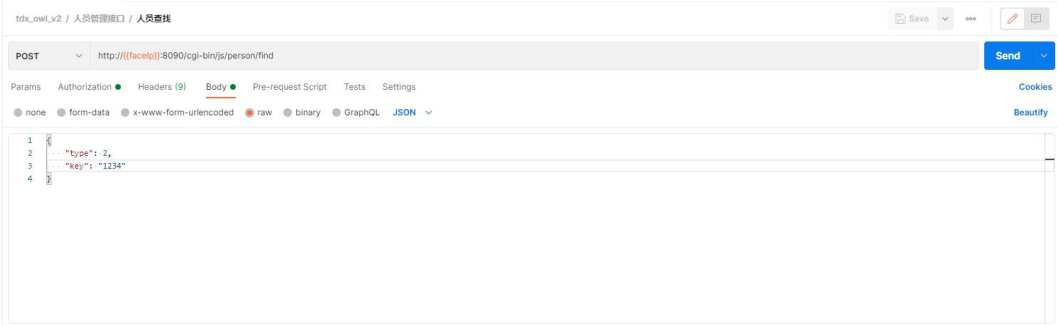

Return to example

{

"code": "000",

"data": {

"acGroupNumber": 1, //Corresponding access control permission group number

"cardNo": "123", // Card number

"idCard": "1234", // ID card number

"mobile": "", // mobile phone number

"name": "001", // Username

"sn": "001", // employee number

"type": 1, // User type 1: Employee 2: Guest 3: Blacklist

"updateTime": 1678851969615, // user information modification date

"verifyPwd": "" // User password

},

"msg": "Request successful"

}

4.7 Personnel List Search

Description : Query all user information by page

Method	URL
POST	http://device IP:8090/cgi-bin/js/ person/findList


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
index	page number	Int	Y	Page number, starting from 1
length	Query quantity	Int	N	The number of users queried per page, the default is 20

Postman Example

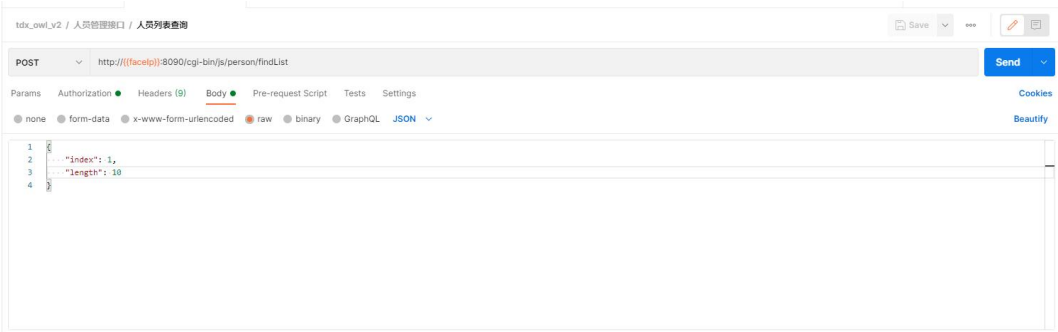

Return to example

{

"code": "000",

"data": [

{

"acGroupNumber": 1, //Corresponding access control permission group number

"cardNo": "123", // Card number

"idCard": "1234", // ID card number

"mobile": "", // mobile phone number

"name": "001", // Username

"sn": "001", // employee number

"type": 1, // User type 1: Employee 2: Guest 3: Blacklist

"updateTime": 1678851969615, // user information modification date

"verifyPwd": "" // User password

},

{

"acGroupNumber": 1,

"cardNo": "123",

"idCard": "1234",

"mobile": "",

"name": "001",

"sn": "001",

"type": 1,

"updateTime": 1678851969615,

"verifyPwd": ""

}

],

"msg": "Request successful"

}

4.8 Creation or update of personnel passage time period

Note : Set the access time for the corresponding user from Monday to Sunday. Users who pass outside the access time will be displayed as insufficient authority and verification failed.

Method	URL
POST	http://device IP:8090/cgi-bin/js/ person/passtime/merge

Header Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
s	page number	List<String>	Y	Staff ID Collection
passtimeList	Traffic time	List<Object>	N	Traffic time A maximum of 3 sets are allowed. If only 1 segment is set, the last two segments do not need to be transmitted. Passing time string, the format is **start time - end time** , the time format is HH:mm, for example: 00:00 23:59 separated by -

Request parameter example:

{

"sn": ["xxx", "xxxx"], // employee number collection

"passtimeList": [// Pass time string, the format is start time dash end time, the time format is HH:mm, example: 00:00 23:59 separated by -

{

"sun": "00:00-23:59", // Sunday traffic time period

"mon": "00:00-23:59", // Monday time period

"tue": "00:00-23:59", // Tuesday time period

"wed": "00:00-23:59", // Wednesday time period

"thurs": "00:00-23:59", // Thursday time period

"fri": "00:00-23:59", // Friday time period

"sat": "00:00-23:59" // Saturday time period

},

{

"sun": "00:00 23:59", // Sunday traffic time period

"mon": "00:00 23:59", // Monday time period

"tue": "00:00 23:59", // Tuesday time period

"wed": "00:00 23:59", // Wednesday time period

"thurs": "00:00 23:59", // Thursday time period

"fri": "00:00 23:59", // Friday time period

"sat": "00:00 23:59" // Saturday time period


},

...

]

}

Postman Example

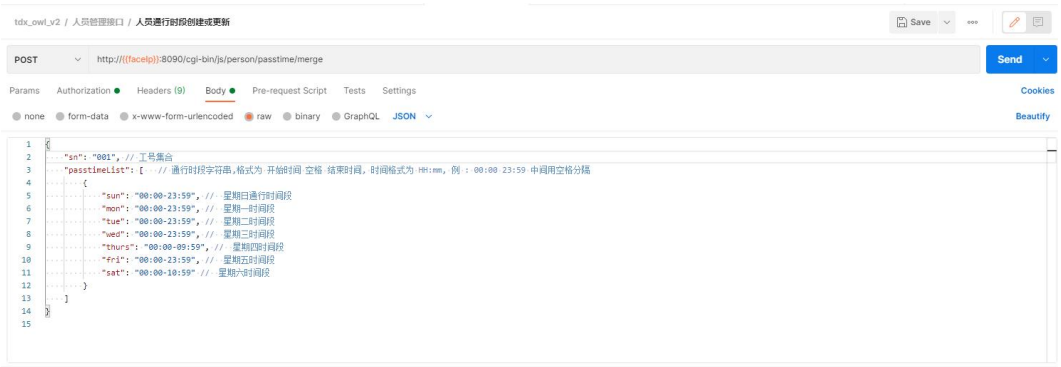

Return to example

{

"code": "000",

"data": {

"passtimeList": [

{

"fri": "00:00-23:59",

"mon": "00:00-23:59",

"sat": "00:00-10:59",

"sun": "00:00-23:59",

"thurs": "00:00-09:59",

"tue": "00:00-23:59",

"wed": "00:00-23:59"

}

],

"sn": [

"001"

]

},

"msg": "Request successful"

}

4.9 Deletion of personnel passage time

Description : Remove the time limit for the user's access

Method	URL
POST	http://device IP:8090/cgi-bin/js/ person/passtime/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be trans	Additional Notes

			mitted	
s	page number	List<String>	Y	Staff ID Collection


Request parameter example:

{

"sn": ["xxx", "xxxx"]

}

Postman Example

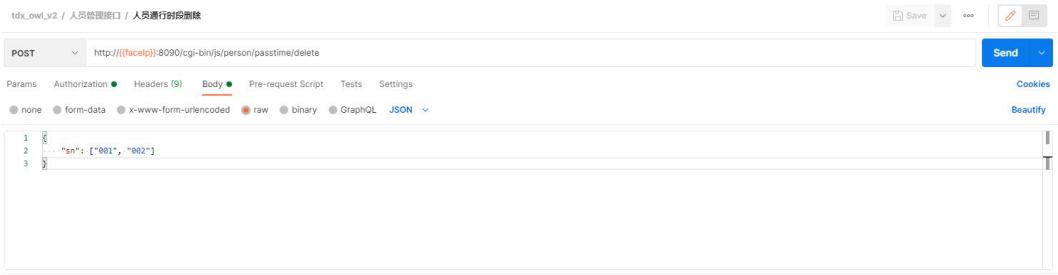

Return to example

{

"code": "000",

"data": {

"sn": [

"001",

"002"

]

},

"msg": "Request successful"

}

5. Face Management Interface

5.1 Face creation or update

Description : Register the facial recognition photo of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ face/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field


Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel number, must first register personnel
imgUrl	Work No.	String	Y	The LAN URL address of the photo

				Photos only support images stored in http protocol locations
imgBase64	Name	String		• Base64 encoded string of the photo • The photo formats supported are PNG, JPG, JPEF; • For imgBase64, you need to remove the header such as: data:image/jpeg;base64
easy	card number	Int	N	Detect photo quality level • 0: Strictly check the photo quality • 1: Relaxed detection of photo quality

Request Instructions

- You must add people before adding pictures
- Both imgUrl and imgBase64 parameters are required
- The photo formats supported are PNG, JPG, JPEF;

Postman Example

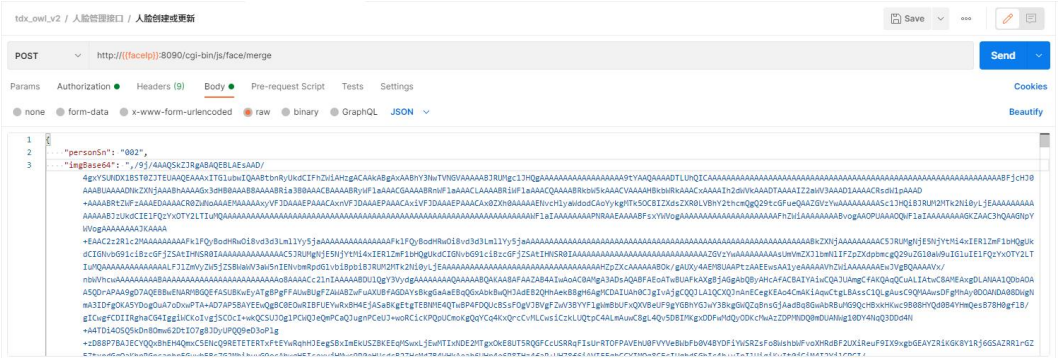

Return to example

{

"code": "000",

"data": {

"easy": 0,

"imgBase64": ",/9j/4AAQSkZJRgABAQEBLAEsAAD/4g.....",

"personSn": "002"

},

"msg": "Request successful"

}

5.2 Face Removal

Description : Delete the facial recognition photo of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ face/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
s	Staff ID Collection	List<String>	Y	Personnel number collection


Request parameter example:

{

"sn": ["002", "001"]

}

Postman Example

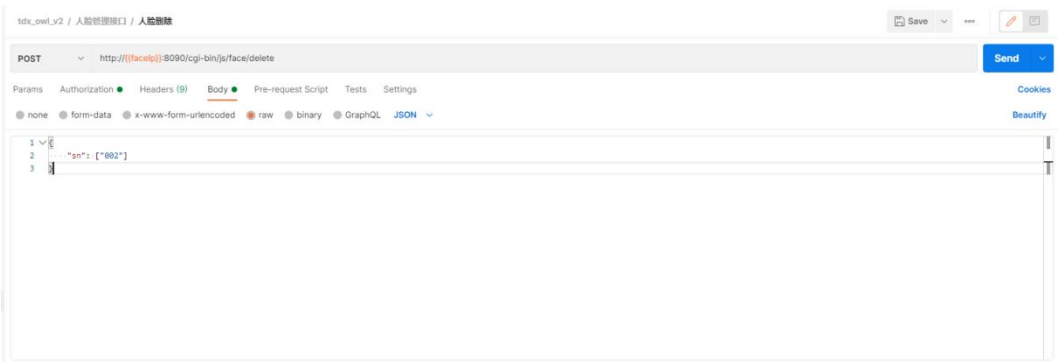

Return to example

{

"code": "000",

"data": {

"sn": [

"002"

]

},

"msg": "Request successful"

}

5.3 Face Search

Description : Query the facial photo information of the person corresponding to the work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ face/find


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel number to be queried

Postman Example

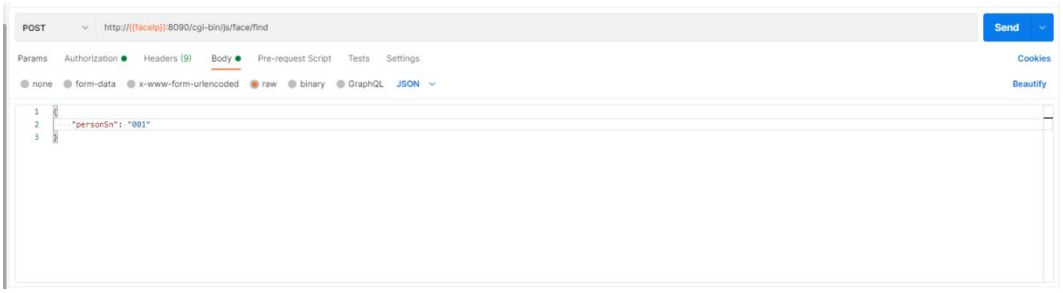

Return to example

{

"code": "000",

"data": {

"featureData": "vQzaba010+GTwx/KZPgyr7xweLQI/r1iEw..", // facial feature information

"imgBase64": "/9j/4AAQSkZJRgABAQAAAQA...", // imgBase64 encoding of personnel photo

"imgPath": "/storage/emulated/0/attnd/web/img/reg_face/1680768368626.jpg", // The path where the photo is saved on the device

"personSn": "001" // employee number

},

"msg": "Request successful"

}

6. Record Management Interface

6.1 Search the Pass Record List

Description : Query the access records of the corresponding person on the face recognition device

Method	URL
POST	http://device IP:8090/cgi-bin/js /record/findList

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
startTime	The start timestamp of the query	Long	Y	Unix millisecond timestamp (13 bits)
endTime	The end timestamp of the query	Long	Y	Same as above
personSn	Work No.	String	N	Query the specified user ID. If this parameter is not passed, query all users.

recordType	Find Type	Int	N	The type of record to be queried • 0 : All (default) • 1: Face recognition • 2: Card payment • 3: Card + Face • 4: Fingerprint
index	page number	Int	N	Page number, starting from 1
length	Query the number of records	Int	N	The number of records to query each time, the default is 20
order	sort by	Int	N	sort by • 0: Descending (default) • 1 : Ascending

Postman Example

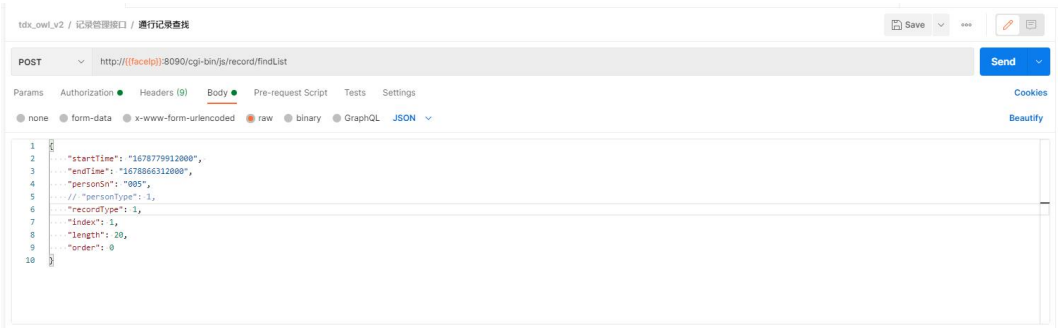

Return to example

{

"code": "000",

"data": [

{

"cardNo": "", // Card number

"checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848139154.jpg", // Path to captured photos

"createTime": 1678848139228, // Pass

"faceFlag": 1, // Is it a face scan pass? 1: Yes 0: No

"id": 153, // Record ID

"idCard": "", // ID card number

"openDoorFlag": 1, // Whether to pass 1: Yes 0: No

"personName": "005", // Username

"personSn": "005", // employee number

"personType": 1, // Employee type

"resultFlag": 1, //

"strangerFlag": 0 // Whether strangers can pass 1: Yes 0: No

},

{

"cardNo": "",

"checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848138631.jpg",

"createTime": 1678848138754,

"faceFlag": 1,

"id": 152,

"idCard": "",

"openDoorFlag": 1,

"personName": "005",

"personSn": "005",

"resultFlag": 1,

"strangerFlag": 0

}

],

"msg": "Request successful"

}

Return parameter data array description:

Parameter name	type	Additional Notes
id	Long	Record unique identifier
personSn	String	The employee number of the person taking the photo
personName	String	Name of the person taking the photo
personType	Int	Query the personnel type of the record • 0 : Unknown • 1 : Employee • 2 : Visitors • 3: Blacklist
checkImgUrl	String	Snap photo LAN address
cardNo	String	card number

idCard	String	ID number
temperature	String	body temperature
attach	String	Additional Information
maskFlag	Int	Wearing a mask1: Yes2: No
capFlag	Int	Wearing a helmet? 1: Yes 0: No
faceFlag	Int	Is it a face scan pass? 1: Yes 0: No
cardFlag	Int	Is it a card swipe pass? 1: Yes 0: No
fingerFlag	Int	Is fingerprint access required? 1: Yes 0: No
idCardFlag	Int	Is it to scan the ID card to pass 1: Yes 0: No
pwdFlag	Int	Is it to verify the password? 1: Yes 0: No
resultFlag	Int	Identification result mark 1: Success 2: Failure 3: Insufficient authority
strangerFlag	Int	Is it a stranger? 1: Yes 0: No
openDoorFlag	Int	Open the door 1: Yes 0: No
createTime	Long	Passing time,
direction	Int	0:close; 1:check_in; 2:break-out 3:break-in; 4.check-out

6.2 Pass record search

Description : Query the access record of the corresponding person on the face recognition device, including the imgBase64 encoding of the captured photo

Method	URL
POST	http://device IP:8090/cgi-bin/js/record/find

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
recordId	Pass record id	Long	Y	The unique identifier of the record in the information returned by the access record list search interface

Interface Description

- Compared with the return information of the access record list search interface, there is one more **checkImgBase64** snapshot photo imgBase64 encoding

Postman Example

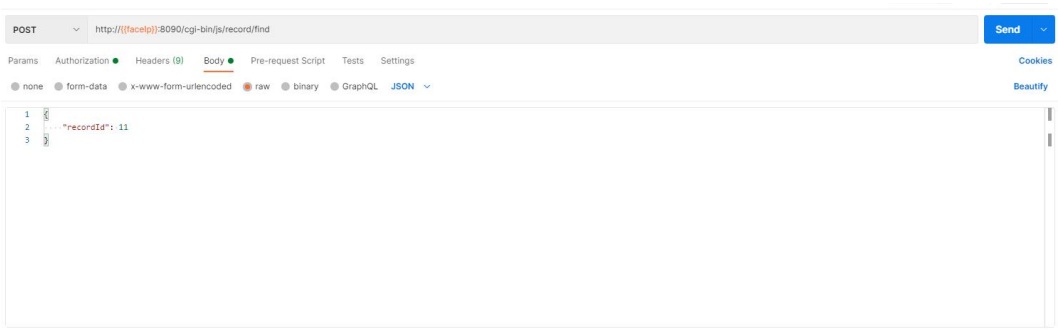

Return to example

{

"code": "000",

"data": {

"checkImgBase64":

"/9j/4AAQSkZJRgABAQAAAQABAAD/2wBDAA0JCgsKCA0LCgsODg...", //

Snapshot photo imgBase64

"createTime": 1679733871473, // Passage time

"faceFlag": 1, // face

"id": 11,

"openDoorFlag": 0,

"personType": 2,

"resultFlag": 2,

"strangerFlag": 1

},

"msg": "Request successful"

}

Return parameter data array description:

Parameter name	type	Additional Notes
id	Long	Record unique identifier
personSn	String	The employee number of the person taking the photo
personName	String	Name of the person taking the photo
personType	Int	Query the personnel type of the record • 0 : Unknown • 1 : Employee • 2 : Visitors • 3: Blacklist
checkImgUrl	String	Snap photo LAN address
checkImgBase64	String	imgbase64 encoding of the captured photo
cardNo	String	card number
idCard	String	ID number
voucherCode	String	Voucher Number
temperature	String	body temperature
attach	String	Additional Information
maskFlag	Int	Wearing a mask1: Yes2: No 0:not set mask
capFlag	Int	Wearing a helmet? 1: Yes 0: No

faceFlag	Int	Is it a face scan pass? 1: Yes 0: No
cardFlag	Int	Is it a card swipe pass? 1: Yes 0: No
fingerFlag	Int	Is fingerprint access required? 1: Yes 0: No
idCardFlag	Int	Is it to scan the ID card to pass 1: Yes 0: No
pwdFlag	Int	Is it to verify the password? 1: Yes 0: No
resultFlag	Int	Identification result mark 1: Success 2: Failure 3: Insufficient authority
strangerFlag	Int	Is it a stranger? 1: Yes 0: No
openDoorFlag	Int	Open the door 1: Yes 0: No
createTime	Long	Passing time,

6.3 Deletion of Pass Records

Description : Delete the pass records of the corresponding period on the personnel identification device

Method	URL
POST	http://device IP:8090/cgi-bin/js/record/delete

Header Field


Parameter name	describe	type	Must be transmitted	Additional Notes

Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
startTime	Start timestamp	Long	Y	Unix millisecond timestamp (13 bits)
endTime	End timestamp	Long	Y	Same as above
personSn	Work No.	String	N	Delete the records of the specified user ID. If this parameter is not passed, all records will be deleted.
recordType	Find Type	Int	N	Type of deleted records • 0 : All (default) • 1: Face recognition • 2: Card payment • 3: Card + Face • 4: Fingerprint
recordId	Record unique identifier	Int	N	Record unique identifier The id in the data parameter in the response information of the corresponding access record search interface

Postman Example

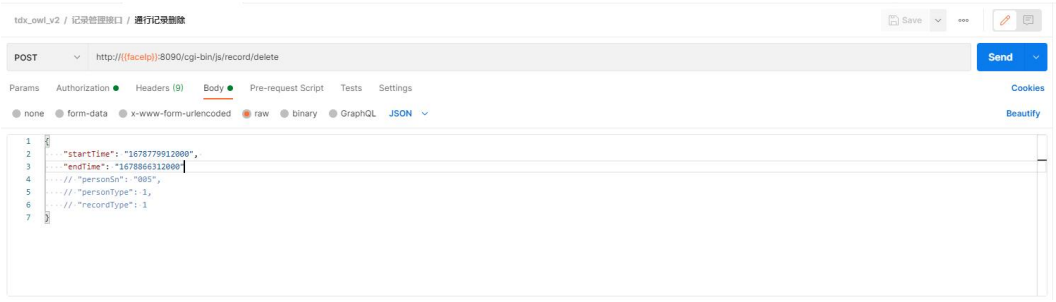

Return to example

{

"code": "000",

"data": {

"endTime": 1678866312000,

"personType": -1,

"recordType": 0,

"startTime": 1678779912000

},

"msg": "Request successful"

}

7. Fingerprint Management Interface

7.1 Fingerprint creation or update

Description : Register the fingerprint data of the corresponding person through the work number

Method	URL

POST	http://device IP:8090/cgi-bin/js/finger/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel number, must first register personnel
fingerId	Unique identifier of feature value	String	Y	Unique identifier of feature value
fingerNum	Which finger? 2	Int	Y	Which finger, 2 digits Example: 12 means the left thumb ● The first position indicates the left and right hands. ○ 1 : left hand 2 : right hand ● 2nd finger marker ○ 1: thumb 2: index finger 3: middle finger 4: ring finger 5: pinky finger

feature	Eigenvalue	String	Y	

Request parameter description

// The parameter is of type List<Object>

[

{

"personSn": "004", // Personnel number, must be registered first

"fingerId": "001", // unique identifier of the feature value

"fingerNum": 21, // finger number right thumb

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..." // feature

},

{

"personSn": "004",

"fingerId": "001",


"fingerNum": 22,

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."

}

]

Postman Example

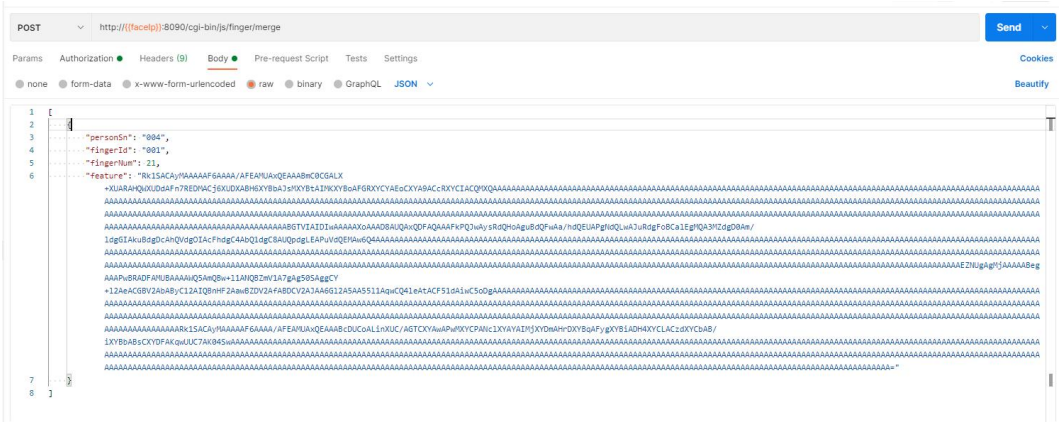

Return to example

{

"code": "000",

"data": [

{

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAA...",

"fingerId": "001",

"fingerNum": 21,

"personSn": "004"

}

],

"msg": "Request successful"

}

7.2 Fingerprint Search

Description : Delete the fingerprint data of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/finger/find


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel unique identification

Postman Example

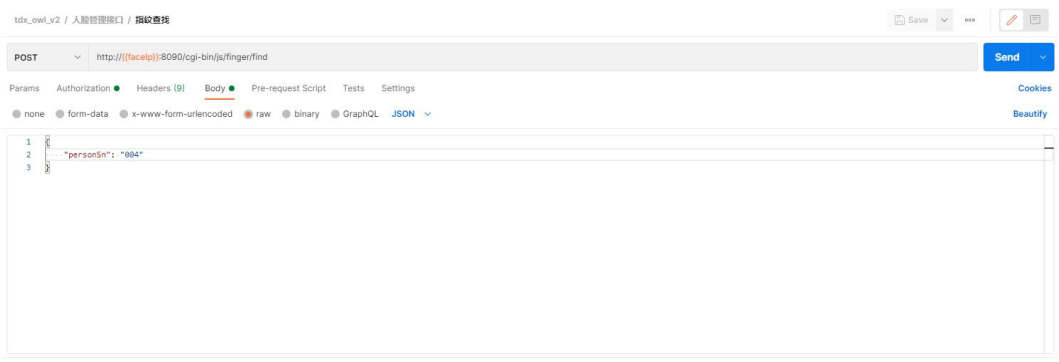

Return to example

{

"code": "000",

"data": [

{

"createTime": 1679731214951, // Fingerprint creation time

"feature":

"Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CGALX+XUARAHQWXUDd

AF...", // feature value

"fingerId": "a194ef00d89643eb9500e31b7f2aade6", // Fingerprint unique identifier

"fingerNum": 21, // The number of fingers, 2 digits. Example: 12 represents the left thumb. The first digit identifies the left and right hands. 1: left hand 2: right hand. The second digit identifies the finger 1: thumb 2: index finger 3: middle finger 4: ring finger 5: pinky finger

"personSn": "004" // Personnel number

}

],

"msg": "Request successful"

}

7.3 Fingerprint Deletion

Description : Delete the fingerprint data of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ finger/delete


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel unique identification
fingerId	Fingerprint ID	String	Y	Fingerprint unique identification

Postman Example

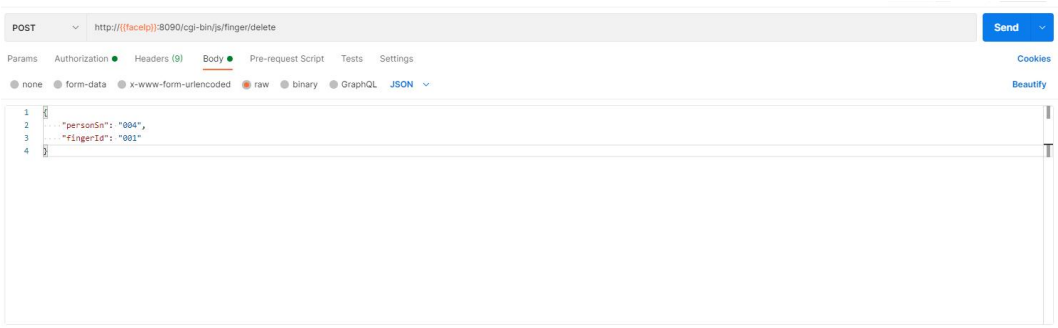

Return to example

{

"code": "000",

"data": {

"fingerId": "001",

"personSn": "004"

},

"msg": "Request successful"

}

8. Time period management interface

8.1 Creating or updating a time period

Description : Create a time zone on the facial recognition machine

Method	URL
POST	http://deviceIP:8090/cgi-bin/js/ac_timezone/merge

Header Field

Parameter name	describe	type	Must be	Additional Notes

			transmitted	
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
acTzNumber	Time period number	Int	Y	Time period number Please enter an integer between 1 and 100. If a time period with this number exists on the device, the information of the corresponding time period will be updated.
acTzName	Time period name	String	Y	Time period name
sunStart	Sunday start time	String	N	The format is HH:mm. Default: 00:00
sunEnd	Sunday End Time	String	N	The format is HH:mm. Default: 23:59
monStart	Monday start time	String	N	The format is HH:mm. Default: 00:00

monEnd	Monday End Time	String	N	The format is HH:mm. Default: 23:59
tueStart	Tuesday start time	String	N	The format is HH:mm. Default: 00:00
tueEnd	Tuesday End Time	String	N	The format is HH:mm. Default: 23:59
wedStart	Wednesday start time	String	N	The format is HH:mm. Default: 00:00
wedEnd	Wednesday End Time	String	N	The format is HH:mm. Default: 23:59
thursStart	Thursday start time	String	N	The format is HH:mm. Default: 00:00
thursEnd	Thursday End Time	String	N	The format is HH:mm. Default: 23:59
friStart	Friday start time	String	N	The format is HH:mm. Default: 00:00
friEnd	Friday End Time	String	N	The format is HH:mm. Default: 23:59
satStart	Saturday start time	String	N	The format is HH:mm. Default: 00:00


satEnd	Saturday End Time	String	N	The format is HH:mm. Default: 23:59

Parameter Description

- The time parameter format is HH:mm
- Each start time defaults to 00:00, and the end time defaults to 23:59
- The end time cannot be earlier than the corresponding start time
- The time period must be used in conjunction with personnel or access control groups. After a person sets a time period or access control group, he or she cannot access outside the time period, and the device will display "Insufficient authority"

Parameter Examples

Postman Example

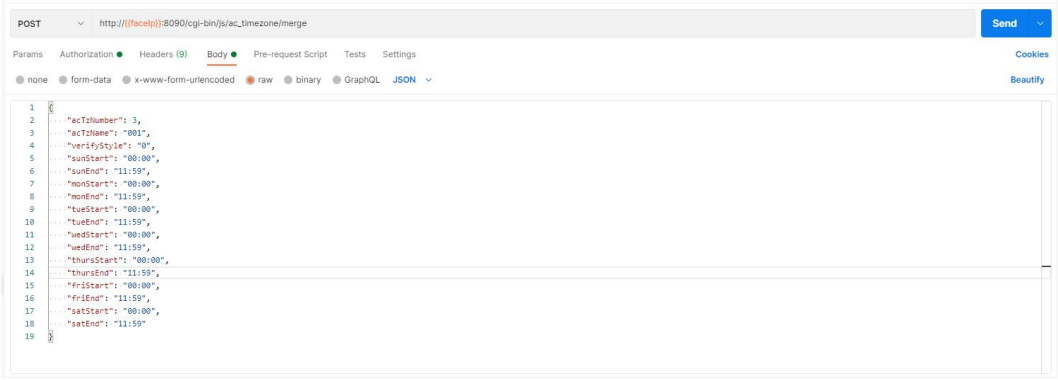

Return to example

{

"code": "000",

"data": {

"acTzName": "001",

"acTzNumber": 3,

"friEnd": "11:59",

"friStart": "00:00",

"monEnd": "11:59",

"monStart": "00:00",

"satEnd": "11:59",

"satStart": "00:00",

"sunEnd": "11:59",

"sunStart": "00:00",

"thursEnd": "11:59",

"thursStart": "00:00",

"tueEnd": "11:59",

"tueStart": "00:00",

"wedEnd": "11:59",

"wedStart": "00:00"

},

"msg": "Request successful"

}

8.2 Time period deletion

Description : Delete the corresponding time period on the personnel identification device

Method	URL
POST	http://deviceIP:8090/cgi-bin/js/ac_timezone/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
acTzNumber	Access control group number	List<Int>	Y	Time period number array

Parameter Description:

```
{
"acTzNumber": [2, 3]
}
```

Postman Example

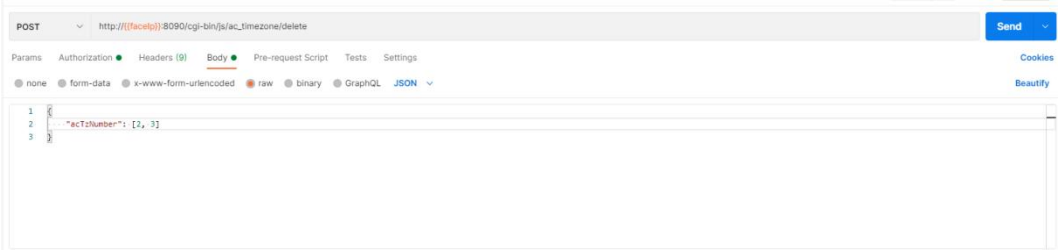

Return to example

{

"code": "000",

"data": {

"acTzNumber": [

2,

3

]

},

"msg": "Request successful"

}

8.3 Time period list query

Description : Query the access control group list information on the device

Method	URL
POST	http://DeviceIP:8090/cgi-bin/js/ac_timezone/findList

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
acTzNumber	Access control group number	List<Int>	Y	Access control group number array, pass an empty array to query all


Parameter Description:

{

"acTzNumber": [2, 3]

}

Postman Example

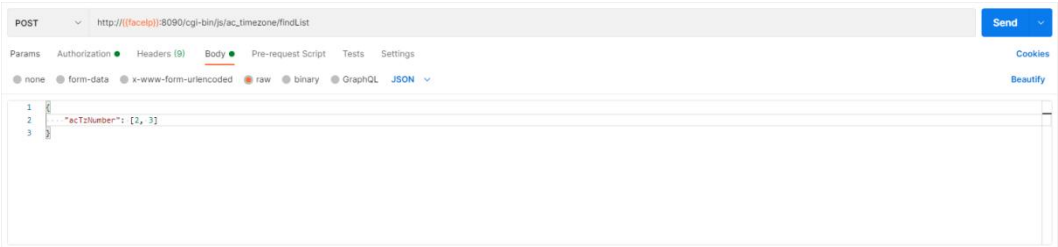

Return to example

{

"code": "000",

"data": [

{

"acTzNumber": 2,

"friEnd": "11:59",

"friStart": "00:00",

"monEnd": "11:59",

"monStart": "00:00",

"satEnd": "11:59",

"satStart": "00:00",

"sunEnd": "11:59",

"sunStart": "00:00",

"thursEnd": "11:59",

"thursStart": "00:00",

"tueEnd": "11:59",

"tueStart": "00:00",

"wedEnd": "11:59",

"wedStart": "00:00"

},

{

"acTzNumber": 3,

"friEnd": "11:59",

"friStart": "00:00",

"monEnd": "11:59",

"monStart": "00:00",

"satEnd": "11:59",

"satStart": "00:00",

"sunEnd": "11:59",

"sunStart": "00:00",

"thursEnd": "11:59",

"thursStart": "00:00",

"tueEnd": "11:59",

"tueStart": "00:00",

"wedEnd": "11:59",

"wedStart": "00:00"

}

],

"msg": "Request successful"

}

9. Access control group management interface

9.1 Create or update access control group

Description : Create a door access control group on the facial recognition machine

Method	URL
POST	http://device IP:8090/cgi-bin/js/ac_group/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json


Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
acGroupNumber	Access control group number	Int	Y	Access control group number Please enter an integer between 2 and 50. If there is an access control group with this number on the device, the corresponding access control group information will be updated.
name	Access control group name	String	Y	Access control group name

verifyStyle	Verification	Int	N	Verification ● 0 : Any ● 1: Face only ● 2: Card only ● 20: Card + Face ● 21: Card + Fingerprint ● 3: Fingerprint only ● 30: Fingerprint + Face ● 4: Password only
expiredType	Expiration Type	Int	N	Expiration Type ● 0 Never expires ● 1 Time ● 2 times ● 3 times + times
validTimeBegin	Effective time starts	Long	N	The start time of the person's validity period, Unix millisecond timestamp (13 bits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "
validTimeEnd	Validity period ends	Long	N	The expiration date of the employee, in Unix millisecond timestamp (13 digits) If a person is identified outside the validity period, the device will announce "Insufficient name permissions" and the device screen will display "Name + Insufficient permissions "

validCount	Valid times	Int	N	TODO
acTzNumber1	Passage time 1 No.	Int	N	Passage time 1 No. Please enter an integer between 0 and 100, corresponding to the time period number
acTzNumber2	Passage time 2 No.	Int	N	Same as above
acTzNumber3	Passage time 3 No.	Int	N	Same as above

Postman Example

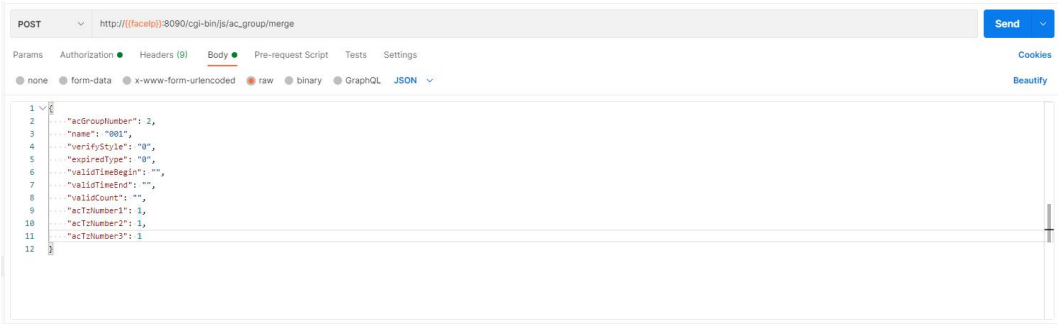

Return to example

{

"code": "000",

"data": {

"acGroupNumber": 2,

"acTzNumber1": 1,

"acTzNumber2": 1,

"acTzNumber3": 1,

"expiredType": 0,

"name": "001",

"verifyStyle": 0

},

"msg": "Request successful"

}

9.2 Access Control Group Deletion

Description : Delete the corresponding access control group on the personnel identification device.

Method	URL
POST	http://device IP:8090/cgi-bin/js/ac_group/delete

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes

acGroupNumber	Access control group number	List<Int>	Y	Access control group number array


Parameter Description:

{

"acGroupNumber": [2, 3]

}

Postman Example

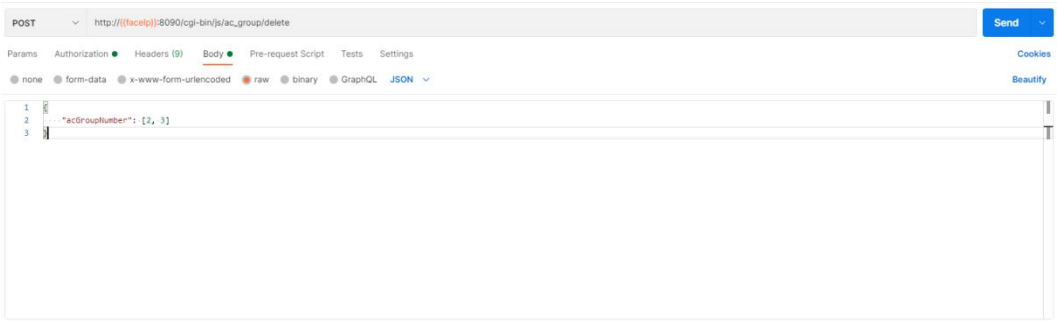

Return to example

{

"code": "000",

"data": {

"acGroupNumber": [

2,

3

]

},

"msg": "Request successful"

}

9.3 Access Control Group List Query

Description : Query the access control group list information on the device

Method	URL
POST	http://device IP:8090/cgi-bin/js/ac_group/findList

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
acGroupNumber	Access control group number	List<Int>	Y	Access control group number array, pass an empty array to query all


Parameter Description:

{

"acGroupNumber": [2, 3]

}

Postman Example

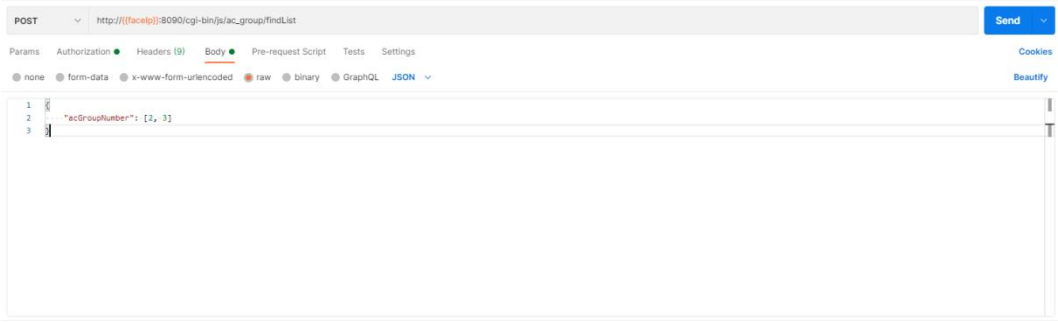

Return to example

{

"code": "000",

"data": [

{

"acGroupNumber": 2, // Access control group number

"acTzNumber1": 1, // Time period 1 number

"acTzNumber2": 1, // Time period 2 number

"acTzNumber3": 1,

"expiredType": 0,

"name": "001",

"verifyStyle": 0

},

{

"acGroupNumber": 3,

"acTzNumber1": 1,

"acTzNumber2": 1,

"acTzNumber3": 1,

"expiredType": 0,

"name": "001",

"verifyStyle": 0

}

],

"msg": "Request successful"

}

code code description

code	msg
101101	The value of personType is an integer between -1 and 3
101102	The value of findType is an integer greater than 0
101103	The value of startTime is in the wrong format
101104	The value of endTime is in the wrong format
101105	The value of endTime should be greater than startTime
101106	The value of recordId should be greater than 0

10. Palm print/palm vein management interface

10.1 Palm print/palm vein creation or update

Description : Register the palm print/palm vein data of the corresponding person through the work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/palm/merge

Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel number, must first register personnel
palmId	Unique identifier of feature value	String	Y	Unique identifier of feature value

palmNum	Which palm	Int	Y	1 left hand 2 right hand
feature	Eigenvalue	String	Y	

Request parameter description

// The parameter is of type List<Object>

[

{

"personSn": "004", // Personnel number, must be registered first

"palmId": "001", // unique identifier of the characteristic value

"palmNum": 21, // 1 left hand 2 right hand

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..." // feature

},

{

"personSn": "004",

"palmId": "001",


"palmNum": 22,

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."

}

]

Postman Example

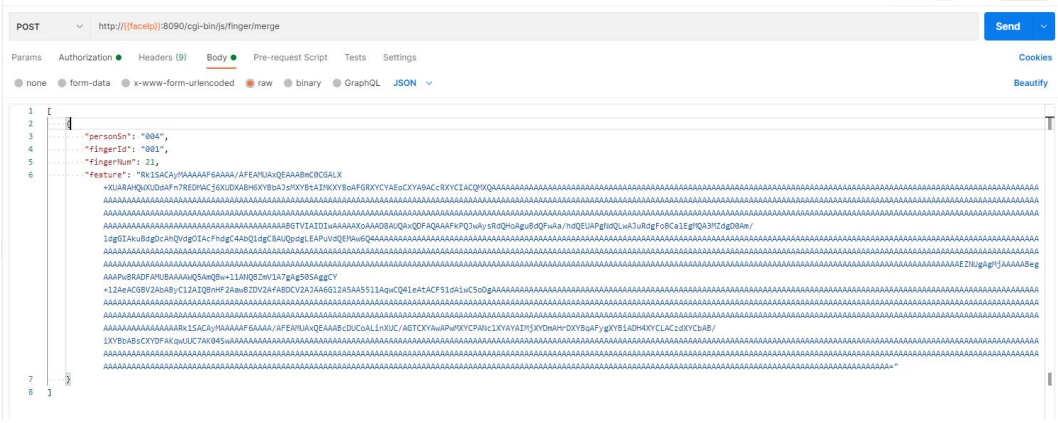

Return to example

{

"code": "000",

"data": [

{

"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAA...",

"palmId": "001",

"palmNum": 21,

"personSn": "004"

}

],

"msg": "Request successful"

}

10.2 Palm print/palm vein search

Description : Search for the palm print/palm vein data of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/palm/find


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel unique identification

Postman Example

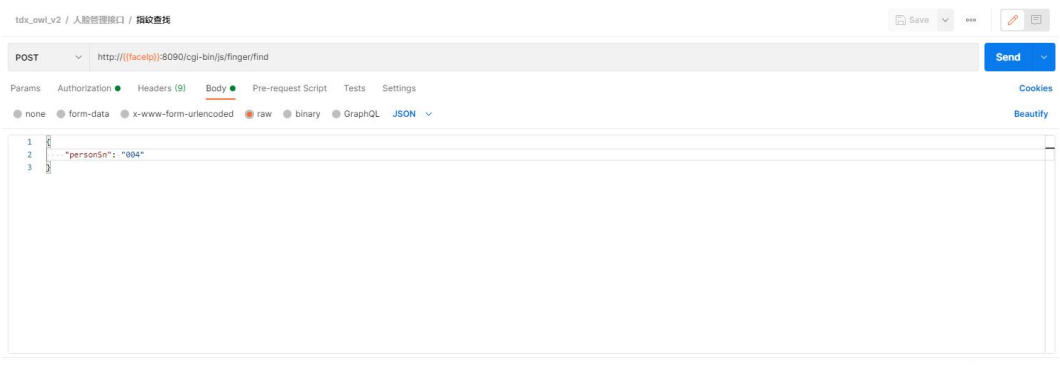

Return to example

{

"code": "000",

"data": [

{

"createTime": 1679731214951, // creation time

"feature":

"Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CGALX+XUARAHQWXUDd

AF...", // feature value

"palmId": "a194ef00d89643eb9500e31b7f2aade6", // Palm print/palm vein unique

identifier

"palmNum": 1, // 1 left hand 2 right hand

"personSn": "004" // Personnel number

}

],

"msg": "Request successful"

}

10.3 Palm print/palm vein deletion

Description : Delete the palm print/palm vein data of the corresponding person by work number

Method	URL
POST	http://device IP:8090/cgi-bin/js/ palm /delete


Header Field

Parameter name	describe	type	Must be transmitted	Additional Notes
Content-Type	Request body type	String	Y	application/json

Body Field

Parameter name	describe	type	Must be transmitted	Additional Notes
personSn	Staff number	String	Y	Personnel unique identification
palmId	Palmprint ID	String	Y	Fingerprint unique identification

Postman Example

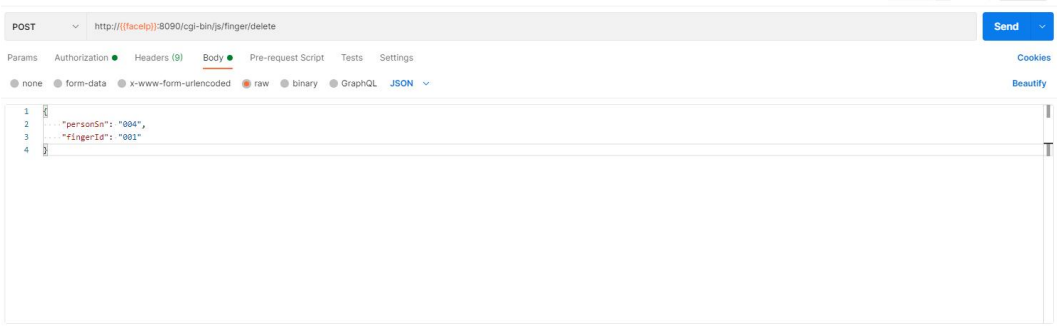

Return to example

{

"code": "000",

"data": {

"palmId": "001",

"personSn": "004"

},

"msg": "Request successful"

}

Schedule

1. code code description

code	msg
-1	The device is busy, please try again later
000	Request Success
401	Illegal request, authentication failed
1000	Request parameter error
1001	The value of length is an integer between 0 and 1000.

2. Supported languages/time zones