# Seah Lynn - Project Portfolio

### 1. Introduction

This project portfolio details my contributions to a Software Engineering group project, where my team and I created the Command Line Interface (CLI) desktop application, +Work. It also serves to document the key features I implemented in the application.

### 2. About The Team

We are a group of 5 Year 2 NUS Computer Science students, who worked together to create the CLI application, +Work.

# 3. About The Project

+Work is a CLI application created by my team for NUS School of Computing's CS2103T Software Engineering module. In this module, each team is required to morph or enhance an exiting CLI AddressBook application, to fit the needs of a target group of users.

Our application, +Work, is a project management tool aimed at NUS project leaders who are in charge of a small project group. It allows project leaders to manage their members, meeting times, task allocations as well as personal claims for items purchased. A user can use +Work to find the most popular meeting time among his project members, when calling for a meeting, and add project tasks, and members that are assigned under these tasks, into +Work to better manage the project manpower.

# 4. Formatting of Document

Shown below are symbols that will appear in my Project Portfolio, and their significance.

IMPORTANT

Information listed in this note is essential information that users should be mindful of, in order for +Work to function as mentioned in the User Guide.

NOTE

Information listed here are things that users should take note of, so as to more efficiently use +Work.

# 5. Summary of Contributions

This section details all of my contributions to the project, and showcases how I worked on different aspects of the project.

### 5.1. Enhancements

 Major enhancement: I added the ability to retrieve the overall statistics of tasks and members in +Work.

- What it does: This feature allows the user to retrieve statistics relating to tasks and members in +Work, including the number of tasks and inventory items allocated to each member, and the proportion of tasks of different statuses, along with the time spent on each task inputted into +Work.
- Justification: This feature increases the functionality of +Work because it gives the user a broad overview of the project's progress and members' responsibility allocation at a glance, which is one of the main goals of effective project management.
- Highlights: The statistics are displayed in the form of a Pie-Chart for easy comparison of data at a glance. Implementation of the statistics code also required the use of a newly introduced mapping concept our team added to +Work, and required extensive consideration in the integration of the two implementations.
- **Major enhancement**: I added the ability for users to work with (add, delete, list, set image for) project members on +Work.
  - What it does: This feature allows the user to add project members to +Work, so that both members and tasks can be managed in one application.
  - Justification: This feature improves the product significantly because it adds another aspect
    of project management (member management) into +Work, and allows different tasks and
    members to be assigned to one another. This allows users to be able to draw connections
    between tasks and members when managing the project.
  - Highlights: One of the unique features that member has, is the ability to be assigned profile pictures. Users can link an image on their laptop to a specific member in +Work, to set the image as the member's profile photo. This was challenging to implement because I had to ensure the UI would be able to accurately display the profile picture of each member in an appealing way.

#### • Minor enhancement:

- Created the UI for members in +Work, which can include members' profile photos, as well as list tasks allocated to each member under individual member cards
- Created the UI of statistics calculated, and made sure it was in an easy-to-read format
- Added test cases for all additional commands and classes related to Members and Statistics
- Code contributed: [Functional code] [Test code]

# 5.2. Other Significant Contribution to Project

- Project management
  - Set up the project organisation and repository at the beginning of the project
- Enhancements to existing features
  - Enhanced the UI display for tasks, to include information regarding member allocated to the different tasks, in individual task cards. (Pull requests #36, #38)
  - Wrote additional tests for existing features to increase coverage from 88% to 92% (Pull requests #36, #38)
- Documentation

- Wrote parts of the +Work User Guide relating to member and statistics: #14
- Wrote parts of the +Work Developer Guide relating to member and statistics: #14
- Community
  - Reviewed PRs (with non-trivial review comments): #12, #32, #19, #42
  - Reported bugs and suggestions for other teams in the class (examples: 1, 2, 3)

# 6. Contributions to the User Guide

We had to make changes to the original AddressBook User Guide with instructions for the features that we implemented. The following section displays excerpts of my additions to the **+Work User Guide** for the Statistics and Member features.

## 6.1. Member-related Commands


### 6.1.1. Adding a member: add-member

To add a member to the list of team members in +Work, use the command 'add-member' following the format below.


Format: add-member mn/MEMBER\_NAME mi/MEMBER\_ID mt/TAGS

Example: add-member mn/New Member mi/NM mt/UG can be executed as follows:


Step 1: +Work initially contains a list of 6 project members, as shown below.

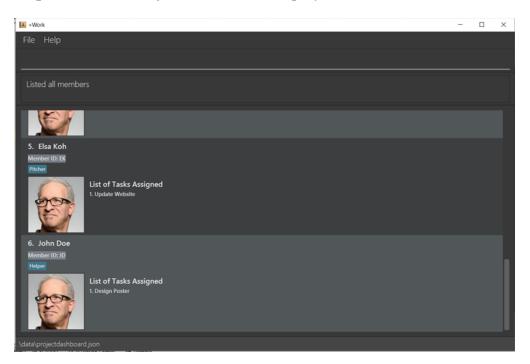


**Step 2:** To add a new project member into +Work, you enter the command add-member mn/New Member mi/NM mt/UG into the command prompt box.

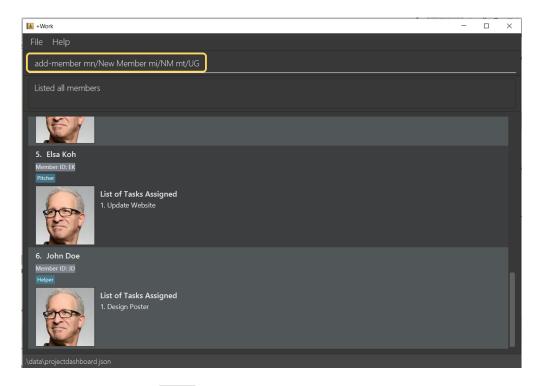

**Step 3:** After you hit Enter, the result box will display the message "New member added", and a new member with name 'New Member', member ID 'NM' and tag 'UG' is added to +Work (left image). The addition of a new member can also be seen from the list of members (right image) shown below.

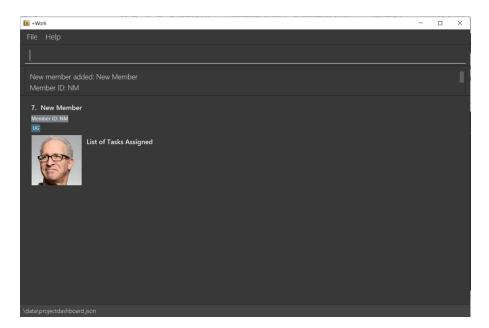

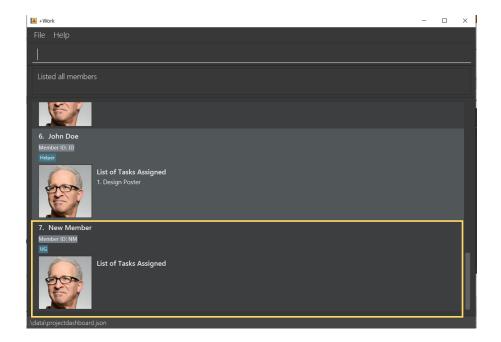

#### **IMPORTANT**

Member ID is an alphanumeric ID set by you, and cannot be changed once the member is created.

NOTE

- Adding a member tag is optional in the adding of a new member.
- It is possible to add a member with multiple tags following this format: add-member mn/New Member mi/NM mt/UG mt/DG mt/···


### 6.1.2. Set image for member: set-image

To set a profile picture for a member in +Work, use the command set-image following the format below.

Format: set-image mi/MEMBER\_ID im/IMAGE\_PATH


Example: set-image mi/NM im/C:\Desktop\NewUserImage.png can be executed as follows:

**Step 1:** +Work initially contains a list of project members with default profile pictures, as shown below.

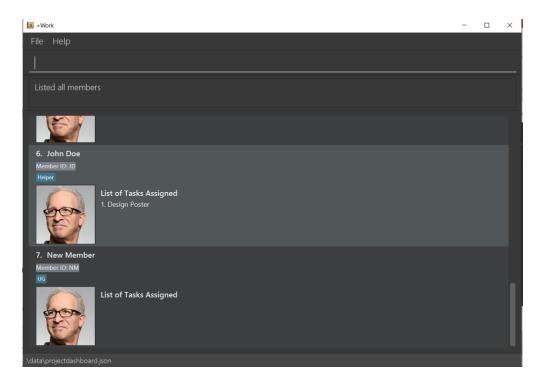

**Step 2:** To update the profile picture of the project member with member ID 'NM' in +Work to a specified image, you enter the command set-image mi/NM im/C:\Desktop\NewUserImage.png into the command prompt box.

**Step 3:** After you Enter the command, the member 'New Member' with member ID 'NM' has a new profile picture, specified by the image path you entered.

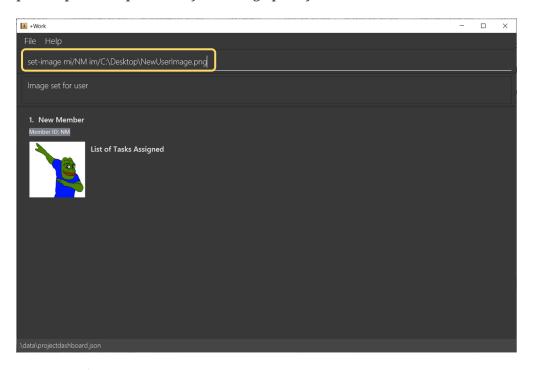

NOTE

Image Path refers to the folder path of the image stored in your computer, and should end with .png

#### **IMPORTANT**

If you shift the image's location in your computer, +Work will be unable to find the image to display, and will display a warning message, before displaying the default profile picture. It is recommended that you store all the images in a central folder to prevent this from happening.

### 6.1.3. Editing a member: edit-member


To edit a member in +Work, using the command edit-member following the format below.

Format: edit-member mi/MEMBER\_ID mn/MEMBER\_NAME mt/MEMBER\_TAG

- Edits the member at the specified mi/MEMBER\_ID.
- In this command, all the fields apart from mi/MEMBER\_ID is optional. However, at least one of the optional fields must be provided.
- Existing values will be updated to the input values.
- When editing tags, the existing tags of the member will be removed i.e adding of tags is not cumulative.


Example: edit-member mi/NM mn/No Longer New mt/edited can be executed as follows:

**Step 1:** +Work initially contains a list of 7 project members, as shown below.

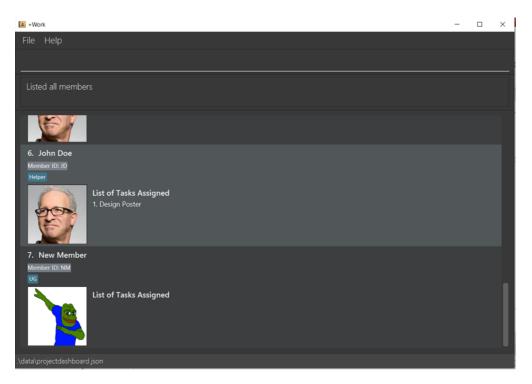

**Step 2:** To edit the member name and tag of 'New Member' with member ID 'NM', you enter the command edit-member mi/NM mn/No Longer New mt/edited into the command prompt box.

**Step 3:** After you Enter the command, the member with member ID 'NM' and tag 'UG' is edited, with a new member name 'No Longer New' and new tag 'edited'.

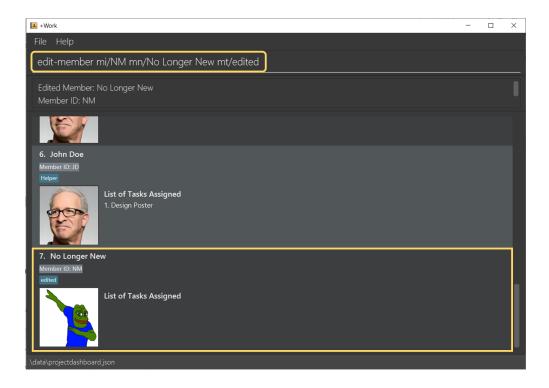


# 6.2. Statistics Commands

### 6.2.1. Getting statistics of members: member-stats

To get statistics relating to the members in +Work, use the statistics command following the format below.

Format: member-stats

Calling the member-stats command will result in the statistics being displayed as follows:

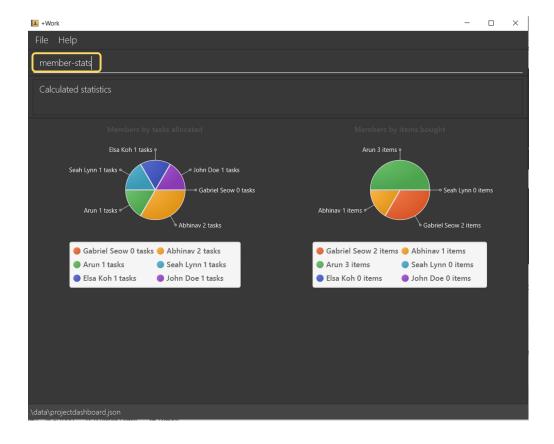

NOTE


The resultant statistics displayed shows the proportion and number of tasks and inventory items allocated to each project member in +Work.

### 6.2.2. Getting statistics of tasks: task-stats

To get statistics relating to the tasks in +Work, use the statistics command following the format below.

Format: task-stats

Calling the task-stats command will result in the statistics being displayed as follows:

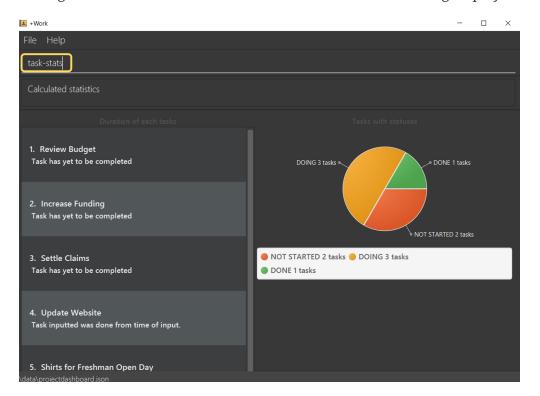

**NOTE** 

The resultant statistics displayed shows the proportion of tasks that are undone, in progress and completed, as well as the time taken for each task inputted into +Work.

**NOTE** 

The rest of my additions to the member commands in +Work's User Guide can be viewed in +Work's complete User Guide.

# 7. Contribution to the Developer Guide

The following section displays my additions to the **+Work Developer Guide** for the **Statistics** and **Member** features. They showcase my ability to write technical documentation and the technical depth of my contributions to the project.

### 7.1. Statistics feature

The Statistics feature allows users to retrieve statistics relating to members and tasks in +Work, so that users can get a broad overview of the project's and member's project.

### 7.1.1. Implementation

The commands introduced by this statistics feature includes: task-stats and member-stats. These commands are facilitated by the class 'Statistics' that resides within model. The 'Statistics' class implements the following operations:

- Statistics#doCalculations() Calculates the statistics needed using existing list of tasks, members and mappings.
- Statistics#getPortionMembersByTasks() Retrieves statistics of all the members and number of tasks completed by the each individual member.
- Statistics#getPortionMembersByItems() Retrieves statistics of all the members and number of items purchased by the each individual member.
- Statistics#getPortionTasksByStatus() Retrieves statistics of all existing tasks and number of tasks of each status.

These operations are exposed in the Model interface as Model#doCalculations, and Model#getStatistics.

Given below is an example usage scenario and how the Statistics mechanism behaves at each step.

**Step 1.** The user launches the application for the first time. The 'Statistics' object stored by ProjectDashboard is initialised based on the data previously saved.

NOTE

Data previously saved refers to the statistics calculation done based on list of members, tasks and mappings saved.

**Step 2.** The user executes the task-stats command to retrieve statistics related to the tasks in the application.

The task-stats command calls Model#getFilteredTasksList(), Model#getFilteredMembersList() and Model#getFilteredMappingsList() to obtain lists of all the members, tasks and mappings saved in the application. Using the lists, a Statistics object is formed. 'Model#setStatistics' is called to updated the statistics in ProjectDashboard.

The following sequence diagram (Figure 10) shows how the 'task-stats' operation works.

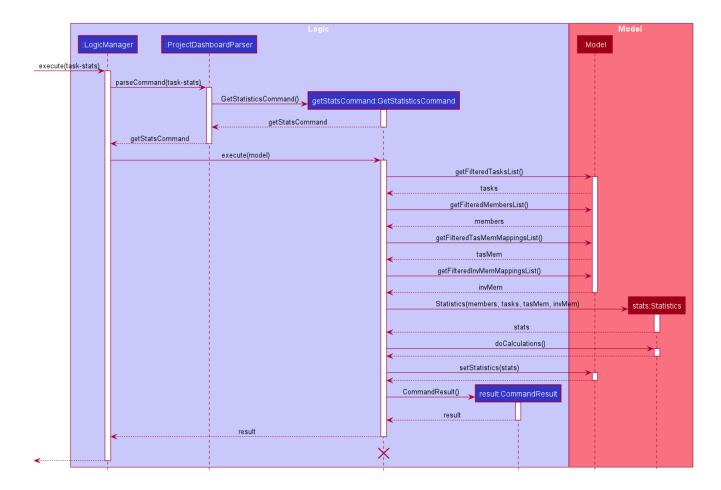


Figure 10. Operational flow of 'GetStatisticsCommand'

**NOTE** The member-stats operation is similar to the one shown in figure 10.

Step 3. In order for task statistics to be displayed in a comprehensive manner, when the task-stats command is called, TaskStatisticsView class is also called to display the task stats.

NOTE To allow the UI to be responsive, getStatistics() is similarly exposed in the Logic interface as `Logic#getStatistics()'

The following sequence diagram (Figure 11) shows how calling the 'task-stats' operation leads to the comprehensive UI display of task statistics.

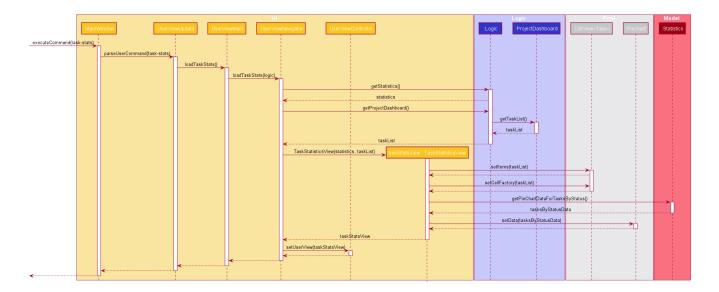


Figure 11. Operational flow of displaying statistics in +Work

The following activity diagram summarizes what happens when a user executes the task-stats command:

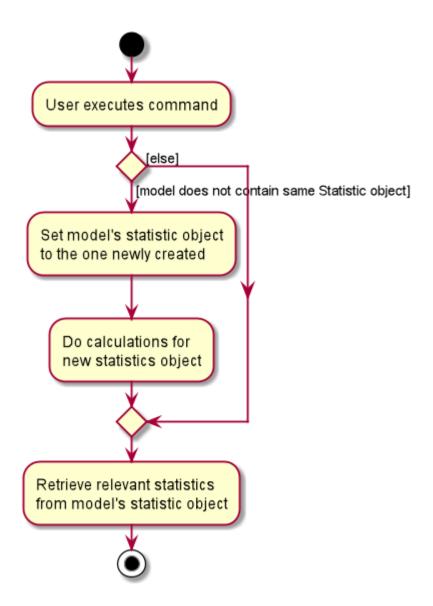


Figure 12. Operational flow during execution of task-stats command

### 7.1.2. Design Considerations

This section describes the pros and cons of the current and other alternative implementations of the Statistics class in +Work, as well as the display of statistics in +Work.

#### **Aspect: Implementation of Statistics class**

- Alternative 1 (current choice): One statistics object for the entire ProjectDashboard
  - Pros: Easy to implement, centralised class for all statistics
  - Cons: May have performance issues due to calculations involving large amounts of tasks and members.
- Alternative 2: Individual statistic objects for members and tasks.
  - Pros: Ensures faster performance, more detailed statistics can be included
  - $\circ$  Cons: Complicates the implementation of the statistics class, might not have enough time to implement it by v1.4

**Alternative 1** was chosen given the time constraint in implementing the features in time for +Work Version 1.4.

#### **Aspect: Display of Statistics for Project Dashboard**

This section describes the pros and cons of the current and other alternative implementations of displaying the calculate statistics in +Work.

- Alternative 1 (current choice): Use a pie chart to represent information
  - Pros: Increases the ease of workload comparison
  - Cons: Decreases the amount of detail of individual tasks and members that are displayed
- Alternative 2: Use a list to represent information
  - Pros: Includes more details for individual elements
  - Cons: Decreases the ease of comparison between tasks and members

Because the team came to a consensus that the main objective of the Statistics feature in +Work is to provide the user with an overview of all the project tasks and members, for ease of comparison, **Alternative 1** was chosen as it fits the purpose more than Alternative 2 does.

### 7.2. Member Feature

The member feature introduces the ability for +Work to deal with project members, in the same way it deals with project tasks. This makes +Work a more comprehensive application because project tasks and members can be kept track of together.

### 7.2.1. Implementation

+Work's members and their related commands are supported by a Member class that resides within model. The following class diagram exposes the structure of the Member class, and shows how the

different components relating to the Member class works together.

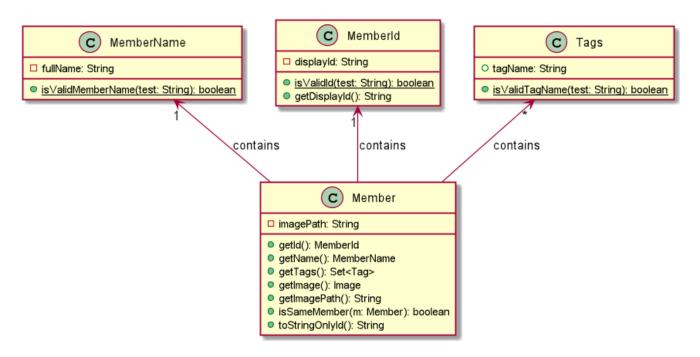


Diagram 13. Class diagram of Member package

Apart from the typical commands (add-member, delete-member, find-member) involved in such a central class, the member features also introduce a set-image command. The set-image command allows users to set an image in their computer as the profile picture of a member in +Work. To accommodate the set-image command, the Member class has an alternative constructor that takes in the image filepath as a parameter to save it as an attribute to the member object, when set-image command is called. Additionally, to support the command, the Member class implements the following operation:

- Member#getImagePath() Retrieves the filepath of the image stored in the user's computer
- Member#getImage() Retrieves the member's image using the image filepath

Given below is an example usage scenario and how the set-image mechanism behaves at each step.

**Step 1.** The user launches the application for the first time, and adds a team member into +Work. The member is displayed with a default profile picture.

**Step 2.** The user executes the set-image command to set an image in their computer as the profile picture of a member in +Work..

The set-image command calls Model#getFilteredMembersList() to retrieve the Member that is to be edited. A new member object is formed, with all the same parameters as the specified member object, and a new Image Filepath parameter. Model#setMember is called to replace the old member object with the new one in +Work.

The following sequence diagram shows how the 'set-image' operation works.

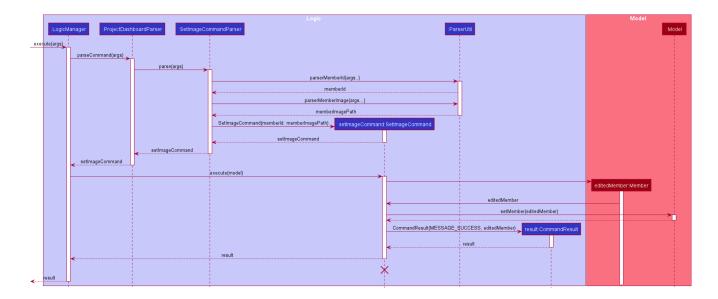


Figure 14. Operational flow of 'SetImageCommand'

NOTE

The image's file path is stored in the Member object. If the image is shifted to another location, the file path stored becomes invalid, and the user has to call the set-image command again, with the new file path.

**Step 3.** When an operation is called to display a member, Member#getImage is called to display the image using Javafx's ImageView.

The following sequence diagram shows how the image is called up and subsequently displayed in the +Work for an individual member.

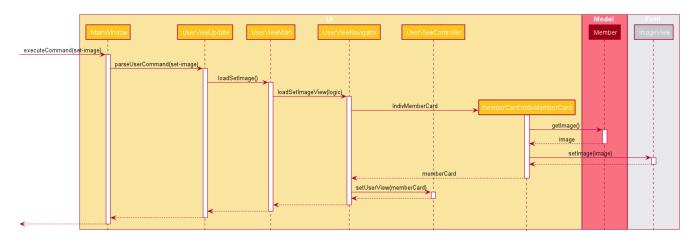


Figure 15. Operational flow of displaying a member with his profile picture

NOTE

The sequence diagram only shows how a member's profile image is called up and displayed. It doesn't show how the member's name and tags are displayed, since this is very similar to how AB3 originally displays its Person name and tags.

The following activity diagram summarizes what happens when a user executes the set-image command:

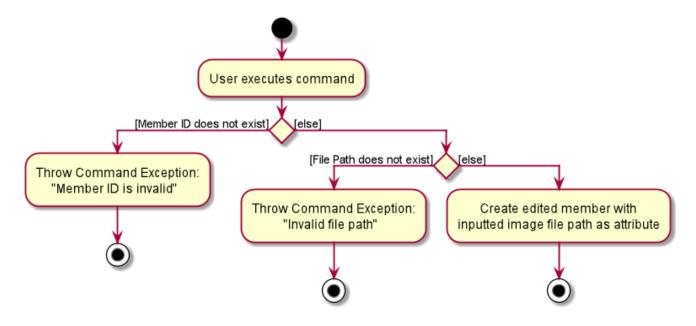


Figure 16. Operational flow during execution of set-image command

### 7.2.2. Design Considerations

This section describes the pros and cons of the current and other alternative implementations of the image attribute under members, as well as the display of members in +Work.

#### Aspect: Storage of image under member

- Alternative 1: Storing the image filepath as a changeable attribute
  - Pros: Editing a member's profile picture involves accessing the member and changing its file path attribute
  - Cons: The image file path attribute is exposed to the rest of the classes in +Work and may be unintentionally edited, causing the member's profile picture to be edited without the intention to.
- Alternative 2 (current choice): Storing the image filepath as a final attribute
  - Pros: Ensures the member's image filepath remains unchangeable and specific to the member
  - Cons: A new member object has to be created to replace the member being edited every time the member's profile picture is updated

**Alternative 2** was chosen to keep in line with the original structure of the Person object in AB3, with all attributes being final and unchangeable.

#### **Aspect: Display of members**

- Alternative 1: Display each member with only its member name, ID and profile picture
  - $\circ$  Pros: Concise display of each member in +Work, with only the essential information being exposed
  - Cons: Less details of individual members are displayed, making it difficult to draw links between members and the tasks they are involved in

- Alternative 2 (current choice): Display members with its member name, ID, profile picture and tasks assigned
  - Pros: Includes more details for individual members, which increases the ease in which the user can identify a member's responsibilities
  - Cons: Display of members is cluttered, and may expose unnecessary information in certain situations

**Alternative 2** was chosen because it is more in line with +Work's objective of drawing easy comparison between project members and tasks.