

Tan Yuanhong - Project Portfolio

PROJECT: AlgoBase

Overview

AlgoBase is a desktop address book application used for teaching Software Engineering principles. The user interacts with it using a CLI, and it has a GUI created with JavaFX. It is written in Java, and has about 10 kLoC.

About this portfolio

This project portfolio details my individual contributions to the **AlgoBase** project. It includes a summary of the enhancements and other contributions I made throughout the duration of the project. Additionally, portions of my contribution to the User Guide and Developer Guide have also been included.

Summary of contributions

- **Code contributed:** [Code contributed](#)
- **Major enhancement:** Implemented the problem searching and sorting feature.
 - What it does: allows the user to filter problems by combining search constraints on most fields (e.g. problem names, sources, descriptions, difficulty, etc.), allows user to save and reuse some typical search rules and allows user to sort the search result.
 - Justification: To organize algorithmic questions, the first step is to find a proper subset of AlgoBase to either add to a training plan or solve the problems directly. Searching and sorting feature should be one of the most frequently used features in **AlgoBase**. Plus, by enabling the user to save certain frequently used find rules (e.g. medium difficulty), we essentially made it possible to create a problem list that's dynamically updated according to certain rules - the user no longer needs to manually add tags or create plans for problems with certain properties, they can just use the saved find rules to locate them.
 - Highlights:
 - This is a full-stack feature involving all the components of **AlgoBase** from **Logic** to **Model** to **Storage** to **UI**, consisting of roughly 3000 lines of functional code and more than 2000 lines of testing code.
 - **find** can search on almost all fields of a problem while **sort** provides 10 combinations of sorting order.
 - It requires an in-depth analysis of the overall architecture of **AlgoBase** because
 - The original implementation of **find** in AddressBook accepts only one search constraint (i.e. the name), but in **AlgoBase** we need to support combination of

arbitrary (non-zero) number of search constraints.

- The design of AB3 only considers "filtering" problems, thus it used `FilteredList` to support `find` command. However, **AlgoBase** needs to support both `find` and `sort`. We need to redesign the way AB3 exposes the processed observable list to the UI so that the list accepts both a predicate and a comparator.

- Relevant pull requests: [#49](#) [#61](#) [#64](#) [#90](#) [#94](#) [#107](#)

- **Minor enhancement:** Implemented the command history feature.

- What it does: allows the user to navigate to previous commands using `⬅` and `⬆` keyboard shortcut.
- Justification: This feature makes `addfindrule` more useful - the user can first check if their problem find rule is working as expected by executing it using `find` command, then press `⬅` to restore the command text, change the command word to `addfindrule` and assign a name to the added find rule.
- Relevant pull request [#105](#) [#137](#) (Adapted some code from AB4)

- **Other contributions:**

- Project management:
 - Managed releases `v1.3` (1 release) on GitHub
- Enhancements to existing features:
 - Re-implement the `help` command: [#81](#)
- Documentation:
 - Explains how reserved words should work in **AlgoBase** (used as a reference in the development) [#35](#)
- Community:
 - As shown below, I participated in the review of most significant PRs in **AlgoBase** and provided some in-depth comments to make sure that the code quality of this project is consistent.
 - PRs reviewed (with non-trivial review comments): [#24](#) [#37](#) [#65](#) [#66](#) [#67](#) [#70](#) [#80](#) [#85](#) [#116](#) [#145](#) [#147](#) [#201](#)
 - Contributed to forum discussions
 - Fixed the forum issue template [#126](#)
 - Reported module website's inaccurate information on PPP [#149](#)
 - Reported bugs and suggestions for other teams in the class: [Reported 19 bugs in PED](#)

Contributions to the User Guide

Given below are sections I contributed to the User Guide. They showcase my ability to write documentation targeting end-users.

Sorting problems: `sort`

Sorts the current list of results by a specified order and direction.

Format: `sort m/METHOD [ord/ORDER]`

- Method can be `name`, `author`, `weblink`, `difficulty` or `source`.
- ORDER can be `ascend` or `descend` representing ascending and descending order. The default is in ascending order.
- String-based values (i.e. `name`, `author`, etc.) are sorted alphabetically.

NOTE

If sorted by ascending order (i.e. the default order), empty fields will have the highest priority, which means if you execute `sort m/weblink`, the first few results would be (if any) without web links.

Examples:

- `sort m/name` Sorts the current list of problems in ascending order of names.
- `sort m/author ord/descend` Sorts the current list of problems in descending order of author names.
- `sort m/difficulty ord/ascend` Sorts the current list of problems from lowest to highest difficulty.

Locating problems: `find`

Finds problems fulfilling all provided constraints.

Format: `find [n/NAME] [a/AUTHOR] [d/DESCRIPTION] [src/SOURCE] [diff/LOWER_BOUND-UPPER_BOUND] [t/TAG]...`

- Name
 - is case-insensitive. e.g. `henz` will match `Henz`
 - is considered a match as long as one word matches. (e.g. `Henz Ben` matches both `Martin Henz` and `Ben Leong`)
 - is matched word by word. e.g. `hello` will match `hello world` but not `helloworld`
- Author requires an exact match.
- Description
 - is case-insensitive
 - is matched word by word
 - is considered as a match only when the problem's description includes all words in the constraint. e.g. `wordA wordB` matches `wordC wordB wordA` not `wordD wordA`
- Source requires an exact match.
- Tag
 - Constraints are separated by spaces. (e.g. `find t/Recursion Brute-Force` will display all problems with both tag `Recursion` and `Brute-Force`)
 - Constraint tag set is a subset of matching problems. (e.g. `find t/Recursion Brute-Force` will

match problem with tags `Recursion+Brute-Force+Playful` but not `Recursion+Adhoc`)

- Tags are considered equal only when the tag strings are exactly matched.

- **Difficulty**

- matches problems with `LOWER_BOUND <= difficulty <= UPPER_BOUND`

TIP If you want to match problems with exact difficulty `1.5`, please use `diff/1.5-1.5`

NOTE When providing the search restrictions, you should ensure that keywords are non-blank and difficulty range is valid (as specified in `add` command). Also at least one search restriction should be provided.

NOTE Words are separated by empty spaces. Thus if we have a sentence "Hello, world!", we have two words `Hello`, and `world!`.

Examples:

- `find n/Sequence`
Returns any problem with word `sequence` (case-insensitive) in its name.
- `find t/algorithm diff/2.0-4.0`
Returns any problem with `algorithm` as one of its tags AND with a difficulty between 2.0 and 4.0 (inclusive).
- `find a/Hentin Marz src/Kattis`
Returns any problem from `Kattis` that's authored by `Hentin Marz`.

Storing a problem-finding rule: `addfindrule`

Saves a problem-finding rule from provided constraints.

Format: `addfindrule RULE_NAME [n/NAME] [a/AUTHOR] [d/DESCRIPTION] [src/SOURCE] [diff/LOWER_BOUND-UPPER_BOUND] [t/TAG]...`

Alias: `afr`

NOTE The rules for constraints are the same as those described in `find` command.

Examples:

- `addfindrule MediumDiffAlgo t/algorithm diff/2.0-4.0`
Adds a new find rule named `MediumDiffAlgo` that when applied, returns any problem with `algorithm` as one of its tags AND with a difficulty between 2.0 and 4.0 (inclusive).
- `addfindrule Kattis src/Kattis` or `afr Kattis src/Kattis`
Adds a new find rule named `Kattis` that when applied, returns any problem from `Kattis`.

Applying a problem-finding rule: `apply`

Applies a problem-finding rule.

Format: `apply INDEX`

- Applies the find rule at the specified **INDEX**.
- The index refers to the index number shown in the displayed find rule list.
- The index **must be a positive integer** 1, 2, 3, ...

Examples:

- **apply 2**
Applies the 2nd find rule in the displayed list.

Deleting a problem-finding rule: **deletefindrule**

Deletes a problem-finding rule.

Format: **deletefindrule INDEX**

Alias: **dfr**

- Deletes the find rule at the specified **INDEX**.
- The index refers to the index number shown in the displayed find rule list.
- The index **must be a positive integer** 1, 2, 3, ...

Examples:

- **deletefindrule 2** or **dfr 2**
Deletes the 2nd find rule in the displayed list.

Contributions to the Developer Guide

Given below are sections I contributed to the Developer Guide. They showcase my ability to write technical documentation and the technical depth of my contributions to the project.

[Design - Model](#)

[Implementation - Find Feature](#)

Save Find Rules Feature

AlgoBase provides many ways to organizing your problems including tags and plans. However, both organizing features require persistent user involvement - if the user added a new problem belonging to a category, the user needs to manually assign a tag to the problem or add the problem to a plan. Since AlgoBase's **find** command enables the user to filter problems with great flexibility, we allow them to save certain find rules so that they can re-apply these rules to quickly locate problems of their need.

This section will describe in detail the current implementation and design considerations of the save find rules (or problem search rules) feature of AlgoBase.

The following activity diagram summarizes what happens when a user executes **addfindrule** command:

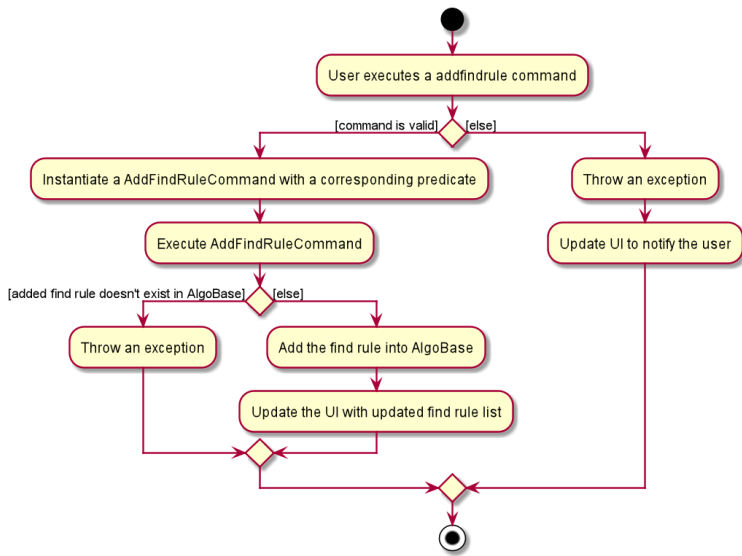


Figure 1. Activity Diagram for the Execution of `addfindrule` Command

Current Implementation

The save find rules feature is facilitated by the following classes:

- **ProblemSearchRule**
It stores both the **Name** of the find rule and all predicates included in this find rule. A **ProblemSearchRule** doesn't have to include all possible predicates as the user may not provide all of them. Missing predicates will be stored as **null** in this class.
- **UniqueFindRuleList**
It stores the find rules and makes sure that every find rule in this list has a unique name.
 - **UniqueFindRuleList** stores a **ObservableList<ProblemSearchRule>** for UI purposes.

NOTE

Except for **ProblemSearchRule**, we refer to these rules as **FindRule** in all other places. This is to prevent possible naming conflicts if **AlgoBase** is to support saving find rules on other items (e.g. Plans, etc.). **FindRule** corresponds to **FindCommand**. Thus, if you are to implement saving find plan rules, name them as **PlanSearchRule**, **AddFindPlanRuleCommand**, **UniqueFindPlanRuleList**, etc.

Under the category of save find rules feature, we have the following **Command** classes and their corresponding **Parser** classes:

- **AddFindRuleCommand**
- **DeleteFindRuleCommand**
- **ApplyCommand**
It applies a problem-finding rule by specifying the index of the displayed find rule.

Since these commands share similar implementations, we will only take **AddFindRuleCommand** as an example since it's the most complicated one among the three.

Implementation of `addfindrule` feature

The `addfindrule` feature is facilitated by `AddFindRuleCommand` and `AddFindRuleCommandParser` class.

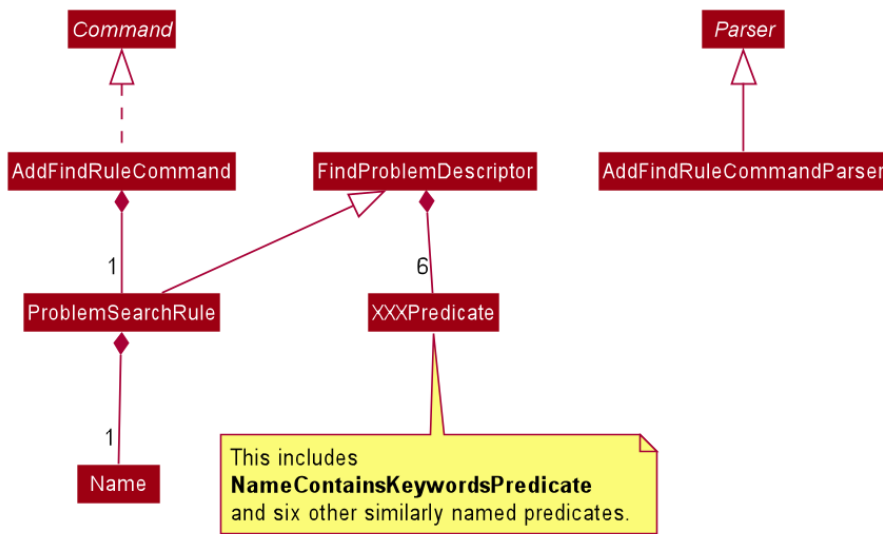


Figure 2. Class Diagram for Add Find Rule Feature

The sequence diagram below shows the high-level abstraction of how AlgoBase processes the request when user types in `addfindrule rule1 n/Sequences`:

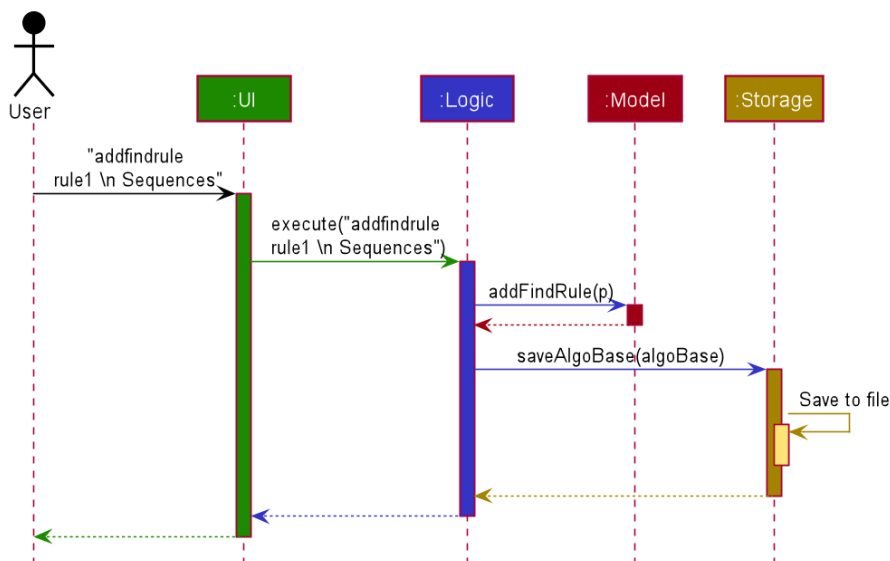


Figure 3. High-level Sequence Diagram for the Execution of `addfindrule rule1 n/Sequences`

The sequence diagram below illustrates the interaction between the `Logic` and `Model` component when executing `AddFindRuleCommand`. Notice that the constructor for `AddFindRuleCommand` requires `Name` to be non-null and accepts null values for other predicates. Thus if the predicate is not present in the arguments, `AddFindRuleCommandParser` will pass null to the constructor of `AddFindRuleCommand`.

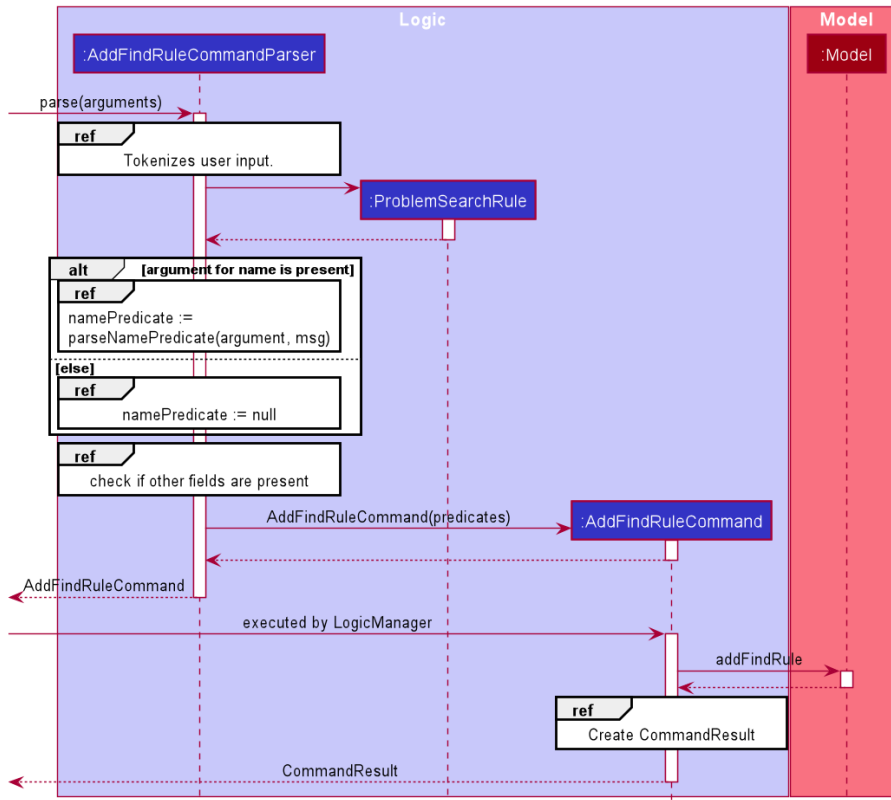


Figure 4. Sequence Diagram for the Execution of `addfindrule` Command

Design Considerations

Aspect: To implement `ProblemSearchRule` as a subclass of `FindProblemDescriptor` or implement it as a immutable concrete class.

Since AlgoBase is forked from AddressBook 3, it also inherits AB3's design choice on all data classes - they are all immutable classes with all fields being `final`. However, `ProblemSearchRule` is essentially saving the information of a command input, where the user may provide any number of predicates as the argument. We implement mutable `FindProblemDescriptor` to accommodate variable user inputs, now we have to consider whether to keep `ProblemSearchRule` immutable or not.

- **Alternative 1 (current choice):** `ProblemSearchRule` extends `FindProblemDescriptor` with an additional field `name`
 - Pros: Drastically reduces the amount of duplicate code as `ProblemSearchRule` shares most fields with `FindProblemDescriptor`
 - Cons: `ProblemSearchRule` as a data class is no longer immutable. We have to be careful not to call any setters it inherits from `FindProblemDescriptor`.
- **Alternative 2:** `ProblemSearchRule` as an individual class with immutable fields.
 - Pros: Provides good protection over unexpected changes to the data fields.
 - Cons: Lots of repeated code.