

MONARC technical guide

"security made in Lëtzebuerg" (SMILE) g.i.e

Table of Contents

1. Introduction	1
2. Modules of the project	1
3. Architecture	1
3.1. Global architecture	1
3.1.1. Network requirements	3
3.2. Specifications by server	3
4. Requirements and deployment	3
4.1. Requirements	4
4.1.1. Network	4
4.1.2. TLS certificate	4
4.1.3. System and software	4
4.2. Deployment	5
4.2.1. Only the front office	5
4.2.2. The back office and the front office	5
5. Updates	7
5.1. System update	8
5.2. MONARC update	8

1. Introduction



This document is currently under active development and discussion!

This document is intended to administrators of a MONARC instance. If you find errors or omissions in this document, please don't hesitate to submit an [issue](#) or open a [pull request](#) with a fix.

2. Modules of the project

The source code of MONARC is divided in several modules with dedicated Git repositories.

Summary of the different modules of the project

	Back office	Front office
	MONARC BO : Management of the database, clients and FO servers.	MONARC : The MONARC front office
Modules	<ul style="list-style-type: none">MonarcCore (zm-core in vendor/monarc/core)MonarcBO (zm-backoffice in vendor/monarc/backoffice)	<ul style="list-style-type: none">MonarcCore (zm-core in vendor/monarc/core)MonarcFO (zm-client in vendor/monarc/frontoffice)
Interfaces (in node_modules/)	<ul style="list-style-type: none">ng_anrng_backoffice	<ul style="list-style-type: none">ng_anrng_client

- MonarcCore ([zm-core](#)) is the API in charge of providing an access to the data. Common to the front office and the back office.
- MonarcFO ([zm-client](#)) is the interface for the front office.
- MonarcBO ([zm-backoffice](#)) is the interface for the back office.

3. Architecture

3.1. Global architecture


Basically MONARC is composed of two main parts:

- a back office: for the management of the database, FO servers and clients of MONARC installations;
- a front office: for the management of the risks analysis. A front office instance can be used without the back office.



If you want run your own risk analysis you only need the front office. More information about the installation in [this section](#).

The whole architecture includes an additional reverse proxy (**RPX**) and a configuration server (**CFG**). It is possible to connect many front offices (**FO**) to one back office (**BO**). It is automatically deployed with [ansible](#). More information in the repository of the [ansible playbook](#).

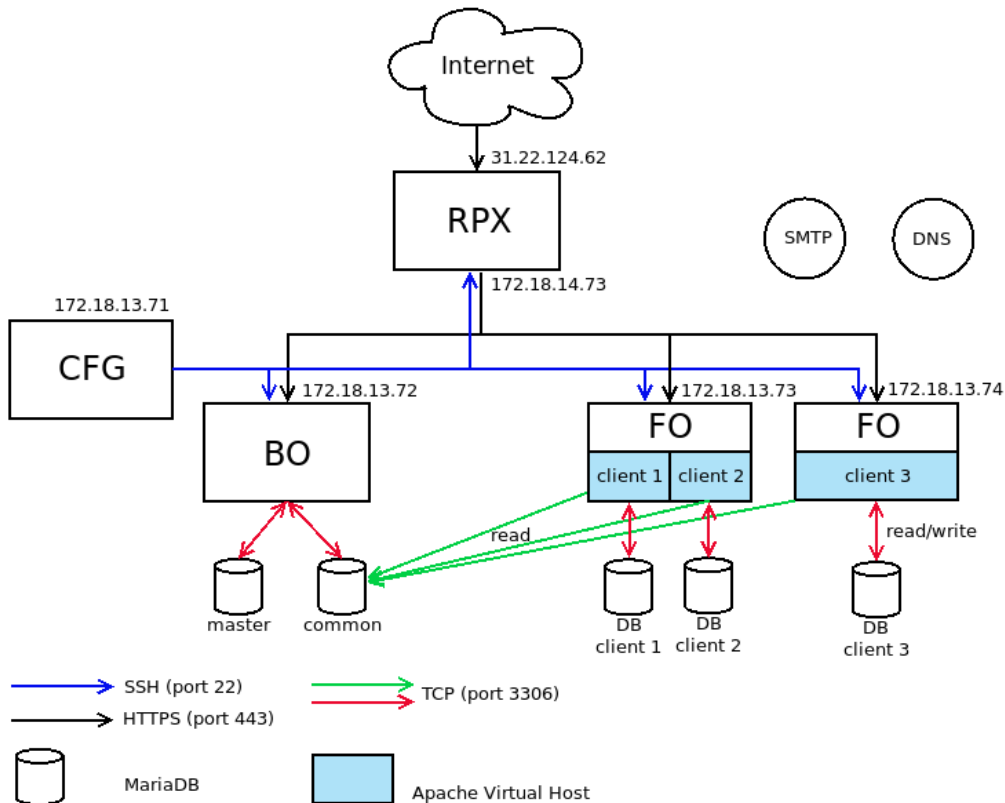

Example of IPs and FQDNs:

- 172.18.14.73 - monarc-rpx.private.your.domain.com - my.monarc.lu
- 172.18.13.71 - monarc-conf.private.your.domain.com
- 172.18.13.72 - monarc-master.private.your.domain.com
- 172.18.13.73 - monarc-fo01.private.your.domain.com
- 172.18.13.74 - monarc-fo02.private.your.domain.com



In this example, the **FO** server *monarc-fo01* hosts two distinct databases for two clients. An Apache Virtual Host is also configured for each clients. A user who wants to do a security analysis with MONARC will access to his MONARC account via the address <https://my.monarc.lu/formation/>

Note that the *common* database of the **BO** is listening on **0.0.0.0:3306**.

It is strongly recommended to use a TLS certificate on the reverse proxy in order to provide a HTTPS connection between Internet and the reverse proxy. In our example, a TLS certificate for my.monarc.lu is used.

Depending your setup you will ideally provide a HTTPS connection between the reverse proxy and the BO/FOs servers. If you want so, make sure to have:

- a certificate for each server, or;
- a wildcard certificate (e.g.: **private.your.domain.com*), or;
- a self-signed certificate.

3.1.1. Network requirements

The configuration server (**CFG**) manages the configurations of the back office, reverse proxy and different front office(s) via SSH.

The reverse proxy (**RPX**) should of course be available from Internet. The **DNS** is important for the reverse proxy in order to resolve the FQDNs of the servers inside the network.

Through the reverse proxy you should be able to contact the **BO** and the **FOs** from Internet. No need to be able to contact the configuration server from the outside.

The database *common* of the BO should also be available to the FO servers.

[Postfix](#) should be installed on the BO and on the FO. Indeed, SMTP is used for the account creation and the password recovery. The easiest configuration is to set up Postfix for relaying emails through your internal mail server (**SMTP**).

3.2. Specifications by server

Specifications given only as advices.

	Back office	Front office	Reverse proxy	Configuration server
Number of vCPU	4	4		
RAM (GB)	16	16		
HDD (BG)	25	25		
Operating system	Ubuntu Server 16.04.2 LTS	Ubuntu Server 16.04.2 LTS	Ubuntu Server 16.04.2 LTS	Ubuntu Server 16.04.2 LTS
Comment			Not that powerful. But all connections (for the BO and FOs) will go through it.	Not that powerful. Mainly used for the creation of clients on the different FOs.

4. Requirements and deployment

4.1. Requirements

4.1.1. Network

The deployment on the different servers requires an Internet connection since the updates are retrieved from our GitHub repositories. If this is hardly possible in your environment due to an internal policy, you need to configure a proxy in order to access to Internet. This is an important requirement since all MONARC updates, including security updates, are provided from the Git repositories.

The [ansible playbook](#) also needs an Internet connection in order to dynamically deploy new clients.

The servers (or the proxy) should be able to contact:

- github.com
- api.github.com
- pypi.python.org
- registry.npmjs.org
- deb.nodesource.com
- getcomposer.org
- packagist.org
- packagist.phpcomposer.com
- letsencrypt.org

To make the different servers use the proxy, specify the address of your proxy in the file [/home/ansible/.bash_profile](#). For example:

```
export http_proxy=http://proxy.your.domain.com:4128
export https_proxy=http://proxy.your.domain.com:4128
```

4.1.2. TLS certificate

Is is strongly advised to use a TLS certificate on the reverse proxy. Depending on your configuration, you may need to secure the connection after the reverse proxy. See [this section](#).

The certificate **yourcert.crt** and the key file **yourcert.key** are by default located at [/etc/sslkeys/](#) (location configurable using the variables in the [inventory/hosts](#) file of the ansible playbook). You can also use a single **.pem** file, but make sure it includes the certificate and the key.

4.1.3. System and software

The deployment of MONARC has been tested on Ubuntu 16.04 LTS and Ubuntu 17.04.

- Git;

- ## 4.2. Deployment

Requirements

- Git on all servers;
- Python 2 on all servers. Actually ansible 2.2 features only a tech preview of Python 3 support;
- dnspython on the configuration server;
- [ansible](<https://www.ansible.com/>) must be installed on the configuration server;
- postfix on the BO and all FO servers.

Usage

Install ansible on the configuration server and get the playbook for MONARC:

```
sudo apt-get install jq
sudo -H pip install ansible dnspython
git clone https://github.com/monarc-project/ansible-ubuntu.git
cd ansible-ubuntu/
```

Configuration

- create a user named **ansible** on each server;
- generate a SSH key for the user **ansible** on the configuration server:

```
ssh-keygen -t rsa -C "your_email@example.com"
```

- copy the public key on the other servers:

```
ssh-copy-id ansible@B0
ssh-copy-id ansible@RPX
ssh-copy-id ansible@F0
```

- add the user **ansible** in the **sudo** group:

```
sudo usermod -aG sudo ansible
```

- add the user **www-data** in the **ansible** group:

```
sudo usermod -aG ansible www-data
```

- give the permission to ansible to use sudo without password:

```
echo 'ansible ALL=(ALL:ALL) NOPASSWD:ALL' >> /etc/sudoers
```


- create a file *inventory/hosts*:

```
[dev]
FO

[dev:vars]
master= "BO"
publicHost= "monarc.example.com"

[master]
BO monarc_sql_password="password"

[rpx]
RPX.localhost

[monarc:children]
rpx
master
dev

[monarc:vars]
env_prefix=""
clientDomain="monarc.example.com"
emailFrom="info@example.com"
github_auth_token="<your-github-auth-token>"
protocol="https"
certificate="sslcert.crt"
certificatekey="sslcert.key"
certificatechain="sslcert.crt"
burlalias="monarcbo"
localDNS="example.net"
```

The variable **monarc_sql_password** is the password for the SQL database on the BO.

- finally, launch ansible:

```
cd playbook/
ansible-playbook -i ../inventory/ monarc.yaml --user ansible
```

ansible will install and configure the back office, the front office and the reverse proxy. Consequently the configuration server should be able to contact these servers through SSH.

You will find more information [in the ansible playbook](#).

5. Updates

Before updating MONARC it is strongly advised to configure database backup. For that you just need to create a file **data/backup/credentialsmysql.cnf**:

```
[client]
host      = localhost
user      = sql-monarc-user
password  = your-password
socket    = /var/run/mysqld/mysqld.sock
[mysql_upgrade]
host      = localhost
user      = sql-monarc-user
password  = your-password
socket    = /var/run/mysqld/mysqld.sock
basedir   = /usr
```

If this file is not present, a warning message will be displayed during the update.

5.1. System update

Keep the software of your distribution up-to-date (Apache, PHP, MariaDB, Postfix, etc.). At least the security updates from the GNU/Linux distribution.

5.2. MONARC update

The master branch should always be working and it is recommended to install the project using this one.

If you have already installed MONARC and want to update to a later version, you can use the provided script:

```
$ ./scripts/update-all.sh
$ sudo systemctl restart apache2.service
```

Updates from the last stable release of MONARC will be retrieved. For more details the script will:

- backup your databases in case the update fails (if enabled, as explained previously);
- check the presence of composer and if needed install it;
- retrieve the new code from the Git repositories from the last stable release (master branch):
 - pull updates for module/[MonarcCore, MonarcBO/MonarcFO] via Git or composer;
 - pull updates for node_modules/[ng_anr, ng_backoffice/ng_client] via Git or Npm.
- run the appropriate database upgrade scripts (pathCore, pathBO, pathFO);
- update the translations.