

```

root@lx01:/etc/apache2/sites-available# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:2d:bb:49 brd ff:ff:ff:ff:ff:ff
    inet 192.168.240.251/24 brd 192.168.240.255 scope global enp0s3
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe2d:bb49/64 scope link
        valid_lft forever preferred_lft forever
root@lx01:/etc/apache2/sites-available# nano intranet.conf

```

LX01-EXAMBLANC2026 [En fonction] - Oracle VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

```

GNU nano 7.2 intranet.conf
<VirtualHost *:80>
    # The ServerName directive sets the request scheme, hostname and port that
    # the server uses to identify itself. This is used when creating
    # redirection URLs. In the context of virtual hosts, the ServerName
    # specifies what hostname must appear in the request's Host: header to
    # match this virtual host. For the default virtual host (this file) this
    # value is not decisive as it is used as a last resort host regardless.
    # However, you must set it for any further virtual host explicitly.
    #ServerName intranet.examen.labo

    ServerAdmin webmaster@localhost
    DocumentRoot /home/webmaster/site

    <Directory /home/webmaster/site>
        AllowOverride All
        Require all granted
    </Directory>

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
    # It is also possible to configure the loglevel for particular
    # modules, e.g.
    #LogLevel info ssl:warn


    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined


    # For most configuration files from conf-available/, which are
    # enabled or disabled at a global level, it is possible to
    # include a line for only one particular virtual host. For example the
    # following line enables the CGI configuration for this host only
    # after it has been globally disabled with "a2disconf".
    #Include conf-available/serve-cgi-bin.conf
</VirtualHost>

```

SRV-AD-EXAMBLANC-2026 [En fonction] - Oracle VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

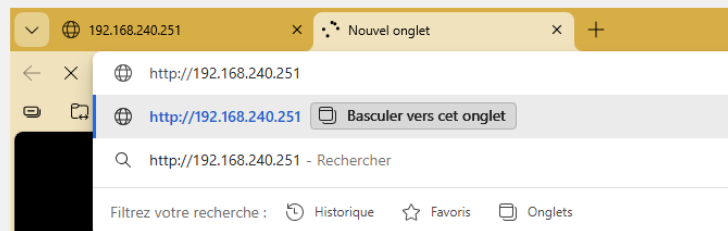

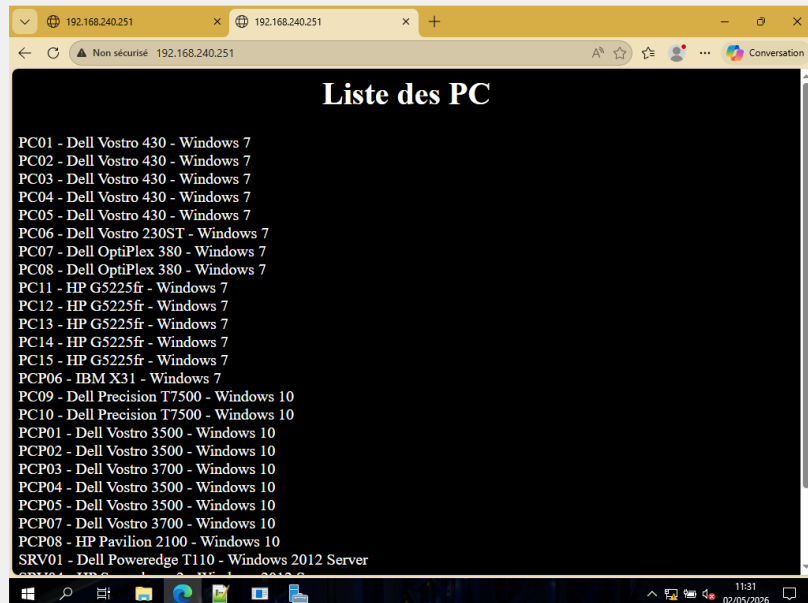

```
GNU nano 7.2 intranet.conf
<VirtualHost *:80>
    # The ServerName directive sets the request scheme, hostname and port that
    # the server uses to identify itself. This is used when creating
    # redirection URLs. In the context of virtual hosts, the ServerName
    # specifies what hostname must appear in the request's Host: header to
    # match this virtual host. For the default virtual host (this file) this
    # value is not decisive as it is used as a last resort host regardless.
    # However, you must set it for any further virtual host explicitly.
    #ServerName intranet.examen.labo

    ServerAdmin webmaster@localhost
    DocumentRoot /var/www/html


    <Directory /var/www/html>
        AllowOverride All
        Require all granted
    </Directory>

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
    # It is also possible to configure the loglevel for particular
    # modules, e.g.
    #LogLevel info ssl:warn

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined

    # For most configuration files from conf-available/, which are
    # enabled or disabled at a global level, it is possible to
    # include a line for only one particular virtual host. For example the
    # following line enables the CGI configuration for this host only
    # after it has been globally disabled with "a2disconf".
    #Include conf-available/serve-cgi-bin.conf
</VirtualHost>
```

```
root@lx01:/etc/apache2/sites-available# systemctl restart ap
apache2.service          apparmor.service        apt-daily.timer          apt-daily-upgrade.timer
apache-htcacheclean.service apt-daily.service        apt-daily-upgrade.service
root@lx01:/etc/apache2/sites-available# systemctl restart apache2.service
root@lx01:/etc/apache2/sites-available#
```

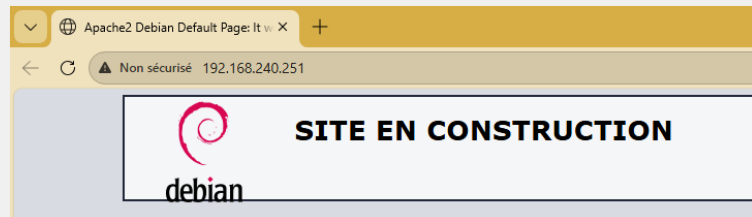

```
GNU nano 7.2 import.sh
#!/bin/bash
#create by jurg
#date 22 mars 2026

FILE=/home/tech/import/users.csv

#COMMENTEZ LES 3 LIGNES CI DESSOUS !!!!!!!vérifier si le dossier users.csv existe
if [[ ! -f "$FILE" ]]; then
    exit
fi

#COMMENTEZ LES 2 LIGNES CI DESSOUS !!!!!!!
echo "Voulez-vous importer le fichier $FILE ? (o/n)"
read reponse

if [[ $reponse = "o" ]];then
    for line in `cat $FILE` `do
        #COMMENTEZ LES 2 LIGNES CI DESSOUS !!!!!!!
        login=$(echo ${line}|cut -d, -f1)
        pass=$(echo ${line}|cut -d, -f2)

        #COMMENTEZ LA LIGNE CI DESSOUS !!!!!!!
        sudo useradd ${login} -m --home /home/${login}/ --create-home --dev/null

        #COMMENTEZ LES 3 LIGNES CI DESSOUS !!!!!!!
        if [[ $? -ne 0 ]];then
            echo "Echec"
        fi

        #COMMENTEZ LA LIGNE CI DESSOUS !!!!!!!
        echo ${login}:${pass} | sudo chpasswd >/dev/null

        #COMMENTEZ LES 3 LIGNES CI DESSOUS !!!!!!!
        if [[ $? -ne 0 ]];then
            echo "Echec"
        fi
    done
else
    done
fi
```

```
root@lx01:~# sudo useradd jsarien
root@lx01:~# sudo passwd jsarien
Nouveau mot de passe :
Retapez le nouveau mot de passe :
passwd : mot de passe mis à jour avec succès
root@lx01:~# sudo usermod -g webmaster jsarien
root@lx01:~# sudo usermod -aG sudo jsarien
root@lx01:~# id jsarien
uid=1003(jsarien) gid=1001(webmaster) groupes=1001(webmaster),27(sudo)

root@lx01:~# groups jsarien
jsarien : webmaster sudo
root@lx01:~#
```

```

root@lx01:~# sudo adduser jsairien
Ajout de l'utilisateur « jsairien » ...
Ajout du nouveau groupe « jsairien » (1004) ...
Ajout du nouvel utilisateur « jsairien » (1004) avec le groupe « jsairien » (1004) ...
Création du répertoire personnel « /home/jsairien » ...
Copie des fichiers depuis « /etc/skel » ...
Nouveau mot de passe :
Retapez le nouveau mot de passe :
passwd : mot de passe mis à jour avec succès
Modifier les informations associées à un utilisateur pour jsairien
Entrer la nouvelle valeur, ou appuyer sur ENTER pour la valeur par défaut
  NOM []:
  Numéro de chambre []:
  Téléphone professionnel []:
  Téléphone personnel []:
  Autre []:
Cette information est-elle correcte ? [0/n]
Ajout du nouvel utilisateur « jsairien » aux groupes supplémentaires « users » ...
Ajout de l'utilisateur « jsairien » au groupe « users » ...
root@lx01:~# sudo usermod -g webmaster jsairien
root@lx01:~# sudo usermod -aG sudo jsairien
root@lx01:~# id jsairien
uid=1004(jsairien) gid=1001(webmaster) groupes=1001(webmaster),27(sudo),100(users)
root@lx01:~# groups jsairien
jsairien : webmaster sudo users
root@lx01:~#

```

 LX02-EXAMBLANC2026 [En fonction] - Oracle VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

```

root@lx02:~# cd /var/www
root@lx02:/var/www# ls
glpi html
root@lx02:/var/www# ls -l
total 8
drwxr-xr-x 22 tech tech 4096 7 mars 2024 glpi
drwxr-xr-x 2 root root 4096 7 mars 2024 html
root@lx02:/var/www#

```

```

root@lx02:/var/local# nano aazadah.basir_

```

```

root@lx02:/var/local# ls
aazadah.basir
root@lx02:/var/local# ls -l
total 4
-rw-r--r-- 1 root staff 14 2 mai 12:48 aazadah.basir
root@lx02:/var/local# chmod 760 aazadah.basir
root@lx02:/var/local# ls -l
total 4
-rwxrw---- 1 root staff 14 2 mai 12:48 aazadah.basir
root@lx02:/var/local#

```