



TECHNISCHE
UNIVERSITÄT
WIEN
Vienna University of Technology

VIENNA UNIVERSITY OF TECHNOLOGY

FACULTY OF PHYSICS

LABORATORY III

Laboratory Report

Electron Spin Resonance

Authors:

Raul Wagner

Martin Kronberger

Group 301

Supervisor:

Victor Lindenbauer

conducted on:
04 June 2025

1 Resonanceabsorbption of a passive HF-Oscillator

1.1 Fundamentals

To detect electron spin resonance (ESR) in DPPH, the DPPH sample is placed in an RF coil that is part of a resonant circuit with high quality factor. This circuit is excited by a variable-frequency RF oscillator operating between 15 and 130 MHz.

When the resonance condition for ESR is met at a frequency ν_0 , the DPPH sample absorbs energy, which loads the resonant circuit. As a result, the AC resistance increases, and the voltage across the RF coil decreases.

To detect this change, a passive resonant circuit is used for comparison. Its coil is placed coaxially opposite the empty RF coil. The resonance frequency of the passive circuit is given by:

$$\nu_0 = \frac{1}{2\pi \cdot L_2 C_2} \quad (1)$$

Where L_2 and C_2 are the inductance and capacitance of the oscillation circuit. The resonance frequency of the circuit can be adjusted by changing the capacitance C_2 .

When the active circuit is driven at its resonance frequency ν_0 , it is dampened, and the voltage U_1 across the RF coil decreases. The ESR signal is detected by measuring the rectified voltage U_1 , which corresponds to the current I_1 through a measurement resistor $R_1 = 56 \text{ k}\Omega$:

$$U_1 = 56\text{k}\Omega \cdot I_1 \quad (2)$$

1.2 Setup

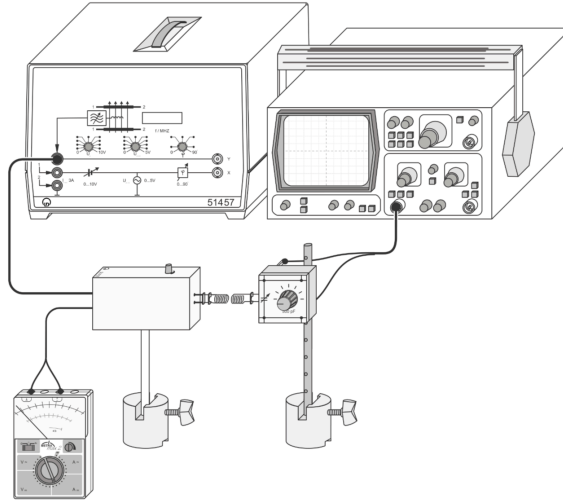


Figure 1: Experimental setup

- Connect the ESR base unit to the ESR operating unit via a 6-pin cable and set the rotary potentiometer on the top left to maximum sensitivity.
- Plug in the 13-30 MHz plug-in coil (large).
- Due to a bad connection of the measurement cable of I_1 the current and voltage of the active circuit could not be measured.
- Position the coil of the passive resonant circuit coaxially opposite of the active coil and connect via a BNC/4 mm measurement cable to channel I of the dual-channel oscilloscope.

1.3 Procedure

- Set the variable capacitor of the passive resonant circuit to position Skt. = 3/6.
- Adjust the minimum frequency on the ESR base unit.
- At the operating frequency, measure and record:
 - the frequency,
 - the voltage U_2 of the “passive” coil on the oscilloscope,
- Increase the frequency in steps and repeat the measurement.
- Perform additional measurement series with Skt. = 2/6 and 1/6.
- A measurement without the passive circuit could also not be done due to the bad connection of the active circuit cable.

1.4 Measurement values

ν / MHz	U_2 / V	ν / MHz	U_2 / V
14.5	1.8	16.5	2
15	2.2	17	1.8
15.5	2.35	17.5	1.25
16	2.2	18	1
16.5	2	18.5	0.8
17	1.8	19	0.7

Table 1: Voltage U_2 at Skt. = 3/6

ν / MHz	U_2 / V	ν / MHz	U_2 / V
14.5	1.8	16.5	2
15	2.2	17	1.8
15.5	2.35	17.5	1.25
16	2.2	18	1
16.5	2	18.5	0.8
17	1.8	19	0.7

Table 2: Voltage U_2 at Skt. = 2/6

ν / MHz	U_2 / V	ν / MHz	U_2 / V
14.5	1.8	16.5	2
15	2.2	17	1.8
15.5	2.35	17.5	1.25
16	2.2	18	1
16.5	2	18.5	0.8
17	1.8	19	0.7

Table 3: Voltage U_2 at Skt. = 1/6

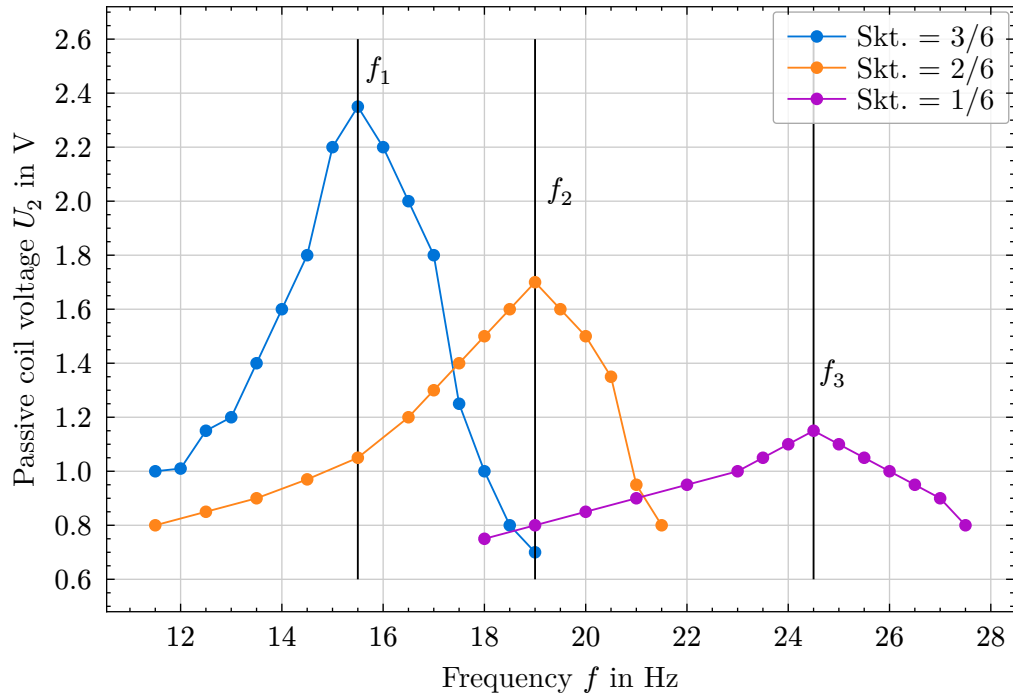


Figure 2: The resonance frequencies μ_n can be determined by measuring voltage peaks in the passive coil voltage $U_2(f)$. The measurement apparatus for the current through the active coil was broken. Thus, the active voltage $U_1(f)$ couldn't be determined. It would usually correspond to a damped oscillation thus creating corresponding local minima in U_1 at the same resonance frequencies

2 Electrons spin resonance on DPPH

2.1 Fundamentals

Electron spin resonance (ESR) detects transitions between spin states of unpaired electrons in a magnetic field B_0 . The energy levels split due to the Zeeman effect, and when electromagnetic radiation of the right frequency ν is applied, resonant absorption occurs.

This resonance condition is:

$$h\nu = g\mu_B B_0 \quad (3)$$

Where h is the planks constant, ν is the radiation frequency, g is the lande g-factor, μ_B the Bohr magneton and B_0 the static magnetic field.

From this, the magnetic field B_0 can be calculated using:

$$B_0 = h\nu g\mu_B \quad (4)$$

For a free electron: $g = 2.0023$

Spin quantum number: $J = s = \frac{1}{2}$

ESR transition: $\Delta m = J = \pm 1$

The ESR line width ΔB_0 relates to level lifetime T via the uncertainty relation:

$$\Delta B_0 = 12g\mu_B T \quad (5)$$

2.1.1 Experiment:

DPPH is used as a stable free radical sample with $g \approx 2.003$. The magnetic field is generated by Helmholtz coils and modulated at 50 Hz. A high-Q RF resonant circuit detects the absorption via a drop in voltage when resonance occurs.

2.2 Setup

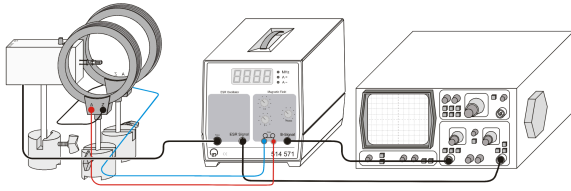


Figure 3: Experimental setup




Figure 4: Experimental setup

The experimental setup is shown in Fig. 4 and 5.

- Place the Helmholtz coils parallel to each other at a center distance of 6.8 cm (equal to the mean radius r).
- Connect both Helmholtz coils in series with the ammeter to the ESR operating unit.
- Connect the ESR base unit to the ESR operating unit via a 6-pin cable.
- Connect output Y of the ESR operating unit via a BNC cable to channel I of the dual-channel oscilloscope, and output X to channel II.

2.3 Procedure

Determination of the Resonance Magnetic Field B_0

- Insert the 30-75 MHz plug-in coil (medium) and place the DPPH sample in the coil.

Laboratory Work III - Electron Spin Resonance

- Switch on the ESR base unit and position it so that the plug-in coil with DPPH sample is in the center of the Helmholtz-coil pair (see Fig. 4).
- Set the resonance frequency $\nu = 30$ MHz.
- Set the modulation amplitude U_{mod} to the second scale division.
- Set the phase shift to 0° .
- Operate the oscilloscope in dual-channel mode:
 - Dual on
 - Time base $2 \frac{\text{ms}}{\text{cm}}$
 - Amplitude I and II $0.5 \frac{\text{V}}{\text{mm}}$ AC
- Slowly increase the DC voltage U_0 to the Helmholtz coils until the resonance signals are equidistant (see Fig. 6).
- Switch the oscilloscope to XY mode and adjust the phase shift so that the two resonance peaks coincide.
- Vary U_0 until the resonance signal is symmetric, keeping the modulation voltage as low as possible.
- Measure the DC current $2I_0$ through the Helmholtz-coil pair and record it together with the resonance frequency ν .
- Increase ν by 5 MHz and adjust U_0 to reestablish resonance.
- Again measure and record the current $2I_0$.
- Continue raising ν in 5 MHz steps (switch to the 75-130 MHz coil (small) at 75 MHz) and repeat the measurements.

Determination of the Half-Width δB_0

- Operate the oscilloscope in XY mode:
 - Amplitude II $0.05 \frac{\text{V}}{\text{mm}}$ AC
- Reestablish the resonance condition for $\nu = 50$ MHz (medium plug-in coil).
- Vary the modulation voltage U_{mod} until the resonance trace spans the full screen width (10 cm) in the X-direction.
- Switch the ammeter to AC mode and measure the effective current $2I_{\text{mod}}$ corresponding to U_{mod} .
- Increase the X-deflection, read off the width ΔU of the resonance peak at half its height, and record it.

2.4 Measurement values

ν / MHz	$2 I_0$ / A	Plug-in coil
30	0.53	middle
35	0.63	middle
40	0.71	middle
45	0.79	middle
50	0.89	middle
55	0.97	middle
60	1.06	middle
65	1.15	middle
70	1.23	middle
75	1.33	middle
80	1.41	middle
80	1.53	small
90	1.65	small
95	1.67	small
100	1.7	small
105	1.74	small
110	1.79	small
115	2.05	small
120	2.16	small

Table 4: Current $2I_0$ as a function of frequency ν of the magnetic field

Laboratory Work III - Electron Spin Resonance

ν / MHz	B_0 / mT
30	1.12
35	1.33
40	1.5
45	1.67
50	1.88
55	2.05
60	2.24
65	2.43
70	2.6
75	2.81
80	2.98
80	3.24
90	3.49
95	3.53
100	3.6
105	3.68
110	3.79
115	4.34
120	4.57

Table 5: Magnetic field B_0 as a function of frequency ν of the magnetic field

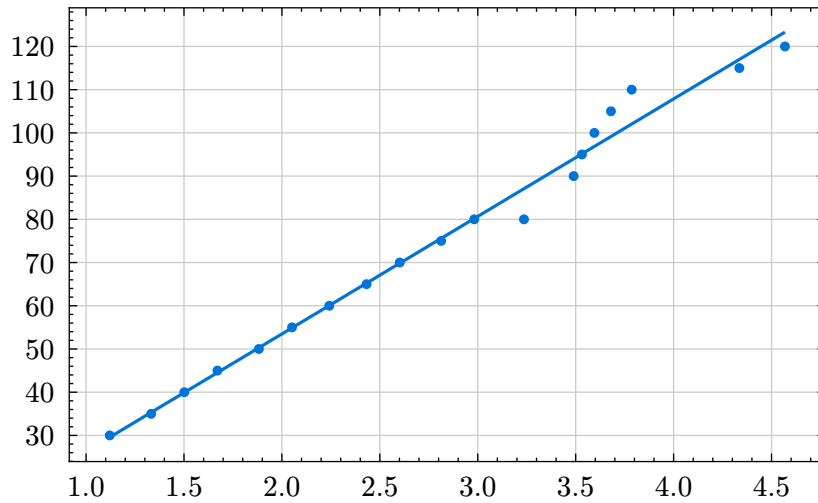


Figure 5: Resonance frequency as a function of the magnetic field for DPPH

Measured Half-Width δU :

$$\delta U = 0.95 \text{ V}$$

With

$$\delta I = \frac{\delta U}{U_{\text{mod}}} \cdot I_{\text{mod}} \quad (6)$$

calculated Half-Width $\delta I = 0.078 \text{ A}$

With

$$\delta B_0 = 4.23 \text{ mT} \cdot \delta I \quad (7)$$

calculated $\delta B_0 = 0.33 \text{ mT}$

Slope: $27.19 \frac{\text{MHz}}{\text{mT}}$

In experiment determined g-factor:

$$g = 1.9426$$

g-factor from literature:

$$g = 2.0036$$

Despite a deviation from linearity in the higher frequency range, a linear relationship between resonance frequency and magnetic field strength is observed. Furthermore, the measured g-factor is in sufficient agreement with the literature value.

2.5 Error Estimation

Since the voltage values were read from an oscilloscope, the error of these values is $\pm 0.1 \text{ V}$. Since the Current was measured by an amperemeter, the error for the current is $\pm 0.01 \text{ A}$.

Fehler!