

In Liugong, user creation flows are automated and tracked using JSON for data reading.

This is a code which shows a manage employee creation.

```
1 package Selenium;
2
3 import com.fasterxml.jackson.databind.ObjectMapper;
4 import org.openqa.selenium.*;
5 import org.openqa.selenium.chrome.ChromeDriver;
6
7 import java.io.File;
8
9 public class ManageUser {
10
11     public static void main(String[] args) throws InterruptedException {
12         try {
13             // Load JSON data
14             ObjectMapper mapper = new ObjectMapper();
15             ManageUserData data = mapper.readValue(
16                 new File("C:\\jsons\\manage_user.json"),
17                 ManageUserData.class
18             );
19
20             // Launch browser
21             WebDriver driver = new ChromeDriver();
22             driver.manage().window().maximize();
23             driver.get(data.getUrl());
24             Thread.sleep(2000);
25
26             // Login
27             driver.findElement(By.xpath("//input[@title='User Name']")).sendKeys(data.getUsername());
28             Thread.sleep(1000);
29             driver.findElement(By.xpath("//input[@title='Password']")).sendKeys(data.getPassword());
30             Thread.sleep(1000);
31             driver.findElement(By.xpath("//div[@data-ms-link-role='submit']")).click();
32             Thread.sleep(3000);
```

```
3             Thread.sleep(1000);
4             driver.findElement(By.xpath("//input[@title='Password']")).sendKeys(data.getPassword());
5             Thread.sleep(1000);
6             driver.findElement(By.xpath("//div[@data-ms-link-role='submit']")).click();
7             Thread.sleep(3000);
8
9             // Navigation to Manage Employee
10            driver.findElement(By.xpath("//div[@title='Switch Portal']")).click();
11            Thread.sleep(1000);
12            driver.findElement(By.xpath("//span[text()='Administration']")).click();
13            Thread.sleep(1000);
14            driver.findElement(By.xpath("//span[text()='User Management']")).click();
15            Thread.sleep(1000);
16            driver.findElement(By.xpath("//span[text()='Manage Employee']")).click();
17            Thread.sleep(3000);
18
19            // Add record
20            driver.findElement(By.xpath("//li[@title='Add Record']")).click();
21            Thread.sleep(2000);
22            driver.findElement(By.id("manage_employee_master_edit_employee_id")).sendKeys(data.getEmployeeId());
23            Thread.sleep(1000);
24
25            driver.findElement(By.xpath("//label[contains(text(),'Title')]/following::span[contains(@class,'k-dropdown')][1]")).click();
26            Thread.sleep(1000);
27            driver.findElement(By.xpath("//li[text()='\" + data.getTitle() + \"']")).click();
28            Thread.sleep(1000);
29
30            driver.findElement(By.id("manage_employee_master_edit_first_name")).sendKeys(data.getFirstName());
31            driver.findElement(By.xpath("//label[contains(text(),'Last Name')]/following::input[1]")).sendKeys(data.getLastName());
32            driver.findElement(By.id("manage_employee_master_edit_contact_number")).sendKeys(data.getContactNumber());
33
34            driver.findElement(By.xpath("//span[@aria-owns='manage_employee_master_edit_company_location_listbox']")).click();
```

```
ChromeDrive... LiugongDataD... CallCreation... Seleniumday1... ManageUser.java × ManageUserDa... TestData.java
6 driver.findElement(By.xpath("//label[contains(text(),'Last Name')]/following::input[1]")).sendKeys(data.getLastName());
7 driver.findElement(By.id("manage_employee_master_edit_contact_number")).sendKeys(data.getContactNumber());
8
9 driver.findElement(By.xpath("//span[@aria-owns='manage_employee_master_edit_company_location_listbox']")).click();
10 Thread.sleep(1000);
11 driver.findElement(By.xpath("//li[text()='North - North']")).click();
12
13 driver.findElement(By.id("manage_employee_master_edit_contact_email")).sendKeys(data.getContactEmail());
14 Thread.sleep(1000);
15
16 driver.findElement(By.xpath("//label[contains(text(),'Org. Level Number')]/following::span[contains(@class, 'k-dropc...
17 Thread.sleep(1000);
18 driver.findElement(By.xpath("//li[text()='1 - Group']")).click();
19
20 driver.findElement(By.xpath("//span[@aria-owns='manage_employee_master_edit_servicing_org_level_code_listbox']")).cl:
21 Thread.sleep(1000);
22 driver.findElement(By.xpath("//li[text()='liugong - Liugong India']")).click();
23 Thread.sleep(1000);
24
25 // Submit the form
26 WebElement submitButton = driver.findElement(By.xpath("//button[text()='Submit']"));
27 ((JavascriptExecutor) driver).executeScript("arguments[0].click();", submitButton);
28 Thread.sleep(2000);
29
30 driver.quit();
31
32 } catch (Exception e) {
33     e.printStackTrace();
34 }
35 }
```

This one is managing some data what we want to be read

```
1 package Selenium;
2
3 public class ManageUserData {
4     private String url;
5     private String username;
6     private String password;
7     private String employeeId;
8     private String firstName;
9     private String lastName;
10    private String contactNumber;
11    private String contactEmail;
12    private String title; // <-- Add this field
13
14    // Getters and setters for all fields
15    public String getUrl() { return url; }
16    public void setUrl(String url) { this.url = url; }
17
18    public String getUsername() { return username; }
19    public void setUsername(String username) { this.username = username; }
20
21    public String getPassword() { return password; }
22    public void setPassword(String password) { this.password = password; }
23
24    public String getEmployeeId() { return employeeId; }
25    public void setEmployeeId(String employeeId) { this.employeeId = employeeId; }
26
27    public String getFirstName() { return firstName; }
28    public void setFirstName(String firstName) { this.firstName = firstName; }
29
30    public String getLastName() { return lastName; }
31    public void setLastName(String lastName) { this.lastName = lastName; }
```

```
private String contactEmail;
private String title; // <-- Add this field

// Getters and setters for all fields
public String getUrl() { return url; }
public void setUrl(String url) { this.url = url; }

public String getUsername() { return username; }
public void setUsername(String username) { this.username = username; }

public String getPassword() { return password; }
public void setPassword(String password) { this.password = password; }

public String getEmployeeId() { return employeeId; }
public void setEmployeeId(String employeeId) { this.employeeId = employeeId; }

public String getFirstName() { return firstName; }
public void setFirstName(String firstName) { this.firstName = firstName; }


public String getLastName() { return lastName; }
public void setLastName(String lastName) { this.lastName = lastName; }

public String getContactNumber() { return contactNumber; }
public void setContactNumber(String contactNumber) { this.contactNumber = contactNumber; }

public String getContactEmail() { return contactEmail; }
public void setContactEmail(String contactEmail) { this.contactEmail = contactEmail; }

public String getTitle() { return title; }
public void setTitle(String title) { this.title = title; }
}
```

This page is shows how json can read the data

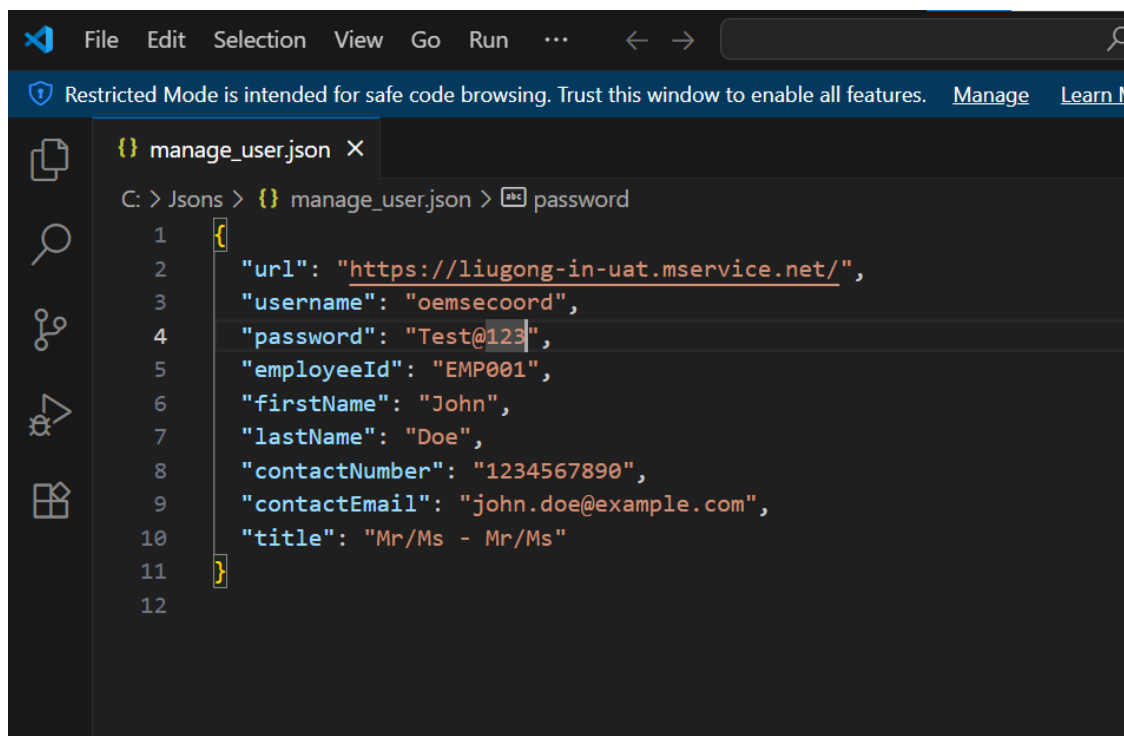

The screenshot shows the Visual Studio Code editor with a file named 'manage_user.json' open. The file contains a JSON object representing user data. The editor interface includes a menu bar at the top with options like File, Edit, Selection, View, Go, Run, and a search bar. Below the menu bar, a status bar indicates 'Restricted Mode is intended for safe code browsing. Trust this window to enable all features.' The file explorer on the left shows the file 'manage_user.json' under the 'C: > Jsns > {} manage_user.json' path. The main editor area displays the JSON content with line numbers from 1 to 12.

```
1 {
2   "url": "https://liugong-in-uat.mservice.net/",
3   "username": "oemsecoord",
4   "password": "Test@123",
5   "employeeId": "EMP001",
6   "firstName": "John",
7   "lastName": "Doe",
8   "contactNumber": "1234567890",
9   "contactEmail": "john.doe@example.com",
10  "title": "Mr/Ms - Mr/Ms"
11 }
12
```