



Read the data from JSON and provide a command/value to avoid inconvenience or issues in the core program.

This code includes the path of a JSON file, reads the data from the JSON folder, and provides a common name.

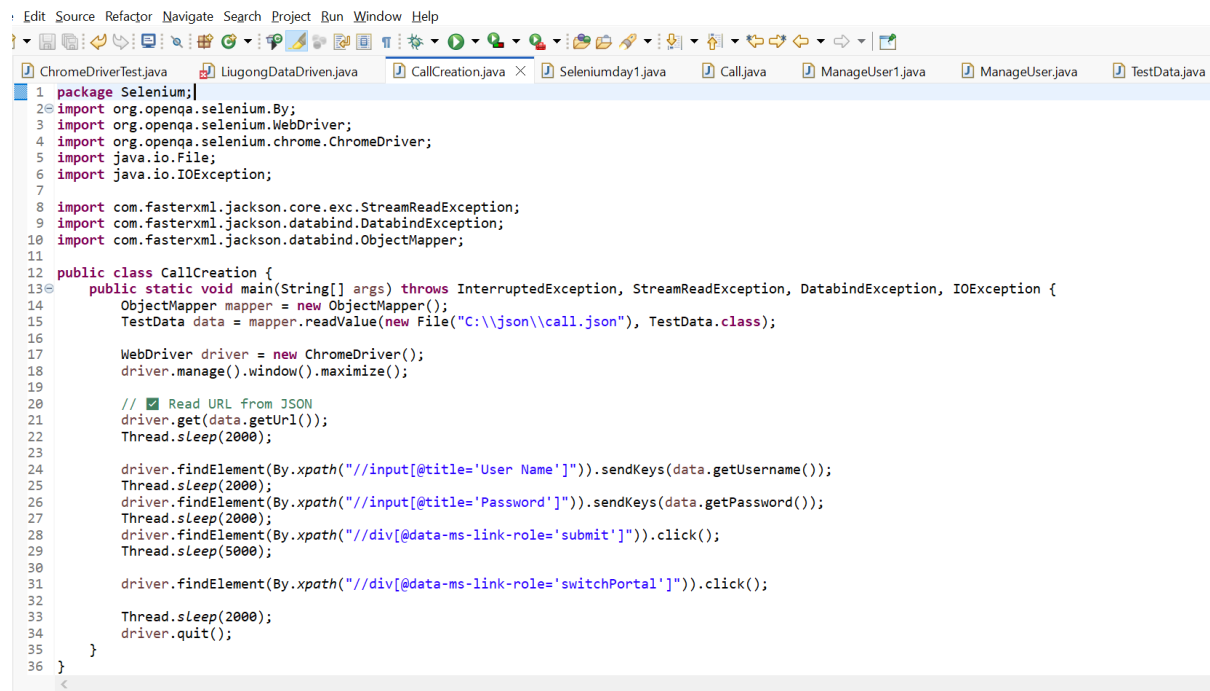

```
1 package Selenium;
2 import org.openqa.selenium.By;
3 import org.openqa.selenium.WebDriver;
4 import org.openqa.selenium.chrome.ChromeDriver;
5 import java.io.File;
6 import java.io.IOException;
7
8 import com.fasterxml.jackson.core.exc.StreamReadException;
9 import com.fasterxml.jackson.databind.DatabindException;
10 import com.fasterxml.jackson.databind.ObjectMapper;
11
12 public class CallCreation {
13     public static void main(String[] args) throws InterruptedException, StreamReadException, DatabindException, IOException {
14         ObjectMapper mapper = new ObjectMapper();
15         TestData data = mapper.readValue(new File("C:\\json\\call.json"), TestData.class);
16
17         WebDriver driver = new ChromeDriver();
18         driver.manage().window().maximize();
19
20         // Read URL from JSON
21         driver.get(data.getUrl());
22         Thread.sleep(2000);
23
24         driver.findElement(By.xpath("//input[@title='User Name']")).sendKeys(data.getUsername());
25         Thread.sleep(2000);
26         driver.findElement(By.xpath("//input[@title='Password']")).sendKeys(data.getPassword());
27         Thread.sleep(2000);
28         driver.findElement(By.xpath("//div[@data-ms-link-role='submit']")).click();
29         Thread.sleep(5000);
30
31         driver.findElement(By.xpath("//div[@data-ms-link-role='switchPortal']")).click();
32
33         Thread.sleep(2000);
34         driver.quit();
35     }
36 }
```

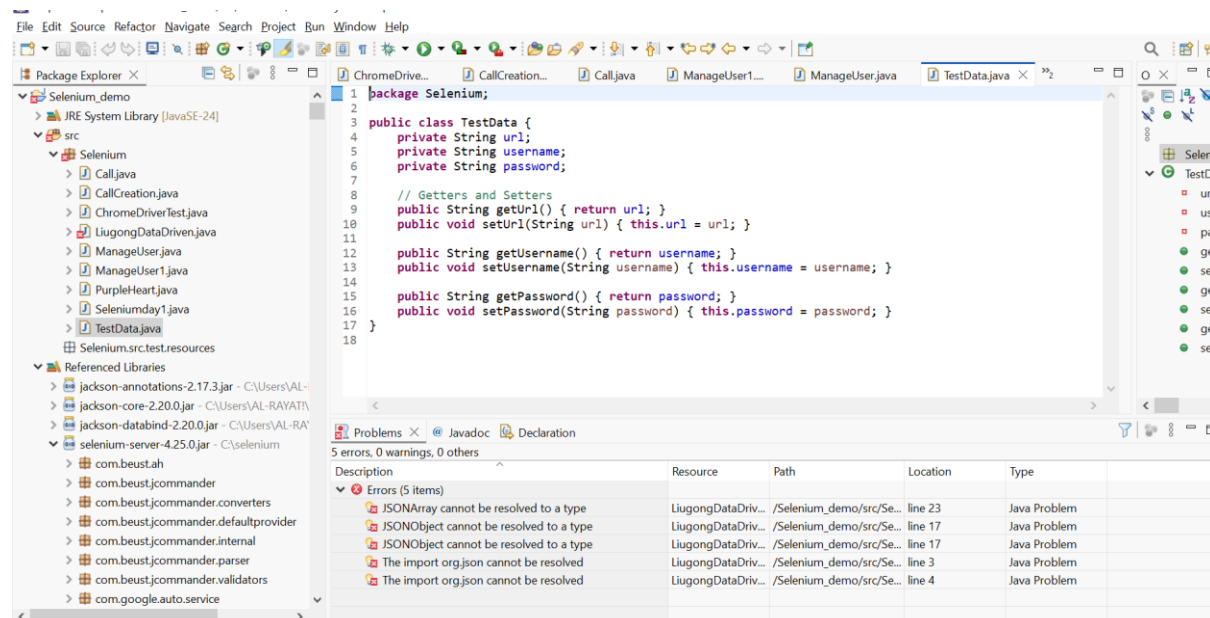


```
1 package Selenium;
2
3 public class TestData {
4     private String url;
5     private String username;
6     private String password;
7
8     // Getters and Setters
9     public String getUrl() { return url; }
10    public void setUrl(String url) { this.url = url; }
11
12    public String getUsername() { return username; }
13    public void setUsername(String username) { this.username = username; }
14
15    public String getPassword() { return password; }
16    public void setPassword(String password) { this.password = password; }
17 }
18
```

Description	Resource	Path	Location	Type
JSONArray cannot be resolved to a type	LiugongDataDriv...	/Selenium_demo/src/Se...	line 23	Java Problem
JSONObject cannot be resolved to a type	LiugongDataDriv...	/Selenium_demo/src/Se...	line 17	Java Problem
JSONObject cannot be resolved to a type	LiugongDataDriv...	/Selenium_demo/src/Se...	line 17	Java Problem
The import org.json cannot be resolved	LiugongDataDriv...	/Selenium_demo/src/Se...	line 3	Java Problem
The import org.json cannot be resolved	LiugongDataDriv...	/Selenium_demo/src/Se...	line 4	Java Problem

This is the core data setup provided with a common name to run.

This is the path ill create in Json.

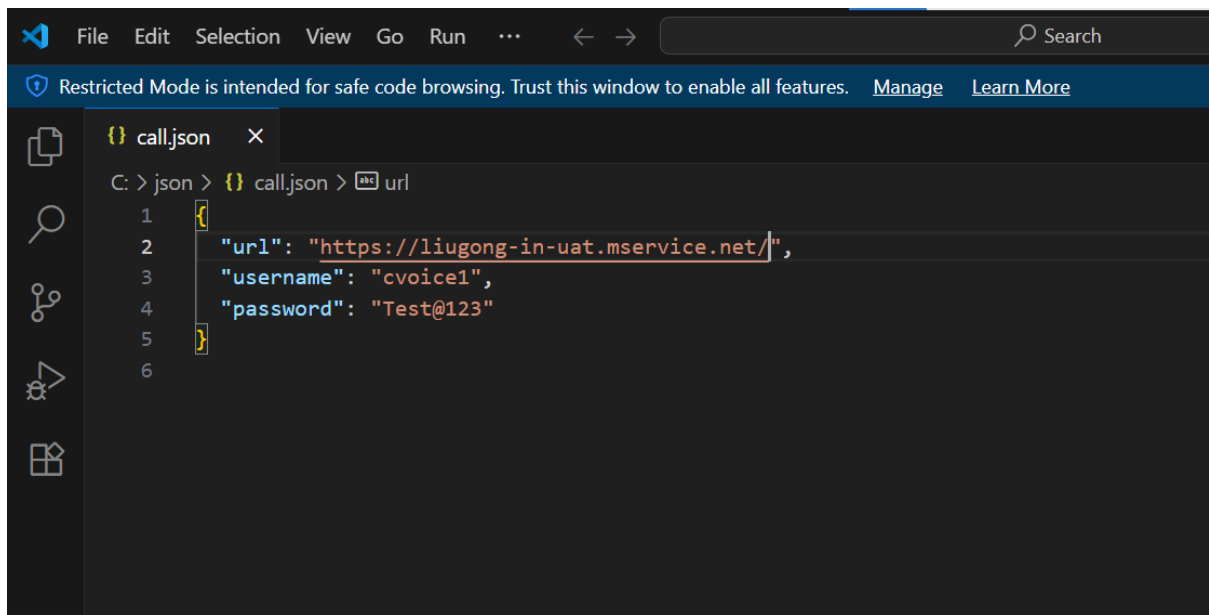

The screenshot shows the Visual Studio Code editor interface. At the top, there's a menu bar with File, Edit, Selection, View, Go, Run, and a search bar. Below the menu bar, a blue banner states: "Restricted Mode is intended for safe code browsing. Trust this window to enable all features. Manage Learn More". The editor has a sidebar on the left with icons for Explorer, Search, Source Control, Run and Debug, and Extensions. The main editor area shows a file named "call.json" with the following content:

```
C: > json > {} call.json > url  
1 {  
2   "url": "https://liugong-in-uat.mservice.net/",  
3   "username": "cvoice1",  
4   "password": "Test@123"  
5 }  
6
```

It just a beginning , ill try more effective in upcoming days.

Basic Data Types in JSON

- **String** → "Hello World"
- **Number** → 123, 45.67
- **Boolean** → true / false
- **Null** → null
- **Object** → { "key": "value" }
- **Array** → [1, 2, 3]

Why Use JSON in Automation


- To store **test data** (like username, password, URLs, etc.).
- To keep data **separate from code** (easy to maintain).
- To support **multiple environments** (DEV, UAT, PROD).
- To handle **dynamic test inputs**.

JSON (JavaScript Object Notation) is a lightweight data-interchange format.

- It is **easy to read and write** for humans.

- It is **easy to parse and generate** for machines.
- Commonly used to exchange data between a **server and a client**.

Architecture of working

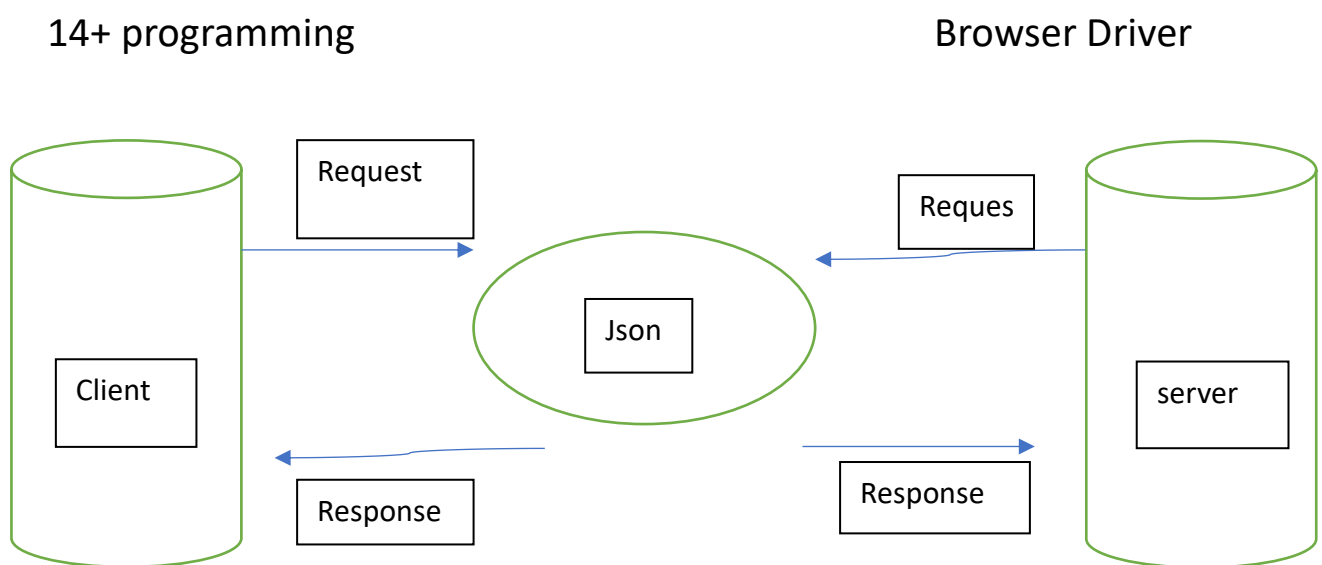

Selenium is a Third part tool so it does not accept directly , se
we need browser drivers