



SINHGAD TECHNICAL EDUCATION SOCIETY'S

SKN SINHGAD Institute of Technology and Science Lonavala

Off Mumbai-Pune Express Way Kusgaon (Bk). Pune - 410401

DEPARTMENT OF INFORMATION TECHNOLOGY

LABORATORY MANUAL

: LP-IV

B.E. IT (SEM – I)

AY 2023 - 2024

Subject Teacher

Prof. S. T. Deore

TEACHING SCHEME
PRACTICAL: 2 HRS/WEEK

EXAMINATION SCHEME
TERM WORK : 25 MARKS
PRACTICAL : 25 MARKS

VISION

उत्तमपुरुषान् उत्तमाभियंतृन् निर्मातुं कटीबद्धाः वयम्।

MISSION

We believe in and work for the holistic development of students and teachers. We strive to achieve this by imbuing a unique value system, transparent work culture, excellent academic and physical environment conducive to learning, creativity and technology transfer.

Vision and Mission of Department**VISION**

To provide excellent Information Technology education by building strong teaching and research environment

MISSION

1. Innovation: To transform the students into innovative, competent and high quality IT professionals to meet the growing global challenges.
2. Quality Education: To achieve and impart quality education with an emphasis on practical skills and social relevance.
3. Technical Expertise: To endeavor for continuous up-gradation of technical expertise of students to cater to the needs of the society.
4. Industry Interaction: To achieve an effective interaction with industry for mutual benefits.

Program Educational Objectives:

- I. To develop students to achieve high level of technical expertise with Strong theoretical background and sound practical knowledge
- II. To inculcate research environment for enhancement of Academia – Industry collaboration through conference
- III. To prepare graduates to be sensitive to ethical, societal and Environmental issues while engaging their professional duties, Entrepreneurship and leadership. .
- IV. To Enhance ability of students for providing Engineering solution in a global and societal context
- V. Pursue higher education for professional development.

Program Outcomes: POs

POs are statements that describe what students are expected to know and be able to do upon graduating from the program. These relate to the skills, knowledge, analytical ability attitude and behavior that students acquire through the program.

- i. **Engineering Knowledge:** Apply the knowledge of mathematics, science, engineering fundamentals, and an engineering specialization to the solution of complex engineering problems.
- ii. **Problem Analysis:** Identify, formulate, review research literature, and analyze complex engineering problems reaching substantiated conclusions using first principles of mathematics, natural sciences and engineering sciences.
- iii. **Design/Development of Solutions:** Design solutions for complex engineering problems and design system components or processes that meet the specified needs with appropriate consideration for the public health and safety, and the cultural, societal, and environmental considerations.
- iv. **Conduct Investigations of Complex Problems:** Use research-based knowledge and research methods including design of experiments, analysis and interpretation of data, and synthesis of the information to provide valid conclusions for complex problems:
 - a. that cannot be solved by straightforward application of knowledge, theories and techniques applicable to the engineering discipline as against problems given at the end of chapters in a typical text book that can be solved using simple engineering theories and techniques;
 - b. that may not have a unique solution. For example, a design problem can be solved in many ways and lead to multiple possible solutions;
 - c. that require consideration of appropriate constraints / requirements not explicitly given in the problem statement such as cost, power requirement, durability, product life, etc.;
 - d. which need to be defined (modeled) within appropriate mathematical framework; and
 - e. that often require use of modern computational concepts and tools, for example, in the design of an antenna or a DSP filter.
- v. **Modern Tool Usage:** Create, select, and apply appropriate techniques, resources, and modern engineering and IT tools including prediction and modeling to complex engineering activities with an understanding of the limitations.
- vi. **The Engineer and Society:** Apply reasoning informed by the contextual knowledge to assess societal, health, safety, legal and cultural issues and the consequent responsibilities relevant to the professional engineering practice.
- vii. **Environment and Sustainability:** Understand the impact of the professional engineering solutions in societal and environmental contexts, and demonstrate the knowledge of, and need for sustainable development.
- viii. **Ethics:** Apply ethical principles and commit to professional ethics and responsibilities and norms of the engineering practice.
- ix. **Individual and Team Work:** Function effectively as an individual, and as a member or leader in diverse teams, and in multidisciplinary settings.

- x. **Communication:** Communicate effectively on complex engineering activities with the engineering community and with society at large, such as, being able to comprehend and write effective reports and design documentation, make effective presentations, and give and receive clear instructions.
- xi. **Project Management and Finance:** Demonstrate knowledge and understanding of the engineering and management principles and apply these to one's own work, as a member and leader in a team, to manage projects and in multidisciplinary environments.
- xii. **Life-long Learning:** Recognize the need for, and have the preparation and ability to engage in independent and lifelong learning in the broadest context of technological change.

Program Specific Outcomes: PSOs

1. Get solid foundation in design and development of electronics modules useful to society
2. Able to handle skills developing programs

Course Objectives and Course Outcomes (COs)

Course Objectives:

1. To describe ubiquitous computing, its properties applications and architectural design.
2. To explain various smart devices and services used in ubiquitous computing.
3. To teach the role of sensors and actuators in designing real time applications using Ubicomp.
4. To explore the concept of human computer interaction in the context of Ubicomp.
5. To explain Ubicomp privacy and challenges to privacy.
6. To describe Ubicomp network with design issues and Ubicomp management.

Course Outcomes:

On completion of the course, student will be able to:-

1. Students will demonstrate the knowledge of design of Ubicomp and its applications.
2. Students will be able explain smart devices and services used Ubicomp.
3. Students will be able to describe the significance of actuators and controllers in real time application design.
4. Students will be able use the concept of HCI to understand the design of automation applications.
5. Students will be able to classify Ubicomp privacy and explain the challenges associated with Ubicomp privacy.
6. Students will be able to get the knowledge of ubiquitous and service oriented networks along with Ubicomp management.



CERTIFICATE

This is to certify that Mr. /Ms _____ of class
BE IT Div _____ Roll No. _____ Examination Seat No./PRN No. _____ has
completed all the practical work in the **LP-IV [414447]** satisfactorily, as prescribed by
Savitribai Phule Pune University , Pune in the academic year **2023 - 24 (Semester-I)**

Course In-charge

Head of Department

Principal

Date:

INDEX

| Sr. No | Title of Experiment | Date of performance | Date of Submission | Marks Obtained (10) | Signature of Faculty |
|--------|--|---------------------|--------------------|---------------------|----------------------|
| 1 | Study of Deep learning Packages: Tensorflow, Keras, Theano and PyTorch. Document the distinct features and functionality of the packages. | | | | |
| 2 | Implementing Feedforward neural networks with Keras and TensorFlow a. Import the necessary packages b. Load the training and testing data (MNIST/CIFAR10) c. Define the network architecture using Keras d. Train the model using SGD e. Evaluate the network f. Plot the training loss and accuracy | | | | |
| 3 | Build the Image classification model by dividing the model into following 4 stages: a. Loading and preprocessing the image data b. Defining the model's architecture c. Training the model d. Estimating the model's performance | | | | |
| 4 | Use Autoencoder to implement anomaly detection. Build the model by using: a. Import required libraries b. Upload / access the dataset c. Encoder converts it into latent representation d. Decoder networks convert it back to the original input e. Compile the models with Optimizer, Loss, and Evaluation Metrics | | | | |
| 5 | Implement the Continuous Bag of Words (CBOW) Model. Stages can be: a. Data preparation | | | | |

| | | | | | |
|---|--|--|--|--|--|
| | b. Generate training data c. Train model d. Output | | | | |
| 6 | Object detection using Transfer Learning of CNN architectures a. Load in a pre-trained CNN model trained on a large dataset b. Freeze parameters (weights) in model's lower convolutional layers c. Add custom classifier with several layers of trainable parameters to model d. Train classifier layers on training data available for task e. Fine-tune hyper parameters and unfreeze more layers as needed | | | | |

Date:

Name & Signature of Course In-charge

LAB INNOVATION

Note: Student are expected to do minimum one lab innovation

- 1. Development environment, Installing and setting up the android environment**
- 2. Develop Distributed application with Front end and Back End connectivity**
- 3. Develop Chat server Client/Server application with same network.**
- 4. Develop IoT Based application for power saving in Classroom.**
- 5. Develop Raspberry PI based home automation.**

Procedure/Guidelines for Conducting Experiment

Guidelines for Instructor's Manual

- The faculty member should prepare the laboratory manual for all the experiments and it should be made available to students and laboratory instructor/Assistant


Guidelines for Student's Lab Journal

- Student should submit term work in the form of handwritten journal based on specified list of assignments.
- Practical Examination will be based on the term work.
- Candidate is expected to know the theory involved in the experiment.
- The practical examination should be conducted if and only if the journal of the candidate is complete in all respects.

Guidelines for Lab /TW Assessment

- Examiners will assess the term work based on performance of students considering the parameters such as timely conduction of practical assignment, methodology adopted for implementation of practical assignment, timely submission of assignment in the form of handwritten write-up along with results of implemented assignment, attendance etc.
- Examiners will judge the understanding of the practical performed in the examination by asking some questions related to theory & implementation of experiments he/she has carried out.
- Appropriate knowledge of usage of software and hardware related to respective laboratory should be checked by the concerned faculty member.

As a conscious effort and little contribution towards Green IT and environment awareness, attaching printed papers of the program in journal may be avoided. There must be hand-written write-ups for every assignment in the journal. The DVD/CD containing students programs should be attached to the journal by every student and same to be maintained by department/lab In-charge is highly encouraged. For reference one or two journals may be maintained with program prints at Laboratory.

| | | |
|--|--|--|
|  Sinhgad Institutes | Name of the Student: _____ Roll no: ____ | |
| | CLASS: B.E. [IT] Division: _____ Course: - LP-IV | |
| Experiment No. 1 | | |
| **Study of Deep learning Packages: Tensorflow, Keras, Theano and PyTorch. Document the distinct features and functionality of the packages.** | | |
| Date of Performance: | <div style="border: 1px solid black; padding: 2px 10px; display: inline-block;"> / / 23 </div> | <div style="border: 1px solid black; padding: 5px; display: inline-block; width: 100%;"> Marks: / 10 </div> <div style="border: 1px solid black; height: 30px; width: 100%; margin-top: 5px;"></div> |
| | | Sign with Date |

Assignment No-1

Aim: Study of Deep learning Packages: Tensorflow, Keras, Theano and PyTorch. Document the distinct features and functionality of the packages.

Theory: 1)What is Deep learning ?

2)What are various packages in python for supporting Machine Learning libraries and which are mainly used for Deep Learning ?

3)Compare Tensorflow / Keras/Theano and PyTorch on following points(make a table) :

i. Available Functionality

ii. GUI status

iii. Versions.

iv. Features

v. Compatibility with other environments.

vi. Specific Application domains.

4) Enlist the Models Datasets and pretrained models, Libraries and Extensions , Tools related to Tensorflow also discuss any two case studies like (PayPal, Intel, Etc.) related to Tensor Flow. [Ref:<https://www.tensorflow.org/about>]

5) Explain the Keras Ecosystem.(kerastuner,kerasNLP,kerasCV,Autokeras and Modeloptimization.) Also explain following concepts related to keras : 1. Developing sequential Model 2. Training and validation using the inbuilt functions 3. Parameter Optimization. [Ref: <https://keras.io/>]

6) Explain simple Theano program.

7) Explain PyTorch Tensors . And also explain Uber' s Pyro, Tesala

Autopilot.[<https://pytorch.org/>]

Steps/ Algorithm

Installation of Tensorflow On Ubuntu:

1. 1. Install the Python Development Environment:

You need to download Python, the PIP package, and a virtual environment. If these packages are already installed, you can skip this step.

You can download and install what is needed by visiting the following links:

<https://www.python.org/>

<https://pip.pypa.io/en/stable/installing/>

<https://docs.python.org/3/library/venv.html>

To install these packages, run the following commands in the terminal:

```
sudo apt update
```

```
sudo apt install python3-dev python3-pip python3-venv
```

2. Create a Virtual Environment

Navigate to the directory where you want to store your Python 3.0 virtual environment. It can be in your home directory, or any other directory where your user can read and write permissions.

```
mkdir tensorflow_files
```

```
cd tensorflow_files
```

Now, you are inside the directory. Run the following command to create a virtual environment:

```
python3 -m venv virtualenv
```

The command above creates a directory named virtualenv. It contains a copy of the Python binary, the PIP package manager, the standard Python library, and other supporting files.

3. Activate the Virtual Environment

```
source virtualenv/bin/activate
```

Once the environment is activated, the virtual environment' s bin directory will be added to the beginning of the \$PATH variable. Your shell' s prompt will alter, and it will show the name of the virtual environment you are currently using, i.e. virtualenv.

4. Update PIP

```
pip install --upgrade pip
```

5. 5. Install TensorFlow

The virtual environment is activated, and it's up and running. Now, it's time to install the TensorFlow package.

```
pip install -- upgrade TensorFlow
```

Installation of Keras on Ubuntu :

Prerequisite : Python version 3.5 or above.

STEP 1: Install and Update Python3 and Pip

Skip this step if you already have Python3 and Pip on your machine.

```
sudo apt install python3 python3.pip
```

```
sudo pip3 install -- upgrade pip
```

STEP 2: Upgrade Setuptools

```
pip3 install -- upgrade setuptools
```

STEP 3: Install TensorFlow

```
pip3 install tensorflow
```

Verify the installation was successful by checking the software package information:

```
pip3 show tensorflow
```

STEP 4: Install Keras

```
pip3 install keras
```

Verify the installation by displaying the package information:

```
pip3 show keras
```

[\[https://phoenixnap.com/kb/how-to-install-keras-on-linux\]](https://phoenixnap.com/kb/how-to-install-keras-on-linux)

Installation of Theano on Ubuntu:

Step 1: First of all, we will install Python3 on our Linux Machine. Use the following command in the terminal to install Python3.

```
sudo apt-get install python3
```

Step 2: Now, install the pip module

```
udo apt install python3-pip
```

Step 3: Now, install the Theano

Verifying Theano package Installation on Linux using PIP

```
python3 -m pip show theano
```

Installation of PyTorch

First, check if you are using python's latest version or not. Because PyGame requires

python3 – version

pip3 – version

pip3 install torch==1.8.1+cpu torchvision==0.9.1+cpu torchaudio==0.8.1 -f

https://download.pytorch.org/whl/torch_stable.html

[Ref : <https://www.geeksforgeeks.org/install-pytorch-on-linux/>]

Python Libraries and functions required

1. Tensorflow,keras

numpy : NumPy is a Python library used for working with arrays. It also has functions for working in domain of linear algebra, fourier transform, and matrices. NumPy stands for Numerical Python. To import numpy use

import numpy as np

pandas: pandas is a fast, powerful, flexible and easy to use open source data analysis and manipulation tool, built on top of the Python programming language. To import pandas use

import pandas as pd

sklearn : Scikit-learn (Sklearn) is the most useful and robust library for machine learning in Python. It provides a selection of efficient tools for machine learning and statistical modeling including classification, regression, clustering and dimensionality reduction via a consistence interface in Python. This library, which is largely written in Python, is built upon NumPy, SciPy and Matplotlib. For importing train_test_split use from sklearn.model_selection import train_test_split

2. For TheaonRequirements:

Python3

Python3-pip

NumPy

SciPy

BLAS

Sample Code with comments

1. Tensorflow Test program:

```
import tensorflow as tf

print(tf.__version__)

2.1.0

print(tf.reduce_sum(tf.random.normal([1000, 1000])))

tf.Tensor(-505.04108, shape=(), dtype=float32)
```

2. Keras Test Program:

```
1 from tensorflow import keras
from keras import datasets
#
# Load MNIST data
#
(train_images, train_labels), (test_images, test_labels) = datasets.mnist.load_data()
#
# Check the dataset loaded
#
train_images.shape, test_images.shape
```

3. Theano test program

```
# Python program showing
# addition of two scalars
# Addition of two scalars
import numpy
import theano.tensor as T
from theano import function
# Declaring two variables
x = T.dscalar('x')
y = T.dscalar('y')
```

```
# Summing up the two numbers
```

```
z = x + y
```

```
# Converting it to a callable object
```

```
# so that it takes matrix as parameters
```

```
f = function([x, y], z)
```

```
f(5, 7)
```

```
4. Test program for PyTorch
```

```
## The usual imports
```

```
import torch
```


```
import torch.nn as nn
```

```
## print out the pytorch version used
```

```
print(torch.__version__)
```

Conclusion :

Tensorflow , PyTorch,Keras and Theano all these packages are installed and ready for Deep learning applications . As per application domain and dataset we can choose the appropriate package and build required type of Neural Network.

| | | |
|--|---|--|
|  Sinhgad Institutes | Name of the Student: _____ Roll no: _____ | |
| | CLASS: B.E [IT] Division: _____ Course: - LP-IV | |
| Experiment No. 2 | | |
| **Implementing Feedforward neural networks with Keras and TensorFlow .** | | |
| Date of Performance: / /23 | Sign with Date | <div style="border: 1px solid black; padding: 5px; display: inline-block;"> Marks: / 10 </div> |

Lab. Assignment No – 2

Aim: Implementing Feedforward neural networks with Keras and TensorFlow

- a. Import the necessary packages
- b. Load the training and testing data (MNIST/CIFAR10)
- c. Define the network architecture using Keras
- d. Train the model using SGD
- e. Evaluate the network
- f. Plot the training loss and accuracy

Theory

Implement and train a feed-forward neural network (also known as an "MLP" for "multi-layer perceptron") on a dataset called MNIST and improve model generalisation by achieving increased accuracy and decreased loss where model gains good confidence with the prediction.

Objectives to be achieved

1. Understand how to use Tensorflow Eager and Keras Layers to build a neural network architecture.
2. Understand how a model is trained and evaluated.
3. Identify digits from images.
4. Our main goal is to train a neural network (using Keras) to obtain > 90% accuracy on MNIST dataset.
5. Research at least 1 technique that can be used to improve model generalization.

Methodology to be used

- Deep Learning
- Feed Forward Neural Network

Justification with Theory/Literature

Deep learning has revolutionized the world of machine learning as more and more ML practitioners have adopted deep learning networks to solve real-world problems. Compared to the more traditional ML models, deep learning networks have been shown superior performance for many applications.

The first step toward using deep learning networks is to understand the working of a simple feedforward neural network we get started with how we can build our first neural network model using **Keras** running on top of the **Tensorflow** library.

TensorFlow is an open-source platform for machine learning. Keras is the high-level application programming interface (API) of TensorFlow. Using Keras, we can rapidly develop a prototype system and test it out. This is the first in a three-part series on using TensorFlow for supervised classification tasks.

A Conceptual Diagram of the Neural Network

we'll build a supervised classification model that learns to identify digits from images. We'll use the well-known MNIST dataset to train and test our model. The MNIST dataset consists of 28-by-28 images of handwritten digits along with their corresponding labels.

We'll construct a neural network with one hidden layer to classify each digit image into its corresponding label. The figure below shows a conceptual diagram of the neural network we are about to build. The output layer consists of 10 units, where each unit corresponds to a different digit. Each unit computes a value that can be interpreted as the confidence value of its respective digit. The final classification is the digit with the maximum confidence value.

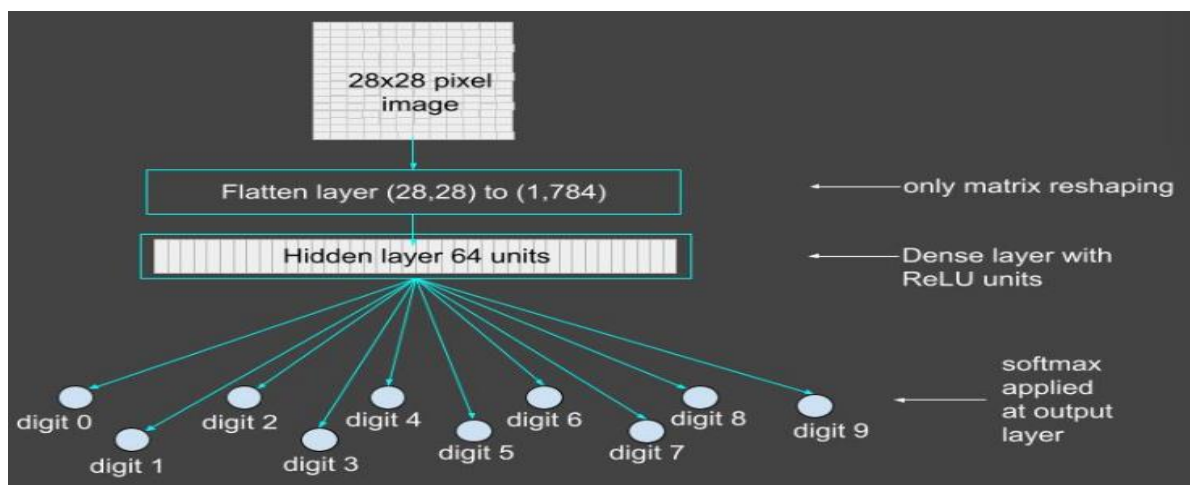


Figure 1: Conceptual diagram of the neural network. Each output unit corresponds to a digit and has its confidence value. The final classification is the digit with the maximum confidence value.

TensorFlow and Keras Libraries

If Keras and TensorFlow are not installed on your system, you can easily do so using pip or conda depending upon your Python environment.

```
pip install tensorflow
```

In the context of ML, a tensor is a multidimensional array, which in its simplest form is a scalar. Vectors and matrices are special cases of tensors. In TensorFlow, a tensor is a data structure. It is a multidimensional array composed of elements of the same type. Tensors are used to encapsulate all inputs and outputs to a deep learning network. The training dataset and each test example has to be cast as a tensor. All operations within the layers of the network are also performed on tensors.

Layers in TensorFlow?

You can build a fully connected feedforward neural network by stacking layers sequentially so that the output of one layer becomes the input to the next. In TensorFlow, layers are callable objects, which take tensors as input and generate outputs that are also tensors. Layers can contain weights and biases, which are both tuned during the training phase. We'll create a simple neural network from two layers:

1. Flatten layer
2. Dense layer

The Flatten Layer:

This layer flattens an input tensor without changing its values. Given a tensor of rank n , the Flatten layer reshapes it to a tensor of rank 2. The number of elements on the first axis remains unchanged. The elements of the input tensor's remaining axes are stacked together to form a single axis. We need this layer to create a vectorized version of each image for further input to the next layer.

The Dense Layer

The dense layer is the fully connected, feedforward layer of a neural network. It computes the weighted sum of the inputs, adds a bias, and passes the output through an activation function. We are using the ReLU activation function for this example. This function does not change any value greater than 0. The rest of the values are all set to 0.

The computations of this layer for the parameters shown in the code above are all illustrated in the figure below.

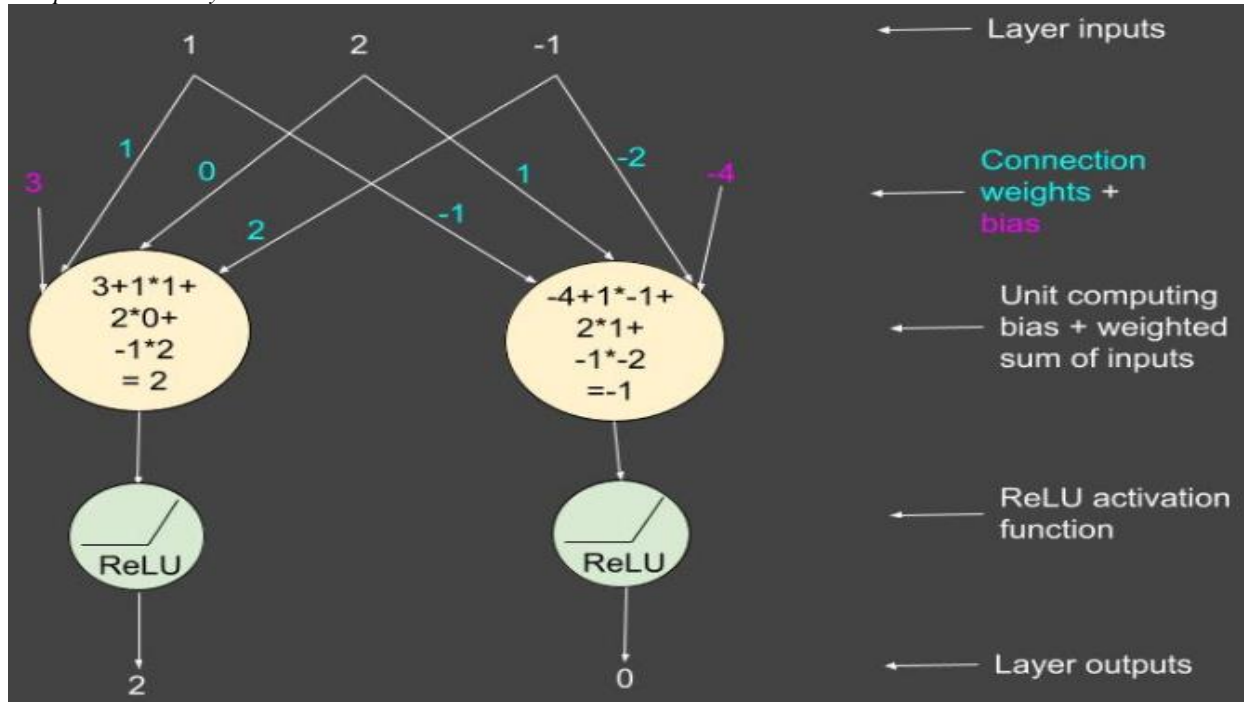


Figure 2: Hidden layer computations.

Creating a Model in TensorFlow

We are now ready to create a model of a simple neural network with one hidden layer. The simplest method is to use `Sequential()` with a list of all the layers you want to stack together. The code below creates a model and prints its summary. Note the use of `relu` as the activation function in the first dense layer and a `softmax` in the output layer. The softmax function normalizes all outputs to sum to 1 and ensures that they are in the range [0, 1].

```
model = tf.keras.Sequential([
    tf.keras.layers.Flatten(input_shape=(28, 28)),
    tf.keras.layers.Dense(64, activation='relu'),
    tf.keras.layers.Dense(10, activation='softmax')
])
```

Compile the Model

Next we compile the model. Here, we specify the optimizer and loss function of our model. The optimization algorithm determines how the connection weights are updated at each training step with respect to the given loss function. Because we have a multiclass classification problem, the loss function we'll use is `categorical_crossentropy`, coupled with the adam optimizer. You can experiment with other

optimizers too. The value of the metrics argument sets the parameter to monitor and record during the training phase.

```
model.compile(optimizer='sgd',  
              loss='sparse_categorical_crossentropy',  
              metrics=['accuracy'])
```

Train the Neural Network

Now that the model is ready, it's time to train it. We'll load the dataset, train the model, and view the training process. Note that the outputs shown here will vary with every run of the program because of the stochastic nature of the algorithms involved.

Load the Dataset

The following code loads the training set and the test set of the MNIST data. It also prints the statistics of both sets. Because our model has 10 outputs, one for each digit, we need to convert the absolute image labels to categorical ones. The utils module in the Keras library provides the method `to_categorical()` for this conversion.

Train the Model

The `fit()` method of the model object trains the neural network. If you want to use a validation set during training, all you have to do is define the percentage of validation examples to be taken from the training set. The splitting of the training set into a train and validation set is automatically taken care of by the `fit()` method.

In the code below, the `fit()` method is called in 10 epochs.

View the Training Process

The `fit()` method returns a history object with detailed information regarding model training. The history attribute is a dictionary object.

To view the learning process, we can plot the accuracy and loss corresponding to different epochs for both the training and validation sets. The following code creates two graphs for these two metrics.

The `predict()` method

If you want to see the output of the network for one or more train/test examples, use the `predict()` method. The following example code prints the values of the output layer when the first test image is used as an

input. It is a 10-dimensional vector of confidence values corresponding to each digit. The final classification of the image is the `argmax()` of this vector.

The `evaluate()` method

The `evaluate()` method computes the overall accuracy of the model on the dataset passed as an argument. The code snippet below prints the classification accuracy on both the training set and the test set.

Code Snippets

▼ Importing Libraries

```
✓ [1] #import necessary libraries  
2s import tensorflow as tf  
from tensorflow import keras
```

```
✓ [2] import pandas as pd  
0s import numpy as np  
import matplotlib.pyplot as plt  
import random  
%matplotlib inline
```

▼ Loading & Preparing the data


MNIST stands for Modified National Institute of Standards and Technology dataset. It is a dataset of 70,000 handwritten images. Each image is of 28*28 pixel i.e about 784 features. Each feature represent only one pixel intensity i.e from 0(white) to 255(black). This dataset is further divided into 60000 training and 10000 testing images.

```
✓ [3] #import dataset and split into train and test  
1s mnist = tf.keras.datasets.mnist  
(x_train,y_train),(x_test,y_test) = mnist.load_data()
```

Downloading data from <https://storage.googleapis.com/tensorflow/tf-keras-datasets/mnist.npz>
11493376/11490434 [=====] - 0s 0us/step
11501568/11490434 [=====] - 0s 0us/step

```
#to see how first image looks
plt.matshow(x_train[0])
```

```
<matplotlib.image.AxesImage at 0x7f686e32ed10>
```

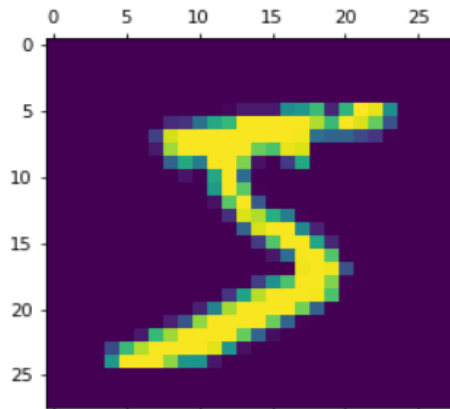

normalizing the images by scaling the pixel intensities to the range 0 to 1

```
[ ] #normalizing the images by scaling the pixel intensities to the range 0 to 1
x_train = x_train/255
x_test = x_test/255
```

```
x_train[0]
```

```
[0.          0.          0.          ],
[0.          0.          0.          0.          0.          ,
 0.          0.          0.19215686, 0.93333333, 0.99215686,
 0.99215686, 0.99215686, 0.99215686, 0.99215686, 0.99215686,
 0.99215686, 0.99215686, 0.98431373, 0.36470588, 0.32156863,
 0.32156863, 0.21960784, 0.15294118, 0.          0.          ,
 0.          0.          0.          ],
[0.          0.          0.          0.          0.          ,
 0.          0.          0.07058824, 0.85882353, 0.99215686,
 0.99215686, 0.99215686, 0.99215686, 0.99215686, 0.77647059,
 0.71372549, 0.96862745, 0.94509804, 0.          0.          ,
 0.          0.          0.          0.          0.          ,
 0.          0.          0.          ],
[0.          0.          0.          0.          0.          ,
 0.          0.          0.          0.31372549, 0.61176471,
 0.41960784, 0.99215686, 0.99215686, 0.80392157, 0.04313725,
 0.          0.16862745, 0.60392157, 0.          0.          ]
```

✓ 0s completed at 2:22 PM

▼ Creating the model

The Relu function is one of the most popular activation function. It stands for "Rectified Linear Unit". Mathematically this function is defined as $y = \max(0, x)$. The relu function returns 0 if the input is negative and linear if the input is positive.

The softmax function is another activation function. It changes input values into values that reach from 0 to 1.

```
[ ] model = keras.Sequential([
    keras.layers.Flatten(input_shape=(28,28)),
    keras.layers.Dense(128,activation='relu'),
    keras.layers.Dense(10,activation='softmax')
])
```

```
[ ] model.summary()
```

Model: "sequential_2"

| Layer (type) | Output Shape | Param # |
|---------------------------|--------------|---------|
| flatten_2 (Flatten) | (None, 784) | 0 |
| dense_4 (Dense) | (None, 128) | 100480 |
| dense_5 (Dense) | (None, 10) | 1290 |
| Total params: 101,770 | | |
| Trainable params: 101,770 | | |
| Non-trainable params: 0 | | |

▼ Compile the model

```
[ ] model.compile(optimizer='sgd',
                  loss='sparse_categorical_crossentropy',
                  metrics=['accuracy'])
```

▼ Train the model

```
[ ] history=model.fit(x_train,y_train,validation_data=(x_test,y_test),epochs=10)
```

```
Epoch 1/10
1875/1875 [=====] - 5s 3ms/step - loss: 0.6254 - accuracy: 0.8444 - val_loss: 0.3584 - val_accuracy: 0.9009
Epoch 2/10
1875/1875 [=====] - 5s 2ms/step - loss: 0.3366 - accuracy: 0.9053 - val_loss: 0.3012 - val_accuracy: 0.9156
Epoch 3/10
1875/1875 [=====] - 5s 3ms/step - loss: 0.2889 - accuracy: 0.9188 - val_loss: 0.2641 - val_accuracy: 0.9252
Epoch 4/10
1875/1875 [=====] - 5s 2ms/step - loss: 0.2583 - accuracy: 0.9276 - val_loss: 0.2405 - val_accuracy: 0.9330
Epoch 5/10
1875/1875 [=====] - 5s 3ms/step - loss: 0.2352 - accuracy: 0.9345 - val_loss: 0.2215 - val_accuracy: 0.9384
Epoch 6/10
1875/1875 [=====] - 5s 2ms/step - loss: 0.2162 - accuracy: 0.9392 - val_loss: 0.2047 - val_accuracy: 0.9430
Epoch 7/10
1875/1875 [=====] - 5s 3ms/step - loss: 0.2004 - accuracy: 0.9437 - val_loss: 0.1907 - val_accuracy: 0.9455
Epoch 8/10
1875/1875 [=====] - 5s 3ms/step - loss: 0.1871 - accuracy: 0.9472 - val_loss: 0.1821 - val_accuracy: 0.9476
Epoch 9/10
1875/1875 [=====] - 5s 2ms/step - loss: 0.1755 - accuracy: 0.9505 - val_loss: 0.1709 - val_accuracy: 0.9501
Epoch 10/10
1875/1875 [=====] - 5s 2ms/step - loss: 0.1653 - accuracy: 0.9539 - val_loss: 0.1622 - val_accuracy: 0.9521
```

✓ 0s completed at 2:22 PM

▼ Evaluate the model


```
[ ] test_loss,test_acc=model.evaluate(x_test,y_test)
print("Loss=%.3f" %test_loss)
print("Accuracy=%.3f" %test_acc)
```

```
313/313 [=====] - 1s 2ms/step - loss: 0.1622 - accuracy: 0.9521
Loss=0.162
Accuracy=0.952
```


▼ Making prediction on new data

```
▶ n=random.randint(0,9999)
plt.imshow(x_test[n])
plt.show
```

```
↳ <function matplotlib.pyplot.show(*args, **kw)>
```

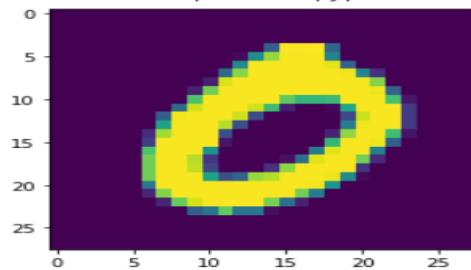

Plot graph for accuracy and loss

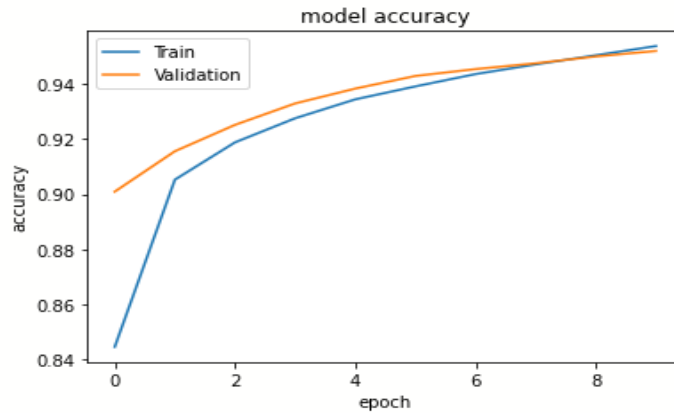

Confusion Matrix

```

test_predict = model.predict(x_test)
# Get the classification labels
test_predict_labels = np.argmax(test_predict, axis=1)
confusion_matrix = tf.math.confusion_matrix(labels=y_test, predictions=test_predict_labels)
print('Confusion matrix of the test set:\n', confusion_matrix)

```

Confusion matrix of the test set:

```

tf.Tensor(
[[ 965    0    1    1    0    4    6    1    2    0]
 [   0 1117    2    2    1    1    3    2    7    0]
 [   6    2  977   13    5    1    7    8   12    1]
 [   1    0    9  960    1    9    1   10   13    6]
 [   1    1    4    0  939    1    8    3    3   22]
 [   9    1    2   19    3  823   11    2   14    8]
 [   9    3    2    2   10    7  919    1    5    0]
 [   1   10   18    7    5    1    0  968    1   17]
 [   3    1    3   18    7    7    7    9  916    3]
 [   8    8    0   12   22    3    1   12    6  937]], shape=(10, 10), dtype=int32)


```

Conclusion

With above code we can see that, throughout the epochs, our model accuracy increases and loss decreases that is good since our model gains confidence with our prediction

This indicates the model is trained in a good way

1. The two loss(loss and val_loss) are decreasing and the accuracy (accuracy and val_accuracy) increasing.
2. The val_accuracy is the measure of how good the model is predicting so, it is observed that the model is well trained after 10 epochs

| | | |
|--|--|--|
|  Sinhgad Institutes | Name of the Student: _____ Roll no: _____ | |
| | CLASS: - B.E [IT] Division: _____ Course: - LP-IV | |
| Experiment No. 3 | | |
| **Build the Image classification model by dividing the model into following 4 stages: ** | | |
| Date of Performance: / /23 | Sign with Date | <div style="border: 1px solid black; padding: 5px; text-align: center;"> Marks: / 10 </div> <div style="border: 1px solid black; height: 30px; margin-top: 5px;"></div> |

Lab. Assignment No – 3

Aim: Build the Image classification model by dividing the model into following 4 stages:

- a. Loading and preprocessing the image data**
- b. Defining the model's architecture**
- c. Training the model**
- d. Estimating the model's performance**

Objective:

1. To be able to apply deep learning algorithms to solve problems of moderate complexity
1. Understand how a model is trained and evaluated.
2. Classifying images from the image dataset.
3. Our main goal is to train a neural network (using Keras) to obtain > 90% accuracy on image dataset..
4. To apply the algorithm to a real-world problem, optimize the models learned and report on the expected accuracy that can be achieved by applying the models

Outcomes:

At the end of the assignment the students should able-

1. Learn and Use various Deep Learning tools and packages.

2. Build and train a deep Neural Network models for use in various applications.
3. Apply Deep Learning techniques like CNN, RNN Auto encoders to solve real word Problems.
4. Evaluate the performance of the model build using Deep Learning.

Solution Expected

Implement and train a Convolutional neural network (CNN) on an hand-written digits image dataset called MNIST and improve model generalisation by achieving increased accuracy and decreased loss where model gains good confidence with the prediction.

Methodology to be used

- Deep Learning
- Convolutional Neural Network

Infrastructure: Desktop/ laptop system with Linux /Ubuntu 16.04 or higher (64-bit)/ Windows OS/Mac OS

Software used: LINUX/ Windows OS/ Virtual Machine/ IOS, Anaconda distribution, Jupyter notebook, python 3.9.12

Theory:

Deep Learning has been proved that its a very powerful tool due to its ability to handle huge amounts of data. The use of hidden layers exceeds traditional techniques, especially for pattern recognition. One of the most popular Deep Neural Networks is Convolutional Neural Networks (CNN).

Convolutional Neural Networks (CNNs)

A convolutional neural network (CNN) is a type of Artificial Neural Network (ANN) used in image recognition and processing which is specially designed for processing data (pixels). The goal of a CNN is to learn higher-order features in the data via convolutions. They are well suited to object recognition with images and consistently top image classification competitions. They can identify faces, individuals, street signs, platypuses,

and many other aspects of visual data. CNNs overlap with text analysis via optical character recognition, but they are also useful when analyzing words⁶ as discrete textual units. They're also good at analyzing sound. The efficacy of CNNs in image recognition is one of the main reasons why the world recognizes the power of deep learning. CNNs are good at building position and (somewhat) rotation invariant features from raw image data. CNNs are powering major advances in machine vision, which has obvious applications for self-driving cars, robotics, drones, and treatments for the visually impaired. The structure of image data allows us to change the architecture of a neural network in a way that we can take advantage of this structure. With CNNs, we can arrange the neurons in a three-dimensional structure for which we have the following:

1. Width
2. Height
3. Depth

These attributes of the input match up to an image structure for which we have:

1. Image width in pixels
2. Image height in pixels
3. RGB channels as the depth

We can consider this structure to be a three-dimensional volume of neurons. A significant aspect to how CNNs evolved from previous feed-forward variants is how they achieved computational efficiency with new layer types.

CNN Architecture Overview

CNNs transform the input data from the input layer through all connected layers into a set of class scores given by the output layer. There are many variations of the CNN architecture, but they are based on the pattern of layers, as demonstrated in Figure 1 (below).

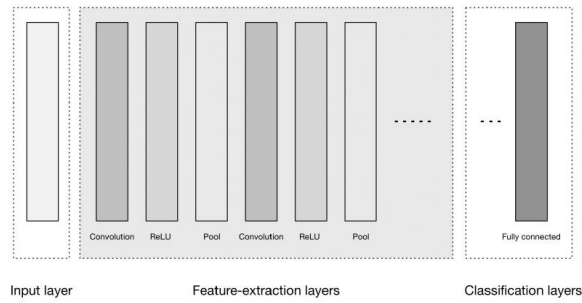


Figure 1. High-level general CNN architecture

Figure 1 depicts three major groups:

1. Input layer

- An image matrix (volume) of dimension $(h \times w \times d)$
- A filter $(f_h \times f_w \times d)$
- Outputs a volume dimension $(h - f_h + 1) \times (w - f_w + 1) \times 1$



Figure 2: Image matrix multiplies kernel or filter matrix

The input layer accepts three-dimensional input generally in the form spatially of the size (width \times height) of the image and has a depth representing the color channels (generally three for RGB color channels) as shown in fig 2 above.

2. Feature-extraction (learning) layers

The feature-extraction layers have a general repeating pattern of the sequence as shown in fig 1 above of -:

A. Convolution layer

We express the Rectified Linear Unit (ReLU) activation function as a layer in the diagram in fig 1. convolutional layers transform the input data by using a patch of locally connecting neurons from the previous layer

B. Pooling layer

These layers find a number of features in the images and progressively construct higher-order features. This corresponds directly to the ongoing theme in deep learning by which features are automatically learned as opposed to traditionally hand engineered.

3. Classification layers

Finally we have the classification layers in which we have one or more fully connected layers to take the higher-order features and produce class probabilities or scores. These layers are fully connected to all of the neurons in the previous layer, as their name implies. The output of these layers produces typically a two dimensional output of the dimensions $[b \times N]$, where b is the number of examples in the mini-batch and N is the number of classes we're interested in scoring.

Multilayer neural networks vs CNN

In traditional multilayer neural networks, the layers are fully connected and every neuron in a layer is connected to every neuron in the next layer whereas The neurons in the layers of a CNN are arranged in three dimensions to match the input volumes. Here, depth means the third dimension of the activation volume, not the number of layers, as in a multilayer neural network.

Evolution of the connections between layers

Another change is how we connect layers in a convolutional architecture. Neurons in a layer are connected to only a small region of neurons in the layer before it. CNNs retain a layer-oriented architecture, as in traditional multilayer networks, but have different types of layers. Each layer transforms the 3D input volume from the previous layer into a 3D output volume of neuron activations with some differentiable function that might or might not have parameters, as demonstrated in Figure 1.

Input Layers

Input layers are where we load and store the raw input data of the image for processing in the network. This input data specifies the width, height, and number of channels. Typically, the number of channels is three, for the RGB values for each pixel.

Convolutional Layers

Convolutional layers are considered the core building blocks of CNN architectures. As Figure 2 illustrates, convolutional layers transform the input data by using a patch of locally connecting neurons from the previous layer. The layer will compute a dot product between the region of the neurons in the input layer and the weights to which they are locally connected in the output layer.

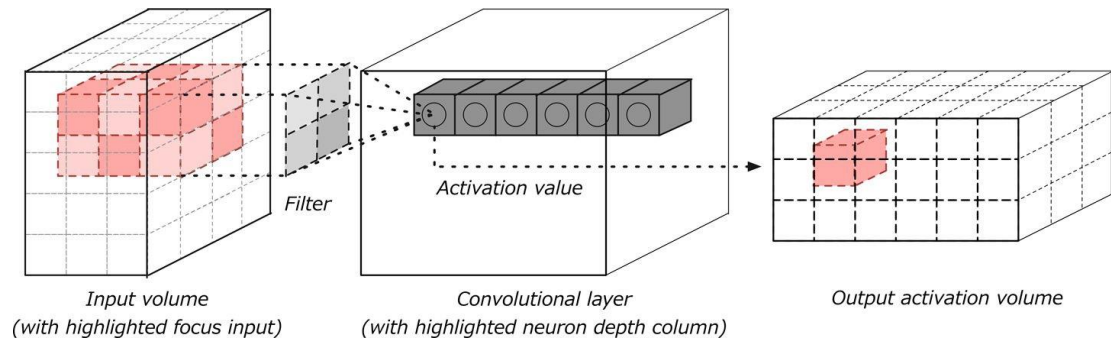


Figure 2. Convolution layer with input and output volumes

The resulting output generally has the same spatial dimensions (or smaller spatial dimensions) but sometimes increases the number of elements in the third dimension of the output (depth dimension).

TensorFlow is an open-source platform for machine learning. Keras is the high-level application programming interface (API) of TensorFlow. Using Keras, we can rapidly develop a prototype system and test it out. This is the first in a three-part series on using TensorFlow for supervised classification tasks.

STEPS: To implement Convolutional Neural Network for image classification

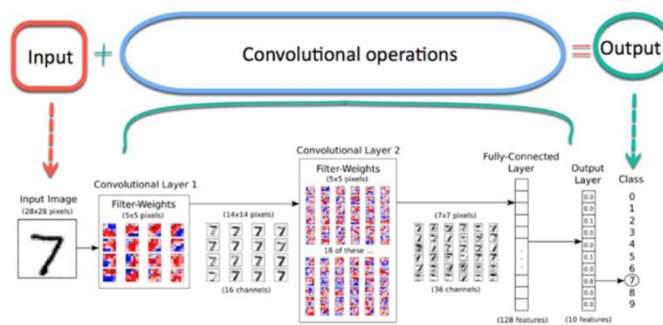


Figure 2. Image Classification model using CNN with python

CNN:

Now imagine there is an image of a bird, and you want to identify it whether it is really a bird or something other. The first thing you should do is feed the pixels of the image in the form of arrays to the input layer of the neural network (MLP networks used to classify such things). The hidden layers carry Feature Extraction by performing various calculations and operations. There are multiple hidden layers like the convolution, the ReLU, and the pooling layer that performs feature extraction from your image. So finally, there is a fully connected layer that you can see which identifies the exact object in the image. You can understand very easily from the following figure:

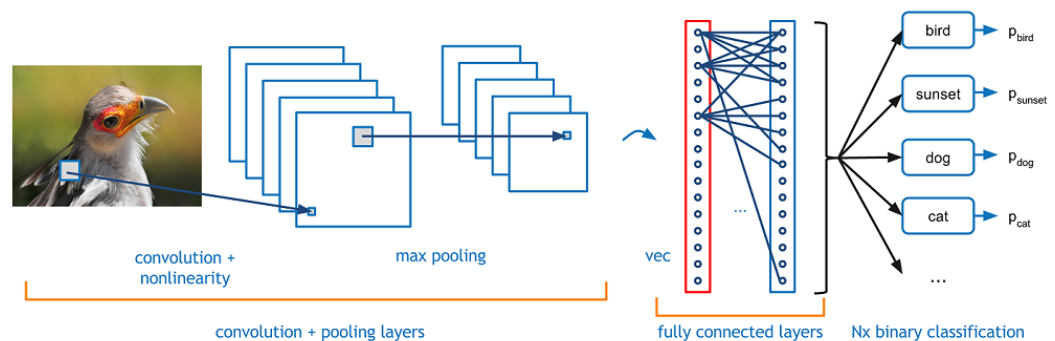


Figure 2. Convolution and pooling layers in CNN

Convolution:-

Convolution Operation involves matrix arithmetic operations and every image is represented in the form of an array of values (pixels).

Let us understand example:

$$a = [2, 5, 8, 4, 7, 9]$$

$$b = [1, 2, 3]$$

In Convolution Operation, the arrays are multiplied one by one element-wise, and the product is grouped or summed to create a new array that represents $a * b$.

The first three elements of matrix **a** are now multiplied by the elements of matrix **b**. The product is summed to get the result and stored in a new array of $a * b$.

This process remains continuous until the operation gets completed.

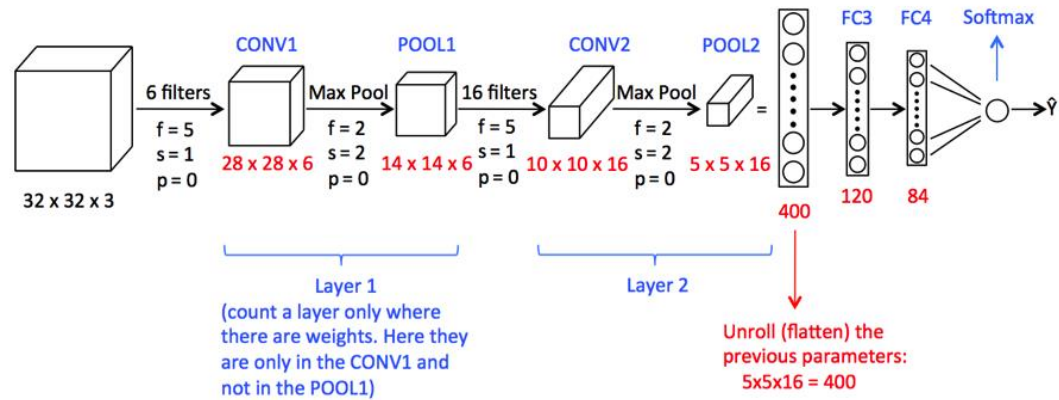


Figure 2. Sequence of Convolution and pooling layers in CNN

Pooling:

After the convolution, there is another operation called pooling. So, in the chain, convolution and pooling are applied sequentially on the data in the interest of extracting some features from the data. After the sequential convolutional and pooling layers, the data is flattened into a feed-forward neural network which is also called a Multi-Layer Perceptron.

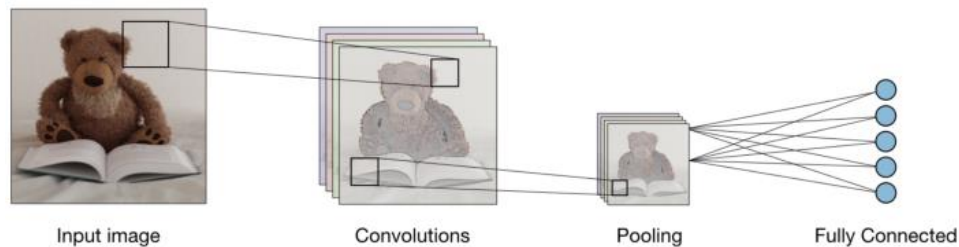


Fig: Data flattening into a feed-forward neural network

Thus, we have seen steps that are important for building CNN model.

Code Snippets**#Importing Libraries**

```
import numpy as np
import pandas as pd
import random
import tensorflow as tf
import matplotlib.pyplot as plt
```

```
from sklearn.metrics import accuracy_score  
  
from tensorflow.keras.models import Sequential  
from tensorflow.keras.layers import Flatten, Conv2D, Dense,  
MaxPooling2D  
from tensorflow.keras.optimizers import SGD  
from tensorflow.keras.utils import to_categorical  
from tensorflow.keras.datasets import mnist
```

Loading and preprocessing the image data

Loading the MNIST dataset is very simple using Keras. The dataset is so popular, that you can use access it through datasets.mnist and use the load_data() function to get a train and a test set.

The dataset contains 28x28 images showing handwritten digits.

```
(X_train, y_train), (X_test, y_test) = mnist.load_data()
```

If you print the shape the any of the sets you will see more information about the samples.

For example, printing the shape of the train set will get you (60000, 28, 28):

60000: This is the number of samples in the set.

28: This is the height of each image.

28: This is the width of each image.

So we have 60,000 28x28 images.

```
print(X_train.shape)
```

```
(60000, 28, 28)
```

Anytime you are using a neural network, you should pay special attention to the range of the input values you will be feeding it. In our case, each image is a matrix of 28x28 pixels.

Let's print the range of these values to understand what's the scale we are working with:

```
X_train[0].min(), X_train[0].max()  
(0, 255)
```

The pixel values in our images are between 0 (black) to 255 (white).

Neural networks have a much easier time converging when they work with values that don't vary a lot in scale. It's a common practice to scale every input to fit a small range like 0 to 1 or -1 to 1.

We should do that here, and scale our pixels to a range that goes from 0 (black) to 1 (white).

Here is the formula to scale a value: $\text{scaled_value} = (\text{original_value} - \text{min}) / (\text{max} - \text{min})$. In our case, the minimum value is 0 and the maximum value is 255.

Let's use this to scale our train and test sets (notice that you can get rid of the 0.0 in the formula below but I'm leaving them there for clarity purposes):

```
X_train = (X_train - 0.0) / (255.0 - 0.0)  
X_test = (X_test - 0.0) / (255.0 - 0.0)  
X_train[0].min(), X_train[0].max()  
(0.0, 1.0)
```


We can now plot the first 20 images on the train set:

```
def plot_digit(image, digit, plt, i):  
    plt.subplot(4, 5, i + 1)
```

```

plt.imshow(image, cmap=plt.get_cmap('gray'))
plt.title(f'Digit: {digit}')
plt.xticks([])
plt.yticks([])
plt.figure(figsize=(16, 10))
for i in range(20):
    plot_digit(X_train[i], y_train[i], plt, i)
plt.show()

```

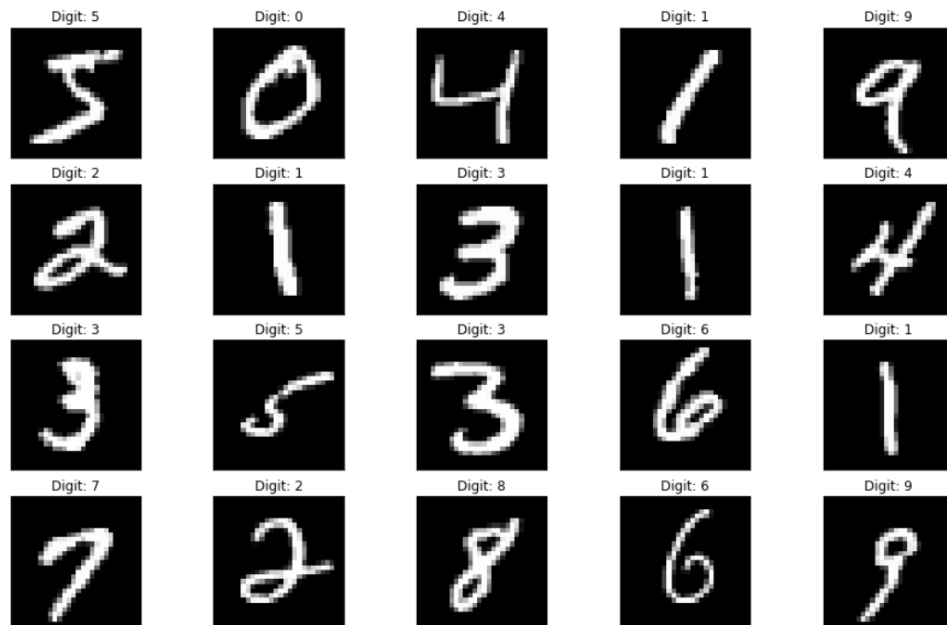

In Computer Vision, we usually use 4 dimensions to represent a set of images:

The total number of images (we call this "batch size")

The width of each image

The height of each image

The number of channels of each image

As you saw before, our train set has 3 dimensions only; we are missing the number of channels. We need to transform our data by adding that fourth dimension. Since these images are grayscale, that fourth dimension will be 1.

We can use numpy's reshape() function to reshape all of the data by adding that extra dimension.

```
X_train = X_train.reshape((X_train.shape + (1,)))
```

```
X_test = X_test.reshape((X_test.shape + (1,)))
```

Finally, let's take a look at the format of our target values (y_train). Let's print the first 20 samples in our train set:

```
y_train[0:20]
```

```
array([5, 0, 4, 1, 9, 2, 1, 3, 1, 4, 3, 5, 3, 6, 1, 7, 2, 8, 6, 9],  
      dtype=uint8)
```

We are representing the target digits using integers (the digit 5 is represented with value 5, the digit 0 with value 0, etc.) This is important because it determines which loss function we should use to optimize our neural network.

We have two options:

Use integers for our target values (as they are now), and make sure we use the "Sparse Categorical Cross-Entropy" loss function.

One-hot encode the targets and use the "Categorical Cross-Entropy" loss function.

The easiest solution is to leave the targets as they are, so let's move on to creating the model.

Defining the model's architecture

There are several ways to create a model in Keras. In this example, we are going to use Kera's Sequential API because it's very simple to use.

Let's break down the definition of model below step by step:

First, we are going to define the first hidden layer of our network: A convolutional layer with 32 filters and a 3x3 kernel. This layer will use a ReLU activation function. The goal of this layer is to generate 32 different representations of an image, each one of 26x26. The 3x3 kernel will discard

a pixel on each side of the original image and that's way we get 26x26 squares instead of 28x28.

Notice how we also need to define the input shape of the network as part of that first layer. Remember that our images are 28x28 with a single color channel, so that leads to the (28, 28, 1) shape.

Right after that first layer, we are going to do a 2x2 max pooling to downsample the amount of information generated by the convolutional layer. This operation will half the size of the filters. Remember we start with 32 filters of 26x26, so after this operation will have 32 filters of 13x13.

We then take the (13, 13, 32) vector and flatten it to a (5408,) vector. Notice that $13 \times 13 \times 32 = 5408$.

Finally, we add a couple more fully-connected layers (also called Dense layers.) Notice how the output layer has size 10 (one for each of our possible digit values) and a softmax activation. Softmax ensures we get a probability distribution indicating the most likely digit in the image.

```
model = Sequential([  
    Conv2D(32, (3, 3), activation="relu", input_shape=(28, 28, 1)),  
    MaxPooling2D((2, 2)),  
    Flatten(),  
    Dense(100, activation="relu"),  
    Dense(10, activation="softmax")  
])
```

We now have our model. The next step is to define how we want to train it: Let's use an SGD optimizer (Stochastic Gradient Descent) with 0.01 as the learning rate.

As we discussed before, we need to use the `sparse_categorical_crossentropy` loss because our target values are represented as integers.

And we are going to compute accuracy of our model as we train it.

Notice in the summary of the model the shape of the vectors as they move through the layers we defined. They should look familiar after reading the explanation of our model above.

```
optimizer = SGD(learning_rate=0.01, momentum=0.9)
model.compile(
    optimizer=optimizer,
    loss="sparse_categorical_crossentropy",
    metrics=["accuracy"]
)
model.summary()
```

Model: "sequential_1"

| Layer (type) | Output Shape | Param # |
|--------------------------------------|---------------------------|---------------|
| conv2d_1 (Conv2D) | (None, 26, 26, 32) | 320 |
| max_pooling2d_1 (MaxPooling2) | (None, 13, 13, 32) | 0 |
| flatten_1 (Flatten) | (None, 5408) | 0 |
| dense_2 (Dense) | (None, 100) | 540900 |
| dense_3 (Dense) | (None, 10) | 1010 |

```
=====
```

```
=====
```

Total params: 542,230

Trainable params: 542,230

Non-trainable params: 0

#Training and testing the model

At this point we are ready to fit our model on the train set.

For this example, we are going to run batches of 32 samples through our model for 10 iterations (epochs.) This should be enough to get a model with good predictive capabilities.

Note: This network is fairly shallow so it shouldn't take a long time to train it on a CPU. If you have access to a GPU it should be much faster.

model.fit(X_train, y_train, epochs=10, batch_size=32)

Epoch 1/10

1875/1875 [=====] - 7s 3ms/step - loss: 0.2412 - accuracy: 0.9252

Epoch 2/10

1875/1875 [=====] - 6s 3ms/step - loss: 0.0847 - accuracy: 0.9748

Epoch 3/10

1875/1875 [=====] - 6s 3ms/step - loss: 0.0535 - accuracy: 0.9831

Epoch 4/10

1875/1875 [=====] - 6s 3ms/step - loss: 0.0383 - accuracy: 0.9886

Epoch 5/10

1875/1875 [=====] - 6s 3ms/step - loss: 0.0288 - accuracy: 0.9909

Epoch 6/10

1875/1875 [=====] - 6s 3ms/step - loss:
0.0212 - accuracy: 0.9936

Epoch 7/10

1875/1875 [=====] - 6s 3ms/step - loss:
0.0163 - accuracy: 0.9951

Epoch 8/10

1875/1875 [=====] - 6s 3ms/step - loss:
0.0129 - accuracy: 0.9961

Epoch 9/10

1875/1875 [=====] - 6s 3ms/step - loss:
0.0092 - accuracy: 0.9973

Epoch 10/10


1875/1875 [=====] - 6s 3ms/step - loss:
0.0072 - accuracy: 0.9983

<keras.callbacks.History at 0x7ff9e24c1a20>

At this point you should have a model that scored above 99% accuracy on the train set.

Now it's time to test it with a few of the images that we set aside on our test set. Let's run 20 random images through the model and display them together with the predicted digit:

```
plt.figure(figsize=(16, 10))
for i in range(20):
    image = random.choice(X_test).squeeze()
    digit = np.argmax(model.predict(image.reshape((1, 28, 28, 1)))[0],
axis=-1)
    plot_digit(image, digit, plt, i)
plt.show()
```

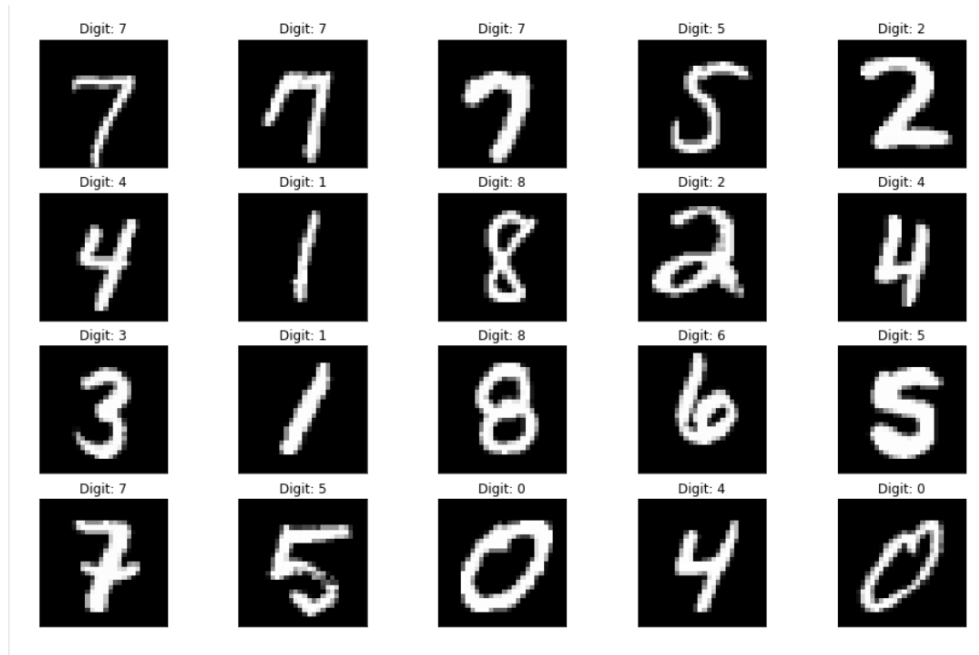

The results look pretty good!

To get a much better idea about the quality of the predictions, we can run the entire test set (10,000 images) through the model and compute the final accuracy. To do this we can use the `accuracy_score()` function from SciKit-Learn passing a couple of arguments:

True values: The correct digit expected for each image. These are the values we have stored in `y_test`.

Predicted values: The predictions that our model made. These are the results of our model.

The final accuracy will be the value printed after running the cell.

```
predictions = np.argmax(model.predict(X_test), axis=-1)
```

```
accuracy_score(y_test, predictions)
```

```
0.9855
```

Estimating the model's performance

Now the trained model needs to be evaluated in terms of performance.

```

score      =      model.evaluate(X_test,      y_test,      verbose=0)
print('Test      loss:',      score[0])      #Test      loss:      0.0296396646054
print('Test accuracy:', score[1]) #Test accuracy: 0.9904

```

Test accuracy 99%+ implies the model is trained well for prediction. If we visualize the whole training log, then with more number of epochs the loss and accuracy of the model on training and testing data converged thus making the model a stable one.

```


import os
# plotting the metrics
fig = plt.figure()
plt.subplot(2,1,1)
plt.plot(model_log.history['acc'])
plt.plot(model_log.history['val_acc'])
plt.title('model accuracy')
plt.ylabel('accuracy')
plt.xlabel('epoch')
plt.legend(['train', 'test'], loc='lower right')
plt.subplot(2,1,2)
plt.plot(model_log.history['loss'])
plt.plot(model_log.history['val_loss'])

```

```

.title('model      loss')
plt.ylabel('loss')
plt.xlabel('epoch')
plt.legend(['train', 'test'], loc='upper right')
plt.tight_layout()
fig

```

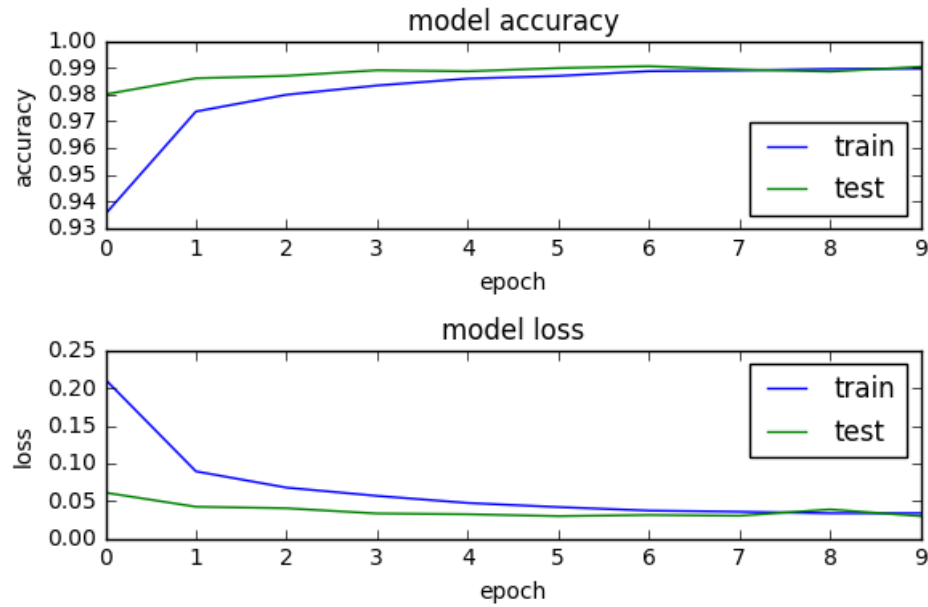

Saving the model to disk for reuse

Now, the trained model needs to be serialized. The architecture or structure of the model will be stored in a json file and the weights will be stored in hdf5 file format.

```
#Save the model to JSON
# serialize model to JSON
model_digit_json = model.to_json()
with open("model_digit.json", "w") as json_file:
    json_file.write(model_digit_json)
# serialize weights to HDF5
model.save_weights("model_digit.h5")
print("Saved model to disk")
```


Hence the saved model can be reused later or easily ported to other environments too

Conclusion:

Thus, we have implemented the Image classification model using CNN. With above code we can see that sufficient accuracy has been met. Throughout the epochs, our model accuracy increases and loss decreases that is good since our model gains confidence with our prediction

This indicates the model is trained in a good way

1. The loss is decreasing and the accuracy is increasing with every epoch.
2. The test accuracy is the measure of how good the model is predicting so, it is observed that the model is well trained after 10 epochs

| | | |
|--|--|--|
|  <p>CLASS: - B.E [IT] Sinhgad Institutes</p> | Name of the Student: _____ Roll no: ____ | |
| | Division: _____ Course: - LP-IV | |
| | Experiment No. 4 | |
| ** Use Autoencoder to implement anomaly detection. Build the model by using: ** | | |
| Date of Performance: / /23 | | <div style="border: 1px solid black; padding: 5px; display: inline-block;">Marks: / 10</div> <div style="border: 1px solid black; width: 100px; height: 30px; margin-top: 5px;"></div> |
| Sign with Date | | <div style="border: 1px solid black; width: 100px; height: 30px; margin-top: 5px;"></div> |

Lab Assignment:-04

Aim: Use Autoencoder to implement anomaly detection. Build the model by using:


- a. Import required libraries**
- b. Upload / access the dataset**
- c. Encoder converts it into latent representation**
- d. Decoder networks convert it back to the original input**
- e. Compile the models with Optimizer, Loss, and Evaluation Metrics**

Theory

AutoEncoders are widely used in anomaly detection. The reconstruction errors are used as the anomaly scores. Let us look at how we can use AutoEncoder for anomaly detection using TensorFlow. Import the required libraries and load the data. Here we are using the ECG data which consists of labels 0 and 1.

Label 0 denotes the observation as an anomaly and label 1 denotes the observation as normal.

Objectives to be achieved 1) Use Autoencoder to implement anomaly detection. Methodology to be used AutoEncoder is a generative unsupervised deep learning algorithm used for reconstructing high dimensional input data using a neural network with a narrow bottleneck layer in the middle which contains the latent representation of the input data.

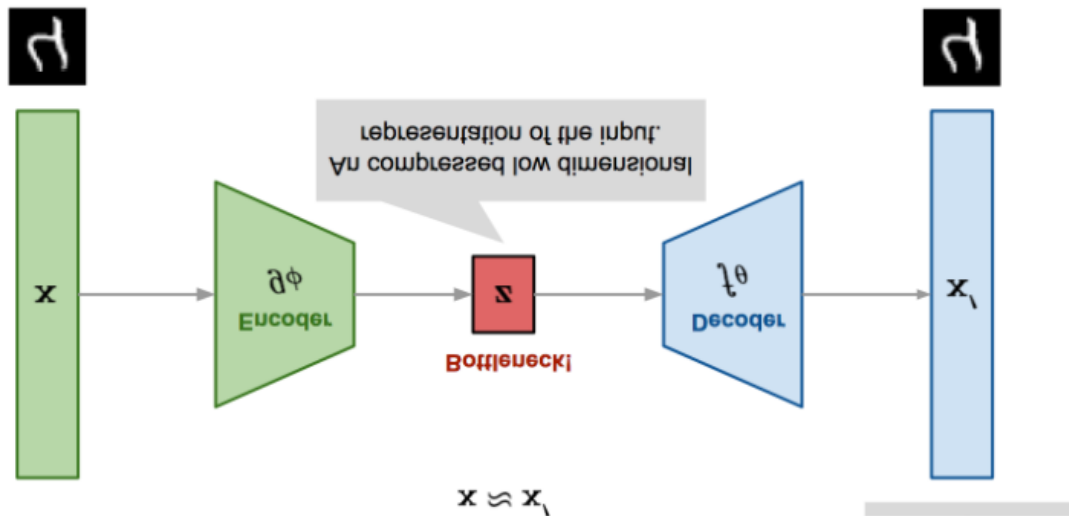

Import required libraries

```
import pandas as pd
import numpy as np
import tensorflow as tf
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.model_selection import train_test_split

from sklearn.preprocessing import StandardScaler
from sklearn.metrics import confusion_matrix, recall_score,
accuracy_score, precision_score

RANDOM_SEED = 2021
TEST_PCT = 0.3
LABELS = ["Normal", "Fraud"]
```

Read the dataset

I had downloaded the data from Kaggle and stored it in the local directory.

```
dataset = pd.read_csv("creditcard.csv")
```

Exploratory Data Analysis


```
#check for any nullvalues
print("Any nulls in the dataset
",dataset.isnull().values.any() )
print('-----')
print("No. of unique labels ",
len(dataset['Class'].unique()))
print("Label values
",dataset.Class.unique())

#0 is for normal credit card transaction
#1 is for fraudulent credit card
transaction
print('-----')
print("Break down of the Normal and Fraud
Transactions")
print(pd.value_counts(dataset['Class'],
sort = True) )
```


Visualize the dataset

plotting the number of normal and fraud transactions in the dataset.


```
#Visualizing the imbalanced dataset
count_classes =
pd.value_counts(dataset['Class'], sort =
True)
count_classes.plot(kind = 'bar', rot=0)
plt.xticks(range(len(dataset['Class'].uni
que())), dataset.Class.unique())
plt.title("Frequency by observation
number")
plt.xlabel("Class")
plt.ylabel("Number of Observations");
```

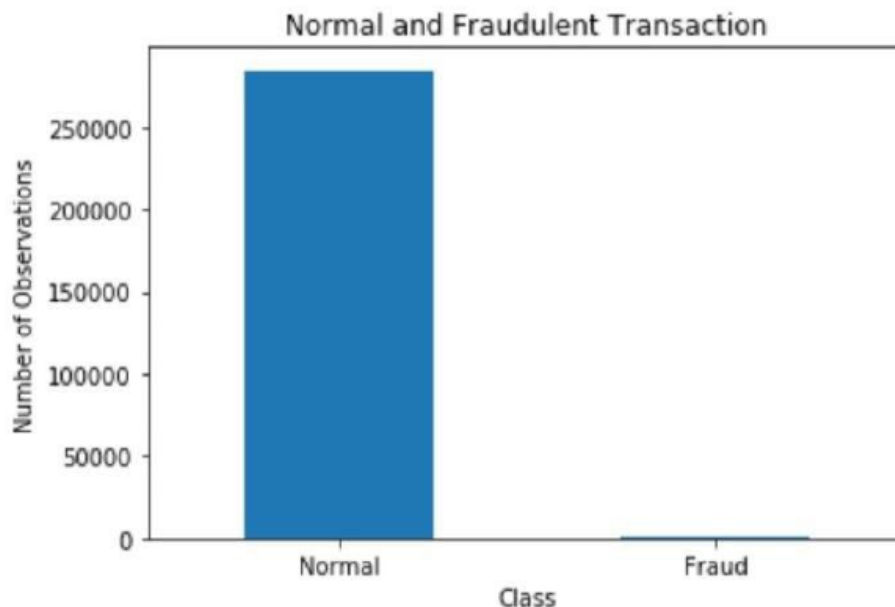

Visualizing the amount for normal and fraud transactions.

```
# Save the normal and fraudulent transactions in separate dataframe
normal_dataset = dataset[dataset.Class == 0]
fraud_dataset = dataset[dataset.Class == 1]

#Visualize transaction amounts for normal and fraudulent transactions
bins = np.linspace(200, 2500, 100)
plt.hist(normal_dataset.Amount, bins=bins, alpha=1, density=True, label='Normal')
plt.hist(fraud_dataset.Amount, bins=bins, alpha=0.5, density=True, label='Fraud')
plt.legend(loc='upper right')
plt.title("Transaction amount vs Percentage of transactions")
plt.xlabel("Transaction amount (USD)")
plt.ylabel("Percentage of transactions");
plt.show()
```

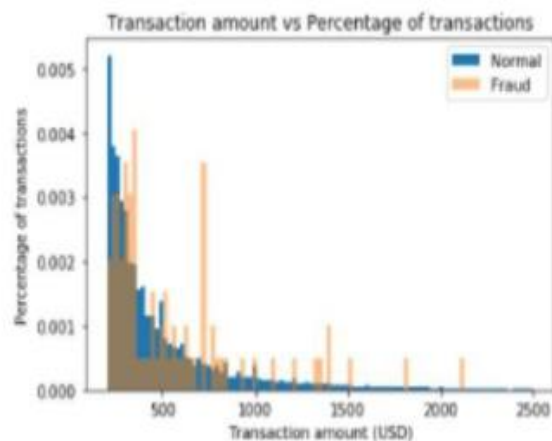

Create train and test dataset

Checking on the dataset

| V6 | V7 | V8 | V9 | V10 | ... | V22 | V23 | V24 | V25 | V26 | V27 | V28 | Time | Amount | Class |
|-----------|-----------|-----------|-----------|-----------|-----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------|--------|-------|
| 0.452388 | 0.238099 | 0.090988 | 0.383787 | 0.580794 | ... | 0.277838 | -0.110474 | 0.099928 | 0.128539 | -0.109118 | 0.133588 | -0.021053 | 0.0 | 149.82 | 0 |
| -0.082301 | -0.078803 | 0.085182 | -0.255425 | -0.100974 | ... | -0.038972 | 0.191288 | -0.338848 | 0.107170 | 0.125895 | -0.008983 | 0.014724 | 0.0 | 2.09 | 0 |
| 1.800499 | 0.791401 | 0.247078 | -1.514884 | 0.307843 | ... | 0.771879 | 0.989412 | -0.889281 | -0.327842 | -0.138097 | -0.855383 | -0.069752 | 1.0 | 378.95 | 0 |
| 1.247203 | 0.337809 | 0.377438 | -1.387024 | -0.054952 | ... | 0.005274 | -0.180321 | -1.179579 | 0.047376 | -0.221829 | 0.082723 | 0.091488 | 1.0 | 123.80 | 0 |
| 0.899621 | 0.583841 | -0.270531 | 0.817739 | 0.783074 | ... | 0.798278 | -0.137488 | 0.141287 | -0.206010 | 0.902292 | 0.218422 | 0.210153 | 2.0 | 89.99 | 0 |

Time and Amount are the columns that are not scaled, so applying `StandardScaler` to only Amount and Time columns. Normalizing the values between 0 and 1 did not work great for the dataset.

```
sc=StandardScaler()
dataset['Time'] =
sc.fit_transform(dataset['Time'].values.r
eshape(-1, 1))
dataset['Amount'] =
sc.fit_transform(dataset['Amount'].values
.reshape(-1, 1))
```

The last column in the dataset is our target variable.

The last column in the dataset is our target variable.

```
raw_data = dataset.values
# The last element contains if the
transaction is normal which is
represented by a 0 and if fraud then 1
labels = raw_data[:, -1]

# The other data points are the
electrocardiogram data
data = raw_data[:, 0:-1]

train_data, test_data, train_labels,
test_labels = train_test_split(
    data, labels, test_size=0.2,
    random_state=2021
)
```

Normalise the data to have a value between 0 and 1

Normalize the data to have a value between 0 and 1

```
min_val = tf.reduce_min(train_data)
max_val = tf.reduce_max(train_data)

train_data = (train_data - min_val) /
(max_val - min_val)
test_data = (test_data - min_val) /
(max_val - min_val)

train_data = tf.cast(train_data,
tf.float32)
test_data = tf.cast(test_data,
tf.float32)
```

Use only normal transactions to train the Autoencoder.

```
train_labels = train_labels.astype(bool)
test_labels = test_labels.astype(bool)

#creating normal and fraud datasets
normal_train_data =
train_data[~train_labels]
normal_test_data =
test_data[~test_labels]

fraud_train_data =
train_data[train_labels]
fraud_test_data = test_data[test_labels]
print(" No. of records in Fraud Train
Data=",len(fraud_train_data))
print(" No. of records in Normal Train
data=",len(normal_train_data))
print(" No. of records in Fraud Test
Data=",len(fraud_test_data))
print(" No. of records in Normal Test
data=",len(normal_test_data))
```


Set the training parameter values

Set the training parameter values

```
nb_epoch = 50
batch_size = 64
input_dim = normal_train_data.shape[1]
#num of columns, 30
encoding_dim = 14
hidden_dim_1 = int(encoding_dim / 2) #
hidden_dim_2=4
learning_rate = 1e-7
```

Create the Autoencoder

The architecture of the autoencoder is shown below.

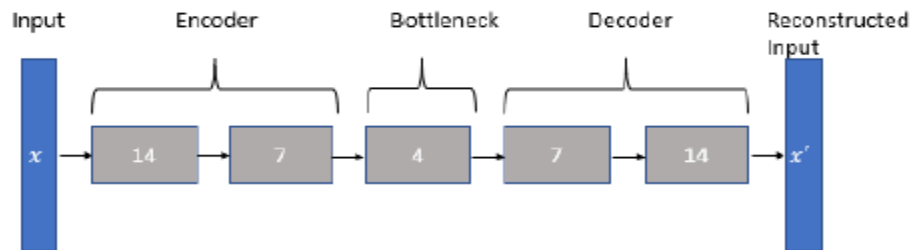

```
#input Layer
input_layer =
tf.keras.layers.Input(shape=(input_dim,
))

#Encoder

encoder =
tf.keras.layers.Dense(encoding_dim,
activation="tanh",
activity_regularizer=tf.keras.regularizer
s.l2(learning_rate))(input_layer)
encoder=tf.keras.layers.Dropout(0.2)
(encoder)
encoder =
tf.keras.layers.Dense(hidden_dim_1,
activation='relu')(encoder)
encoder =
tf.keras.layers.Dense(hidden_dim_2,
activation=tf.nn.leaky_relu)(encoder)

# Decoder
decoder =
tf.keras.layers.Dense(hidden_dim_1,
activation='relu')(encoder)
decoder=tf.keras.layers.Dropout(0.2)
(decoder)
decoder =
tf.keras.layers.Dense(encoding_dim,
activation='relu')(decoder)
decoder =
tf.keras.layers.Dense(input_dim,
activation='tanh')(decoder)

#Autoencoder
```



```
autoencoder =
tf.keras.Model(inputs=input_layer,
outputs=decoder)
autoencoder.summary()
```

```
Model: "functional_1"
Layer (type)                 Output Shape              Param #
-----
input_1 (InputLayer)         [(None, 30)]              0
dense (Dense)                 (None, 14)                434
dropout (Dropout)            (None, 14)                0
dense_1 (Dense)              (None, 7)                 105
dense_2 (Dense)              (None, 4)                 32
dense_3 (Dense)              (None, 7)                 35
dropout_1 (Dropout)          (None, 7)                 0
dense_4 (Dense)              (None, 14)               112
dense_5 (Dense)              (None, 30)               450
-----
Total params: 1,168
Trainable params: 1,168
Non-trainable params: 0
```

Define the callbacks for checkpoints and early stopping

```
cp =
tf.keras.callbacks.ModelCheckpoint(filepath="autoencoder_fraud.h5",

mode='min', monitor='val_loss',
verbose=2, save_best_only=True)
# define our early stopping
early_stop =
tf.keras.callbacks.EarlyStopping(
    monitor='val_loss',
    min_delta=0.0001,
    patience=10,
    verbose=1,
    mode='min',
    restore_best_weights=True
```

Compile the Autoencoder

```
autoencoder.compile(metrics=['accuracy'],  
loss='mean_squared_error',  
optimizer='adam')
```


Train the Autoencoder

```
history =  
autoencoder.fit(normal_train_data,  
normal_train_data,  
epochs=nb_epoch,  
batch_size=batch_size,  
shuffle=True,  
validation_data=  
(test_data, test_data),  
verbose=1,  
callbacks=[cp,  
early_stop]  
)
```

```
Epoch 11/25  
7085/7108 [*****>.] - ETA: 0s - loss: 5.3796e-04  
Epoch 00011: val_loss did not improve from 0.00053  
Restoring model weights from the end of the best epoch.  
7108/7108 [*****] - 8s 1ms/step - loss: 5.3799e-04 - val_loss: 5.3531e-04  
Epoch 00011: early stopping
```


Plot training and test loss

```
plt.plot(history['loss'], linewidth=2,  
label='Train')  
plt.plot(history['val_loss'],  
linewidth=2, label='Test')  
plt.legend(loc='upper right')  
plt.title('Model loss')  
plt.ylabel('Loss')  
plt.xlabel('Epoch')  
#plt.ylim(ymin=0.70,ymax=1)  
plt.show()
```

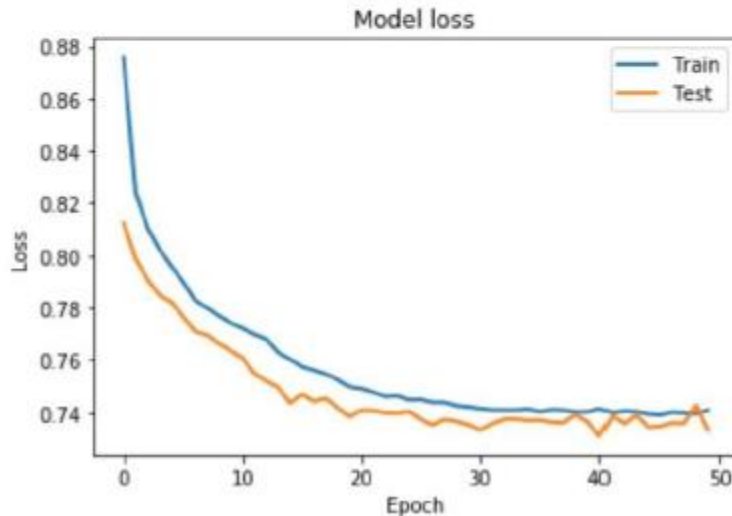

Anomalies are data points where the reconstruction loss is higher


To calculate the reconstruction loss on test data, predict the test data and calculate the mean square error between the test data and the reconstructed test data.

```
test_x_predictions =
autoencoder.predict(test_data)
mse = np.mean(np.power(test_data -
test_x_predictions, 2), axis=1)
error_df =
pd.DataFrame({'Reconstruction_error':
mse,
'True_class':
test_labels})
```

Plotting the test data points and their respective reconstruction error sets a threshold value to visualize if the threshold value needs to be adjusted.


```
threshold_fixed = 50
groups = error_df.groupby('True_class')
fig, ax = plt.subplots()

for name, group in groups:
    ax.plot(group.index,
            group.Reconstruction_error, marker='o',
            ms=3.5, linestyle='',
            label= "Fraud" if name == 1
            else "Normal")
    ax.hlines(threshold_fixed, ax.get_xlim()
    [0], ax.get_xlim()[1], colors="r",
    zorder=100, label='Threshold')
    ax.legend()
plt.title("Reconstruction error for
normal and fraud data")
plt.ylabel("Reconstruction error")
plt.xlabel("Data point index")
plt.show();
```

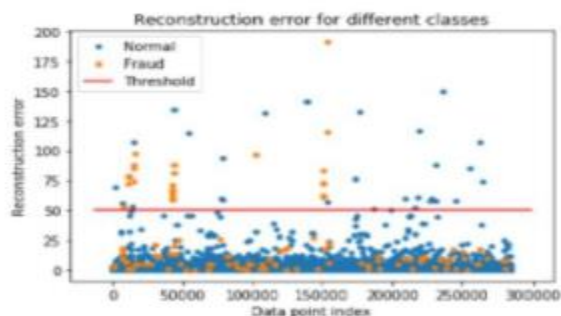

Conclusion:

Autoencoders can be used as an anomaly detection algorithm when we have an unbalanced dataset where we have a lot of good examples and only a few anomalies. Autoencoders are trained to minimise reconstruction error. When we train the Autoencoders on normal data or good data, we can hypothesise that the anomalies will have higher reconstruction errors than the good or normal data.

| | | | |
|--|-----------------------------------|--|------------------------|
|  Sinhgad Institutes | Name of the Student: _____ | | Roll no: _____ |
| | CLASS: -B.E [IT] | | Division: _____ |
| | Course: - LP-IV | | |
| | Experiment No. 5 | | |
| ** Implement the Continuous Bag of Words (CBOW) Model. Stages can be: ** | | | |
| Date of Performance: <div style="border: 1px solid black; width: 100px; height: 20px; display: flex; align-items: center; justify-content: center;">/ /23</div> | | Sign with Date <div style="border: 1px solid black; width: 100px; height: 20px;"></div> | |
| | | <div style="border: 1px solid black; padding: 2px 5px;">Marks: / 10</div> | |

Lab. Assignment No – 5

AIM : Implement the Continuous Bag of Words (CBOW) Model. Stages can be:

- a. Data preparation
- b. Generate training data
- c. Train model
- d. Output

Theory :

- 1) What is NLP ?
- 2) What is Word embedding related to NLP ?
- 3) Explain Word2Vec techniques.
- 4) Enlist applications of Word embedding in NLP.
- 5) Explain CBOW architecture.
- 6) What will be input to CBOW model and Output to CBW model.
- 7) What is Tokenizer .
- 8) Explain window size parameter in detail for CBOW model.
- 9) Explain Embedding and Lambda layer from keras
- 10) What is yield()

Steps/ Algorithm

1. Dataset link and libraries :

Create any English 5 to 10 sentence paragraph as input

Import following data from keras :

```

keras.models import Sequential
keras.layers import Dense, Embedding, Lambda
keras.utils import np_utils
keras.preprocessing import sequence
keras.preprocessing.text import Tokenizer

```

Import Gensim for NLP operations : requirements :

Gensim runs on Linux, Windows and Mac OS X, and should run on any other platform that supports Python 3.6+ and NumPy. Gensim depends on the following software: Python, tested with versions 3.6, 3.7 and 3.8. NumPy for number crunching.

Ref: <https://analyticsindiamag.com/the-continuous-bag-of-words-cbow-model-in-nlp-hands-onimplementation-with-codes/>

- a) Import following libraries gensim and numpy set i.e. text file created. It should be preprocessed.
 - b) Tokenize every word from the paragraph. You can call in built tokenizer present in Gensim
 - c) Fit the data to tokenizer
 - d) Find total no of words and total no of sentences.
 - e) Generate the pairs of Context words and target words :
- e.g. cbow_model(data, window_size, total_vocab):

```

total_length = window_size*2
for text in data:
    text_len = len(text)
    for idx, word in enumerate(text):
        context_word = []
        target = []
        begin = idx - window_size
        end = idx + window_size + 1
        context_word.append([text[i] for i in range(begin, end) if 0 <= i < text_len and i
!= idx])
        target.append(word)
contextual = sequence.pad_sequences(context_word, total_length=total_length)

```

```
final_target = np_utils.to_categorical(target, total_vocab)
```

```
yield(contextual, final_target)
```

f) Create Neural Network model with following parameters . Model type : sequential

Layers : Dense , Lambda , embedding. Compile Options :

```
(loss='categorical_crossentropy', optimizer='adam')
```

g) Create vector file of some word for testing

e.g.:dimensions=100

```
vect_file = open('/content/gdrive/My Drive/vectors.txt', 'w')
```

```
vect_file.write('{} {} \n'.format(total_vocab,dimensions))
```

h) Assign weights to your trained model

e.g. weights = model.get_weights()[0]

for text, i in vectorize.word_index.items():

```
final_vec = ''.join(map(str, list(weights[i, :])))
```

```
vect_file.write('{} {} \n'.format(text, final_vec))
```

```
Close()
```

i) Use the vectors created in Gensim :


e.g. cbow_output =

```
gensim.models.KeyedVectors.load_word2vec_format('/content/gdrive/My
Drive/vectors.txt', binary=False)
```

j) choose the word to get similar type of words:

```
cbow_output.most_similar(positive=['Your word'])
```

Conclusion: The model tries to predict the target word by trying to understand the context of the surrounding words. Consider the same sentence as above, 'It is a pleasant day'. The model converts this sentence into word pairs in the form (contextword, targetword). The user will have to set the window size. If the window for the context word is 2 then the word pairs would look like this: ([it, a], is), ([is, pleasant], a), ([a, day], pleasant). With these word pairs, the model tries to predict the target word considered the context words.

| | | |
|---|---|--|
|  <p>CLASS: B.E [IT]</p> | Name of the Student: _____ Roll no: ____ | |
| | Division: _____ Course: - LP-IV | |
| | Experiment No. 6 | |
| | ** Object detection using Transfer Learning of CNN architectures .** | |
| Date of Performance: / /23 | Sign with Date | <div style="border: 1px solid black; padding: 5px; text-align: center;"> Marks: / 10 </div> <div style="border: 1px solid black; height: 30px; margin-top: 5px;"></div> |

Lab. Assignment No – 6

AIM Object detection using Transfer Learning of CNN architectures

- a. Load in a pre-trained CNN model trained on a large dataset
- b. Freeze parameters (weights) in model's lower convolutional layers
- c. Add custom classifier with several layers of trainable parameters to model
- d. Train classifier layers on training data available for task
- e. Fine-tune hyper parameters and unfreeze more layers as needed

Theory:

- 1) What is Transfer learning ?
- 2) What are pretrained Neural Network models ?
- 3) Explain Pytorch library in short.
- 4) What are advantages of Transfer learning.
- 5) What are applications of Transfer learning.
- 6) Explain Caltech 101 images dataset.
- 7) Explain Imagenet dataset .
- 8) list down basic steps for transfer learning.
- 9) What is Data augmentation?
- 10) How and why Data augmentation is done related to transfer learning?
- 11) Why preprocessing is needed on input data in Transfer learning.
- 12) What is PyTorch Transforms module. Explain following commands w.r.t it :

Compose([

RandomResizedCrop(size=256, scale=(0.8, 1.0)),

RandomRotation(degrees=15),

ColorJitter(),

RandomHorizontalFlip(),

CenterCrop(size=224), # Image net standards

.ToTensor(),

Normalize

13) Explain the Validation Transforms steps with Pytorch Transforms .

14) Explain VGG-16 model from Pytorch

Steps/ Algorithm

1. Dataset link and libraries :

<https://data.caltech.edu/records/mzrjq-6wc02>

separate the data into training, validation, and testing sets with a 50%, 25%, 25% split and then structured the directories as follows:

/datadir

/train

/class1

/class2

.

.

/valid

/class1

/class2

.

.

/test

/class1

/class2

.

Libraries required :

PyTorch

torchvision import transforms

torchvision import d


```
torch.utils.data import DataLoader
```

```
torchvision import models
```

```
torch.nn as nn
```

```
torch import optim
```

Ref: <https://towardsdatascience.com/transfer-learning-with-convolutional-neural-networks-in-pytorch-dd09190245ce>

m) Prepare the dataset in splitting in three directories Train , alidation and test with 50 25 25

n) Do pre-processing on data with transform from Pytorch

Training dataset transformation as follows :

```
transforms.Compose([
    transforms.RandomResizedCrop(size=256, scale=(0.8, 1.0)),
    transforms.RandomRotation(degrees=15),
    transforms.ColorJitter(),
    transforms.RandomHorizontalFlip(),
    transforms.CenterCrop(size=224), # Image net standards
    transforms.ToTensor(),
    transforms.Normalize([0.485, 0.456, 0.406],
        [0.229, 0.224, 0.225]) # Imagenet standards
```

Validation Dataset transform as follows :

```
transforms.Compose([
    transforms.Resize(size=256),
    transforms.CenterCrop(size=224),
    transforms.ToTensor(),
    transforms.Normalize([0.485, 0.456, 0.406], [0.229, 0.224, 0.225])
```

o) Create Datasets and Loaders :

```
data = {
    'train':(Our name given to train data set dir created )
    datasets.ImageFolder(root=train_dir, transform=image_transforms['train']),
    'valid':
    datasets.ImageFolder(root=valid_dir, transform=image_transforms['valid']),
}

dataloaders = {
```

```
'train': DataLoader(data['train'], batch_size=batch_size, shuffle=True),
'val': DataLoader(data['valid'], batch_size=batch_size, shuffle=True)
}
```

p) Load Pretrain Model : from torchvision import models

```
model = model.vgg16(pretrained=True)
```

q) Freez all the Models Weight

```
for param in model.parameters():
```

```
    param.requires_grad = False
```

r) Add our own custom classifier with following parameters :

Fully connected with ReLU activation, shape = (n_inputs, 256)

Dropout with 40% chance of dropping

Fully connected with log softmax output, shape = (256, n_classes)

```
import torch.nn as nn
```

```
# Add on classifier
```

```
model.classifier[6] = nn.Sequential(
```

```
    nn.Linear(n_inputs, 256),
```

```
    nn.ReLU(),
```

```
    nn.Dropout(0.4),
```

```
    nn.Linear(256, n_classes),
```

```
    nn.LogSoftmax(dim=1))
```

s) Only train the sixth layer of classifier keep remaining layers off .

```
Sequential(
```

```
(0): Linear(in_features=25088, out_features=4096, bias=True)
```

```
(1): ReLU(inplace)
```

```
(2): Dropout(p=0.5)
```

```
(3): Linear(in_features=4096, out_features=4096, bias=True)
```

```
(4): ReLU(inplace)
```

```
(5): Dropout(p=0.5)
```

```
(6): Sequential(
```

```
(0): Linear(in_features=4096, out_features=256, bias=True)
```

```
(1): ReLU()
```

```
(2): Dropout(p=0.4)
```

```
(3): Linear(in_features=256, out_features=100, bias=True)
```

)

)

t) Initialize the loss and optimizer

```
criterion = nn.NLLLoss()
```

```
optimizer = optim.Adam(model.parameters())
```

u) Train the model using Pytorch

```
for epoch in range(n_epochs):
```

```
    for data, targets in trainloader:
```

```
        # Generate predictions
```

```
        out = model(data)
```

```
        # Calculate loss
```

```
        loss = criterion(out, targets)
```

```
        # Backpropagation
```

```
        loss.backward()
```

```
        # Update model parameters
```

```
        optimizer.step()
```

v) Perform Early stopping

w) Draw performance curve

x) Calculate Accuracy

```
pred = torch.max(ps, dim=1)
```

```
equals = pred == targets
```

```
# Calculate accuracy
```

```
accuracy = torch.mean>equals)
```

Conclusion:The model performance has increased but some datasets are video sequence and the background remains static in some cases and might lead to overfitting. Few datasets have very small humans that are making the task tough to learn.