


ShotSki Mahi组装

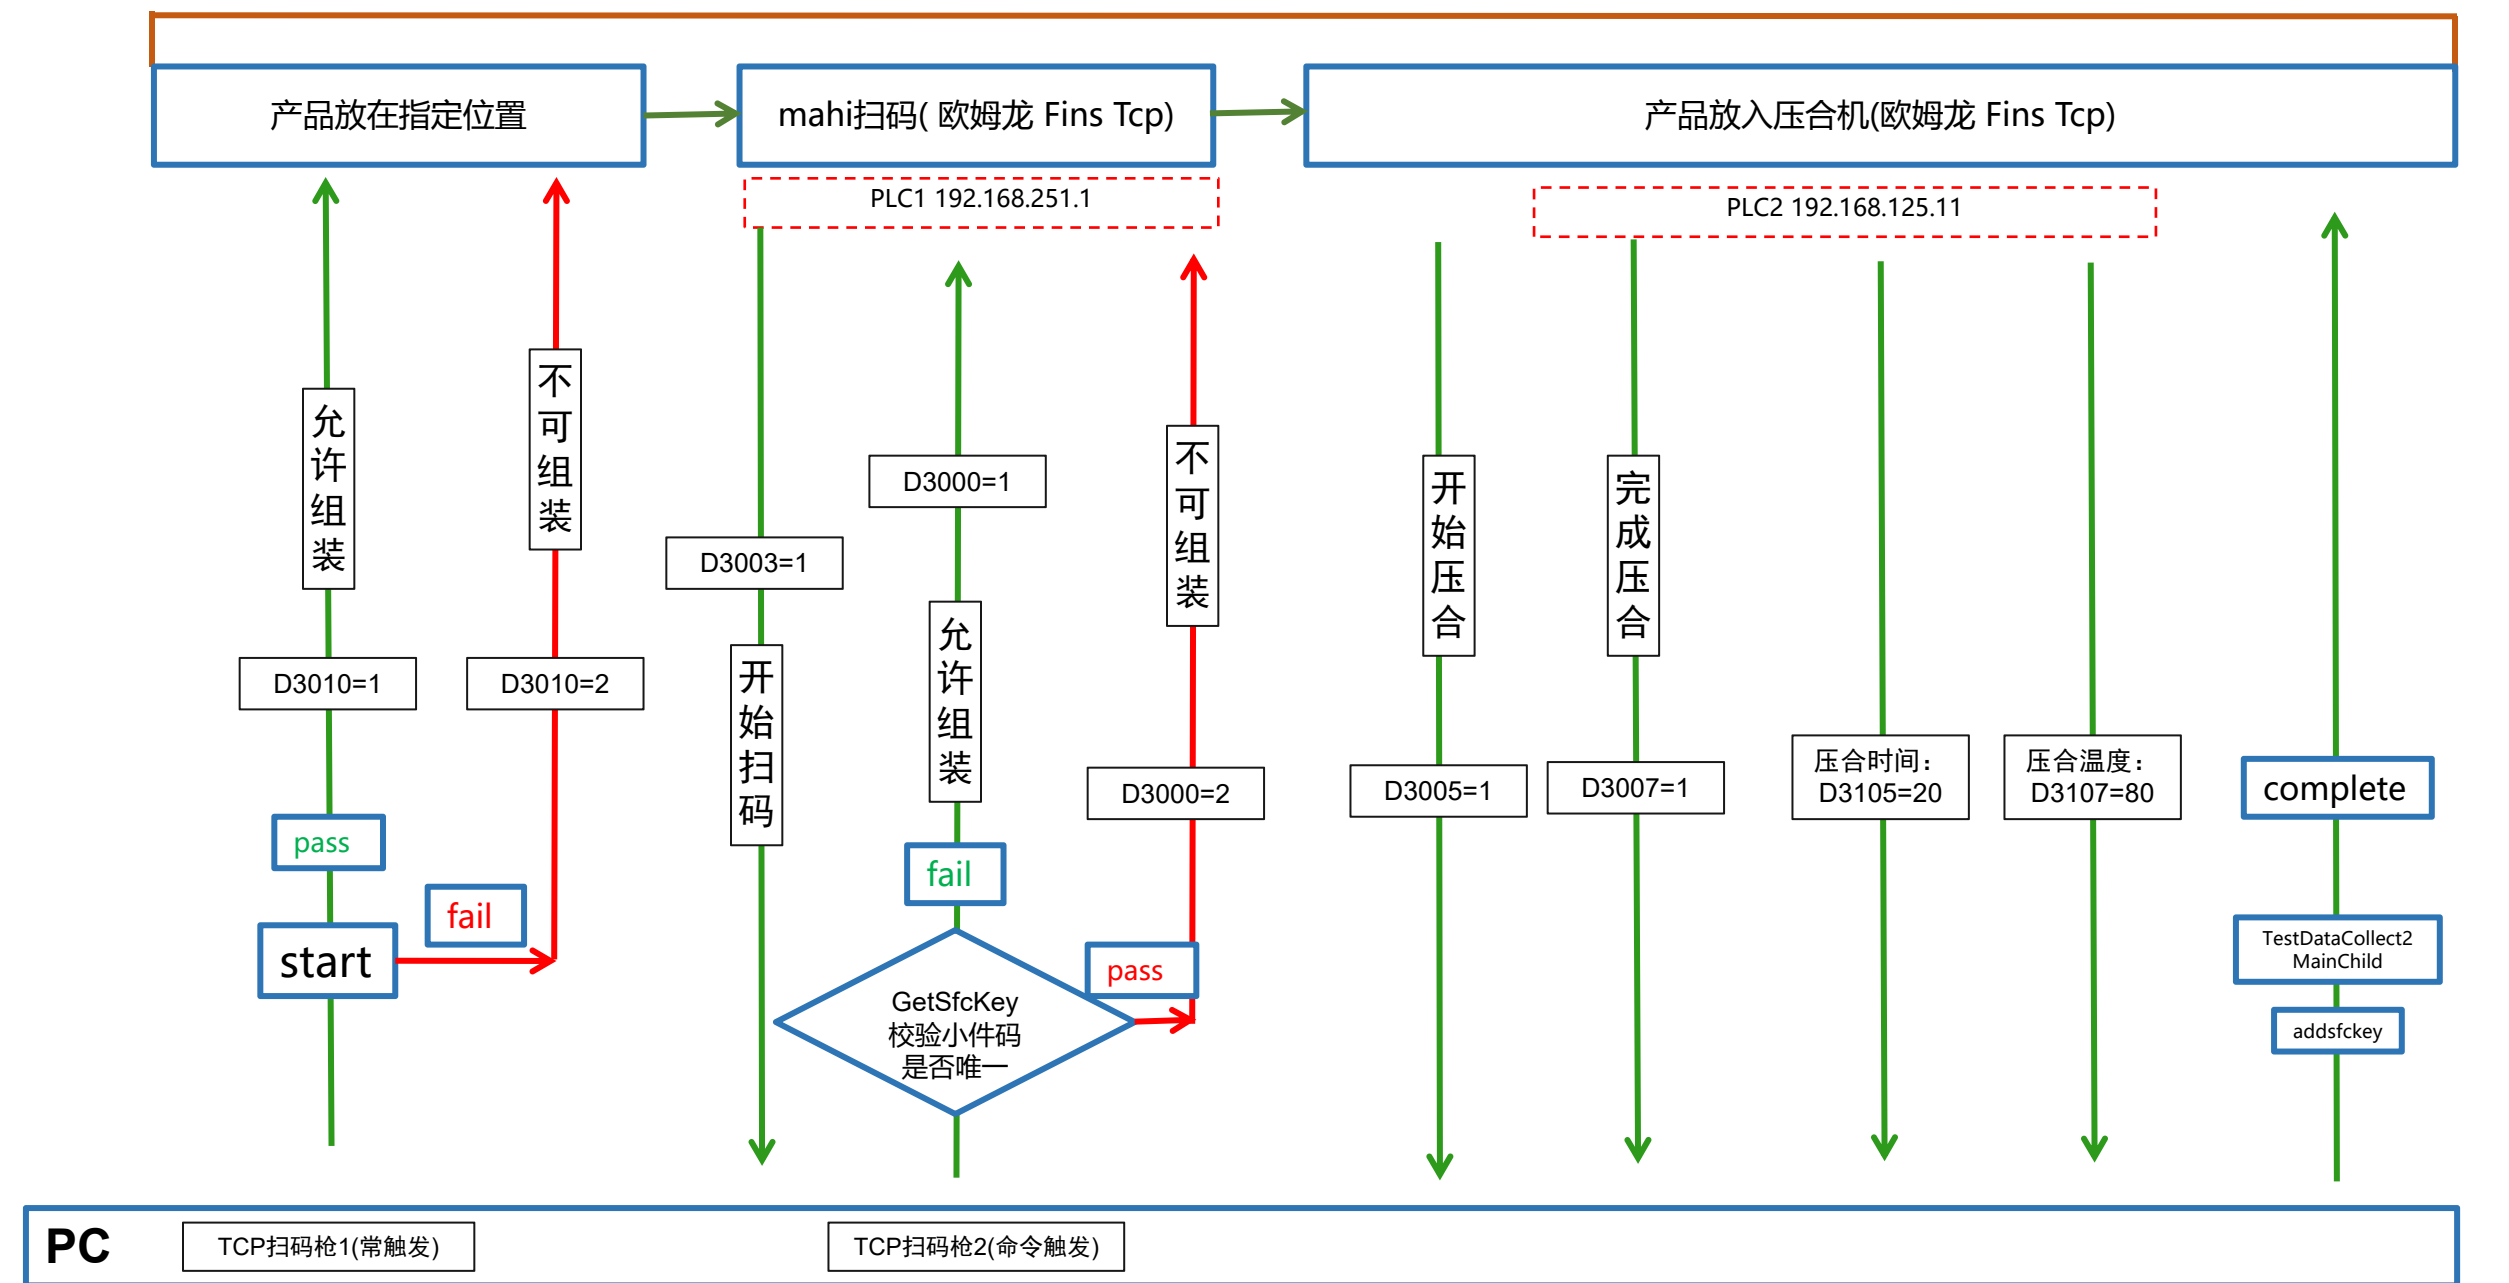

业务流程解读：

1、TCP1扫码枪1扫入产品码SFC→2、调用start接口根据返回结果PASS(欧姆龙PLC1寄存器地址D3010写入值1)/FAIL(D3010=2 业务流程终止 表示不可组装)、网络异常等→3、监控欧姆龙PLC1 D3003=1 TCP2发送命令T 给TCP扫码枪2表示开始扫码→4、调用GetSfcKey
校验小件码是否唯一 返回结果FAIL(D3000写1)或PASS(D3000写2不可组装流程终止)→5、(欧姆龙PLC2)实时监控寄存器D3005=1开始压合读取后重置D3005=0。→6、(PLC2)监控D3007=1表示完成压合，使用后重置值为0。→7、(欧姆龙PLC2)读取D3105值、D3107值作为TestDataCollect2MainChild 参数值。→8、调用
addsfckey→TestDataCollect2MainChild→complete流程结束(闭环)。

产品扫码

小件扫码

PASS

日志界面

1、首次打开软件显示扫码枪1和扫码枪2和PLC1、PLC2的连接情况，超时20s未连接后自动重新连接

----Mahi条码规则

RMRule=B?????

----小件名称

RMName=Mahi

----Scan扫码枪IP端口

Scan1_IP=127.0.0.1

Scan1_Port=501

Scan2_IP=127.0.0.1

Scan2_Port=502

----PLC的IP端口

PLC1_IP=127.0.0.1

PLC1_Port=503

PLC2_IP=127.0.0.1

PLC2_Port=504

----API接口开关配置

API_Start_Enabled=true

API_AddSfcKey_Enabled=true

API_TestDataCollect2MainChild_Enabled=true

API_Complete_Enabled=true



setting.ini

Start接口(get)



Electronics

```
http://10.6.78.14/Service.action?method=Start&param={
  "LOGIN_ID":"815048",
  "SFC":"BHY0000006083613",
  "STATION_ID":"5921",
  "LINE":"F3-3F-Assy-C1",
  "SHOPORDER":"Peach_CELL_包装_星尘粉_P2",
  "SCHEDULING_ID":"4385",
  "CLIENT_ID":"1"
}
```

- 1、LOGIN_ID对应mes_config里面的LoginID
- 3、STATION_NAME对应mes_config里面的Operation
- 4、LINE对应mes_config里面的Line
- 5、SHOPORDER对应mes_config里面Resource
- 6、SCHEDULING_ID对应mes_config里面SchedulingID
- 7、CLIENT_ID对应mes_config里面ClientID

PASS返回:

```
{"RESULT":"PASS","MESSAGE":"PASS","SERVICE_RUNTIME":10,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 14:39:26.646","SERVER_IP":"10.6.79.214"}
```

FAIL返回:

```
{"RESULT":"FAIL","MESSAGE":"登录超时,请重新登录!10.6.79.38:80","CODE":1,"SERVICE_RUNTIME":1,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 15:33:42.657","SERVER_IP":"10.6.79.38"}
```

FAIL返回要把"MESSAGE"内容显示到软件界面

```
mes_config.ini - 记事本
文件(F) 编辑(E) 格式(O) 查看(V) 帮助(H)
IP=FAIL 读取ini文件失败 IP D:\配置工具\cfg\mes_co
\mes_config.ini
[Config]
LogKeepDays=3
LoginUser=4082774
LoginPassword=co5r4ha+rHDdKDBWSNoAAA==
LoginID=3010193
Client=AMF
ClientID=1
Section=SMT
SectionID=0
Line=F11-1F-Laser2-A
PROJECT=Yoshi
PRODUCT=13454774-00
ClientPN=NULL
Resource=Yoshi_WIFI_镭雕2_RAMP
PROJECT_ID=341
PRODUCT_ID=789
SHOPORDER_ID=2021
SchedulingID=3164
Load_ID=-1
SchedulingQty=20000000
ShoporderQty=20000000
StationID=4633
Model_ID=
FristStation=1
Operation=Decode_1(CNC_3_4_Decode)
SapShoporder=Yoshi_WIFI_镭雕2_RAMP
Remark=decoder-cnc4
TraceStationId=BYHZ_F11-1F-Laser2-A_199_decoder-cnc4
[Testing]
Result=
```



```
mes_config.ini - 记事本
文件(F)  编辑(E)  格式(O)  查看(V)  帮助(H)
IP=FAIL 读取ini文件失败      IP      D:\配置工具\cfg\mes_co
\mes_config.ini
[Config]
LogKeepDays=3
LoginUser=4082774
LoginPassword=co5r4ha+rHDdKDBWSNoAAA==
LoginID=3010193
Client=AMF
ClientID=1
Section=SMT
SectionID=0
Line=F11-1F-Laser2-A
PROJECT=Yoshi
PRODUCT=13454774-00
ClientPN=NULL
Resource=Yoshi_WIFI_镭雕2_RAMP
PROJECT_ID=341
PRODUCT_ID=789
SHOPORDER_ID=2021
SchedulingID=3164
Load_ID=-1
SchedulingQty=20000000
ShoporderQty=20000000
StationID=4633
Model_ID=
FristStation=1
Operation=Decode_1(CNC_3_4_Decode)
SapShoporder=Yoshi_WIFI_镭雕2_RAMP
Remark=decoder-cnc4
TraceStationId=BYHZ_F11-1F-Laser2-A_199_decoder-cnc4
[Testing]
Result=
```

AddSfcKey接口(get)



Electronics

http://10.6.78.14/Service.action?method=AddSfcKey¶m={"LOGIN_ID":"5555914","CLIENT_ID":"1","SFC":"HGVHRG000010001JT4","STATION_ID":"13547","STATION_NAME":"磁铁组装","SHOPORDER":"PHA25034_包装_0001JT4_P1","DATA_NAME":"Mahi","DATA_VALUE":"HG0012","PROJECT_ID":"1541","PRODUCT_ID":"3897"}

- 1、LOGIN_ID对应mes_config里面的LoginID
- 2、STATION_ID对应mes_config里面的StationID
- 3、STATION_NAME对应mes_config里面的Operation
- 4、SHOPORDER对应mes_config里面的Resource
- 5、DATA_NAME对应setting配置文件里面的RMName
- 6、DATA_VALUE对应输入的值
- 7、PROJECT_ID对应mes_config里面的PROJECT_ID
- 8、PRODUCT_ID对应mes_config里面的PRODUCT_ID

PASS返回:

```
{"RESULT":"PASS","MESSAGE":"PASS","SERVICE_RUNTIME":10,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 14:39:26.646","SERVER_IP":"10.6.79.214"}
```

FAIL返回:

```
{"RESULT":"FAIL","MESSAGE":"登录超时,请重新登录!"
```

```
10.6.79.38:80","CODE":1,"SERVICE_RUNTIME":1,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 15:33:42.657","SERVER_IP":"10.6.79.38"}
```

FAIL返回要把"MESSAGE"内容显示到软件界面

```
mes_config.ini - 记事本
文件(F)  编辑(E)  格式(O)  查看(V)  帮助(H)
IP=FAIL 读取ini文件失败      IP      D:\配置工具\cfg\mes_co
\mes_config.ini
[Config]
LogKeepDays=3
LoginUser=4082774
LoginPassword=co5r4ha+rHDdKDBWSNoAAA==
LoginID=3010193
Client=AMF
ClientID=1
Section=SMT
SectionID=0
Line=F11-1F-Laser2-A
PROJECT=Yoshi
PRODUCT=13454774-00
ClientPN=NULL
Resource=Yoshi_WIFI_镭雕2_RAMP
PROJECT_ID=341
PRODUCT_ID=789
SHOPORDER_ID=2021
SchedulingID=3164
Load_ID=-1
SchedulingQty=20000000
ShoporderQty=20000000
StationID=4633
Model_ID=
FristStation=1
Operation=Decode_1(CNC_3_4_Decode)
SapShoporder=Yoshi_WIFI_镭雕2_RAMP
Remark=decoder-cnc4
TraceStationId=BYHZ_F11-1F-Laser2-A_199_decoder-cnc4
[Testing]
Result=
```

TestDataCollect2MainChild接口(get)



Electronics

http://10.6.78.14/Service.action?method=TestDataCollect2MainChild¶m={LOGIN_ID:5550466,CLIENT_ID:1,SN:HGVHRG000000001JT4,PRODUCT_NAME:A613-40153,SHOPORDER_NO:PHA25034_包装_0001JT4_P1,PROJECT_NAME:PHA25034,TDS_NAME:LOKI,STARTIME:'2026-03-08 10:21:36',STATION_ID:13547,LINE_NO:F2-1F-Assy-A1,TEST_STATION:磁铁组装,FIXTURE_NO:BYHZ_F5-1F-Assy-B_03_spring-finger-assy,TEST_RESULT:PASS,TEST_DATA_LIST:[{NAME:压合时间,VALUE:"20"},{NAME:压合温度,VALUE:"80"}]}

- 1、LOGIN_ID对应mes_config里面的LoginID
 - 2、PRODUCT_NAME对应mes_config里面的PRODUCT
 - 3、SHOPORDER_NO对应mes_config里面的Resource
 - 4、PROJECT_NAME对应mes_config里面的PROJECT
 - 5、TDS_NAME固定传LOKI
 - 6、STATION_ID对应mes_config里面的StationID
 - 7、LINE_NO对应mes_config里面的Line
 - 8、TEST_STATION对应mes_config里面的Operation
 - 9、FIXTURE_NO对应mes_config里面的traceStationId
- 压合时间、压合温度不是固定值，分别为D3105和D3107的值

PASS返回:

```
{"RESULT":"PASS","MESSAGE":"PASS","SERVICE_RUNTIME":10,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 14:39:26.646","SERVER_IP":"10.6.79.214"}
```

FAIL返回:

```
{"RESULT":"FAIL","MESSAGE":"登录超时,请重新登录!10.6.79.38:80","CODE":1,"SERVICE_RUNTIME":1,"IP_ADDRESS":"10.76.78.174","TIME":"2023-10-25 15:33:42.657","SERVER_IP":"10.6.79.38"}
```

FAIL返回要把"MESSAGE"内容显示到软件界面

Complete接口(get)



Electronics

```
http://10.6.78.14/Service.action?method=Complete&param={
    "LOGIN_ID":"2827304",
    "CLIENT_ID":"1",
    "SFC":"BHY0000006083613",
    "SCHEDULING_ID":"4385",
    "STATION_ID":"5921",
}
```

- 1、LOGIN_ID对应mes_config里面的LoginID
- 2、CLIENT_ID对应mes_config里面ClientID
- 3、SFC对应“产品码”
- 4、SCHEDULING_ID对应mes_config里面SchedulingID
- 5、STATION_ID对应mes_config里面的StationID

PASS返回:

```
{"RESULT":"PASS","MESSAGE":"PASS","SERVICE_RUNTIME":10,"IP_
ADDRESS":"10.76.78.174","TIME":"2023-10-25
14:39:26.646","SERVER_IP":"10.6.79.214"}
```

FAIL返回:

```
{"RESULT":"FAIL","MESSAGE":"登录超时,请重新登录!
10.6.79.38:80","CODE":1,"SERVICE_RUNTIME":1,"IP_ADDRESS":"10.7
6.78.174","TIME":"2023-10-25 15:33:42.657","SERVER_IP":"10.6.79.38"}
FAIL返回要把"MESSAGE"内容显示到软件界面
```

```
mes_config.ini - 记事本
文件(F) 编辑(E) 格式(O) 查看(V) 帮助(H)
IP=FAIL 读取ini文件失败      IP      D:\配置工具\cfg\mes_co
\mes_config.ini
[Config]
LogKeepDays=3
LoginUser=4082774
LoginPassword=co5r4ha+rHDdKDBWSNoAAA==
LoginID=3010193
Client=AMF
ClientID=1
Section=SMT
SectionID=0
Line=F11-1F-Laser2-A
PROJECT=Yoshi
PRODUCT=13454774-00
ClientPN=NULL
Resource=Yoshi_WIFI_镭雕2_RAMP
PROJECT_ID=341
PRODUCT_ID=789
SHOPORDER_ID=2021
SchedulingID=3164
Load_ID=-1
SchedulingQty=20000000
ShoporderQty=20000000
StationID=4633
Model_ID=
FristStation=1
Operation=Decode_1(CNC_3_4_Decode)
SapShoporder=Yoshi_WIFI_镭雕2_RAMP
Remark=decoder-cnc4
TraceStationId=BYHZ_F11-1F-Laser2-A_199_decoder-cnc4
[Testing]
Result=
```