Synchronization and Spatiotemporal Phases in Driven Precessing Domain Walls

Luz Pérez Herrera,[1] E. F. Pusiol,[2] and A. B. Kolton[2,1]

[1] *Instituto Balseiro, UNCUYO, (R8402AGP) San Carlos de Bariloche, Río Negro, Argentina*
[2] *Centro Atómico Bariloche, CNEA-CONICET, (R8402AGP) San Carlos de Bariloche, Río Negro, Argentina*

(Dated: October 29, 2026)

The dynamics of extended magnetic domain walls driven by constant and alternating magnetic fields are studied using a collective coordinate u–ϕ model. While purely constant-field driven systems exhibit deterministic spatiotemporal chaos and roughening, the alternating component can lock the precessional frequency via Shapiro-like steps. Using linear stability analysis and Floquet theory, the phase boundaries of stable, synchronized flat wall states are mapped. By studying the nonlinear dynamics of the extended system, a rich phase diagram is identified, composed of five dynamical regimes characterized by the combination of domain wall spatial order (flat, rough or periodic) and domain wall precession temporal order (pinned, synchronized or unsynchronized). Notably, the macroscopic temporal order of the synchronized phases can lead to a flat domain wall or to a periodic structure dominated by a narrow band of linearly unstable modes, both with coherent precession of the domain wall magnetization, while unsynchronized phases can be flat, with coherent precession, or rough with spatiotemporal chaos and incoherent precession.

I. INTRODUCTION

Synchronization is a generic phenomenon in nonlinear dynamical systems whereby oscillators adjust their rhythms through mutual interactions or external periodic forcing. It occurs in a wide variety of physical, biological and technological systems, including Josephson junctions, coupled pendulums and neuronal networks[1,2].

Magnetic domain walls (DWs) can also behave like oscillators. When driven by a field higher than the Walker breakdown field[3], the internal magnetization angle begins to rotate continuously at a specific angular velocity. Within the framework of the 1D Walker model, adding a harmonic component to the driving field produces Shapiro steps[4–6]: the precessional frequency of the internal degree of freedom remains fixed to an integer multiple of the driving frequency over a range of parameters.

While insightful, the 1D Walker model fails to capture the effects of the DW flexural modes[7–9]. In a more realistic model for an extended DW, it has been recently shown[10] that spatiotemporal chaos can emerge when the wall enters the precessional regime. Even in this complex condition, the corresponding rigid wall frequency still appears in the power spectrum above the chaotic broadband baseline noise.

This naturally raises the question of whether synchrony can occur in extended DWs. In that case, the macroscopic order induced by the synchrony should manifest itself in the spatial structure of the DW. Similar effects have been found in simulations[11,12] and experimentally[13] in other physical systems susceptible to synchrony. An alternating magnetic field or electrical current via spin transfer torque could thus serve to control the otherwise complex DW dynamics, a capability highly relevant for DW-based technologies[6,14–16].

In this work, we study the dynamics of extended DWs with perpendicular magnetic anisotropy using the collective-coordinate $u-\phi$ model[3,17]. We analyze the effects of an AC driving field on the spatiotemporal dynamics of the DW over a wide range of system sizes. In particular, we demonstrate that an appropriate AC field can suppress the spatiotemporal chaos of the DC-driven wall. We identify the parameter regions in which the DW synchronizes with the external drive and determine how synchronization affects its long-range spatial structure. This reveals a phase diagram with five distinct dynamical regimes, characterized by the combination of the DW spatial structure (flat, rough or periodic) and the temporal dynamics of the DW precession (pinned, synchronized or unsynchronized). In the thermodynamic limit, these regimes are separated by sharp boundaries, which we expect to correspond to nonequilibrium dynamical phase transitions.

II. MODELS AND METHODS

Our fundamental description of the DW dynamics is based on the Landau-Lifshitz-Gilbert (LLG) equation:

$$\frac{\partial \mathbf{m}}{\partial t} = -\gamma \mathbf{m} \times \mathbf{H}_{\text{eff}} + \alpha \mathbf{m} \times \frac{\partial \mathbf{m}}{\partial t}\,, \tag{1}$$

where γ is the reduced gyromagnetic ratio and α is the Gilbert damping constant. The unit magnetization vector is defined in spherical coordinates as $\mathbf{m} = (\sin\theta\cos\varphi, \sin\theta\sin\varphi, \cos\theta)$. The effective field $\mathbf{H}_{\text{eff}} = -(1/\mu_0 M_s)\delta E/\delta \mathbf{m}$ is derived from the total magnetic energy functional, which incorporates exchange, anisotropy, Zeeman, and magnetostatic contributions:

$$E = \int \Big\{ A_{\text{ex}}[(\nabla\theta)^2 + \sin^2\theta(\nabla\varphi)^2] - K_u\cos^2\theta \\ -\mu_0 H_z(t) M_s \cos\theta + \frac{1}{2}\mu_0 M_s^2 [N_n(\mathbf{m}\cdot\mathbf{n})^2 + \cos^2\theta] \Big\} d\mathbf{r}\,. \tag{2}$$

Here M_s is the saturation magnetization, A_{ex} is the exchange stiffness constant, K_u the uniaxial anisotropy con-

stant and μ_0 the magnetic permeability. We consider a uniform, time-dependent magnetic field $H_z(t)$ along the z-axis. The last contribution in Eq. (2) accounts for magnetostatic effects of a DW in the local thin-film approximation, where N_n is the demagnetizing factor along the DW normal direction[18]. We assume a directed DW with its average normal in the direction $\mathbf{n} \equiv \hat{\mathbf{y}}$.

To gain additional insight, we describe the DW dynamics using a reduced collective-coordinate framework known as the $u-\phi$ model. This approach captures the most relevant degrees of freedom while remaining computationally efficient compared to full micromagnetic simulations of the LLG equation.

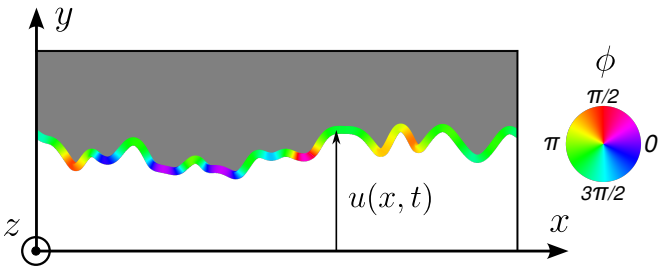


Figure 1. Snapshot of a DW configuration highlighting its collective coordinates $u(x,t)$ and $\phi(x,t)$. Reproduced from Ref. 10.

Substituting a Bloch domain-wall ansatz

$$\theta(x,y,t) = 2\arctan\left\{\exp[(y-u(x,t))/\Delta]\right\}, \quad (3)$$
$$\varphi(x,y,t) = \phi(x,t), \quad (4)$$

into Eq. (1), gives us the reduced coordinate model for the DW. Here $u(x,t)$ and $\phi(x,t)$ represent the local position and the internal magnetization angle of the wall, respectively (see Fig. 1). We assume a constant DW width $\Delta = \sqrt{A_{\mathrm{ex}}/\left(K_u - \mu_0 M_s^2/2\right)}$, where the denominator accounts for the effective anisotropy including the magnetostatic demagnetizing energy.

This model treats the DW as a single-valued directed interface, thereby prohibiting overhangs and loops while allowing for the proliferation and dynamics of vertical Bloch lines. It therefore goes beyond standard elastic interface models by incorporating an internal degree of freedom. We do not consider here the additional effects of thermal fluctuations and quenched disorder.

To simplify the analysis, we nondimensionalize the model using characteristic length, time, and magnetic-field scales[10]. Distances are measured in units of $u_0 = \Delta$ along the y-direction, and $L_0 = \Delta(2\tilde{K}/N_n)^{1/2}$ in the x-direction, where $\tilde{K} = 2K_u/(\mu_0 M_s^2) - 1$. Time is measured in units of $T_0 = (1+\alpha^2)/(\gamma M_s N_n)$, and the applied field $H_z(t)$ is expressed in units of the Walker breakdown field[18] $H_W = \alpha M_s N_n/2$, with $h(t) = H_z(t)/H_W$. See Appendix A for details on the conversion to physical units for a thin Co/Pt multilayer. The resulting equations constitute the u–ϕ or Slonczewski model[17]:

$$\dot{u} = \frac{1}{2}\left[\alpha^2 h(t) + \sin(2\phi) + \alpha\partial_x^2 u - \partial_x^2\phi\right],$$
$$\dot{\phi} = \frac{1}{2}\left[\alpha h(t) - \alpha\sin(2\phi) + \partial_x^2 u + \alpha\partial_x^2\phi\right]. \quad (5)$$

This model reduces to the Walker model[3] for rigid DWs, where $\partial_x^2 u = \partial_x^2\phi = 0$. To study synchronization phenomena in extended DWs we set $h(t) = h_0 + h_a\cos(\Omega t)$, with h_0 the DC field and h_a the AC field amplitude. Note that the unit of frequency in this system is $1/T_0$. We then numerically solve the full system of coupled, non-autonomous nonlinear partial differential equations using a pseudo-spectral Crank–Nicolson scheme (see Appendix B for details).

III. SYNCHRONY IN RIGID DOMAIN WALLS

Given that the extended DW can become flat under certain conditions, it is relevant to study synchrony in the resulting rigid DW, described by the Walker model. This rigid-DW regime represents the simplest form of macroscopic order the DW can exhibit, and is considerably more analytically tractable than the full extended model.

To simplify the analysis, we define the variables $\tau \equiv \Omega t$, $q(x,\tau) \equiv u(x,\tau/\Omega)$ and $\psi(x,\tau) \equiv 2\phi(x,\tau/\Omega)$. If we assume a spatially uniform DW given by $q(x,\tau) = q_1(\tau)$ and $\psi(x,\tau) = \psi_1(\tau)$, Eqs. (5) yields the following system of coupled ordinary differential equations for q_1 and ψ_1:

$$\dot{q}_1 = \frac{1}{2\Omega}\left[\alpha^2 h_0 + \alpha^2 h_a\cos(\tau) + \sin(\psi_1)\right], \quad (6)$$
$$\dot{\psi}_1 = \frac{\alpha}{\Omega}\left[h_0 + h_a\cos(\tau) - \sin(\psi_1)\right], \quad (7)$$

The period of the non-autonomous term is fixed to 2π, and Eq. (7) depends only on the parameters h_0, h_a and the ratio α/Ω. We will focus on this equation since it is decoupled from the q_1 solution and dictates the overall dynamics of the system.

For the case $h_a = 0$, Eq. (7) reduces to the Adler equation[19], for which there is an analytical expression for the time average $\langle\dot{\psi}_1\rangle_\tau$:

$$\langle\dot{\psi}_1\rangle_\tau = \begin{cases} 0 & \text{if } |h_0| \le 1, \\ \mathrm{sgn}(h_0)\dfrac{\alpha}{\Omega}\sqrt{h_0^2 - 1} & \text{if } |h_0| > 1. \end{cases} \quad (8)$$

In addition, the average velocity of q_1 is given by

$$\langle\dot{q}_1\rangle_\tau = \frac{\alpha^2+1}{2\Omega}h_0 - \frac{1}{2\alpha}\langle\dot{\psi}_1\rangle_\tau. \quad (9)$$

Note that this expression is also true for the center of mass of the flexible wall model with periodic boundary conditions. Therefore, for the time-independent driving

case we obtain

$$\langle \dot{q}_1 \rangle_\tau = \begin{cases} \dfrac{\alpha^2+1}{2\Omega} h_0 & \text{if } |h_0| \le 1 \ , \\ \dfrac{\alpha^2+1}{2\Omega} h_0 - \dfrac{1}{2\Omega}\,\mathrm{sgn}(h_0)\sqrt{h_0^2-1} & \text{if } |h_0| > 1 \ . \end{cases} \tag{10}$$

When $h_\mathrm{a} \neq 0$, solutions must be found numerically (see Appendix B). To determine if a stable periodic solution exists, we recorded the ψ_1 variable modulo 2π at every period of the drive: the system has converged to a stable periodic solution if and only if these values converge to a single equilibrium value ψ_eq, independent of the initial condition.

Since $\psi = 2\phi$, locking of ψ to $\langle \dot{\psi}_1 \rangle_\tau = n$ corresponds to a precession of the physical angle ϕ at $\langle \dot{\phi} \rangle = n\Omega/2$. Synchrony is expected to occur near the values of h_0 for which Eq. (8) yields an integer. Figure 2 shows example curves of the steady-state average velocities of both q_1 and ψ_1 as a function of the DC field h_0, with the white regions marking the synchronization steps where $\langle \dot{\psi}_1 \rangle_\tau = n$, and $n = 0, 1, 2$. A Walker-breakdown-like feature repeats in $\langle \dot{q}_1 \rangle_\tau$ at each frequency-unlocking transition of the internal degree of freedom ψ_1. Within each synchronization step, the translational average velocity is

$$\langle \dot{q}_1 \rangle_\tau = \frac{\alpha^2+1}{2\Omega} h_0 - \frac{n}{2\alpha}, \quad h_1^n \le h_0 \le h_2^n, \tag{11}$$

with $h_1^n < h_2^n$ delimiting the extension of the n-th step. Consequently, the DW mobility within a synchronized state is identical to that of the constant-driving-field case below the Walker field ($|h_0| < 1$).

These synchronization regions in $\langle \dot{\psi}_1 \rangle_\tau$ are known as *Shapiro steps*, as they are analogous to those predicted and observed in the I–V curves of driven overdamped Josephson junctions[4]. In a synchronized state, solutions should be of the form

$$\psi_\mathrm{s}(\tau) = \psi_\mathrm{c} + n\tau + \tilde{\psi}(\tau), \tag{12}$$

with ψ_c a constant, $\tilde{\psi}(\tau)$ a 2π-periodic function with zero mean, and n an integer. In this case, it is clear that $\langle \dot{\psi}_\mathrm{s} \rangle_\tau = n$.

To approximate the boundaries of the parameter regions for which synchronized solutions exist, we can treat the nonlinear $\sin\psi_1$ term as a perturbation by defining the scaled variables $\tilde{h}_0 \equiv \epsilon h_0$, $\tilde{h}_\mathrm{a} \equiv \epsilon h_\mathrm{a}$, and introducing $\epsilon \equiv \alpha/\Omega$ as an explicit small parameter. Equation (7) then reads:

$$\dot{\psi}_1 = \tilde{h}_0 + \tilde{h}_\mathrm{a}\cos(\tau) - \epsilon\sin(\psi_1). \tag{13}$$

We now expand both the solution ψ_1 and the DC driving parameter h_0 in power series of ϵ:

$$\psi_1(\tau) = \psi^{(0)}(\tau) + \epsilon\psi^{(1)}(\tau) + \epsilon^2\psi^{(2)}(\tau) + \ldots, \tag{14}$$

$$\tilde{h}_0 = \tilde{h}_0^{(0)} + \epsilon\tilde{h}_0^{(1)} + \epsilon^2\tilde{h}_0^{(2)} + \ldots \tag{15}$$

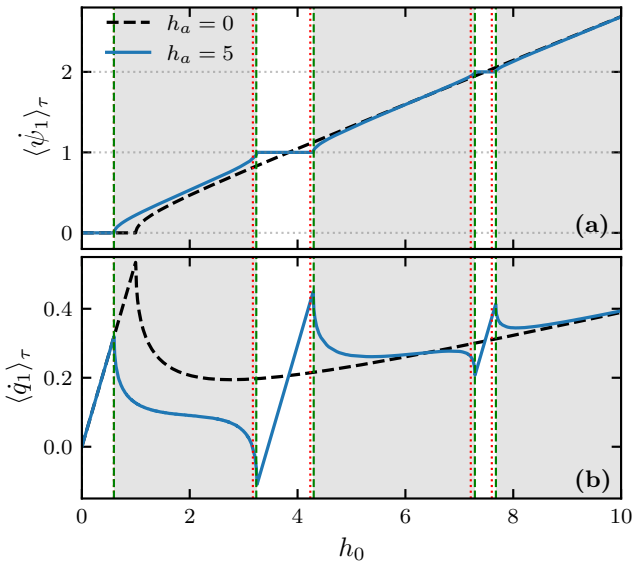


Figure 2. Steady-state average velocities of the (a) internal (ψ_1) and (b) translational (q_1) degrees of freedom as a function of the DC field h_0, for $h_a = 0$ (dashed black) and $h_a = 5$ (solid blue). White regions indicate the synchronization steps, where $\langle \dot{\psi}_1 \rangle_\tau$ locks to integer multiples of the driving frequency [dotted horizontal lines in (a)]. Vertical red dotted lines indicate synchrony boundaries as given by Eq. (24); their second-order approximation, given by Eq. (D9), is shown as green dashed lines. Walker-breakdown-like spikes in $\langle \dot{q}_1 \rangle_\tau$ recur in (b) at each unlocking transition of ψ_1.

Substituting these expansions into Eq. (13) and collecting terms of order ϵ^0, we obtain the unperturbed equation:

$$\dot{\psi}^{(0)} = \tilde{h}_0^{(0)} + \tilde{h}_\mathrm{a}\cos(\tau). \tag{16}$$

Phase-locking to the n-th step requires $\langle \dot{\psi}^{(0)} \rangle_\tau = n$, which fixes $\tilde{h}_0^{(0)} = n$. Integrating yields the zeroth-order solution:

$$\psi^{(0)}(\tau) = n\tau + \tilde{h}_\mathrm{a}\sin(\tau) + \psi_\mathrm{c}. \tag{17}$$

At order ϵ^1, the dynamics of the first-order correction $\psi^{(1)}$ are governed by:

$$\dot{\psi}^{(1)} = \tilde{h}_0^{(1)} - \sin\left(\psi^{(0)}\right). \tag{18}$$

For the synchronized solution to remain valid at this order, $\psi^{(1)}$ must remain a 2π-periodic function of zero mean. Therefore, the time average of the right-hand side of Eq. (18) must vanish:

$$\tilde{h}_0^{(1)} = \left\langle \sin\left(\psi^{(0)}\right) \right\rangle_\tau . \tag{19}$$

Expanding $\sin\left(\psi^{(0)}\right)$ using the Jacobi–Anger identity,

$$\sin\left(\psi^{(0)}\right) = \sum_{m=-\infty}^{\infty} J_m(\tilde{h}_\mathrm{a})\sin[(n+m)\tau + \psi_\mathrm{c}], \tag{20}$$

we see that every term oscillates with zero mean except the one with $m = -n$. This DC component yields:

$$\tilde{h}_0^{(1)} = J_{-n}(\tilde{h}_\mathrm{a})\sin(\psi_\mathrm{c}) = (-1)^n J_n(\tilde{h}_\mathrm{a})\sin(\psi_\mathrm{c}). \quad (21)$$

Truncating the expansion (15) at first order gives $\tilde{h}_0 \approx n + \epsilon\tilde{h}_0^{(1)}$. Substituting back the original physical parameters h_0, h_a, α/Ω, and the solution (21) for $\tilde{h}_0^{(1)}$, we obtain:

$$h_0 \approx \frac{n\Omega}{\alpha} + (-1)^n J_n\left(\frac{\alpha}{\Omega}h_\mathrm{a}\right)\sin(\psi_\mathrm{c}). \quad (22)$$

Since $\sin\psi_\mathrm{c} \in [-1, 1]$, a synchronized solution exists only if

$$\left|h_0 - \frac{n\Omega}{\alpha}\right| \leq \left|J_n\left(\frac{\alpha}{\Omega}h_\mathrm{a}\right)\right|. \quad (23)$$

Finally, each step is centered at $h_0 = n\Omega/\alpha$ and has a field-range width

$$h_2^n - h_1^n = 2\left|J_n\left(\frac{\alpha}{\Omega}h_\mathrm{a}\right)\right|. \quad (24)$$

The details of the continuation of this perturbative treatment to second order in ϵ are worked out in Appendix D. The only second order effect is a rigid shift depending only on $\alpha h_\mathrm{a}/\Omega$ in the synchronization steps with $|n| > 0$. The correction is more significant for the smaller absolute values of n and h_a, vanishing in the limits where either variable goes to infinity. For the $n = 0$ step, the second order corrections vanish identically. In Fig. 2, vertical dotted-red and dashed-green lines correspond to first and second order approximations, respectively.

IV. LINEAR STABILITY OF FLAT, SYNCHRONIZED DOMAIN WALLS

To study the linear stability of synchronized flat solutions, we adopt the theoretical framework recently detailed by Pusiol et al.[10] and extend it to account for a time-dependent magnetic field. We linearize a solution of Eq. (5) $\mathbf{v}(x,\tau) \equiv (u,\phi)^T$ around the flat-wall solution,

$$\mathbf{v}(x,\tau) = \mathbf{v}_1(\tau) + \boldsymbol{\eta}(x,\tau), \quad \boldsymbol{\eta}(x,t) \equiv \begin{pmatrix} Q(x,t) \\ \Phi(x,t) \end{pmatrix} \quad (25)$$

where $\mathbf{v}_1(\tau) \equiv (q_1(\tau), \psi_1(\tau)/2)^T$. Substituting into Eq. (5), the linearized system reads

$$\partial_\tau \boldsymbol{\eta} = \frac{1}{2\Omega}\,\mathcal{M}(\tau)\,\boldsymbol{\eta}, \quad (26)$$

with

$$\mathcal{M}(\tau) \equiv \begin{pmatrix} \alpha\,\partial_x^2 & -\partial_x^2 + 2\cos\psi_1(\tau) \\ \partial_x^2 & \alpha\,\partial_x^2 - 2\alpha\cos\psi_1(\tau) \end{pmatrix}. \quad (27)$$

We perform a Fourier transform in space, so that $\partial_x^2 \to -\kappa^2$. Since Eq. (26) is linear with x-independent coefficients, distinct modes κ decouple, yielding

$$\partial_\tau \boldsymbol{\eta}_\kappa = \frac{1}{2\Omega}\,\mathcal{M}_\kappa(\tau)\,\boldsymbol{\eta}_\kappa, \quad (28)$$

with

$$\mathcal{M}_\kappa(\tau) \equiv -\kappa^2 \begin{pmatrix} \alpha & -1 \\ 1 & \alpha \end{pmatrix} + 2\cos\psi_1(\tau) \begin{pmatrix} 0 & 1 \\ 0 & -\alpha \end{pmatrix}, \quad (29)$$

where the first term is the τ-independent diffusive coupling between Q_κ and Φ_κ, and the second is the 2π-periodic modulation set by the rigid-wall background solution $\psi_1(\tau)$. The stability of a linear system with periodic coefficients can be determined using Floquet theory. By Floquet's theorem, a general solution of Eq. (28) can be written as

$$\boldsymbol{\eta}_\kappa(\tau) = P_\kappa(\tau)\,e^{R_\kappa \tau}\,\boldsymbol{\eta}_\kappa(0), \quad (30)$$

where $P_\kappa(\tau)$ is a 2π-periodic matrix and R_κ is a constant matrix. The monodromy matrix $M_\kappa \equiv P_\kappa(2\pi)\,e^{2\pi R_\kappa}$ is obtained by integrating Eq. (28) over one period, using the canonical initial conditions $\boldsymbol{\eta}_\kappa(0) = (1,0)^T$ and $(0,1)^T$. The amplitude of the perturbation grows exponentially – indicating that the system is unstable – whenever the Floquet multiplier (eigenvalue of M_κ) of largest modulus, μ_κ, satisfies $|\mu_\kappa| > 1$. Since the modes κ are decoupled, their Floquet multipliers can be computed independently, allowing straightforward parallelization across κ. Furthermore, the rescaled time conveniently fixes the integration interval to 2π regardless of parameter values.

Figure 3 shows the resulting stability diagrams obtained numerically for $h_a = 2$ (a) and $h_a = 3$ (b), at $\alpha = 0.27$ and $\Omega = 1$, as an illustrative example. Although the rigid DW is synchronized within the corresponding Shapiro steps, finite intervals of h_0 exhibit spatial instabilities. These unstable regions are generally located near the boundaries of the synchronization steps and are characterized by a finite range of wavenumbers with Floquet multipliers satisfying $|\mu_\kappa| > 1$. Thus, synchronization of the internal precessional dynamics of the rigid DW does not necessarily imply spatial stability of the extended flexible DW. Instead, a synchronized flat DW can coexist with a band of unstable spatial modes, whose growth rates depend continuously on κ. The nonlinear evolution of these instabilities, and also the possible instabilities of non synchronized flat walls (for which Floquet analysis is not adapted), and their effect on the long-time DW structure are investigated in the following section.

V. NONLINEAR DYNAMICS OF EXTENDED DWS

We now investigate the long-time dynamics under the combined DC+AC field, going beyond the linear stability analysis of rigid synchronized states. As an illustrative

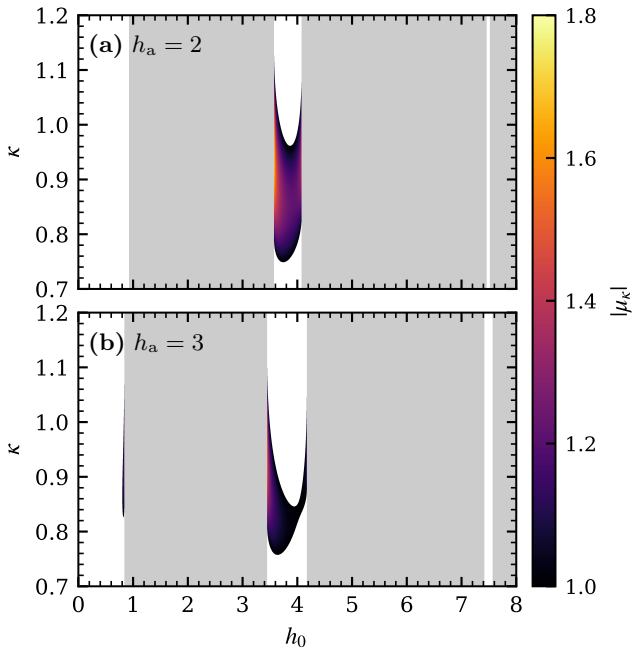


Figure 3. Linear stability diagram of DW modes for $\alpha = 0.27$ and $\Omega = 1$, with $h_a = 2$ in (a) and $h_a = 3$ in (b). White regions are stable; gray regions do not admit a stable time-periodic solution for the rigid wall. Color indicates the magnitude of the largest Floquet multiplier for unstable regions with $|\mu_\kappa| > 1$.

example, we numerically simulate the system of Eqs. (5) (see Appendix B) for the same parameters of the stability map of Fig. 3(b). We characterize the resulting dynamics through the mean angular velocity $\langle\dot{\phi}\rangle_{x,t}$, the mean DW velocity $\langle\dot{u}\rangle_{x,t}$, and the roughness

$$\langle w^2\rangle_t = \left\langle \langle u^2\rangle_x - \langle u\rangle_x^2 \right\rangle_t . \tag{31}$$

The time averages are taken after the system has reached its long-time dynamical regime.

We characterize synchronization with the external drive through the quantity $\langle\sigma^2\rangle_x$, obtained by sampling the DW displacement stroboscopically at intervals of twice the drive period, $T_{\rm drive} = 2\pi/\Omega$. At each point x we compute the variance over time of $\Delta u(x,t) = u(x,t+2T_{\rm drive}) - u(x,t)$,

$$\sigma^2(x) = \overline{\Delta u^2} - \overline{\Delta u}^2, \tag{32}$$

where the overbar denotes the average over the sampling times $t_m = t_0 + 2mT_{\rm drive}$ ($m = 0, 1, 2, \dots$), and then average along the wall, $\langle\sigma^2\rangle_x = L^{-1}\int_0^L \sigma^2(x)\,dx$. When the DW is phase-locked to the drive, $\Delta u(x,t)$ takes the same value at every sampling time, so that $\langle\sigma^2\rangle_x \approx 0$. Otherwise, Δu fluctuates from one sample to the next and $\langle\sigma^2\rangle_x$ takes a finite value. Since $\psi = 2\phi$, a locked precession can have $\langle\dot{\phi}\rangle = \Omega/2$, and the corrugation of the wall may also be period-doubled by the Floquet instability (multipliers $\mu_\kappa < 0$). Sampling at $2T_{\rm drive}$, rather than at $T_{\rm drive}$, allows us to detect locking to both the harmonic (period $T_{\rm drive}$) and subharmonic (period $2T_{\rm drive}$) responses.

To highlight finite-size effects, we consider a small system with $L/L_0 = 8$, for which the first nonzero mode is $\kappa = 2\pi/8 \approx 0.785$, and a large system with $L/L_0 = 1024$. The latter provides access to the extended-wall regime in which deterministic spatiotemporal chaos occurs under purely DC driving[10], whereas the small system is strongly affected by the discrete set of available spatial modes. This comparison allows us to distinguish finite-size effects from the behavior associated with a broad spectrum of flexural modes.

Figure 4 summarizes the steady-state response of extended domain walls as a function of h_0, comparing the large and small systems. The rigid-wall dynamics are also included for comparison (dashed black lines). In Fig. 4(b), both extended walls display synchronization steps at $\langle\dot{\phi}\rangle_{x,t} = \Omega/2$ and Ω, although the step is narrower for the large DW. Figure 4(a) shows that $\langle\dot{u}\rangle_{x,t}$ increases linearly with h_0 in the synchronized regions and displays a Walker-breakdown-like feature at the frequency unlocking edges. In the non-synchronized regions, both for the large and the small systems, $\langle\dot{u}\rangle_{x,t}$ differs appreciably from the rigid wall solution. The small system displays a jerky response in these regions associated to a sparse discrete set of unstable modes, while the large system displays a smoother response due to their higher density of unstable modes. These instabilities are reflected in the high values of $\langle w^2\rangle_t$ in the non-synchronized regions in Figure 4(c). Interestingly however, inside the synchronized regions or Shapiro steps, we can also observe a large departure from the rigid-wall solution for both the small and large systems. This behavior can be linked to the linear Floquet instability shown in Figure 3(b), displaying a band of unstable modes within the Shapiro step, and the differences between the small and large systems can be traced back to the discrete set of modes overlapping such continuous band predicted by Floquet theory. We note that the presence of the band can be innocuous for the small systems if none of its discrete modes overlap the band, as it is observed in the jump to zero of $\langle w^2\rangle_t$ in the middle of the step, for $L/L_0 = 8$.

In summary, Figure 4 illustrate different kinds of dynamical regimes which can differ and sometimes coincide with the rigid-wall solution under combined DC and AC drives. In particular, we observe that the full dynamics properties of the $u-\phi$ model can be related to mode linear instabilities, as for the pure DC case[10], within the Shapiro steps. At variance with the DC case however, Floquet theory can not be applied outside the steps.

Phase	u spatial structure	ϕ synchronization	DW average precession
PF	Flat	Pinned	Absent
SF	Flat	Synchronized	Coherent
SP	Periodic (controlled by Floquet instabilities)	Synchronized	Coherent
NF	Flat	Non-synchronized	Coherent
NR	Rough (Edwards-Wilkinson)	Non-synchronized	Incoherent / chaotic

Table I. Characterization of the dynamical phases in terms of the spatial structure of u, synchronization of the domain-wall precession ϕ with the external drive, and coherence of the precessional dynamics. The PF phase has no average precession of the DW and it remains flat. The SF and SP phases are synchronized and exhibit coherent domain-wall precession, while the NF phase corresponds to coherent but non-synchronized precession. In the NR phase, the precession becomes incoherent and chaotic, accompanied by Edwards–Wilkinson roughening of u in the thermodynamic limit. In the SP phase, the periodic spatial structure is characterized by a wavelength selected by the narrow band of linearly unstable modes.

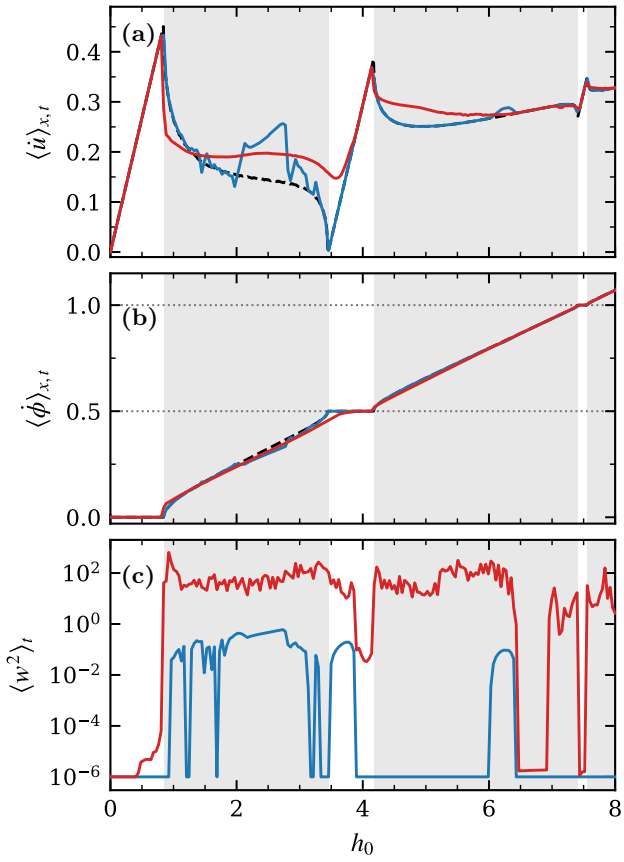


Figure 4. Flexible extended domain wall dynamics. (a) Mean DW velocity $\langle \dot{u} \rangle_{x,t}$ and (b) mean precessional velocity $\langle \dot{\phi} \rangle_{x,t}$ for extended walls of sizes $L/L_0 = 8$ (blue continuous line) and 1024 (red continuous line), together with the rigid-wall result (dashed black lines). (c) Steady-state roughness $\langle w^2 \rangle_t$ for the two extended-wall sizes. Values smaller than 10^{-6} are shown at 10^{-6} for visualization. White and gray regions correspond to synchronized and unsynchronized rigid-wall solutions, respectively. **[TODO: state which line color corresponds to each system size.]** Horizontal dotted lines in (b) indicate the Shapiro steps at $\langle \dot{\phi} \rangle_{x,t} = \Omega/2 = 0.5$ and $\Omega = 1$. All simulations were performed with $\alpha = 0.27$, $\Omega = 1$, and $h_a = 3$.

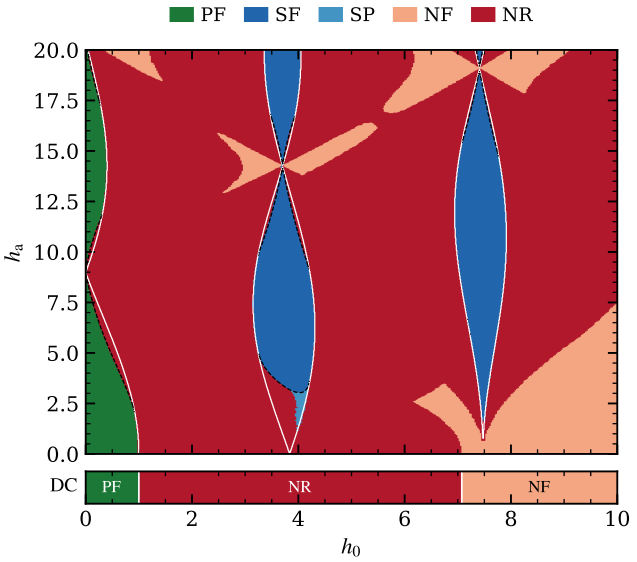


Figure 5. Dynamical phase diagram for an extended domain wall in the large-system limit ($L/L_0 = 256$), showing the five dynamical regimes: pinned flat (PF), synchronized flat (SF), synchronized periodic (SP), non-synchronized flat (NF), and non-synchronized rough (NR), for $\alpha = 0.27$ and $\Omega = 1$. Continuous white and dashed black curves represent the boundaries of synchrony and linear stability ($\mu = 1$) of the corresponding rigid flat wall, respectively. The horizontal strip at the bottom displays the purely DC-driven phases ($h_a = 0$): PF for $0 \leq h_0 \leq 1$, precessional rough (NR) for $1 < h_0 < h_c$, and precessional flat (NF) for $h_0 \geq h_c$, with $h_c \approx 7.08$. The small-system phase diagram ($L/L_0 = 8$) is presented separately in Appendix C.

VI. DYNAMICAL PHASES

We are now in a position to discuss the main result of this work: the full dynamical phase diagram in the (h_0, h_a) plane at fixed AC frequency. Figure 5 shows five distinct dynamical regimes: pinned flat (PF), synchronized flat (SF), synchronized periodic (SP), non-synchronized flat (NF), and non-synchronized rough (NR). The phase diagram corresponds to $L/L_0 = 256$, for which finite-size effects are negligible on the scale

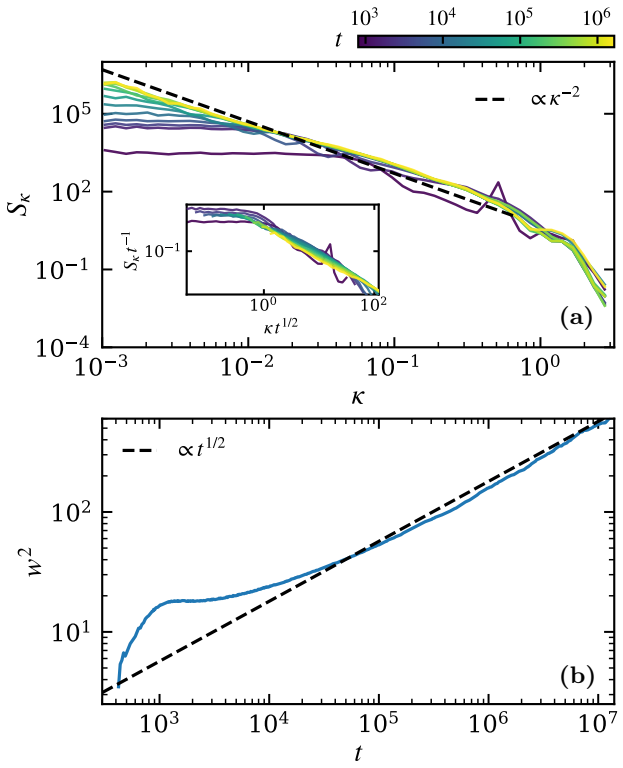


Figure 6. Universal scaling and exponent analysis of the non-synchronized rough (NR) phase ($h_0 = 5$, $h_a = 3$, $\Omega = 1$, $\alpha = 0.27$, for $L/L_0 = 1000$). (a) Main panel: Structure factor S_κ as a function of wavenumber κ at different times t during the transient growth regime, with the dashed line indicating the asymptotic power-law decay $S_\kappa \propto \kappa^{-2}$. Curves are color-coded by time t according to the colorbar above. Inset: Scaling collapse onto the universal master curve $S_\kappa t^{-1}$ versus $\kappa t^{1/2}$, demonstrating dynamic scaling consistent with $S(\kappa, t) \sim \kappa^{-(1+2\zeta)} F(\kappa t^{1/z})$ with roughness exponent $\zeta = 1/2$ and dynamic exponent $z = 2$. (b) Domain-wall roughness w^2 as a function of time t; the dashed line illustrates the characteristic growth regime $w^2 \propto t^{1/2}$. These scaling relations are consistent with the NR phase under combined DC+AC driving belonging to the one-dimensional Edwards–Wilkinson universality class.

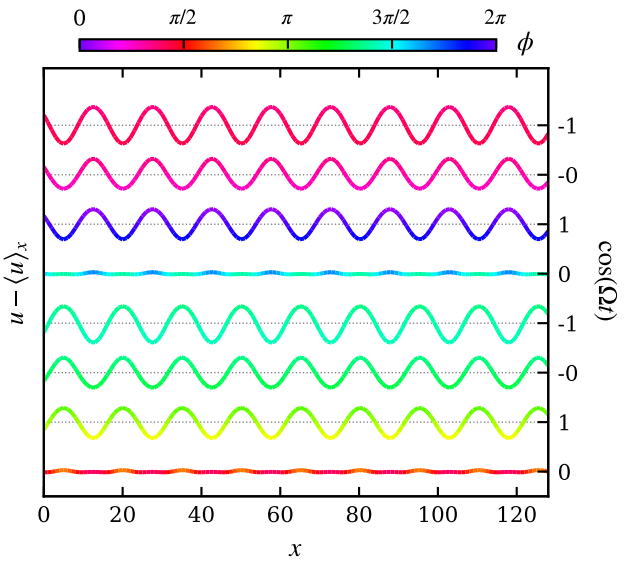


Figure 7. Snapshots of the relative domain-wall displacement $u(x,t) - \langle u \rangle_x$ along a section of the DW in the steady-state synchronized periodic (SP) phase ($h_0 = 4$, $h_a = 3$, $\alpha = 0.27$, and $\Omega = 1$), taken at evenly spaced intervals over two full periods of the AC drive (as indicated by the oscillation of $\cos(\Omega t)$ on the right).

considered. Finite-size effects become visible for substantially smaller systems (see Appendix C), so we use the $L/L_0 = 256$ results as representative of the $L \to \infty$ dynamical phase diagram. Synchronization is identified by $\langle \sigma^2 \rangle_x < 10^{-4}$ (i.e., $\sigma \equiv \langle \sigma^2 \rangle_x^{1/2} < 0.01$ in units of u_0). **[TODO: state the numerical criteria used to separate flat/rough (w^2 threshold), PF ($\langle \dot{\phi} \rangle = 0$) and coherent/incoherent precession (NF vs. NR).]** The continuous white and dashed black lines indicate, respectively, the synchronization boundaries and the linear-stability boundaries of the corresponding synchronized flat rigid-wall solutions. These boundaries provide a reference for the long-time dynamics of the full nonlinear extended-wall equations: the continuous lines delimit the

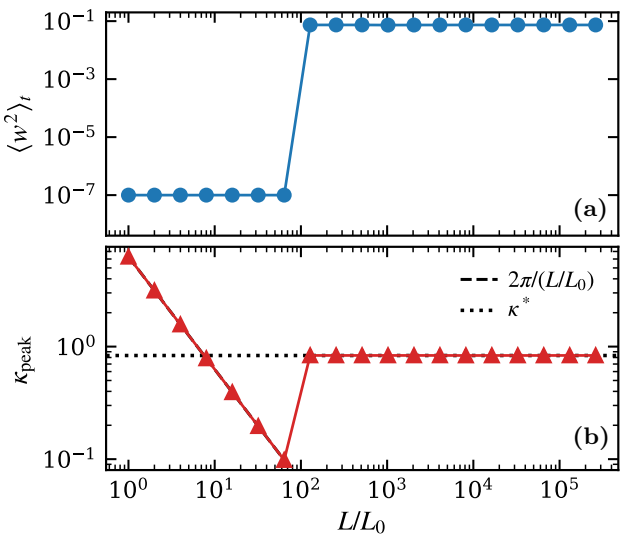


Figure 8. Finite-size analysis of the synchronized periodic (SP) phase ($h_0 = 4$, $h_a = 3$). (a) DW steady-state roughness $\langle w^2 \rangle_t$ and (b) wavenumber of the maximum peak in the structure factor κ_{peak} as a function of L/L_0. The long-range spatiotemporal order is dominated by the most linearly unstable mode κ^* (dotted line) of the synchronized phase. For large enough systems, the roughness converges to a constant value independent of system size. For small sizes, the structure factor is dominated by the lowest available discrete mode $2\pi/(L/L_0)$ (dashed line) and the DW remains flat due to the lack of modes in the narrow instability band.

parameter regions where the corresponding rigid-wall solutions are synchronized, while the dashed lines indicate where these synchronized flat solutions become spatially unstable.

In the PF phase, $\langle\dot{\phi}\rangle = 0$, so the DW does not exhibit average internal precession, although its mean position $\langle u\rangle$ can still evolve in time. The effective Walker breakdown field in presence of AC drive follows $h_W \approx |J_0(\alpha h_a/\Omega)|$, as predicted by the equality in Eq.(23) for the particular $n = 0$ case. The remaining four regimes combine temporal synchronization with distinct spatial structures. The SF and SP phases are synchronized, whereas NF and NR are non-synchronized. Spatially, SF and NF remain essentially flat, while SP develops a periodic corrugation and NR exhibits roughening. The SP regime occupies a comparatively narrow region, for relatively low values of h_a, at the bottom of the $n = 1$ synchronization region.

The synchronization regions of the extended domain wall remain close to those obtained from the rigid-wall dynamics (delimited by the continuous lines) over most of the phase diagram. These lines are described by Eqs.(23) and (24). Deviations due to the flexural modes of the extended DW are most pronounced near the edges of the synchronization steps and in the region where the SP state develops. In these regions, the Floquet stability analysis of the synchronized rigid-wall solution provides a direct indication of the onset of spatial instabilities (indicated by the dashed lines). In Fig. 5 we also observe that the dashed lines provide an approximation for the onset of instabilities inside the synchronized phase of the rigid DW. Thus, synchronization and spatial stability are related but distinct properties of the driven wall.

The AC drive can qualitatively modify the dynamics observed under pure DC driving. It can suppress roughening and stabilize a synchronized flat state, or it can synchronize a spatially unstable state, leading to the SP regime. Conversely, non-synchronized flat states can also occur under AC driving. The resulting phase diagram therefore reflects the interplay between temporal synchronization and spatial stability rather than a single synchronization transition. Since the flat phases are indistinguishable from the rigid-wall solutions, in the following we solely characterize the non-flat phases.

We first characterize the NR regime. To quantify its spatial structure, we analyze the roughening process and consider the *time-dependent* structure factor starting from an initially perturbed flat DW

$$S_\kappa = \left\langle |\hat{u}_\kappa(t)|^2 \right\rangle, \tag{33}$$

and the *time-dependent* global roughness

$$w^2 = \left\langle u^2(t)\right\rangle_x - \langle u(t)\rangle_x^2 . \tag{34}$$

where the averages are done over random realizations of the perturbed initial DW.

During the transient growth regime that nucleates the NR phase, shown in Fig. 6, the structure factor follows the scaling form

$$S_\kappa \propto \kappa^{-2} F(\kappa\, l(t)), \tag{35}$$

with a growing length-scale $l(t) \sim t^{1/2}$, while $F(x) \sim x^2$ for small x and approaches a constant for large x. As shown in the inset of Fig. 6(a), the rescaled data $S_\kappa t^{-1}$ collapse onto a single universal curve when plotted against $\kappa t^{1/2}$. Correspondingly, the roughness grows as

$$w^2 \propto t^{1/2}. \tag{36}$$

These scaling properties are consistent with the one-dimensional Edwards–Wilkinson (EW) universality class, where $w^2 \sim t^{2\zeta/z}$ and $S(q) \sim q^{-(1+2\zeta)} F(qt^{1/z})$, with a roughness exponent $\zeta = 1/2$ and dynamic exponent $z = 2$. The collapse in terms of $\kappa t^{1/2}$ singles out $z = 2$ and rules out the Kardar–Parisi–Zhang (KPZ) class, which shares $\zeta = 1/2$ in one dimension but has $z = 3/2$ and would require the variable $\kappa t^{2/3}$ and $w^2 \sim t^{2/3}$. This is expected since, within the u–ϕ model, tilt invariance ($u \to u + sx$ leaves Eqs. (5) unchanged, as they depend on u only through $\partial_x^2 u$) forbids the KPZ nonlinearity $\lambda(\partial_x u)^2$, irrespective of the internal degree of freedom ϕ. Geometric corrections beyond the small-slope approximation, which are neglected here, could nevertheless produce a crossover to KPZ at very large scales. The NR phase under DC+AC drive is thus in the same universality class as in the purely DC-driven case[10].

We next turn to the SP regime. Figure 7 shows representative configurations over one period of the AC drive. The wall develops a periodic corrugation whose amplitude oscillates in time, while the spatial profile recurs periodically. The roughness approaches a finite value as the system size increases, and the dominant wave number remains finite, indicating that the corrugation is not a finite-size artifact.

The spatial periodicity of the SP phase is directly related to the Floquet instability of the synchronized flat state. In the unstable region, a finite band of wave numbers has Floquet multipliers larger than unity, with a maximum growth rate at a characteristic wave number κ^*. The nonlinear SP state is dominated by a wave number $\kappa_{\rm peak}$ that approaches a finite value with increasing system size and is consistent with the Floquet-selected κ^* (indicated by the dotted horizontal line). Figure 8 shows that both the roughness and $\kappa_{\rm peak}$ converge as L increases. For sufficiently small systems, the allowed wave numbers may not sample the unstable band adequately; in that case the wall can remain effectively flat even when the corresponding continuum system is spatially unstable. **[TODO: give the numerical limits of the unstable band at $h_0 = 4$, $h_{\rm a} = 3$; note that for $L/L_0 = 8$ the first mode $\kappa_1 \approx 0.785$ lies close to κ^* yet the wall remains flat, so the band must be narrower than this separation.]**

The finite-size analysis therefore demonstrates that the periodic corrugation in the SP regime has an intrinsic spatial scale selected by the linear instability of the synchronized state. In the large-system limit, the SP phase

exhibits long-range spatial periodic order together with temporal synchronization.

The main properties of the five dynamical phases are summarized in Table I.

VII. CONCLUSIONS

We investigated synchronization in extended domain walls driven by combined DC and AC magnetic fields and its relation to spatial order. We showed that synchronization can occur even in very large systems exhibiting spatiotemporal chaos in the purely DC-driven regime. Synchronization is generally accompanied by a suppression of this chaotic dynamics and, in most cases, by a flattening of the domain wall. However, synchronized regimes with a periodically corrugated spatial structure also exist. In this regime, the corrugation is dominated by a finite band of linearly unstable modes with a well-defined maximum growth rate, linking the spatial structure of the nonlinear state to the Floquet instability of the synchronized flat state. The resulting dynamical phase diagram, shown in Figure 5, summarizes these different regimes.

The AC field amplitudes required to drive a chaotic domain wall into a synchronized phase (SF or SP) are of the order of the Walker field. For a thin Co/Pt multilayer, the minimum AC amplitude required to reach the SF phase is of order 10 mT, with frequencies on the order of 100 MHz. These conditions are experimentally accessible (see Appendix A for the correspondence between the model parameters and physical units). The finite-size effects identified in this work may also be relevant for experimentally accessible micrometer-scale systems.

The framework developed here neglects disorder and thermal fluctuations[20,21], which may affect the experimental observation of the predicted dynamical regimes. Nevertheless, the present theory provides a basis for extending the analysis to more realistic domain-wall models that incorporate these effects. The framework can also be generalized to higher-dimensional geometries and to electrical current drives, providing directions for future studies.

Beyond these extensions, our results demonstrate that a spatially extended nonlinear system exhibiting deterministic spatiotemporal chaos can synchronize to an external periodic drive. We further show that synchronization can suppress the chaotic dynamics while preserving spatial structure, leading either to a synchronized flat state or to a synchronized periodically corrugated state with long-range spatiotemporal periodic order. This coexistence of temporal synchronization and spatial instability provides a distinctive dynamical regime of driven precessing domain walls.

ACKNOWLEDGMENTS

We thank T. Giamarchi for discussions. Simulations used the Gerencia de Física HPC cluster at CAB-CNEA (SNCAD, Argentina).

Appendix A: Experimental conditions

We work out the conversion of our nondimensional model into physical units for the case of a standard Co/Pt multilayer, with parameters[18] $\alpha = 0.27$, $A_{\rm ex} = 1.4 \times 10^{-11}$ J/m, $M_{\rm s} = 9.1 \times 10^5$ A/m, $K_{\rm u} = 8.4 \times 10^5$ J/m^3 and $N_{\rm n} = 0.016$.

The length scales for this material are $\Delta \approx 6.6$ nm and $L_0 \approx 8.77\Delta \approx 58.0$ nm. This means that representative values of L/L_0 such as 8, 256, and 1024 used throughout our work correspond to DW lengths of ≈ 464 nm, 14.8 μm, and 59.4 μm, respectively ($L/L_0 = 1000$ corresponds to 58.0 μm, while the finite-size scaling in Fig. 8 extends up to $L/L_0 \approx 2.6 \times 10^5 \approx 15$ mm). The limiting thermodynamic behavior begins to occur for lengths of order $100\, L_0 \approx 5.8$ μm.

The time unit in this system is $T_0 \approx 0.33$ ns, which corresponds to an angular-frequency unit $1/T_0 \approx 3.03 \times 10^9$ s^{-1}. The angular frequency $\Omega = 1$ used in this work corresponds to a real frequency of 480 MHz. The wavelength corresponding to this frequency is 0.6 m, many orders of magnitude above both length scales of the system.

The Walker breakdown field is $H_{\rm W} \approx 2.48$ mT. As a specific example, to drive the system in the SF regime at $H_0 = 4H_{\rm W} \approx 10$ mT, with a frequency of $\Omega = 1$ (480 MHz), the AC field amplitude should be at least $H_{\rm a} \approx 3.5 H_{\rm W} \approx 9$ mT.

Appendix B: Numerical methods

All systems of ordinary differential equations (ODEs) were solved using a fourth-order Runge-Kutta method[22]. This includes the system of two coupled, non-autonomous nonlinear ODEs for the Walker model of rigid DWs, Eqs. (6) and (7), and the linear system of ODEs, Eq. (28), used to find the Floquet multipliers of the synchronized rigid wall solution in the extended DW model in Section III.

The partial differential equations (PDEs) for the full u–ϕ model (Eqs. (5)) were solved using a pseudo-spectral Crank-Nicolson scheme, following the method outlined by Pusiol et al.[10]. To do this, we first note that by defining the complex variable[23]

$$z(x,t) = u(x,t) - i\phi(x,t)\,, \tag{B1}$$

the u–ϕ model is equivalent to the single complex PDE

$$\dot{z} = \frac{\alpha - i}{2}[\alpha h(t) - i \sin\left(2\,\mathrm{Im}(z)\right) + z'']\,. \tag{B2}$$

Now we separate the right-hand side of Eq. (B2) into a linear and a nonlinear part:

$$\begin{aligned}\mathcal{L}(z) &= \frac{\alpha - i}{2} z'' \,, \\ \mathcal{N}(z) &= \frac{\alpha - i}{2} [\alpha h(t) - i \sin\left(2\,\mathrm{Im}(z)\right)] \,.\end{aligned} \tag{B3}$$

The linear term is stepped according to the Crank–Nicolson method, and the nonlinear term is stepped with an explicit Euler step:

$$\frac{z^{n+1} - z^n}{\delta t} = \frac{1}{2}\mathcal{L}(z^{n+1} + z^n) + \mathcal{N}(z^n) \,. \tag{B4}$$

By transforming to Fourier space, $\hat{\mathcal{L}}_k = -\frac{\alpha - i}{2} k^2$, and we can derive an explicit formula for the evolution of the k-th Fourier mode:

$$z_k^{n+1} = \frac{\left(1 + \frac{\delta t}{2}\hat{\mathcal{L}}_k\right) z_k^n + \delta t \widehat{\mathcal{N}(z^n)}_k}{\left(1 - \frac{\delta t}{2}\hat{\mathcal{L}}_k\right)} \,. \tag{B5}$$

At each step, the nonlinear term is calculated in real space and then Fourier transformed. This requires tracking z in both real and Fourier space.

We implemented this method in C++ and CUDA C++, developing an implementation-agnostic interface that allows us to run identical simulations on either a CPU or a GPU, as needed. The GPU implementation outperformed the CPU for system sizes requiring about 1 000 samples of z, and was essential in order to study system sizes bigger than $L/L_0 = 1000$.

We chose the spatial resolution such that macroscopic properties are stable and the smallest features are resolved. Then, we picked a time resolution dt small enough that results are independent of small variations.

The source code for the simulator is freely available in Ref. 24.

Appendix C: Finite Size Effects

In Figure 9, we show the dynamical phase diagram for a relatively small system, $L/L_0 = 8$. The differences with the large-system phase diagram (Figure 5) highlight the pronounced role of finite-size effects. In particular, for the small system, the discrete set of allowed spatial modes $\kappa_n = 2\pi n/(L/L_0) \approx 0.785n$ limits the availability of modes that can fall within the linear instability band of the precessing DW. Under purely DC driving ($h_\mathrm{a} = 0$), shown in the horizontal strip below the diagram, the first flexural mode $\kappa_1 \approx 0.785$ is only unstable within a restricted window $1 < h_0 < h_c$, where $h_c \approx 3.8$. For $h_0 > h_c$, all available discrete modes become linearly stable, so the domain wall precesses as a flat interface (NF phase), in sharp contrast with the thermodynamic limit ($L \to \infty$), where the dense spectrum of long-wavelength modes sustains the chaotic NR regime up to $h_c \approx 7$. Similarly, under AC driving, the SF and NF phases dominate a broader region of the phase diagram in the small system, while the chaotic NR regime is significantly reduced compared to large systems.

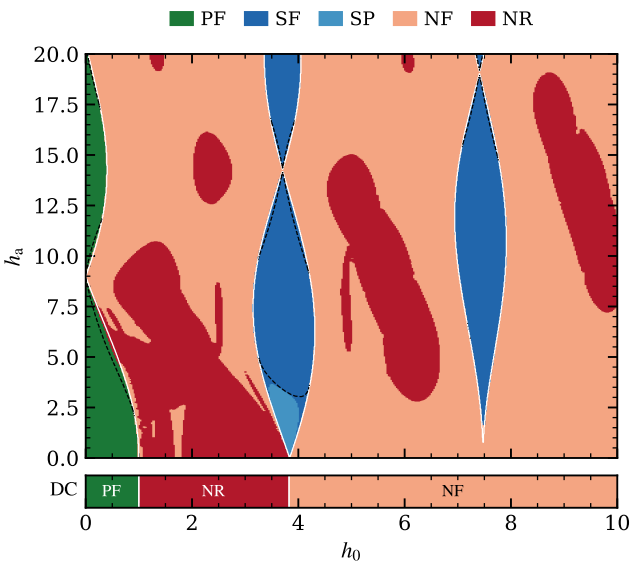


Figure 9. Dynamical phase diagram for a small extended domain wall of size $L/L_0 = 8$, driven by combined DC and AC magnetic fields with $\alpha = 0.27$ and $\Omega = 1$. The five dynamical regimes are: pinned flat (PF), synchronized flat (SF), synchronized periodic (SP), non-synchronized flat (NF), and non-synchronized rough (NR). Continuous white and dashed black curves indicate the rigid-wall synchrony and linear-stability boundaries, respectively. The horizontal strip at the bottom corresponds to purely DC driving ($h_\mathrm{a} = 0$), showing the non-precessional regime (PF, $0 \le h_0 \le 1$), the precessional rough regime (NR, $1 < h_0 < h_c$), and the precessional flat regime (NF, $h_0 \ge h_c$), where $h_c \approx 3.8$ for $L/L_0 = 8$ due to the discrete mode spectrum.

Appendix D: Second-order perturbation theory for rigid DW synchrony

We can continue the expansion of Eq. (15) to second order in ϵ. To do this we expand $\epsilon \sin(\psi_1) \approx \epsilon \sin\left(\psi^{(0)}\right) + \epsilon^2 \psi^{(1)} \cos\left(\psi^{(0)}\right)$, substitute into Eq. (13) and collect the terms of order ϵ^2. We obtain:

$$\dot{\psi}^{(2)} = \tilde{h}_0^{(2)} - \psi^{(1)} \cos\left(\psi^{(0)}\right) . \tag{D1}$$

To find $\psi^{(1)}$, we integrate Eq. (18) using the Jacobi-Anger expansion for $\sin\left(\psi^{(0)}\right)$ and substituting $\tilde{h}_0^{(1)}$ from Eq. (21). This yields:

$$\psi^{(1)}(\tau) = \sum_{m \neq -n} \frac{J_m(\tilde{h}_\mathrm{a})}{n+m} \cos[(n+m)\tau + \psi_\mathrm{c}]. \tag{D2}$$

In order for the second-order solution to remain bounded and 2π-periodic, we require again that the time average of Eq. (D1) vanishes: $\tilde{h}_0^{(2)} = \langle \psi^{(1)} \cos\left(\psi^{(0)}\right) \rangle_\tau$. To compute this average, we expand $\cos\left(\psi^{(0)}\right)$ analogously to the sine term:

$$\cos\left(\psi^{(0)}\right) = \sum_{k=-\infty}^{\infty} J_k(\tilde{h}_\mathrm{a}) \cos[(n+k)\tau + \psi_\mathrm{c}]. \tag{D3}$$

In the product $\psi^{(1)} \cos\left(\psi^{(0)}\right)$, the time average of terms of the form $\langle \cos(p\tau + \psi_\mathrm{c}) \cos(q\tau + \psi_\mathrm{c}) \rangle_\tau$ is nonzero only when $p = \pm q$. Filtering these resonant terms leads to two contributions to the second-order correction:

$$\tilde{h}_0^{(2)} = A + B\cos(2\psi_\mathrm{c}), \tag{D4}$$

where, using the identity $J_{-v}(x) = (-1)^v J_v(x)$, we define the summation constants A and B as:

$$A = \frac{1}{2} \sum_{m \neq -n} \frac{J_m^2(\tilde{h}_\mathrm{a})}{n+m}, \tag{D5}$$

$$B = \frac{1}{2} \sum_{m \neq -n} (-1)^m \frac{J_m(\tilde{h}_\mathrm{a}) J_{2n+m}(\tilde{h}_\mathrm{a})}{n+m}. \tag{D6}$$

However, shifting the index in our expression for B to $r = n + m$, we can rewrite to obtain:

$$B = \frac{1}{2} \sum_{r \neq 0} \frac{J_{r-n}(\tilde{h}_\mathrm{a}) J_{-r-n}(\tilde{h}_\mathrm{a})}{r} = 0, \tag{D7}$$

since the sum terms are odd in r. This simplifies Eq. (D4) to $\tilde{h}_0^{(2)} = A$. Also note that $A = 0$ if $n = 0$, for similar reasons. The second order corrections vanish in the zeroth synchrony step.

Substituting in Eq. (D4), the DC field in the synchrony condition becomes:

$$\tilde{h}_0 \approx n + \epsilon^2 A + \epsilon(-1)^n J_n(\tilde{h}_\mathrm{a}) \sin(\psi_c), \tag{D8}$$

or, in the original physical variables,

$$h_0 \approx \frac{n\Omega}{\alpha} + \frac{\alpha}{\Omega} A + (-1)^n J_n(\frac{\alpha}{\Omega} h_\mathrm{a}) \sin(\psi_c). \tag{D9}$$

This is the same as the first-order case, but with a rigid, field-dependent offset in the center of the synchronization step $\frac{\alpha}{\Omega} A$. Consequently, the only second-order effect is a rigid shift in the synchronization steps, depending only on $\alpha h_\mathrm{a}/\Omega$, while maintaining their widths.

In the limit $h_\mathrm{a} = 0$, the only term contributing to A is the one proportional to J_0. For $n \neq 0$, $A = \frac{1}{2n}$: the shift is towards higher absolute DC fields and decreases with the absolute value of the step index. In the limit of $h_\mathrm{a} \to \infty$, $A \to 0$ due to the decay of the Bessel functions, implying that the second order corrections are most significant for small AC fields.

Figure 2 compares first and second order approximations for the Shapiro steps location.

[1] S. H. Strogatz, *Nonlinear Dynamics and Chaos: With Applications to Physics, Biology, Chemistry, and Engineering*, 2nd ed. (Westview Press, 2015).
[2] A. Pikovsky, M. Rosenblum, and J. Kurths, *Synchronization: A Universal Concept in Nonlinear Sciences*, Cambridge Nonlinear Science Series (Cambridge University Press, 2001).
[3] N. L. Schryer and L. R. Walker, Journal of Applied Physics **45**, 5406 (1974).
[4] S. Shapiro, Physical Review Letters **11**, 80 (1963).
[5] L. Berger, Journal of applied physics **69**, 4683 (1991).
[6] D.-H. Kim, D.-H. Kim, D.-Y. Kim, S.-B. Choe, T. Ono, K.-J. Lee, and S. K. Kim, "Magnetic domain wall motion due to ac bias-driven resonances," (2019), arXiv:1908.01264 [cond-mat.mes-hall].
[7] L. Thevenard, C. Gourdon, S. Haghgoo, J.-P. Adam, H. J. von Bardeleben, A. Lemaître, W. Schoch, and A. Thiaville, Phys. Rev. B **83**, 245211 (2011).
[8] C. Gourdon, L. Thevenard, S. Haghgoo, and A. Cēbers, Phys. Rev. B **88**, 014428 (2013).
[9] G. Kim, D.-H. Jung, H.-S. Han, M. Kang, S. Jeong, Y. Park, M.-Y. Im, and K.-S. Lee, Phys. Rev. B **110**, 214407 (2024).
[10] E. Pusiol, V. Lecomte, S. Bustingorry, and A. Kolton, Physical Review B **113**, 064411 (2026).
[11] A. B. Kolton, D. Domínguez, and N. Grønbech-Jensen, Phys. Rev. Lett. **86**, 4112 (2001).
[12] A. B. Kolton, D. Domínguez, and N. Grønbech-Jensen, Phys. Rev. B **65**, 184508 (2002).
[13] S. Okuma, J. Inoue, and N. Kokubo, Phys. Rev. B **76**, 172503 (2007).
[14] S. S. P. Parkin, M. Hayashi, and L. Thomas, Science **320**, 190 (2008).
[15] K.-W. Moon, D.-H. Kim, C. Kim, D.-Y. Kim, S.-B. Choe, and C. Hwang, Journal of Physics D: Applied Physics **50**, 125003 (2017).
[16] M. Jin, I.-S. Hong, D.-H. Kim, K.-J. Lee, and S. K. Kim, Phys. Rev. B **104**, 184431 (2021).
[17] J. C. Slonczewski, in *AIP Conference Proceedings*, Vol. 5 (American Institute of Physics, 1972) pp. 170–174.
[18] A. Skaugen, P. Murray, and L. Laurson, Phys. Rev. B **100**, 094440 (2019).
[19] R. Adler, Proceedings of the IRE **34**, 351 (1946).
[20] J. Ferré, P. J. Metaxas, A. Mougin, J.-P. Jamet, J. Gorchon, and V. Jeudy, Comptes Rendus Physique **14**, 651 (2013), disordered systems / Systèmes désordonnés.
[21] E. E. Ferrero, L. Foini, T. Giamarchi, A. B. Kolton, and A. Rosso, Annual Review of Condensed Matter Physics **12**,

111 (2021).
[22] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, *Numerical Recipes 3rd Edition: The Art of Scientific Computing*, 3rd ed. (Cambridge University Press, New York, NY, USA, 2007).
[23] A. Skaugen and L. Laurson, Phys. Rev. Lett. **128**, 097202 (2022).
[24] Luz Pérez Herrera, "DW-uphi-simulator," `https://github.com/lightph/dw-uphi-simulator` (2026).