
NAMASTEDEV · OPENAI CODEX HACKATHON

DevLoop AI

The first answer is
just the beginning.

A visible engineering loop that plans, generates, reviews, scores, and improves AI-created code.

Built by Aakash Shah



AI code can look finished before it is engineered.

01 Missed requirements

A polished answer can quietly omit the behavior that matters.

02 Fragile error paths


Happy-path code hides loading, retry, and failure-state gaps.

03 Weak accessibility

Labels, focus states, and keyboard flows are easy to miss.


04 Hidden maintenance cost

One response rarely explains what changed or why.

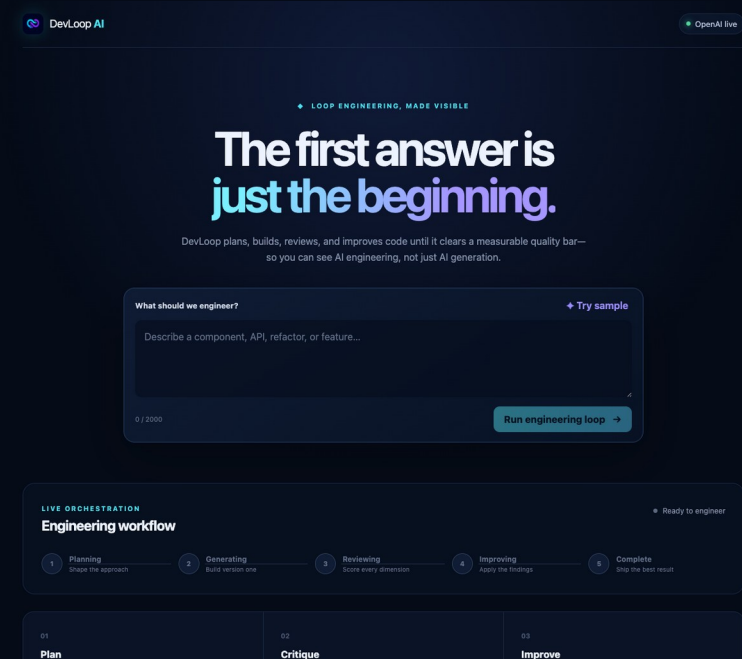

The risk is not generation. It is stopping too early.


DevLoop makes improvement visible.

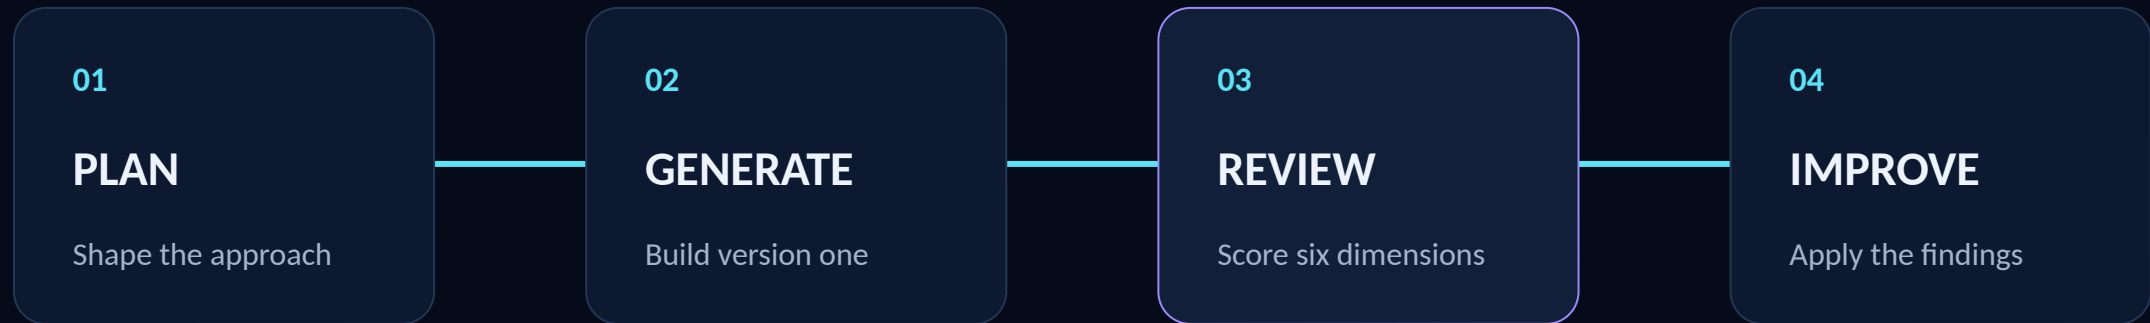

CONTROLLED STOP CONDITION

Quality score ≥ 85 or 3 reviewed iterations

A working product leaves an evidence trail.

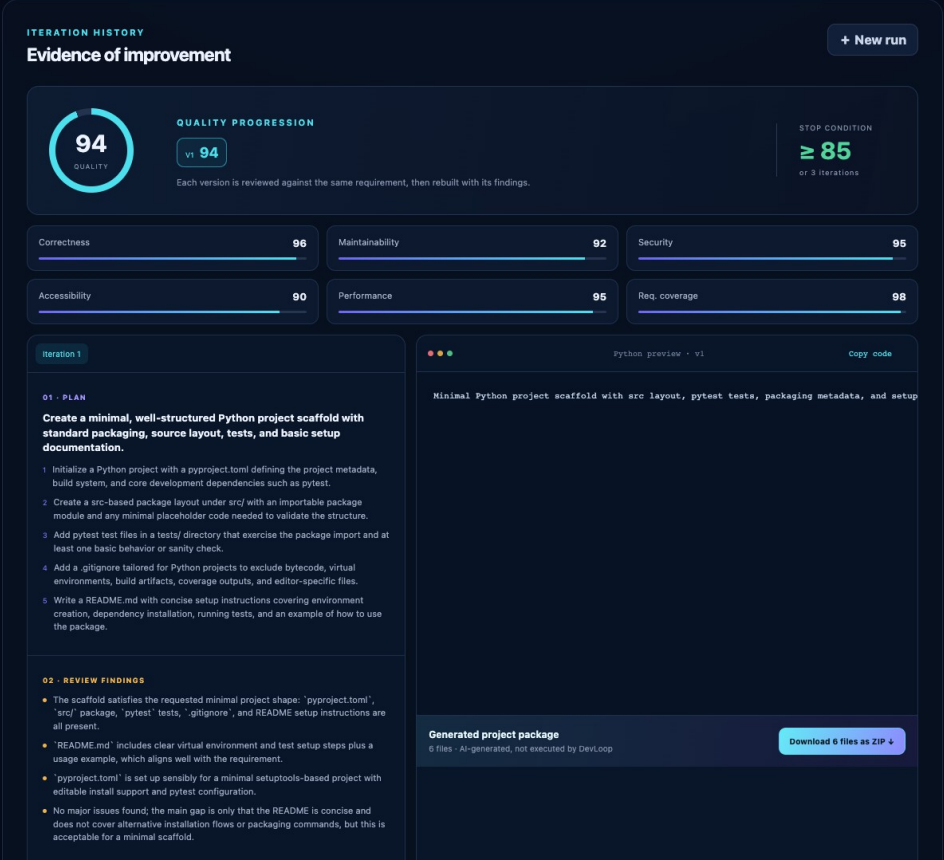


94
reviewed quality score

6
structured dimensions

6
downloadable project files

This live run cleared the threshold on iteration one—so the loop stopped early by design.

The application owns the loop—and its limits.

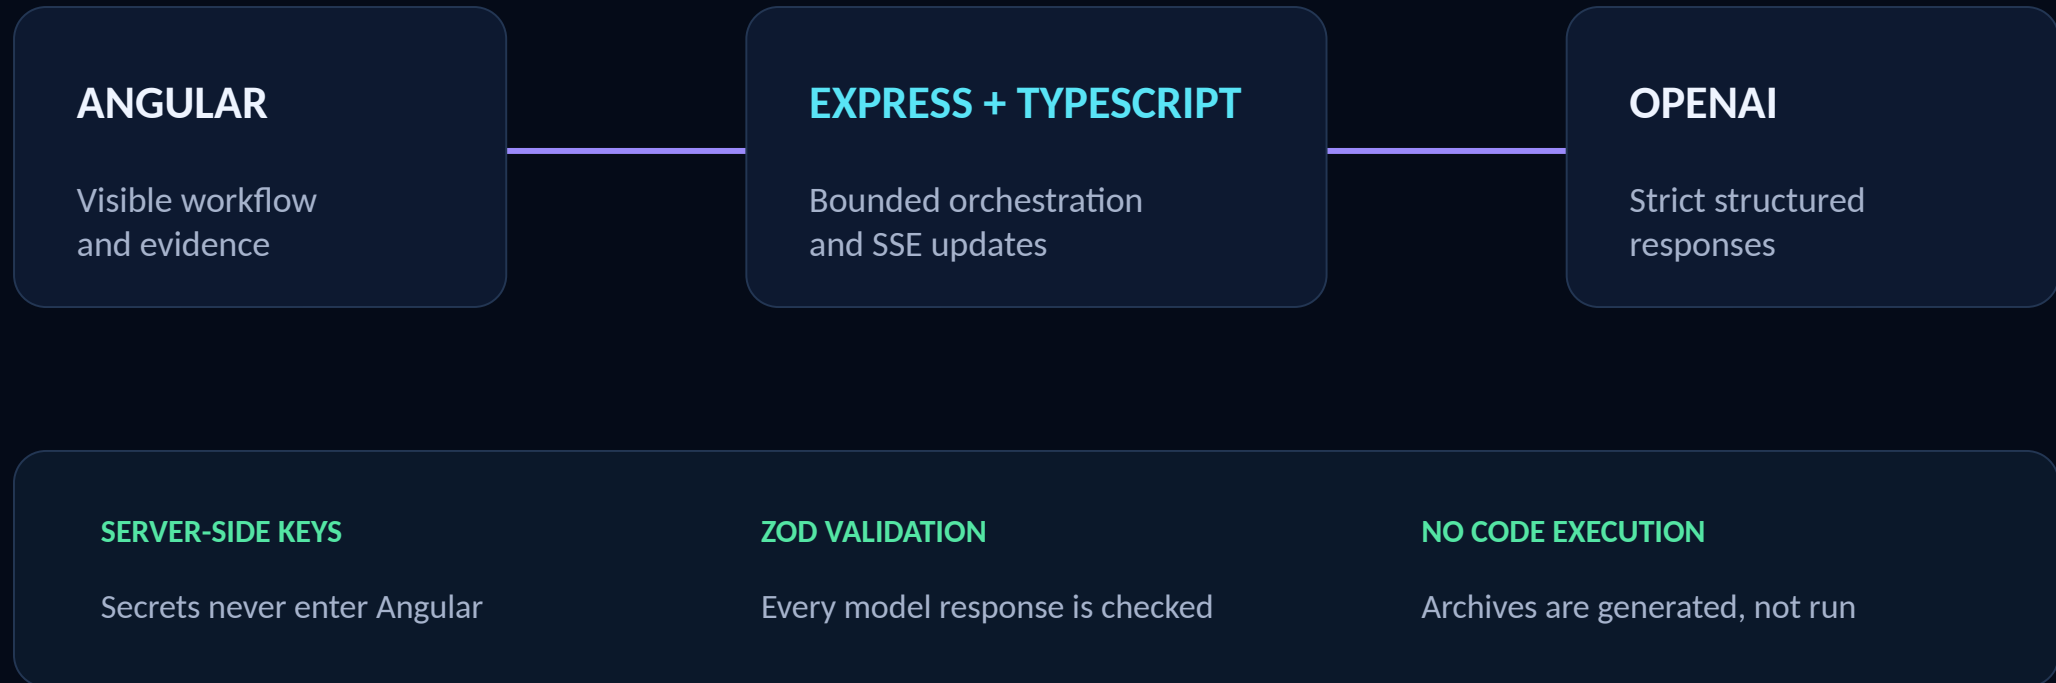



DEVLOOP AI

Better first drafts come from visible engineering.

The first answer is just the beginning.

LIVE PROTOTYPE

devloop-ai.onrender.com

PUBLIC REPOSITORY

github.com/AakashShah14/devloop-ai