



Spring Data JPA with Spring Boot, Hibernate

1. spring-data-jpa-handson




- A. Implement services for managing Country
- B. Find a country based on country code
- C. Add a new country

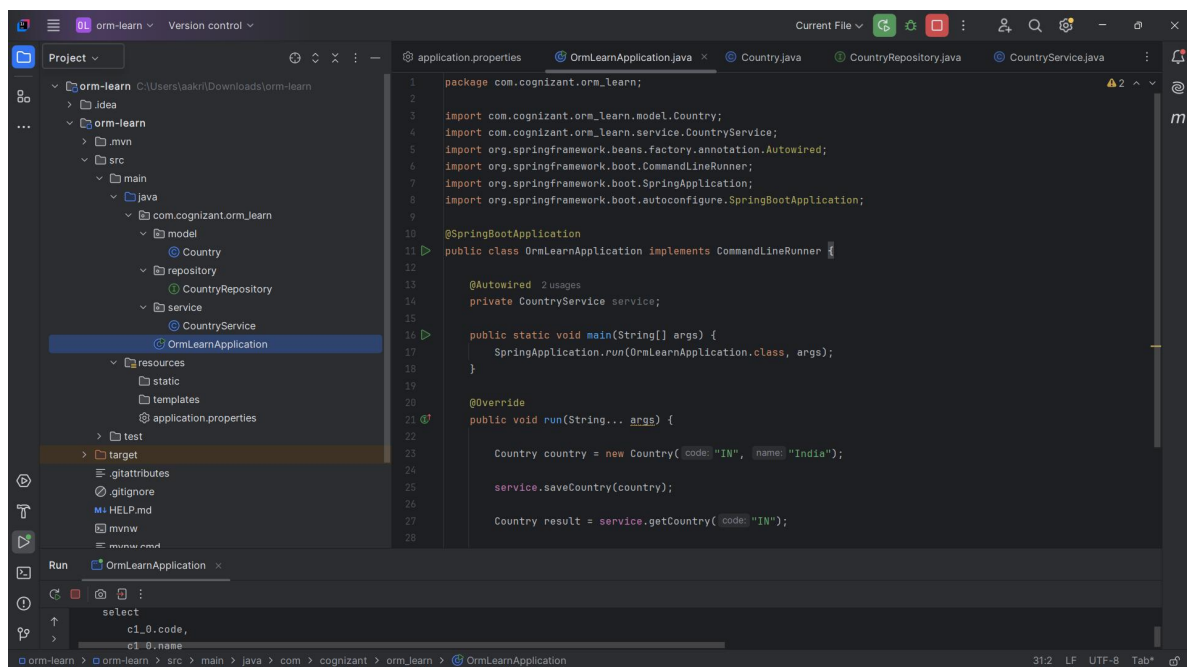

```
1 package com.cognizant.orm_learn;
2
3 import com.cognizant.orm_learn.model.Country;
4 import com.cognizant.orm_learn.service.CountryService;
5 import org.springframework.beans.factory.annotation.Autowired;
6 import org.springframework.boot.CommandLineRunner;
7 import org.springframework.boot.autoconfigure.SpringBootApplication;
8
9
10 @SpringBootApplication
11 public class OrmLearnApplication implements CommandLineRunner {
12
13     @Autowired
14     private CountryService service;
15
16     public static void main(String[] args) {
17         SpringApplication.run(OrmLearnApplication.class, args);
18     }
19
20     @Override
21     public void run(String... args) {
22
23         Country country = new Country( code: "IN", name: "India");
24
25         service.saveCountry(country);
26
27         Country result = service.getCountry( code: "IN");
28     }
29 }
```

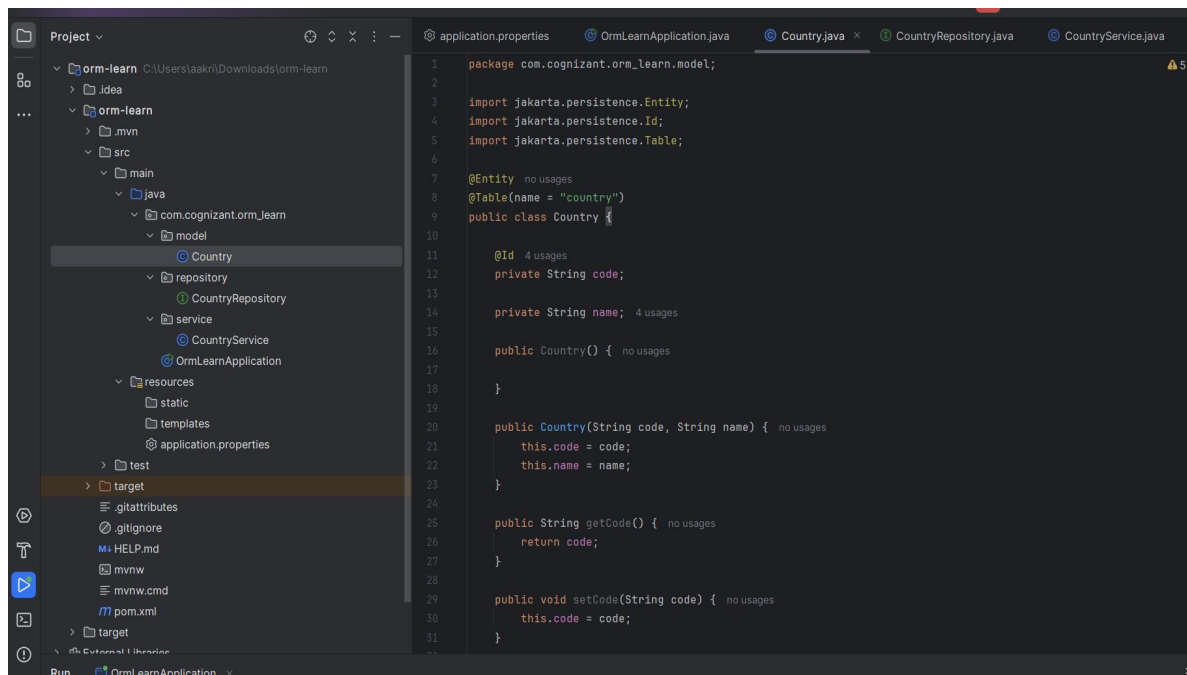

```
1 package com.cognizant.orm_learn.model;
2
3 import jakarta.persistence.Entity;
4 import jakarta.persistence.Id;
5 import jakarta.persistence.Table;
6
7 @Entity
8 @Table(name = "country")
9 public class Country {
10
11     @Id
12     private String code;
13
14     private String name;
15
16     public Country() {
17     }
18
19     public Country(String code, String name) {
20         this.code = code;
21         this.name = name;
22     }
23
24     public String getCode() {
25         return code;
26     }
27
28     public void setCode(String code) {
29         this.code = code;
30     }
31 }
```

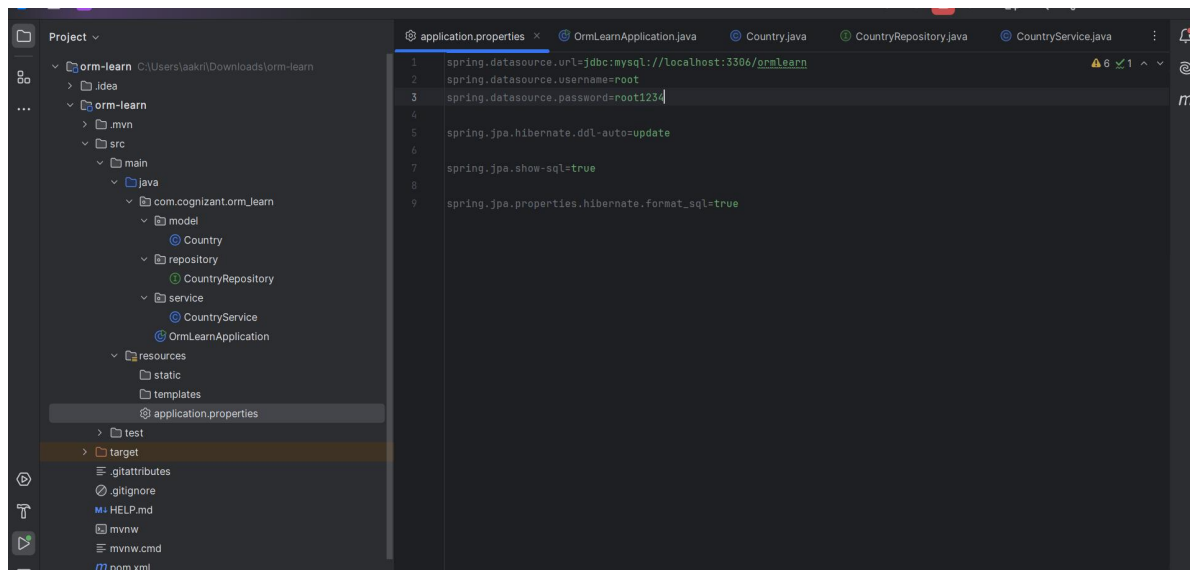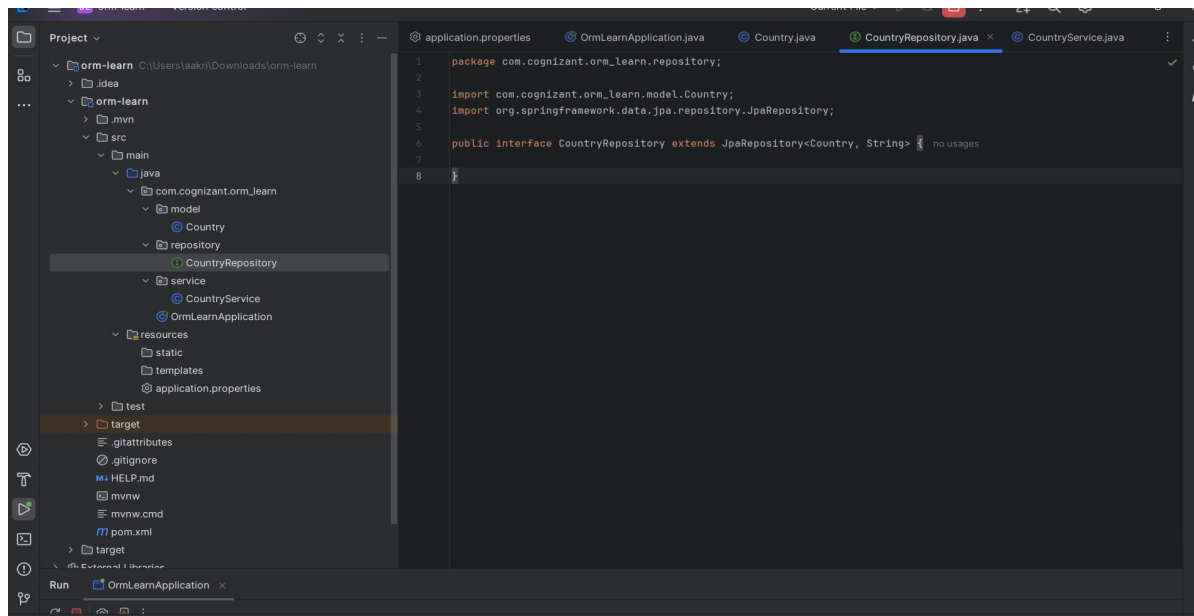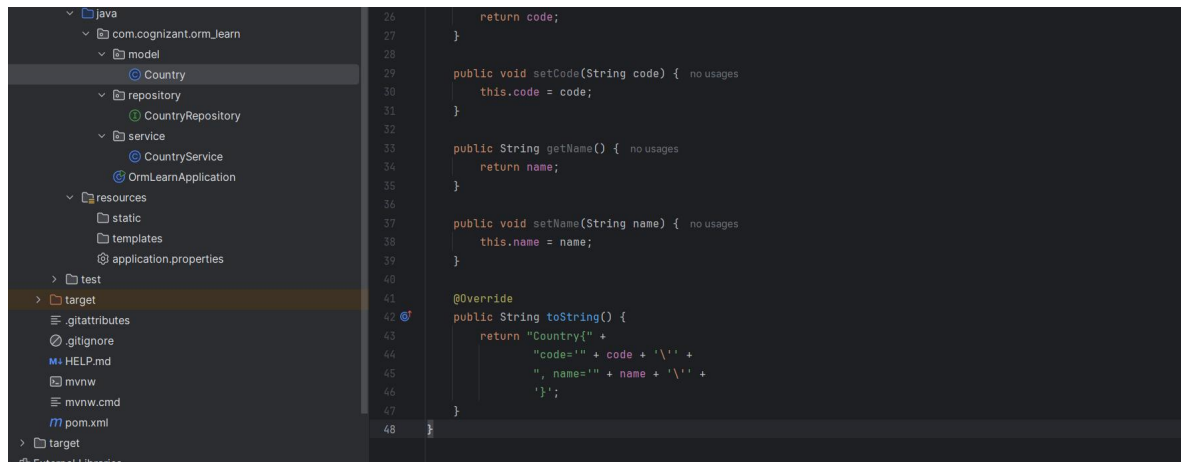

```
c1_0.code=?
Hibernate:
insert
into
country
(name, code)
values
(?, ?)
Hibernate:
select
c1_0.code,
c1_0.name
from
country c1_0
where
c1_0.code=?
Country{code='IN', name='India'}
```

```
MySQL 8.0 Command Line Cli  x  +  v
Query OK, 1 row affected (0.01 sec)

mysql> SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| ormlearn |
| performance_schema |
| sys |
+-----+
5 rows in set (0.01 sec)

mysql> USE ormlearn;
Database changed
mysql> SHOW TABLES;
+-----+
| Tables_in_ormlearn |
+-----+
| country |
+-----+
1 row in set (0.00 sec)

mysql> SELECT * FROM country;
+-----+-----+
| code | name |
+-----+-----+
| IN | India |
+-----+-----+
```

```
Query OK, 1 row affected (0.01 sec)

mysql> SELECT * FROM country;
+-----+-----+
| code | name |
+-----+-----+
| AU | Australia |
| IN | India |
| US | United States |
+-----+-----+
3 rows in set (0.00 sec)

mysql> |
```