



Spring Data JPA with Spring Boot, Hibernate


3.spring-data-jpa-handson(Demonstrate writing Hibernate Query Language and Native Query)

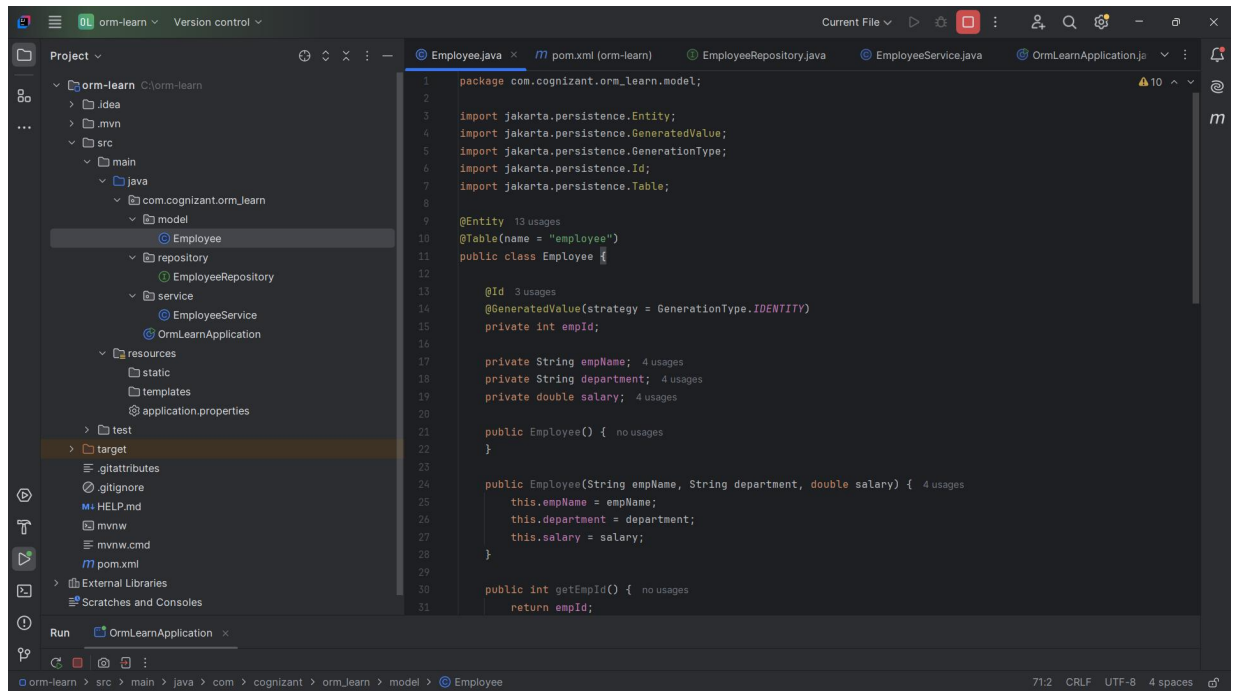


```
1 package com.cognizant.orm_learn.model;
2
3 import jakarta.persistence.Entity;
4 import jakarta.persistence.GeneratedValue;
5 import jakarta.persistence.GenerationType;
6 import jakarta.persistence.Id;
7 import jakarta.persistence.Table;
8
9 @Entity
10 @Table(name = "employee")
11 public class Employee {
12
13     @Id
14     @GeneratedValue(strategy = GenerationType.IDENTITY)
15     private int empId;
16
17     private String empName;
18     private String department;
19     private double salary;
20
21     public Employee() {
22     }
23
24     public Employee(String empName, String department, double salary) {
25         this.empName = empName;
26         this.department = department;
27         this.salary = salary;
28     }
29
30     public int getEmpId() {
31         return empId;
32     }
```

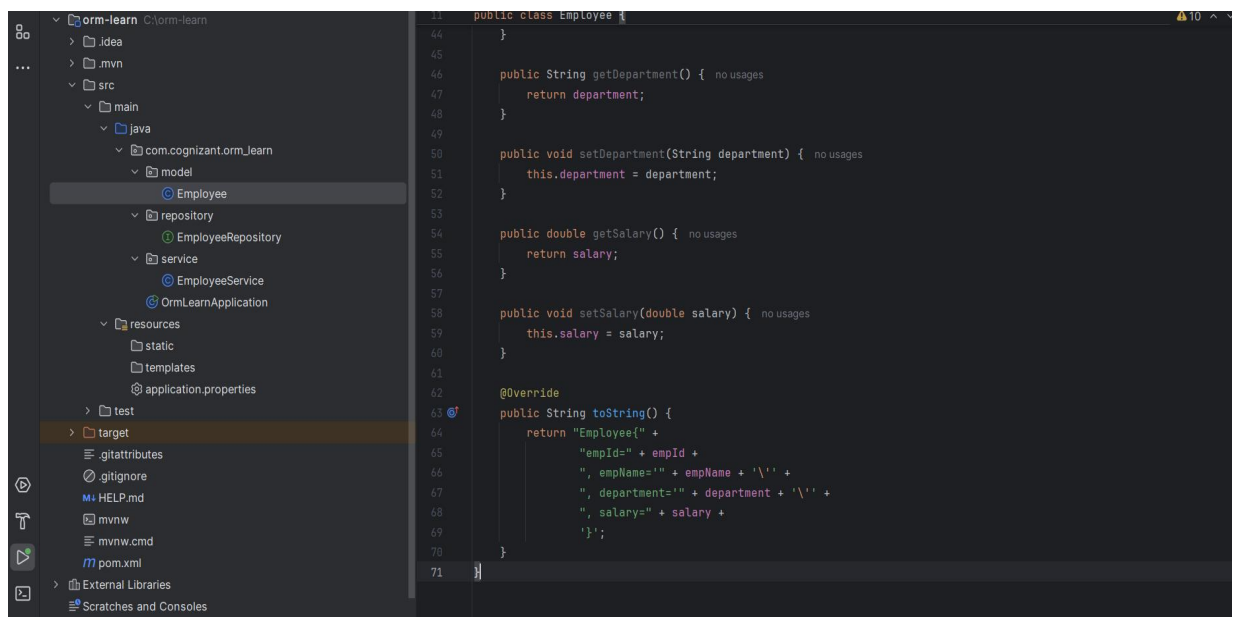

```
44 }
45
46 public String getDepartment() {
47     return department;
48 }
49
50 public void setDepartment(String department) {
51     this.department = department;
52 }
53
54 public double getSalary() {
55     return salary;
56 }
57
58 public void setSalary(double salary) {
59     this.salary = salary;
60 }
61
62 @Override
63 public String toString() {
64     return "Employee{" +
65         "empId=" + empId +
66         ", empName='" + empName + '\'' +
67         ", department='" + department + '\'' +
68         ", salary=" + salary +
69         '\'';
70 }
71 }
```

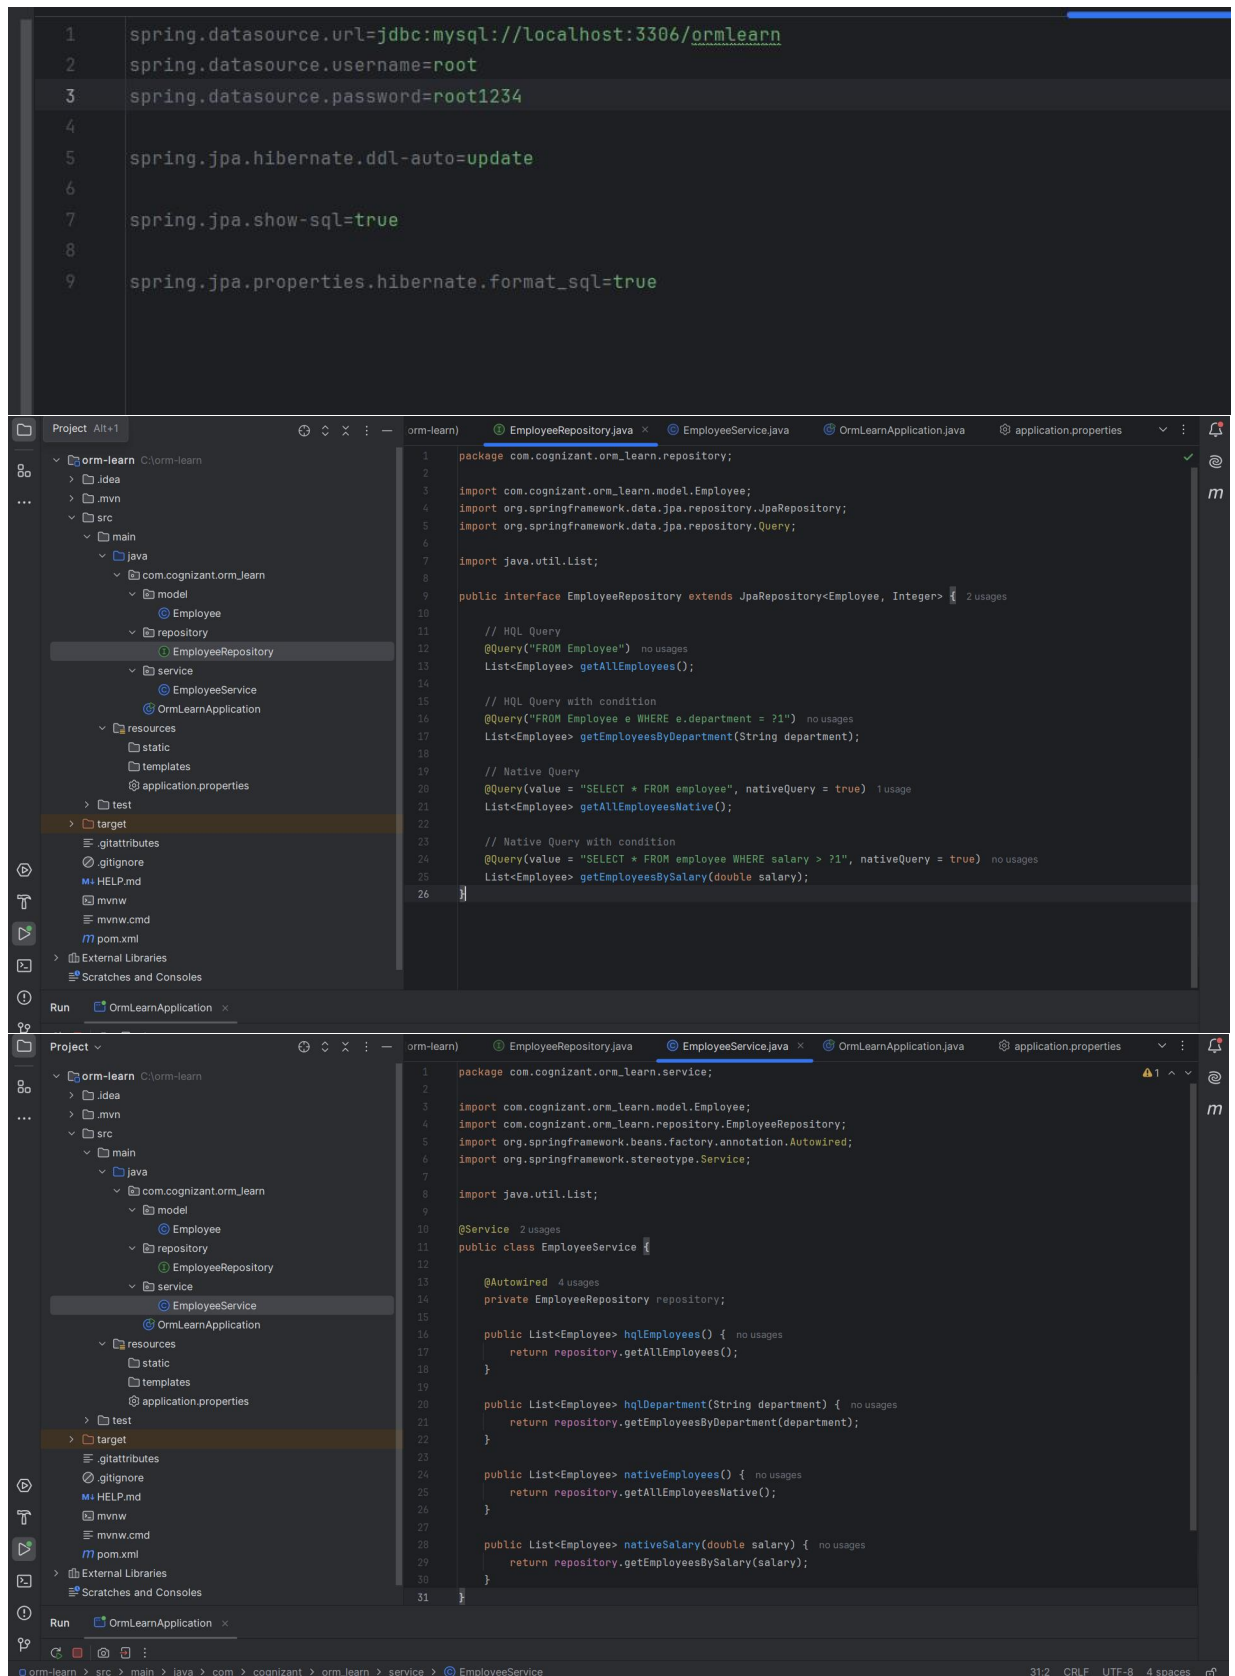

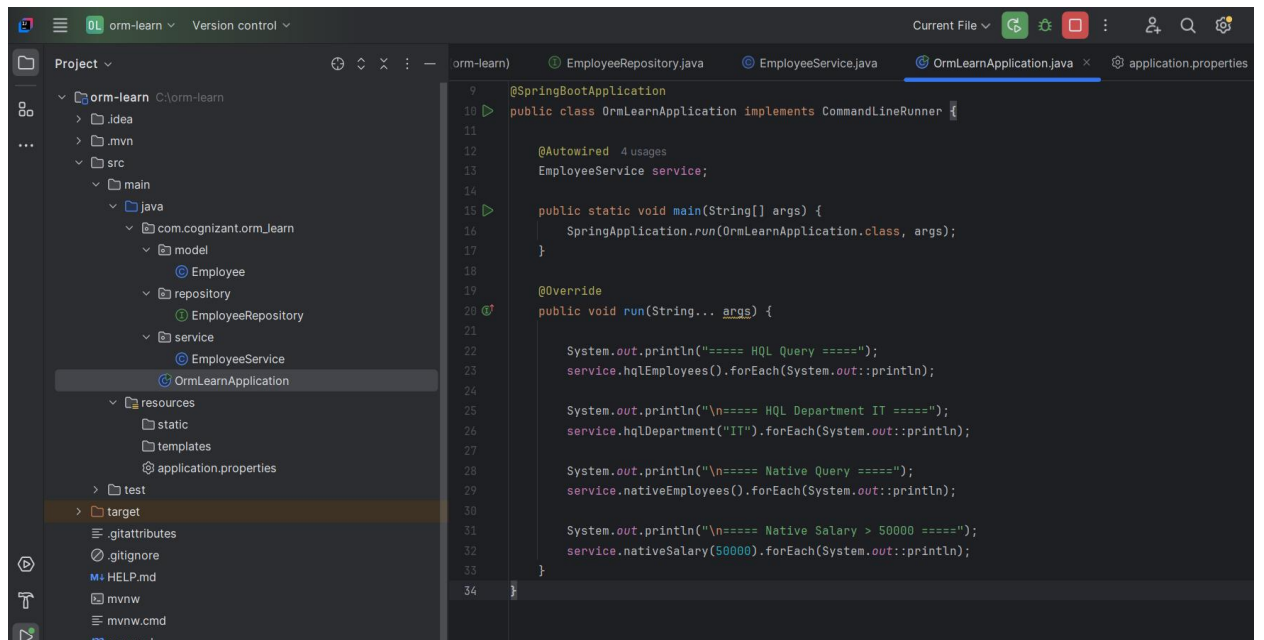

```
Employee{empId=7, empName='Riya', department='Marketing', salary=45000.0}

==== HQL Department IT ====
Hibernate:
    select
        e1_0.emp_id,
        e1_0.department,
        e1_0.emp_name,
        e1_0.salary
    from
        employee e1_0
    where
        e1_0.department=?
Employee{empId=1, empName='Aakrishya', department='IT', salary=55000.0}
Employee{empId=3, empName='Priya', department='IT', salary=65000.0}
Employee{empId=6, empName='Karan', department='IT', salary=80000.0}

==== Native Query ====
Hibernate:
    SELECT
        *
    FROM
        employee
Employee{empId=1, empName='Aakrishya', department='IT', salary=55000.0}
Employee{empId=2, empName='Rahul', department='HR', salary=40000.0}
Employee{empId=3, empName='Priya', department='IT', salary=65000.0}
Employee{empId=4, empName='Amit', department='Finance', salary=70000.0}

arn > src > main > java > com > cognizant > orm_learn > OrmLearnApplication 34:2 LF
```

```

===== Native Query =====
Hibernate:
    SELECT
        *
    FROM
        employee
Employee{empId=1, empName='Aakrishya', department='IT', salary=55000.0}
Employee{empId=2, empName='Rahul', department='HR', salary=40000.0}
Employee{empId=3, empName='Priya', department='IT', salary=65000.0}
Employee{empId=4, empName='Amit', department='Finance', salary=70000.0}
Employee{empId=5, empName='Sneha', department='HR', salary=48000.0}
Employee{empId=6, empName='Karan', department='IT', salary=80000.0}
Employee{empId=7, empName='Riya', department='Marketing', salary=45000.0}

===== Native Salary > 50000 =====
Hibernate:
    SELECT
        *
    FROM
        employee
    WHERE
        salary > ?
Employee{empId=1, empName='Aakrishya', department='IT', salary=55000.0}
Employee{empId=3, empName='Priya', department='IT', salary=65000.0}
Employee{empId=4, empName='Amit', department='Finance', salary=70000.0}

```

learn > src > main > java > com > cognizant > orm learn >  OrmlearnApplication