DNV·GL

SOFTWARE

Implementation of a Design Review Application

Using Virtual Reality- and Gesture Recognition Technology

Andreas Oven Aalsaunet

07 June 2017

About the Design Review Application

An application created to enhance the process of reviewing design models.
At its core, the Design Review Application is a..

- Virtual reality model inspector.
  - The user can traverse the model with 5-6 DOF (degrees of freedom).
  - The user can scale the model.
- Model annotator tool.
  - The user can create two kinds of annotation: Point- and object annotations.
  - These can be edited and categorized.
- Proof-of-concept of how gestures and VR can be utilized for these purposes.
  - The user can perform all these actions by gestures alone.
  - Additionally, the user can also access a menu only by using gestures.

- In the future: A 3D model collaboration tool.

Motivation: 3D models in 2D

3D models have been important in several industries for decades, yet little has happened in how they are worked and interacted with.

- The 3D models themselves are using three dimensions, but are still interfaced in only two. E.g.:
  - Input: The mouse is using 2D.
  - Output: Displays produces 2D images.

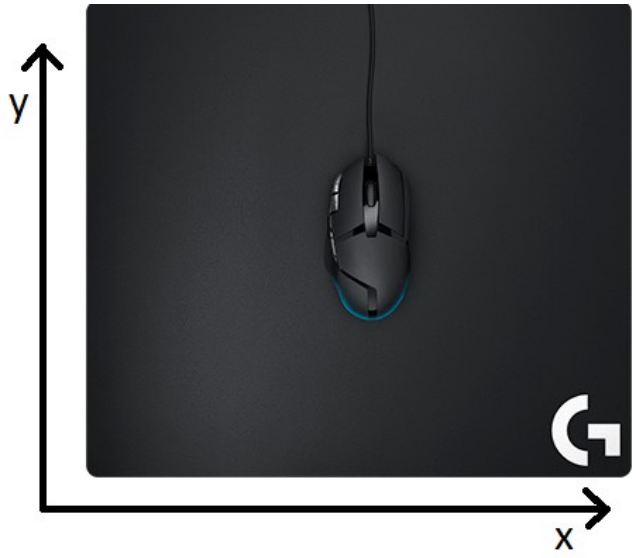

Z wanted!

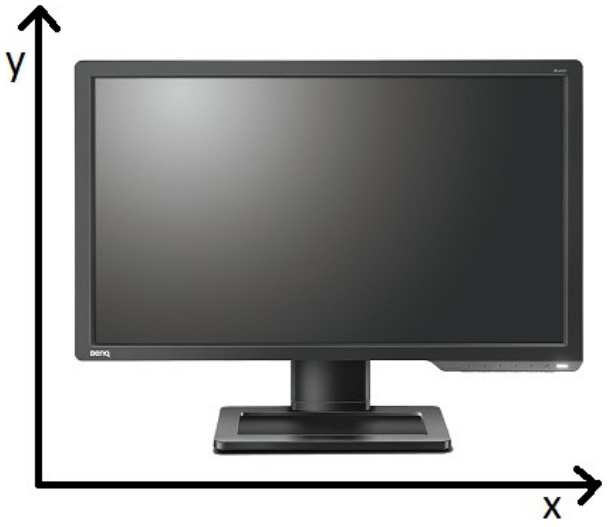

Motivation: 3D models in 2D cont.

- Virtual Reality- and Gesture Recognition Technology can change this, thus possible enabling a better use of the 3D models themselves.
  - Input: By capturing actions performed by the users hands in three dimensions
  - Output: VR headset with stereoscopic vision (individual feed per eye)

Motivation: Limited model usage

Even though 3D modelling programs (e.g «CAD programs») have been around for long, their use in DNV-GL workflows are limited.

Current design review workflow in DNV-GL:

1. The designer makes a 3D design model in a CAD program.
2. The designer creates design documents (2D drawings) based on the model and sends them for verification.
3. A DNV-GL Approval Engineer (AE) reviews the documents and identifies non-conformities.
4. The AE builds a calculation 3D model based on the design documents.
5. The identified non-conformities and other observations are summzarized in a comment letter.
6. The designer receives these remarks and makes the neccessary changes to the design model.
7. The process is repeated until the design is approved.

Motivation: Limited model usage cont.

DNV-GL has demonstrated that re-using the designer's 3D model have several benefits:

- DNV-GL can avoid building a model themselves
- The designer doesn't need to draft 2D drawings
- 3D models can improve the understanding of the design.
- 3D models can improve the interaction between the AE and designer.
- The total time required for a complete design review is reduced.

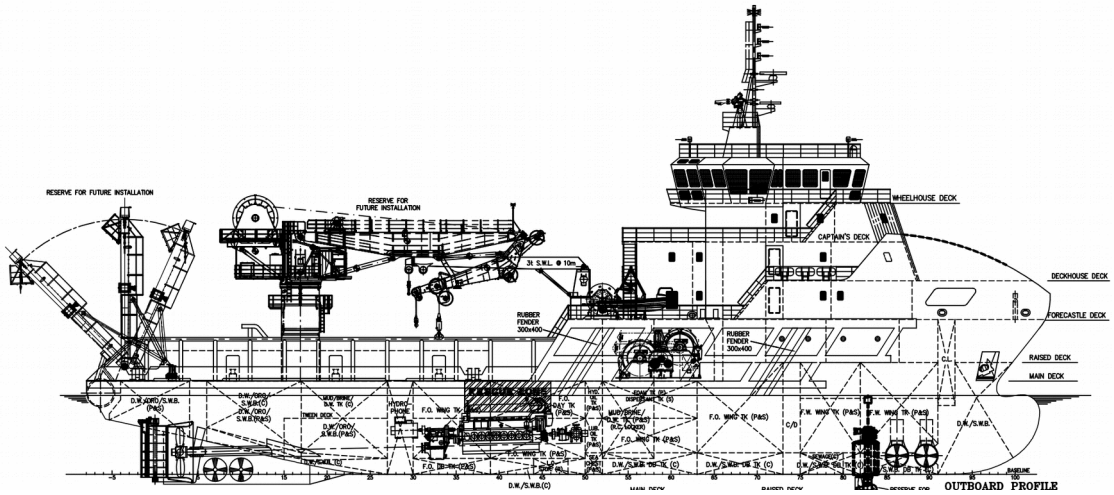

End goal: The digital design review workflow

- Improve 3D model interaction with virtual reality and gesture recognition.
- Streamline the process by removing certain steps (e.g. 2D drawings and multiple models)
- Make information more organised by having it present directly in a 3D model.
- Improve collaboration and communication between designer and AE.

Additionally:

- Keep a history of all the changes made to the design and the 3D model.
- Make the work done during the design phase more accessible during surveys.

A thesis overview

The thesis..

- Reviewed the state of the art
- Reviewed design concerns (e.g VR sickness)
- Discussed the required functionality
- Discussed which of these should be prioritized
- Discussed what tools are available today
- Discussed which of these would be used and why.
- Documented the implementation.

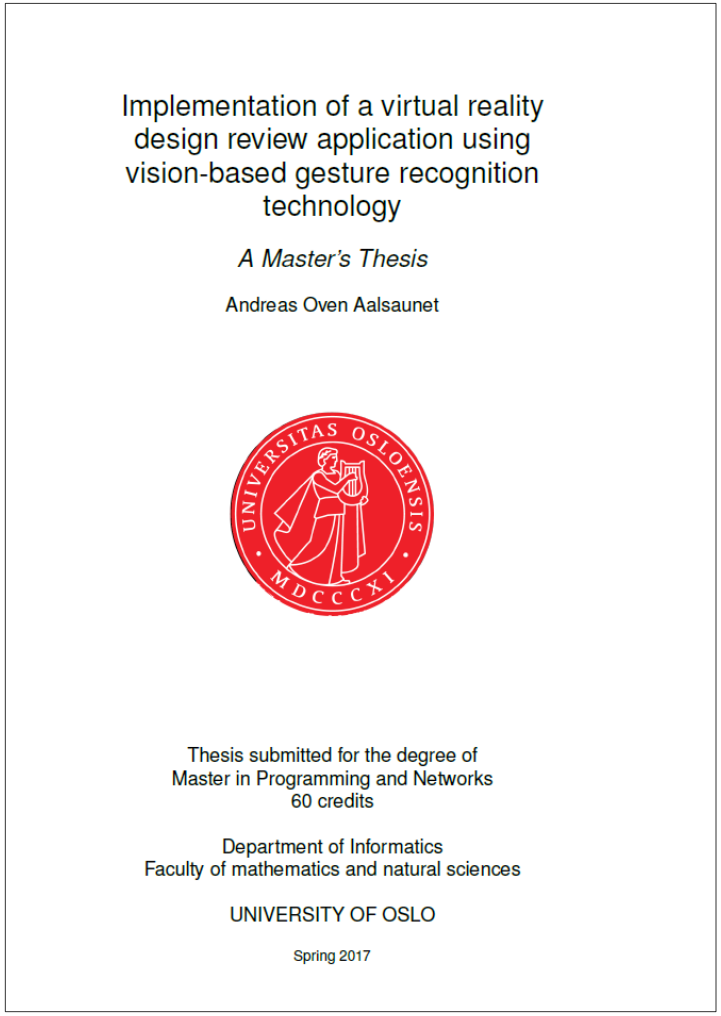

Implementation of a virtual reality design review application using vision-based gesture recognition technology

A Master's Thesis

Andreas Oven Aalsaunet

Thesis submitted for the degree of
Master in Programming and Networks
60 credits

Department of Informatics
Faculty of mathematics and natural sciences

UNIVERSITY OF OSLO

Spring 2017

The intersection of many fields

- Virtual Reality Technology
  - Big impact on application design and performance aspects
- 3D Rendering Techniques
  - Many formats (at least >50), complex models.
- Game Engine Ecosystems
  - Viable platforms for 3D- and VR-based applications
- Gesture Recognition Technology
  - Offers promising interaction possibilities, but often have reliability issues
- Network Technology (e.g. with regard to “multiplayer aspects”)
  - Model consistency.
  - VR can make lag, jitter and packet loss more critical.
- Security (many strictly proprietary 3D models)
  - Sometimes desirable to never have the models themselves on the web

State of the art: Virtual reality technology

Virtual Reality Technology:

- Oculus Rift CV1 and HTC Vive recently released.
  - 2160×1200 resolution (1080x1200 per eye) at a refresh rate of 90 Hz.
  - OLED displays/lenses with a field of view (fov) of about 110 degrees.
  - Tracking system both in the headset and outside it (e.g “base stations”).
- Solid SDKs that provides high level abstractions to the hardware.
- Some AAA single player game titles released.

State of the art: Game engines

Game Engines:

- Have generally become more mature, standardized and user-friendly with a broader scope (more commonly used simulators, visualizations etc).
- Often have built-in support or libraries for 3rd party software or peripherals.
- Often offer good deals for indie developers.
  - E.g Unity Personal is free for companies making less than $100k/year.
- Most popular publicly available ones: Unity, Unreal Engine, CryEngine/Lumberyard.

State of the art: Vision-based hand gesture recognition

There are relatively few consumer-oriented vision-based hand gesture recognition systems available today, with the Leap Motion Controller being one of the few.

- Not counting systems like Xbox Kinect as these focus on the whole body.
- Several companies working at consumer-oriented GRT devices after VR releases.
- Deemed as still immature.
- Little used in commercial software (no AAA titles using it).

The implementation

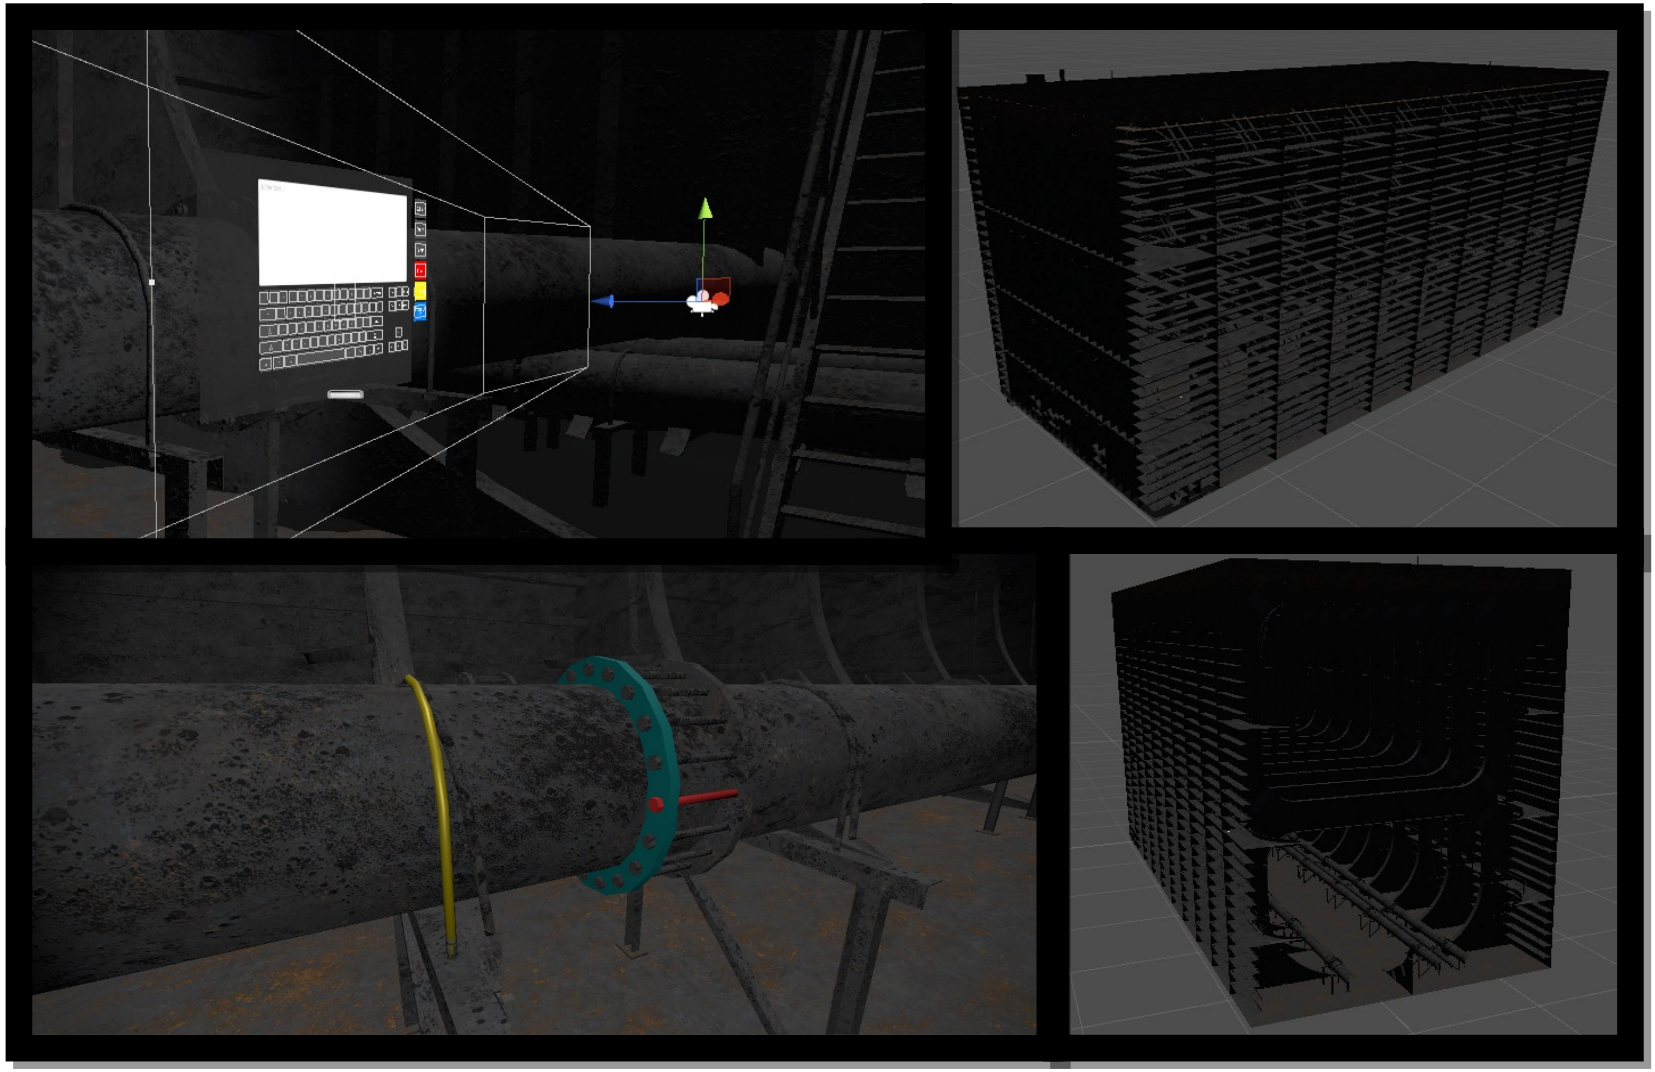

Navigation

- Moving instead of teleporting
- The user is able to navigate a 3D model using either mouse and keyboard or gestures.
- Rotation is done by performing a pinch gesture and moving the hand in the desired rotation direction.
- Movement is handled by one gesture per axis: Left/right (x-axis), up/down (y-axis) or forward/backward (z-axis).
- The user can also “combine” these three gestures into one.

Creating annotations

- The user can create point annotations or object annotations. These hold information related to the location or object they are attached to.
- The annotation is created at the cursors location.
- Point annotations are sphere 3D objects that are by default visible through other objects, to make them easy to spot. This functionality can be disabled.
- Object annotations are “injected” into the annotated object as a component, and thus have no 3D representation of its own. Instead, object annotations change the material of the annotated object.

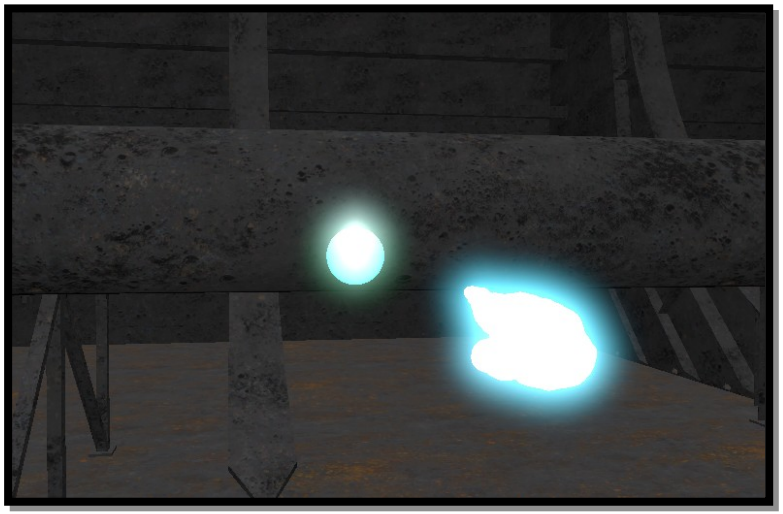

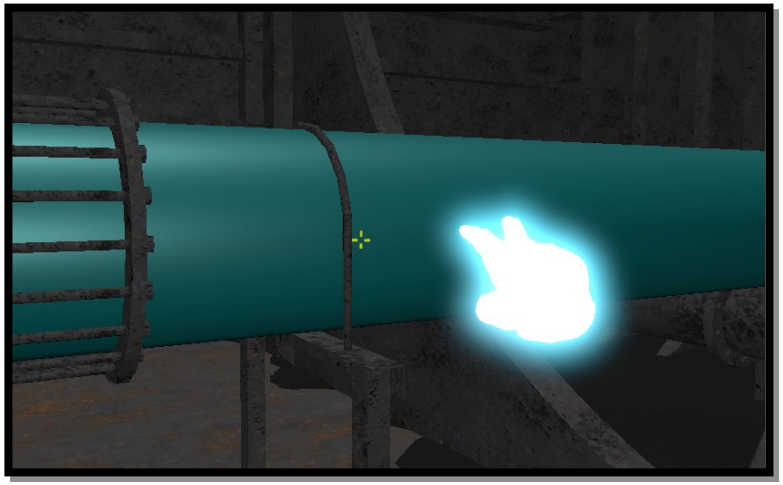

Editing annotations

- Once the user interacts (i.e points or clicks) on an annotation the annotation form opens up.
- The user can use gestures to input a short message and give the annotation a priority, and can then either submit the changes, cancel them or delete the annotation.
- Priorities are colour coded: a) normal, b) important, c) very important.

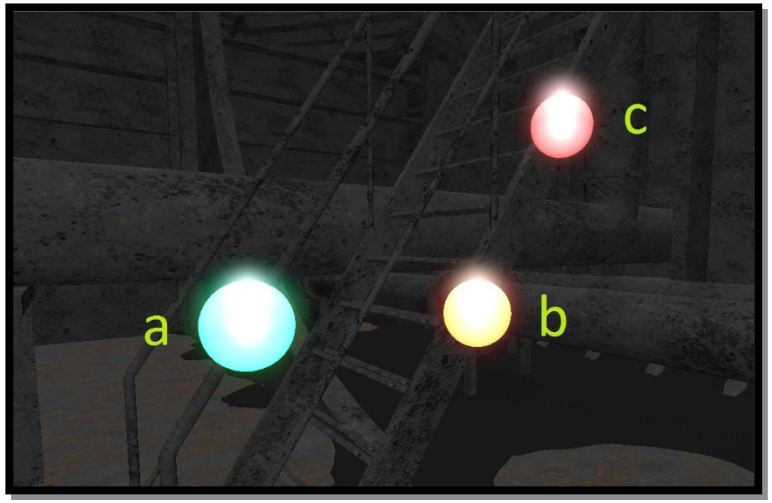

Using gestures for menu interaction

- The menu enables the user to select between some limited options. This includes:
  - Annotation visibility levels
  - Movement gesture schemes
  - Enabling/disabling gestures
- Activates when the user turns a palm against the camera. Buttons are selected by the opposite hand's index finger.

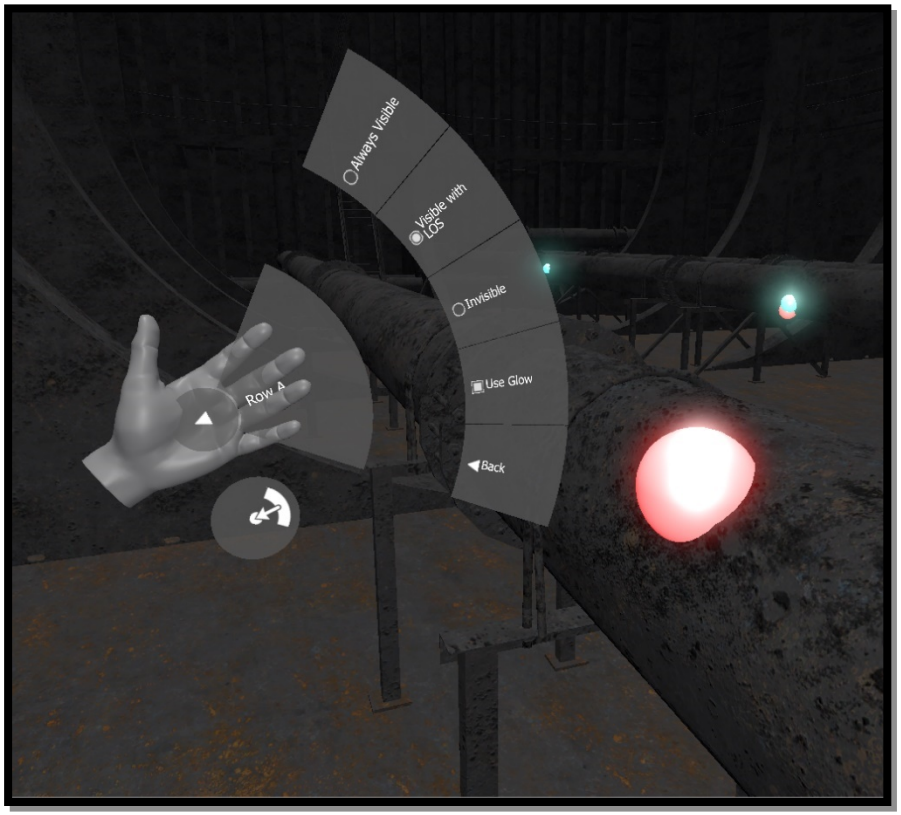

User evaluation

- To evaluate the application, and various design hypothesis, the application was tested by three DNV-GL employees.
  - All unfamiliar with VR
- All participants were given the same introduction, instructions and questions.
- Some responses seem to be personal opinion and some seem unanimous.

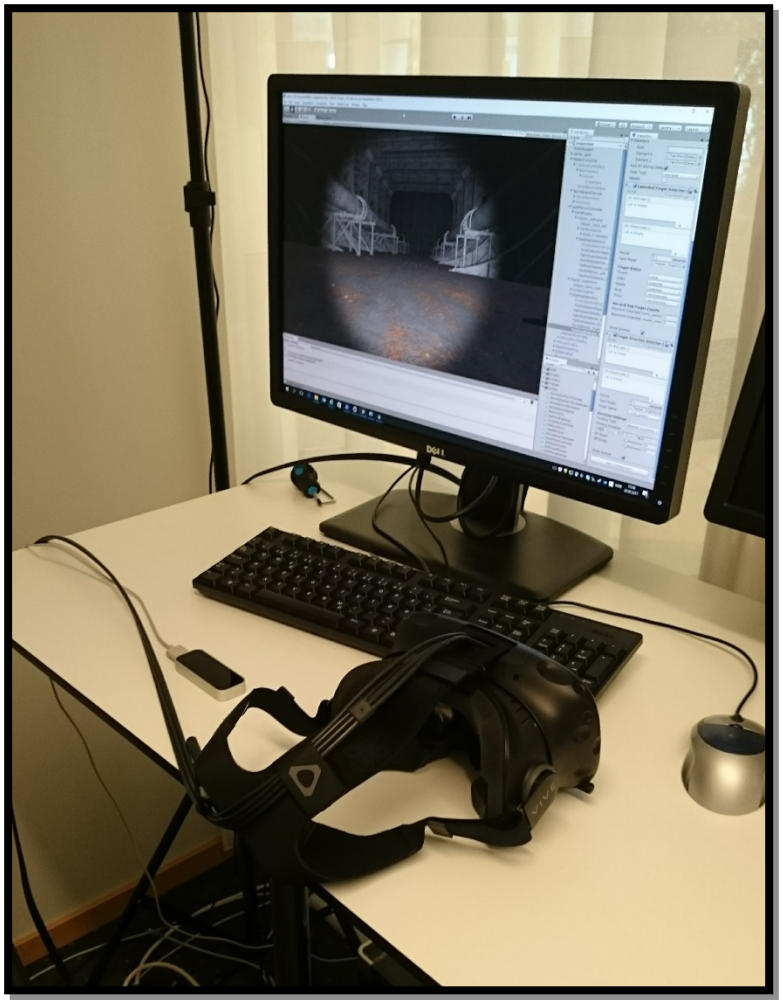

User evaluation observations

- Users seem to prefer having some false negatives over the same amount of false positives, thus prefering stricter gesture requirements.
- The users all responded that the added depth information from VR was very useful.
  - This was especially the case for gestures.
- The users had different preference for gestures, with some exceptions.
  - Varied how intuitive a gesture felt for the user.
  - Still, the users agreed on which gesture they liked the least.
- The users all seem to perfered gestures that emulated the most natural movement patterns (e.g. forward and rotations).
  - Left/right and up/down wasn't that much used.

Future work

- Happening now!
- Support runtime loading of a variety of 3D models.
- Session management supporting multiple users.
- Storing and restoring annotations.
- More complex annotations.
- Expose annotations to other platforms.
- Give the user more customizable gestures.
- Find solutions to give tactile feedback.

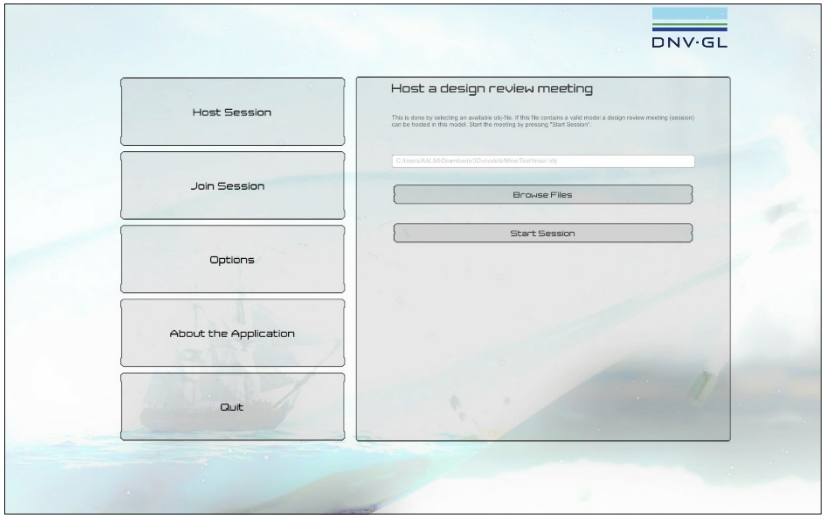

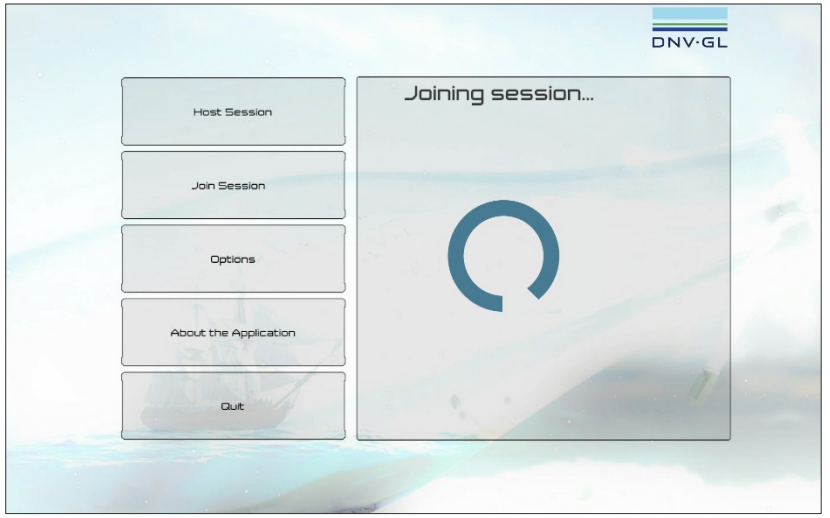

Now on to the demonstration!

Andreas Oven Aalsaunet
andreaoa@ifi.uio.no
+47 913 73 741

www.dnvgl.com

SAFER, SMARTER, GREENER