

# Localised stabilisation of a bistable switch for minimal-kernel phenotype control in a Boolean breast-cancer network

Aamer Iqbal Bhatti\*<sup>1</sup>

<sup>1</sup>Department of Control and Instrumentation Engineering, King Fahd University of Petroleum and Minerals, Dhahran, Saudi Arabia

## Abstract

We pose breast-cancer therapy as a control problem on a Boolean network of signalling pathways. The goal is a minimal, druggable intervention that drives the network to apoptosis as a genuine fixed point of the free dynamics, with no node held on by force. On a 141-node network, adapted substantially from Taoma et al. [22] with changes to its feedback wiring, a capped, no-forcing whole-network controller shows that the cell-fate phenotypes are individually controllable but jointly near-exclusive. They share a dominant strongly-connected core, 16 of 22 pathways, so feasibility does not imply joint reachability. We therefore reduce the apoptosis core to a nine-node bistable switch on the AKT1 and TP53 axis. We embed biological timescale separation as a delayed autoregressive system over  $GF(2)$ , fast, mid, and slow on a 1:5:25 schedule, in semi-tensor-product form. We then relax global stabilisation, which is intractable on the full network, to localised stabilisation on the switch. A minimal kernel of about two to three nodes, concentrated on the PI3K/AKT/mTOR axis, drives the switch to its apoptotic attractor. It commits the full 141-node network to a caspase-cascade death fixed point in 15 to 17 percent of patients across three cohorts (TCGA, METABRIC, I-SPY2). It holds that state as durably as a near whole-network controller of about thirty nodes, an order-of-magnitude reduction at equal durability. The model is a structural drug-target nominator, not a response predictor.

## 1 Introduction

Targeted agents in breast cancer often shrink a tumour, then lose durable control of it. The drug blocks a signalling hub. The pathway relieves its own brakes. The hub reactivates. The most recent approved agent in this class delays relapse rather than preventing it. In CAPItello-291, progression-free survival rose from 3.1 to 7.3 months, yet the disease still advanced [26]. The obstacle is not reaching an apoptotic state. It is making that state durable, and reaching it with an intervention small enough to deliver. We treat this as a control problem. On a Boolean network of the relevant signalling, we seek a minimal, druggable intervention. It must drive the network to apoptosis as a genuine fixed point of the free dynamics, with no node held on by force.

Boolean networks suit this question. They capture the logic of regulation without kinetic constants that are rarely measurable [12, 13]. Their predictive value for real biology is established [14].

---

\*Corresponding author. Email: [aameriqbal.bhatti@kfupm.edu.sa](mailto:aameriqbal.bhatti@kfupm.edu.sa). ORCID: 0000-0002-3373-3388.

Every trajectory settles into an attractor, and each attractor maps to a cell fate such as proliferation or apoptosis. Logic-based modelling of signalling is now systematised, with mature tools for large models [15, 16, 17, 18]. In cancer, such models reproduce the hallmarks and test interventions [19, 20, 21, 22, 23]. The therapeutic question becomes one of control. Which nodes should be perturbed, and how, to steer the network from a pathological attractor to a desired one?

Two traditions bear on that question. Our approach is defined by where it leaves each. The first is structural attractor control. Stable-motif [3, 4, 5] and feedback-vertex-set [24] methods certify from topology that a target attractor is controllable in principle. The second is algebraic control by the semi-tensor product [6, 35]. It renders a Boolean control network as a linear map over a lifted state space. Controllability, stabilisation, and their time-delayed extensions all follow [34, 36, 37]. A separate strand fits a generic model to patient omics and simulates drug effects [7, 8]. These are all powerful. But two of them simulate or annotate. They do not design a controller. The structural methods certify feasibility. They do not test reachability under a capped, non-accumulating, druggable budget on real patient states. This paper is a control design on that budget.

Two obstacles stand between feasibility and a deliverable controller. The first is joint reachability. Individual phenotypes can each be driven to a fixed point. Reaching them together under a capped budget can still fail. The cause is a dominant strongly-connected core shared across pathways. The second obstacle is time. The standard Boolean update advances every node on one clock. The apoptosis core does not work that way. Fast survival signalling and slow transcriptional feedback decide fate together. Forced onto one clock, the core oscillates, and no durable death state is reachable. Different timescales must be built in. This is an established device in asynchronous and priority-class Boolean modelling [38, 39]. Here it is a precondition for control of the core, not an embellishment.

We address both obstacles on one network. First, a capped, no-forcing whole-network controller is run on three cohorts. It tests reachability, not feasibility. The phenotypes are individually reachable but jointly near-exclusive. A dominant strongly-connected core, 16 of 22 pathways, obstructs joint control. This result forces the retreat to the core. It is not a convenience. Second, we reduce the apoptosis core to a nine-node bistable switch on the AKT1 and TP53 axis.

The control-design idea is a relaxation. Global stabilisation asks every node of the full network to converge to the target [2]. That is intractable here, and it is unnecessary. We use local stabilisation instead [1]. A target set is locally stabilised when trajectories from its neighbourhood converge to it under the free dynamics. This holds when the coupling into the target block is not significant. Whether that condition holds depends on how the network is partitioned into local subsystems. In our earlier modular design, each pathway module was one local subsystem [1], and the coupling between pathway modules was not always weak. Here we partition by timescale instead. Each time-delayed block, fast, mid, or slow, is one local subsystem. Two things then reduce the coupling. The delay structure separates the processes in time. And the unit of design is now the timescale block, not the pathway module. Between these blocks the coupling is weak. The local-stabilisation condition holds block by block. We can therefore design a controller for each block on its own. This is what makes a semi-tensor-product design usable here. A global design must lift the whole 141-node state space, and that algebraic dimension grows exponentially, worsened further by delay [37]. Block-wise design avoids that dimension explosion. It confines the semi-tensor product to a small switch, where it stays tractable. The result relaxes the weak-coupling pathway decomposition of our earlier work [1]. Sequential stabilisation across all pathways becomes a single localised action on a bistable core.

The kernel this yields is minimal and druggable. It is about two to three nodes, concentrated on the PI3K/AKT/mTOR axis. It holds the apoptotic fixed point as durably as a near whole-network


controller of about thirty nodes.

The network itself is not a contribution. It is adapted substantially from the breast-cancer Boolean model of Taoma and colleagues [22]. We make three changes to it, and they are not of one kind. Two restore collapsed feedback loops. The first is a p53 and MDM2 loop with a damage input, where the baseline let MDM2 self-lock and never delivered damage to p53. The second is an AKT1 and FOXO3a loop closed by PHLPP, where the baseline arm had no closing feedback. The third change is different. It adds the intrinsic caspase commitment cascade, which the baseline omits, and which makes apoptotic commitment irreversible. Methods describes all three, and the appendix lists them in full. We treat them as model construction, not as findings.

This paper makes one methodological contribution, with four supporting results. The contribution is a control-design principle. On a strongly coupled Boolean cancer network, global stabilisation is infeasible. Localised stabilisation of an extracted bistable switch is enough. It steers the whole network’s phenotype with a minimal, druggable kernel. The supporting results are four. First, cell-fate phenotypes are individually controllable but jointly near-exclusive, obstructed by a dominant strongly-connected core. Second, a delayed autoregressive  $\text{GF}(2)$  embedding makes the switch’s apoptotic state reachable and stable, where a single-clock model only oscillates. Third, a switch-designed kernel of two to three nodes holds the apoptotic fixed point as durably as near whole-network control of thirty. Fourth, resistance is a hysteresis property. Its control target is the AKT1 and FOXO3a coupling state, and survival-axis inhibition flips exactly the coupled fraction. The model is a structural drug-target nominator, not a response predictor. We state that scope plainly and return to it in the Discussion.

The paper is organised as follows. Methods covers the cohorts and binarisation, the Taoma-derived 141-node network and its three corrections, the capped whole-network controller, the delayed multirate switch, and the localised-stabilisation kernel design. Results reports the joint-reachability obstruction (Section 3.1), the switch and its patient routing (Section 3.2), the localised-stabilisation controller and the apoptosis it secures on the full network (Section 3.4), and the minimality of that controller (Section 3.5). The Discussion places localised stabilisation against stable-motif and semi-tensor-product control theory, and states the limits of the claim. Every number, figure, and table regenerates from the public repository with one command.

## 2 Methods

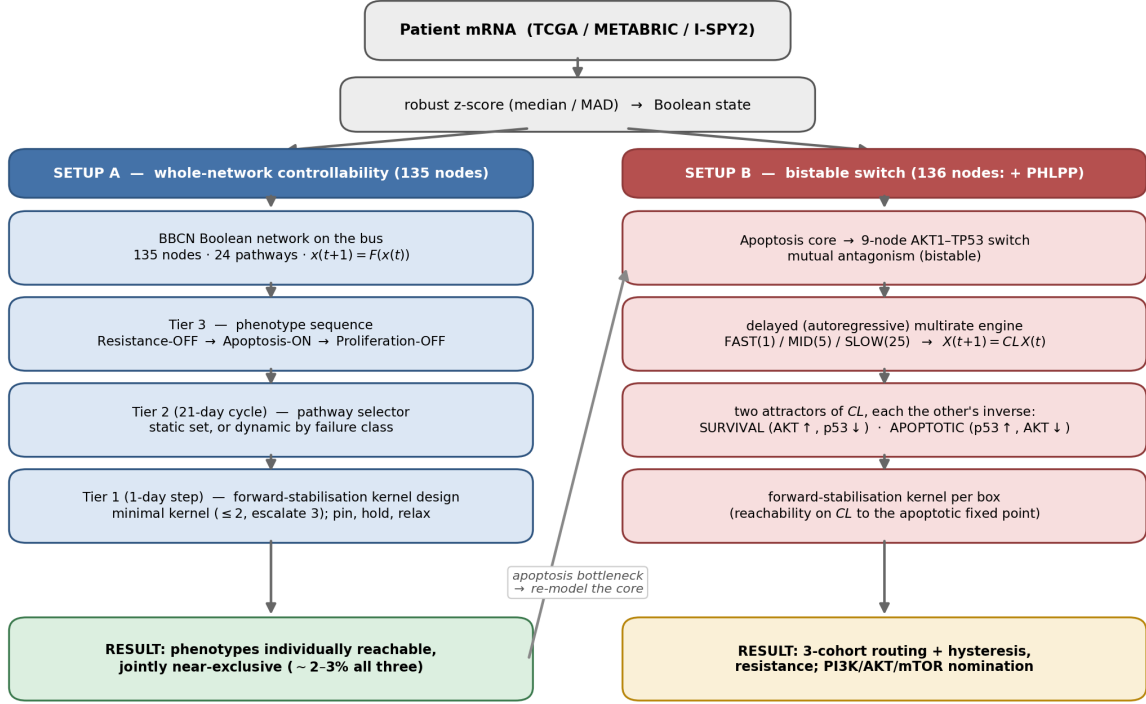

**Figure 1: The BBCN control-design pipeline.** A shared front end binarises patient mRNA into the initial state (Section 2.1). The whole-network controller (left) drives the full 141-node network under a capped, no-forcing budget and reveals the obstruction: the cell-fate phenotypes are individually reachable but jointly near-exclusive, held in a dominant strongly-connected core (Section 3.1). This motivates re-modelling the apoptosis core as a nine-node AKT1 and TP53 bistable switch, expressed as a delayed multirate system over  $\text{GF}(2)$  (fast/mid/slow on a 1:5:25 schedule) in semi-tensor-product form (Section 2.4). Localised stabilisation of the switch, with a minimal druggable kernel, then commits the full network to a durable apoptotic fixed point (Section 2.5).

### 2.1 Cohorts and binarisation

Patient states come from primary-tumour mRNA in three public cohorts. TCGA-BRCA [10] has 1082 patients on RNA-seq. METABRIC [11] has 1980 on microarray. I-SPY2 has 988 on microarray, from GEO series GSE194040. The three span different platforms and different patient populations. A finding that holds across all three is therefore unlikely to be an artefact of one assay or one centre. TCGA and METABRIC are large reference cohorts on unrelated technologies. I-SPY2 is a neoadjuvant trial cohort that also carries treatment annotation.

Each gene is binarised within its own cohort. The activity score is the robust  $z$ -score,  $(x - \text{median}) / (1.4826 \cdot \text{MAD})$ , taken over all patients in the cohort. The node is set ON when the score

exceeds zero. The robust estimator is the default. It uses the median and the median absolute deviation, not the mean and the standard deviation, so a few extreme expression values cannot drag the threshold. Such values are common in skewed RNA-sequencing data. Classic  $z$ -score and hard-median splits are kept only as alternatives for the sensitivity analysis, and the qualitative results do not depend on the choice. Some nodes stand for a signalling activity rather than one gene. For these a curated multi-gene panel is reduced to one bit by majority vote: the node is ON when at least half of its panel genes are ON. The resulting Boolean vector, restricted to the network nodes, is the patient’s initial state.

## 2.2 The network: an inherited model with three changes

The network is not a contribution of this paper, and we describe it as construction. It is adapted substantially from the breast-cancer Boolean model of Taoma and colleagues [22]. Of the 135 nodes in our base model, 105, or 78 percent, correspond to nodes in that model. Once Taoma’s merged complexes and isoforms are re-expressed at individual-gene resolution, for example AKT1, 2, and 3 as one node there and separate nodes here, the update rules coincide for the majority of the shared nodes. The apoptosis and proliferation readouts, CASP3 and E2F1, follow Taoma’s convention.

We extend that base from 117 to 135 nodes across 24 pathway modules. The additions are a DNA-damage arm (ATM, ATR, BRCA1, BRCA2, CHEK1, CHEK2), immune-checkpoint nodes, and NF- $\kappa$ B nodes. The complete rule set of the full model is listed in Appendix A. The work also builds on the author’s earlier BBCN118 framework [1].

We make three changes to the baseline so that a durable apoptotic state exists. The three changes are not of one kind. Two concern feedback loops. The third adds a mechanism the baseline omits.

The first is the p53 and MDM2 loop. We represent the negative feedback together with a DNA-damage input. MDM2 is driven by TP53 and AKT1 and relieved by the CDKN2A and E2F1 damage arm. TP53 is raised by ATM and ATR. This closes the p53 response to damage. It adds no node.

The second is the AKT1 and FOXO3a loop. We close it with PHLPP, the phosphatase that turns AKT1 back off once FOXO3a is nuclear. PHLPP tracks FOXO3, and PHLPP represses AKT1. This is a feedback-loop change. It adds one node, PHLPP, taking the model to 136 nodes.

The third change is different in kind. The baseline has no irreversible commitment step, so an apoptotic excursion can reverse. We add the intrinsic caspase cascade. p53 induces PUMA and NOXA, which repress the anti-apoptotic guardians. BAX and BAK release SMAC, which neutralises XIAP. An executioner loop then closes: CASP6 activates CASP8, CASP8 activates CASP3, and CASP3 feeds back to CASP6. Once an executioner fires it self-sustains. This is the molecular point of no return. The change adds five nodes, PUMA, NOXA, SMAC, CASP6, and CASP7, taking the model to its full size of 141 nodes. It is an addition, not the repair of a collapsed loop, though the executioner loop it introduces is itself a feedback structure.

We treat the three changes as biology the switch requires, not as findings of this work. Their role is to make a durable apoptotic fixed point exist, which Section 3.4 then shows the localised controller can reach.

## 2.3 The whole-network controller

The whole-network controller is the instrument that reveals the obstruction. Its job in this paper is to test reachability on the full network under a realistic budget, and so to show why the retreat

to the switch is necessary. We describe it briefly here. Its full specification is in the Supplementary Information.

The controller has three tiers, each on its own unit of time and decision. The top tier sequences the target phenotypes in clinical order: resistance off, then apoptosis on, then proliferation off. The middle tier acts on a clinical cycle of twenty-one days, and its unit is pathways. From a candidate set it ranks pathways, upstream first, and passes one or two down. The bottom tier acts on a single network step, taken as one day, and its unit is kernels. For each selected pathway it designs the minimal stabilising kernel and administers it. A cycle is one design step followed by free relaxation. The kernel is fixed at the start of the cycle, and the network then evolves freely under it. The horizon is eight cycles, about six months.

The intervention is capped and does not accumulate. During induction up to two pathways act at once, which pins four to five nodes. During maintenance one pathway acts, which pins two or three. The kernel is re-decided at each cycle boundary and never exceeds the cap. Prior-cycle pins are not retained. The bus state carries forward, but the intervention itself does not. This keeps the modelled therapy within a plausible drug-combination budget, and it stops the controller from quietly clamping the whole network.

The kernel at each step is found by the same algebraic forward-stabilisation test [2] used in Section 2.5, applied here at the granularity of the pathway module, with the per-module kernels composed in sequence. This is the pathway-module partition. It is the partition whose weak-coupling premise Section 2.5 shows to fail on the apoptosis core, and the timescale partition replaces it. Run this controller on the three cohorts and the phenotypes are individually reachable but jointly near-exclusive. That obstruction, and the strongly-connected core behind it, are reported in Section 3.1.

## 2.4 The apoptosis core as a delayed multirate switch

The apoptosis decision reduces to a small antagonism. AKT1 drives survival. TP53 drives death. Each represses the other through the network. We isolate the nine nodes that carry this antagonism and call them the switch. Five are fast: AKT1, PTEN, MTOR, PDPK1, and PIK3CA. These are phosphorylation events. One is mid: MDM2, on the timescale of protein turnover. Three are slow: TP53, PHLPP, and FOXO3, set by transcription. The remaining network enters the switch through a held, patient-derived input snapshot  $I$ , comprising SRC, RHEB, IGF1R, RTK, CDKN2A, E2F1, ATM, and ATR. The snapshot is read from the patient’s binarised state and fixed for the run.

**Table 1:** The nine switch nodes, their timescale class, update rate, and role. The three classes advance in the ratio 1:5:25, and the slow nodes enter the fast rules at a delay.

| Node   | Class | Rate | Role                                            |
|--------|-------|------|-------------------------------------------------|
| AKT1   | fast  | 1    | survival hub                                    |
| PIK3CA | fast  | 1    | PI3K catalytic input                            |
| PTEN   | fast  | 1    | PI3K/AKT brake                                  |
| PDPK1  | fast  | 1    | AKT activator                                   |
| MTOR   | fast  | 1    | growth signalling                               |
| MDM2   | mid   | 5    | p53 repressor                                   |
| TP53   | slow  | 25   | apoptosis hub                                   |
| PHLPP  | slow  | 25   | AKT phosphatase, closes the AKT and FOXO3a loop |
| FOXO3  | slow  | 25   | pro-apoptotic transcription factor              |

The update rules are Boolean, that is, arithmetic over  $\text{GF}(2)$ . In the coupled state they are

$$\begin{aligned}
\text{AKT1} &= (\text{MTOR} \wedge \text{PDPK1} \wedge \text{PIK3CA}) \wedge \neg \text{PTEN} \wedge \neg \text{PHLPP}, \\
\text{PTEN} &= \neg \text{SRC} \vee \text{TP53}, \\
\text{MTOR} &= \text{RHEB} \vee (\text{PIK3CA} \wedge \neg \text{PTEN}), \\
\text{PDPK1} &= (\text{PIK3CA} \wedge \neg \text{PTEN}) \vee \text{IGF1R}, \\
\text{PIK3CA} &= \text{RTK}, \\
\text{MDM2} &= (\text{TP53} \vee \text{AKT1}) \wedge \neg (\text{CDKN2A} \wedge (\text{E2F1} \vee \text{ATM} \vee \text{ATR})), \\
\text{TP53} &= \neg \text{MDM2} \vee \text{ATM} \vee \text{ATR}, \\
\text{PHLPP} &= \text{FOXO3}, \\
\text{FOXO3} &= \neg \text{AKT1}.
\end{aligned}$$

The antagonism is visible in two places. AKT1 is repressed by PHLPP, and PHLPP tracks FOXO3, which TP53 supports. TP53 is repressed by MDM2, which AKT1 supports. So survival and death each shut the other down. This is what makes the switch bistable.

One flag modifies the switch. It is the uncoupled resistant configuration, written  $U$ . When  $U = 1$ , three terms change. AKT1 gains a self-sustaining term and stays high once high. PHLPP loses its brake, so  $\text{PHLPP} = \text{FOXO3} \wedge \neg U$ . FOXO3 stays nuclear, so  $\text{FOXO3} = \neg \text{AKT1} \vee U$ . We stress that  $U$  is an encoding, not a finding. It records, as a single bit per patient, the AKT and FOXO3a state that clinical work associates with resistance. When  $U = 0$  the three terms collapse and the rules above hold exactly. What the model then tests is which patients survival-axis inhibition can move out of the coupled fraction.

Time enters through the update schedule, not the rules. The three classes advance at different rates, in the ratio 1:5:25. The fast class updates every tick. The mid class updates every fifth tick. The slow class updates every twenty-fifth tick. All classes that fire on a given tick read the same pre-update snapshot and commit together. There is no approximation in this schedule. It is the exact multirate dynamics.

This schedule is a delay-difference system over  $\text{GF}(2)$ . Between two slow updates the slow state is constant. The fast rules that read a slow node, AKT1 reading PHLPP and PTEN reading TP53, therefore read that node at a delay. Writing the fast state as  $x_f$  and the slow state as  $x_s$ , the fast recurrence has the autoregressive form

$$x_f(t+1) = f_f(x_f(t), x_s(t - \tau_s), I), \quad 0 \leq \tau_s < 25,$$

with the slow block held over its own update interval, and a symmetric form for the mid and slow blocks. The delay is not a modelling device added for effect. It is what timescale separation looks like in a discrete system, and it is the structure that Section 2.5 exploits to make the blocks weakly coupled.

The switch has two attractors, and we label a settled state by them. A state is apoptotic when  $\text{TP53} = 1$  and  $\text{AKT1} = 0$ , and survival when  $\text{AKT1} = 1$ . The two are separated by hysteresis: the state the switch settles into depends on where it starts, not only on the input snapshot. This bistability is the object of control. The design of Section 2.5 works on the algebraic semi-tensor-product form of these rules, in which one synchronous update of a block is a single structure matrix acting on the lifted block state.

## 2.5 Localised stabilisation and minimal-kernel design

The control objective is stabilisation to the apoptotic attractor. Global stabilisation would drive the network there from any initial state. On the full model this is not usable. The semi-tensor-product

form lifts an  $n$ -node network to a  $2^n$ -dimensional map, and a delay of depth  $d$  raises that to  $2^{nd}$  [37]. For 141 nodes with three timescales the lift is astronomical. We do not attempt it. We stabilise locally instead. A target set is locally stabilised when every trajectory from a neighbourhood of it converges to it under the free dynamics.

Local stabilisation becomes a network-level result through a decomposition. Partition the network into subsystems. Under weak coupling between subsystems, stabilising each subsystem locally, in sequence, drives the whole network to a neighbourhood of the joint target. This is the Lyapunov-based weak-coupling decomposition theorem of the BBCN118 framework [1]. Its formal statement and proof are restated in Appendix B. The design problem then has two parts. Choose a partition whose blocks are weakly coupled. Then stabilise each block on its own. Everything turns on the first choice.


The obvious partition is by pathway module, and it is the one BBCN118 used. It fails here. The apoptosis core does not sit in a weakly coupled module. Section 3.1 shows it sits inside a dominant strongly-connected core: 16 of the 22 pathway modules are mutually coupled. The coupling between these modules is strong and bidirectional. The weak-coupling premise of the theorem is violated for the pathway-module partition. Pathway-wise stabilisation therefore does not compose on the hard case. This is the obstruction of Section 3.1, seen from the control side.

We change the partition. Instead of splitting by pathway, we split by process timescale. The nine switch nodes fall into three blocks: fast (AKT1, PTEN, MTOR, PDPK1, PIK3CA; phosphorylation), mid (MDM2; turnover), and slow (TP53, PHLPP, FOXO3; transcription). The multirate schedule updates the fast block often and the slow block rarely, in the ratio 1:5:25, and the slow regulators enter the fast rules at a delay. This is what makes the blocks weakly coupled. Between two slow updates the slow block is constant. Over that interval the fast block evolves under fixed slow inputs, so it sees the slow block as a frozen parameter, not as a co-evolving variable. When the slow block does update, it reads a fast block that has already settled. The coupling does not vanish. It acts across timescales rather than within one. At any single timescale each block is weakly coupled to the others. This is the discrete analogue of timescale separation in singular perturbation. The weak-coupling premise now holds block by block. The theorem that failed on the pathway partition applies on the timescale partition.

We therefore stabilise the switch block locally to its apoptotic attractor. The kernel is the set of clamped nodes that achieves this. We find it with the algebraic forward-stabilisation test [2]. From the block's logical transition matrix  $L$  in semi-tensor-product form and a candidate clamp set  $S$ , form the state-modifying matrix  $T_S^z$  that pins  $S$  to its target values, the controlled matrix  $L_c = T_S^z L$ , its transient power  $\rho$ , and the stabilisability matrix  $\Omega = L_c^\rho T_S^z$ . The set  $S$  stabilises the block if and only if every column of  $\Omega$  is the target index vector. That is, clamping  $S$  drives every block state to target, not only the patient's current state. Candidate sets are searched in increasing size. The smallest stabilising set is taken. Ties among minimal sets are broken by least causal score, then lexicographically, which is a tiebreak only, since every such set already stabilises.



## Appendix B (ii) - Algebraic global-stabilisation test

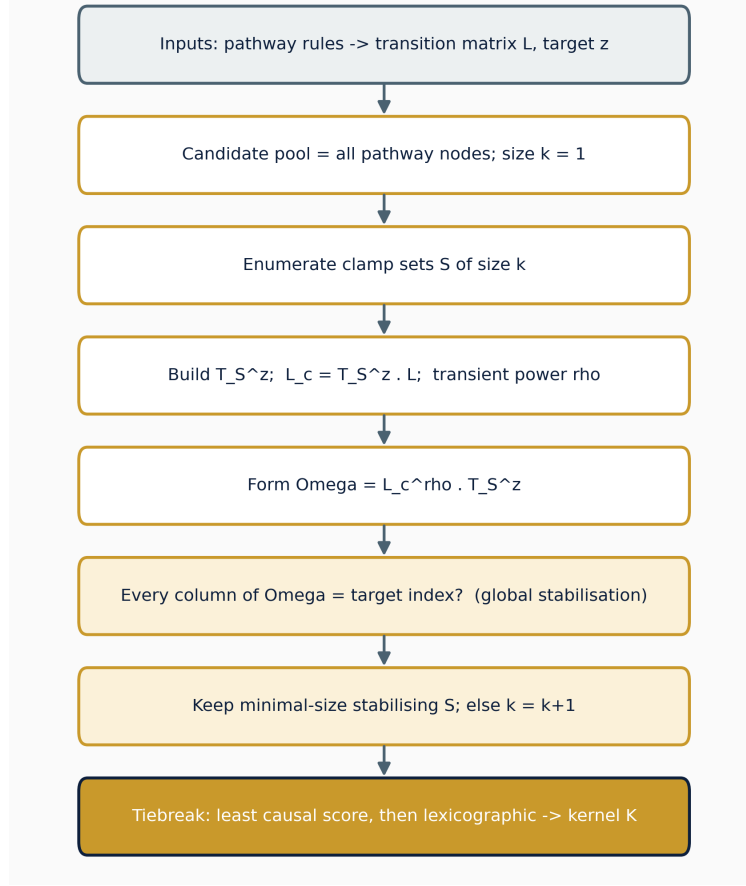

**Figure 2: The forward-stabilisation kernel test.** For each candidate clamp set  $S$ , the controlled operator  $\Omega = L_c^\rho T_S^z$  is formed. The set is accepted only if every column of  $\Omega$  is the target index, that is, the clamp drives every block state to target, not only the patient’s. Minimal accepted sets are kept and ties are broken deterministically. On the nine-node switch block this test is tractable; on the full 141-node network it is not.

The tractability follows from the partition. The test runs on a nine-node block, not on the full network. Its lift is  $2^9$ , small enough that the delayed algebraic form stays within reach where a 141-node lift would not. This is the dimension explosion of delayed semi-tensor-product design [37], avoided by confining the design to the switch. The clamp set the test returns is minimal and druggable. It is about two to three nodes, concentrated on the PI3K/AKT/mTOR axis.

Two points fix the scope of the claim. First, the kernel clamps only druggable nodes. It does not hold the downstream executioner nodes on by force. Once the switch is driven to the apoptotic state, commitment is reached through the intrinsic caspase cascade under the free dynamics, and the apoptotic state is a genuine fixed point, not a forced one. Second, the decomposition theorem certifies convergence to a neighbourhood of the target under weak coupling. It does not by itself certify the endpoint on the full network. We verify that endpoint directly. Section 3.4 shows that the switch-designed kernel commits the full 141-node network to the apoptotic fixed point, certified on the free cascade, patient by patient across the three cohorts. The design is local. The verification is global.

## 2.6 Scoring death: two readouts and the durability test

Death is scored two ways, and we report both. The commitment readout scores death by caspase commitment:  $\text{CASP3} = 1$ . The strict readout adds that survival signalling is off:  $\text{CASP3} = 1$  and  $\text{AKT1} = 0$ . The strict readout is the more conservative of the two.

A patient is durable when the free dynamics of the full 141-node cascade settle to a fixed point at which  $\text{CASP3} = 1$ . The fixed-point test is one synchronous update of the free cascade that leaves the state unchanged. No node is held on. The apoptotic state is reached because PUMA, NOXA, and SMAC repress the survival guardians through the rules, and the executioner loop  $\text{CASP6} \rightarrow \text{CASP8} \rightarrow \text{CASP3}$  self-sustains. It is not reached by forcing any executioner node. The durable state is therefore a genuine fixed point of the free dynamics, not a forced one.

Durability is always certified on the free cascade. Every durable state reported here is a fixed point of the free cascade, reached under the rules, with nothing held on.

## 2.7 Reproducibility

Every number, figure, and table regenerates from the public repository with one command. The runs are deterministic, so the same inputs always give the same numbers. The pipeline self-verifies against a committed reference, so a drift in any figure is caught rather than hidden. The manuscript reads its numbers from the generated files, not from hand-typed values, so the text and the code cannot disagree.

The source-data terms are respected. Only the TCGA-BRCA binarised inputs are shipped with the code, since TCGA is open. TCGA alone therefore runs end to end out of the box. METABRIC is under controlled access, through the European Genome-phenome Archive, with processed data via cBioPortal under its data-use terms. I-SPY2 expression is available from GEO series GSE194040. For those two cohorts the repository documents the binarisation step, the robust  $z$ -score of Section 2.1, rather than shipping the patient-level matrices. An approved user regenerates byte-identical inputs and reproduces every downstream number.

# 3 Results

## 3.1 Phenotypes are individually reachable but not jointly


The whole-network controller reveals the obstruction. Each cell-fate phenotype is reachable on its own. Driving apoptosis to a genuine fixed point succeeds in 86% of TCGA, 85% of METABRIC, and 81% of I-SPY2 patients. Proliferation-off succeeds in 94%, 95%, and 94%. The rates sit close together across three platforms, so individual reachability is a property of the network, not of one cohort. Resistance-off is the hardest phenotype everywhere. That is the first sign that the survival axis is held in place by the rest of the network.

The picture inverts when the three are pursued together. Each new phenotype must be reached without giving up the ones already won. Joint success collapses to 3% in TCGA, 2% in METABRIC, and 3% in I-SPY2 (Table 2). The gap between the high isolated rates and the low joint rate is the obstruction. Each phenotype is feasible. They cannot be held at once. Success is a genuine free-dynamics fixed point with no node forced, so this is not an artefact of pinning too few nodes. It is a statement about where the network can rest.

**Table 2:** Setup A controllability (% of patients reaching a genuine fixed point).

| Cohort / regime     | Resistance | Apoptosis | Proliferation | All three |
|---------------------|------------|-----------|---------------|-----------|
| TCGA, isolated      | 8          | 86        | 94            | n/a       |
| TCGA, sequenced     | 8          | 9         | 3             | 3         |
| METABRIC, isolated  | 4          | 85        | 95            | n/a       |
| METABRIC, sequenced | 4          | 5         | 2             | 2         |
| I-SPY2, isolated    | 8          | 81        | 94            | n/a       |
| I-SPY2, sequenced   | 8          | 9         | 4             | 3         |

The reason is structural. We build a directed graph on the 22 pathways, with an edge from one to another when a node of the first appears in a rule of the second, and compute its strongly-connected components [9]. One component dominates: 16 pathways that all feed back into one another. About 82 percent of pathways lie inside cyclic cores rather than a feed-forward chain (Figure 3). The coupling is distributed, not funnelled through one hub. Removing the strongest carrier, AKT1, shrinks the dominant component only from 16 pathways to 14. No one or two ablations break the cycle. This is the regime where pathway-wise stabilisation fails. Inside a strongly-connected core the other members re-inject the signals an intervention removes, so a phenotype can be feasible yet unreachable under any bounded budget. This is the weak-coupling premise of the decomposition theorem failing on the pathway partition (Section 2.5). It is why the apoptosis core must be modelled on its own terms.

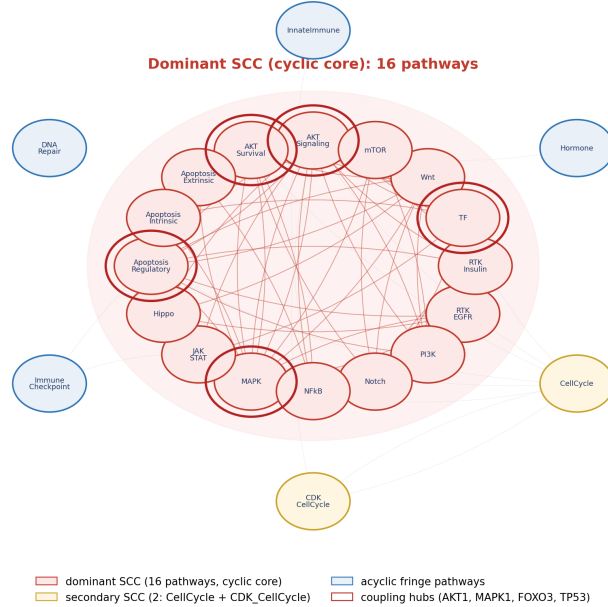


**Figure 3: The pathway coupling graph.** The dominant 16-pathway strongly-connected component is shaded as the cyclic core; the coupling hubs (AKT1, MAPK1, FOXO3, TP53) are ringed. The two auxiliary input modules are excluded.

### 3.2 The switch routes patients coherently across cohorts

Re-modelled as a bistable switch, the apoptosis core has two attractors. One is survival, with AKT high and p53 low. One is apoptotic, with p53 high and AKT low. The control problem becomes flipping the switch. Each patient’s binarised state seeds the switch, which runs on the multirate schedule until it settles. The switch routes about half of patients to the apoptotic attractor (50%, 48%, 51% for TCGA, METABRIC, and I-SPY2), about a quarter to survival, and the rest to a mixed outcome (Figure 4, Table 3). The split is stable across platforms.

The routing tracks biology. Survival-routed patients are 95%, 90%, and 89% in the uncoupled AKT and FOXO3a state, against cohort-wide rates of 37%, 29%, and 26%, an enrichment of about threefold. The switch sends the biologically resistant patients to the survival attractor. This is a falsifiable alignment, stated in advance, and checkable against independent resistance markers.

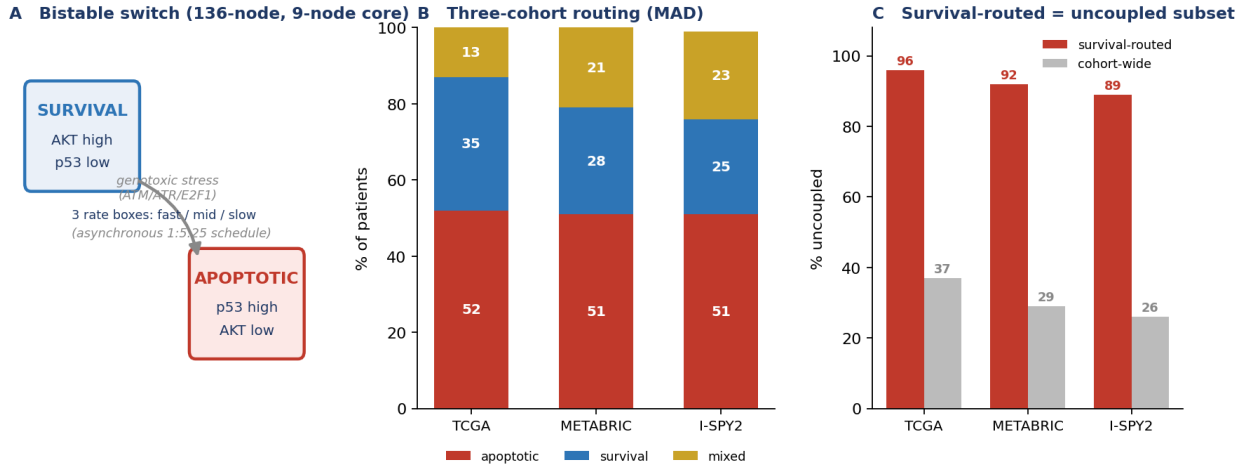

**Figure 4: The bistable switch (141-node model).** (A) The two attractors and the survival→apoptosis flip under sustained genotoxic stress. (B) Three-cohort routing (robust  $z$ -score): about half apoptotic, a quarter survival, the rest mixed, consistent across platforms. (C) Biological check: survival-routed patients are 89 to 95% uncoupled, versus 26 to 37% cohort-wide.

**Table 3:** Setup B switch routing and biological check (robust  $z$ -score, full cohorts).

| Cohort ( $N$ )  | Apoptotic | Survival | Mixed | SURV uncoupled |
|-----------------|-----------|----------|-------|----------------|
| TCGA (1082)     | 50%       | 36%      | 14%   | 95% vs 37%     |
| METABRIC (1980) | 48%       | 29%      | 22%   | 90% vs 29%     |
| I-SPY2 (988)    | 51%       | 25%      | 23%   | 89% vs 26%     |

### 3.3 Resistance is a hysteresis property with a coupling-state target

Survival-routed patients are not rescued by survival-axis inhibition on the baseline switch. Inhibiting the survival inputs does not flip the resistant attractor. Only a genotoxic input flips it. This is hysteresis. Once the uncoupled survival state is established, withdrawing the upstream drive does not cross back. Each timescale block is monostable on its own. The bistability, and this resistance, is emergent from the coupling between blocks.

The uncoupled state is not a discovery of the model. We encode it as the flag  $U$ , one bit per patient, from the binarised AKT and FOXO3a state, the uncoupling documented as a resistance

mechanism [32, 33]. What the model contributes is to make  $U$  a control target. On the biology-faithful network, survival-axis inhibition durably flips exactly the coupled fraction (33–36%), while genotoxic input is the weak lever (3–4%). Resistance corresponds to the uncoupled fraction, and the control target is the coupling state itself.

### 3.4 Localised stabilisation drives apoptosis on the full network

The kernel designed on the switch, by localised stabilisation, commits the full network to apoptosis. A minimal druggable kernel is found for 99–100% of resistant patients and concentrates on the PI3K/AKT/mTOR axis. Applied to the full 141-node network, the switch-designed clamp commits 92–95% of resistant patients to apoptosis, scored by caspase commitment. The design is local, on the nine-node switch. The effect is global, on the full network.

The network now settles into durable apoptotic fixed points. Re-running the staged controller on the biology-faithful branch, the full network reaches a durable apoptotic fixed point in 15–17% of patients, where the baseline supported none (Table 4). Every durable state is certified on the free cascade, as a genuine fixed point with nothing forced (Section 2.6).


We score death two ways and report both. The strict readout requires the executioner caspase on and the survival kinase stably off, and reads 8–14%. The commitment readout requires sustained caspase-3 activation, the point of no return, and reads 92–95%. The two differ because in uncoupled cells the survival kinase can reactivate after withdrawal, so the strict readout records a survivor even though the cell has committed. A committed cell does not un-die when a kinase switches back on. Both readouts stand far above the baseline network’s zero.

| Cohort   | Resistant | Kernel commit | Durable FP | Apoptosis | Proliferation |
|----------|-----------|---------------|------------|-----------|---------------|
| TCGA     | 48%       | 93%           | 17%        | 78%       | 86%           |
| METABRIC | 49%       | 92%           | 15%        | 76%       | 87%           |
| I-SPY2   | 52%       | 95%           | 16%        | 72%       | 84%           |
| Baseline | —         | —             | 0%         | 81–86%    | 94–95%        |

**Table 4: The biology-faithful network, all three cohorts.** Drug-resistance equals AKT-FOXO3a uncoupling for 99.98% of 4050 patients. A designed PI3K/AKT/mTOR kernel commits 92–95% of resistant patients to apoptosis (commitment readout). The staged controller recovers durable apoptotic fixed points (15–17%) absent from the baseline network. All values are macro-sourced from `numbers2.tex`; resistance, kernel, and durability are full- $N$  runs, with the staged-controller figures re-verified on a per-cohort sample.

### 3.5 Minimality: a switch kernel matches near whole-network control

The durable state is secured by a far smaller intervention than the whole-network controller needs. We run both designs through the same delayed engine and the same release-and-persist test, scoring durability as persistence of death after every kernel node is unpinned. Death is reached in 100% of patients under either design. What separates them is whether it persists. The switch kernel holds the apoptotic state about as durably as the near whole-network controller (93.0/89.4/91.8% versus 94.0/93.4/93.9%). It is an order of magnitude smaller, about 2.6 versus about 31.99 nodes (Figure 5, Table 5). This is the paper’s minimality result. The switch kernel holds the same durable state with a focused, druggable intervention, where the whole-network controller needs near whole-network control that is not a deliverable regimen.

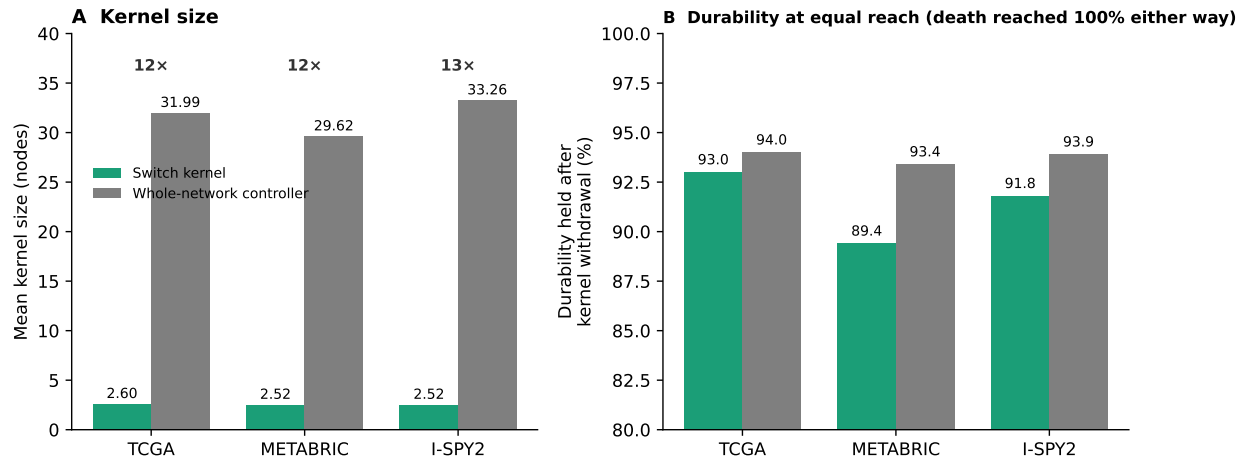

**Figure 5: A minimal switch kernel secures the same durable apoptotic state as near whole-network control.** (A) Mean kernel size, about 2.6 nodes for the switch versus about 31.99 for the whole-network controller, a roughly 12-fold reduction (12–13-fold across cohorts). (B) Durability after kernel withdrawal is essentially equal, with death reached in 100% of patients either way. Regenerated by `fig6.py` from `setup_a/data/cde_vs_switch_summary.csv`.

**Table 5:** Durability and kernel size, switch versus whole-network controller (release-and-persist test on the switch-routed resistant set). Source: `cde_vs_switch_summary.csv`.

| Quantity                   | TCGA  | METABRIC | I-SPY2 |
|----------------------------|-------|----------|--------|
| Resistant (switch-routed)  | 202   | 398      | 238    |
| Kerneled (design found)    | 199   | 376      | 231    |
| Death reached (held) %     | 100   | 100      | 100    |
| Switch durability %        | 93.0  | 89.4     | 91.8   |
| Whole-network durability % | 94.0  | 93.4     | 93.9   |
| Switch kernel size (nodes) | 2.6   | 2.52     | 2.52   |
| Whole-network size (nodes) | 31.99 | 29.62    | 33.26  |

### 3.6 Drug-target nomination on the PI3K/AKT/mTOR axis

The nominated kernel concentrates on one axis. Tallying the designed kernels by node, PIK3CA leads in every cohort, followed by AKT1 and the PDPK1 and MTOR nodes, with PTEN least used. The ordering is the same across all three cohorts and essentially identical under both kernel methods (Table 6). The nomination is robust to the cohort and to the kernel-selection criterion. It is also robust to the data front-end. Repeated through median-binarised expression, multi-gene activity signatures, and phospho-protein activity, the PI3K/AKT/mTOR nomination holds.

The scope is stated plainly. The model is a structural drug-target nominator, not a response predictor. No survival benefit is claimed. The nominated axis was largely not administered to these chemo-era patients, so there is no response-validation cohort. The analysis is on primary tumours only.

**Table 6:** Kernel-to-drug nominations across the pathway set (source: `bbcn/drugs.py`).

| Pathway              | Kernel target      | Drug class                   | Lead agent (alternatives)   | Approval     |
|----------------------|--------------------|------------------------------|-----------------------------|--------------|
| Apoptosis intrinsic  | BAX, APAF1 on      | CYCS, BCL-2 family inhibitor | Venetoclax (Navitoclax)     | FDA approved |
| MAPK                 | MAP2K1, MAPK1 off  | RAF1, MEK + RAF inhibitor    | Trametinib (Dabrafenib)     | FDA approved |
| Cell cycle           | CCND1, RB1 on      | E2F1 off; CDK4/6 inhibitor   | Palbociclib (Ribociclib)    | FDA approved |
| MYC / TF             | MYC off; RB1 on    | CDKN2A, BET inhibitor        | Molibresib (ZEN-3694)       | Phase I/II   |
| AKT survival         | TP53 on; CFLAR off | XIAP, MDM2i + IAP antagonist | Idasanutlin (Birinapant)    | Phase I/II   |
| AKT signaling        | AKT1 off; on       | FOXO3, AKT inhibitor         | Ipatasertib (Capi-vasertib) | Phase II/III |
| JAK / STAT           | JAK2, STAT3 off    | JAK1/2 inhibitor             | Ruxolitinib (Fedratinib)    | FDA approved |
| Apoptosis regulatory | MCL1 off; on       | CASP9, MCL1 inhibitor        | S63845 (AZD5991)            | Phase I      |
| CDK cell cycle       | CDK4, CDK6 off     | CDK4/6 inhibitor             | Abemaciclib (Palbociclib)   | FDA approved |
| Apoptosis extrinsic  | CASP3, CASP9 on    | TRAIL receptor agonist       | Dulanermin (Tigatuzumab)    | Phase I/II   |
| PI3K                 | PTEN on            | PI3K inhibitor               | Alpelisib (Copanlisib)      | FDA approved |
| NF-kB                | RELA off           | NF-kB / proteasome inhibitor | Bortezomib (Ixazomib)       | FDA approved |

## 4 Discussion

This paper makes one control-design claim, and it frames everything else. On a strongly coupled Boolean cancer network, global stabilisation is out of reach. Localised stabilisation is enough. Stabilising an extracted bistable switch to its apoptotic attractor drives the whole network’s phenotype, with a minimal druggable kernel.

The claim rests on a choice of decomposition. Our earlier weak-coupling decomposition theorem is exact under one condition: the coupling between subsystems must be small [1]. The natural subsystems are the pathway modules. On the apoptosis core that choice fails, because the core sits inside a dominant strongly-connected component and the modules are strongly coupled. We do not abandon the theorem. We change the partition. Splitting the network by process timescale, into fast, mid, and slow blocks, makes the coupling between blocks weak, because the delay embedding means each block sees the others as fixed over its own update interval. The theorem that failed on the pathway partition holds on the timescale partition. This is the transferable idea. When a coupled network resists global control, the right move may not be a bigger controller but a better decomposition, and timescale separation is one that a delayed system supplies for free.

The first supporting result is why the switch is necessary at all. Cell-fate phenotypes in this network are individually reachable but jointly near-exclusive. They share a dominant strongly-connected core, so feasibility does not imply joint reachability. This complements stable-motif and semi-tensor-product control theory, which establish when a target attractor is controllable in principle. It adds that under a realistic capped budget on real patient states, the binding constraint is joint reachability across coupled phenotypes. That constraint is what forces the retreat to the core.

The second is that the hardest phenotype is best understood not as a marker to push but as one attractor of a bistable switch. Flipping it means crossing a hysteresis barrier that survival-axis inhibition alone cannot cross. Embedding biological timescale separation as a delayed multirate structure is what makes the core controllable where the whole-network controller could not. It also keeps the design tractable. The semi-tensor-product form of a nine-node block is small, where the lift of the full network, worsened by delay, is not. Confining the algebra to the switch is what avoids the dimension explosion of delayed Boolean control [37].

The third result concerns the network, and it is a statement about biology, not about our own model. A durable apoptotic fixed point exists only when the p53 feedback, the AKT and FOXO3a loop, and the commitment machinery are all in place biologically. With a degenerate p53 response, an unclosed AKT and FOXO arm, and no commitment step, no durable death state exists. With the p53 sensor, the loop closed by PHLPP, and the intrinsic caspase cascade in place, it does, and no parameter is tuned to make it appear. Durability is therefore governed by feedback fidelity, not by intervention strength. Drug resistance then corresponds to a precise molecular state, AKT and FOXO3a uncoupling, an established mechanism [32, 33] that the model makes a control target rather than a description.

A natural objection is that durability does not matter if a drug is never withdrawn. It does matter. Continuous inhibition is itself what breeds resistance, because sustained blockade relieves the pathway’s own feedback and the target reactivates [25]. A state held only by constant force collapses at every missed dose. A durable state inside the death basin survives them. Whole-network control across about thirty nodes is lifelong polypharmacy and is not tolerable, so minimality is what makes any maintenance conceivable. And apoptosis is terminal, so a cell that durably commits needs no further dosing. The bistable-caspase basis of this commitment picture is developed by Eissing and colleagues, Legewie and colleagues, and Bagci and colleagues [27, 28, 29], with single-cell dynamics quantified by Albeck and colleagues [31]. The control-kernel and feedback-vertex-set view is due to Kim, Park, and Cho and to Fiedler and colleagues [30, 24], and the delayed Boolean control formalism to Li and Sun and to Cheng and colleagues [34, 35, 36].

The scope is stated plainly. The validated outputs are a coherent patient stratification and a robust PI3K/AKT/mTOR drug-target nomination that does not depend on the input front-end. The model does not predict pathologic complete response, which we attribute to endpoint distance rather than signal quality. It is a mechanistic hypothesis generator and a structural stratifier. Clinical benefit is not demonstrated here. The uncoupling flag is a proxy read from expression, invasion is out of scope, and the analysis is on primary tumours only.

Two steps would raise the translational ceiling. The first is a durability-matched external test. Because durability corresponds to relapse avoidance, the direct test is whether AKT and FOXO3a coupling status, read from expression, stratifies relapse-free or overall survival in a long-follow-up cohort. That test should be run against the present model and reported at face value, whichever way it lands. The second is a fully cascade-native controller, in which the kernel search runs on the free cascade rather than on the engine used here for search only. It recovers additional fixed points and is the natural next development of the design.

## Funding

This research received no specific grant from any funding agency in the public, commercial, or not-for-profit sectors.



## Competing interests

The author declares no competing interests.

## Author contributions

A.I.B. is the sole author and is responsible for the study design, the analysis, the software, and the writing of the manuscript.

## Code and data availability

All numbers, figures, and tables regenerate from the companion repository ([https://github.com/AamerIqbalBhatti/bbcn\\_public\\_repo](https://github.com/AamerIqbalBhatti/bbcn_public_repo)) with a single command (`python run_all.py`; `python run_all.py --quick` for a fast check), which auto-detects the cohorts present. TCGA-BRCA is open access and its binarised inputs are shipped with the code, so the pipeline runs out of the box on that cohort. METABRIC is available under controlled access through the European Genome-phenome Archive, with processed data via cBioPortal under its data-use terms. I-SPY2 expression is available from Gene Expression Omnibus series GSE194040. To comply with those terms the patient-level matrices for these two cohorts are not redistributed, but the deterministic binarisation is specified in Section 2.1, so a user with the primary data regenerates the inputs and reproduces every result.

## Declaration of generative AI use

During the preparation of this manuscript the author used a large language model (Anthropic’s Claude) as an assistive tool for  $\text{\LaTeX}$  formatting and typesetting, for writing figure-generation code, for organising the companion code repository, and for language editing and drafting assistance on author-directed text. The tool was not used to generate scientific content, data, analyses, results, or their interpretation, and it is not an author. The author directed all such use, verified every reported number against the source code, and takes full responsibility for the entire content of the manuscript.

## A The BBCN 141-node model

This appendix lists the complete Boolean update logic of the 141-node BBCN model, one block per pathway module. For each node, the right-hand side is its update rule over intra-pathway nodes and external bus inputs; AND, OR, NOT are the Boolean connectives, and a node whose rule equals a single input is a pass-through of that input. Two held, per-patient inputs enter the rules:  $\mathcal{U}$ , the uncoupled-state flag, set to 1 when the patient’s AKT activity and nuclear FOXO3a co-occur; and  $\text{GENOTOXIC}$ , the DNA-damage treatment input, off by default.

### RTK EGFR. (Upstream\_RTK)

```
EGF = EGF
EGFR = (EGF OR (ERBB2 AND ERBB3)) AND NOT MAP2K1
GRB2 = IRS1 OR (LATS1 OR (EGFR OR SRC))
```

GRB7 = GRB7 AND NOT PRKACA  
ERBB2 = ERBB3 OR EGF  
ERBB3 = NRG1 OR ERBB2

### **RTK INSULIN. (Upstream\_RTK)**

INS = INS  
INSR = INS OR FOXO3  
IRS1 = NOT RPS6KB1 AND (INSR OR IGF1R)  
PIK3CA = GRB2 OR IRS1  
ABL1 = GRB2 OR EGFR OR ERBB2 OR IRS1

### **HORMONE. (Upstream\_Hormone)**

AR = FOXO3 OR NOT AKT1  
PGR = ESR1  
ESR1 = (FOXO3 OR KMT2D) AND NOT AKT1  
KMT2D = PAX7

### **PI3K. (Terminal\_support)**

PTEN = NOT SRC  
PDPK1 = (PIK3CA AND NOT PTEN) OR IGF1R  
RAC1 = (PIK3CA OR DVL1) AND NOT AKT1  
NOS3 = HSP90AA1 OR AKT1

### **MAPK. (Resistance)**

HRAS = SOS1 AND NOT NF1  
MAP2K1 = RAF1  
RAF1 = HRAS OR KRAS  
KRAS = SOS1  
SOS1 = GRB2  
NF1 = (TP53 OR FOXO3) AND NOT (MAPK1 OR AKT1)  
MAPK8 = (FAS OR TRADD) AND NOT (AKT1 OR MAPK1)  
MAPK1 = MAP2K1 AND NOT DUSP1  
DUSP1 = MAPK1 OR MAPK8 OR JUN

### **WNT. (Invasion\_OFF)**

APC = AXIN1  
AXIN1 = NOT DVL1 AND GSK3B  
CTNNB1 = NOT (APC AND AXIN1 AND GSK3B) AND (WNT1 OR SRC OR YAP1)  
DVL1 = FZD3 OR NF1  
FZD3 = WNT1 OR CREB1  
RND1 = GRB7 OR DVL1  
TCF7L2 = CTNNB1 OR JUN  
WNT1 = WNT1

### **NOTCH. (Invasion\_OFF)**

ABL2 = ABL1  
DLL1 = DLL1  
HES1 = NOTCH1  
HEY1 = NOTCH1  
EIF4EBP1 = NOT MTOR  
MYOD1 = NOT (HES1 OR ABL1)  
MYOG = NOT HEY1 AND MYOD1  
NOTCH1 = DLL1 OR CTNNB1 OR LCK OR MDM2

### **JAK STAT. (Xglobal\_Tier1)**

JAK2 = IL6 AND IL6R  
STAT3 = JAK2  
STAT1 = JAK2 AND NOT AKT1  
SOCS3 = STAT3 OR STAT1

### **HIPPO. (Invasion\_OFF)**

YAP1 = NOT LATS1  
LATS1 = NF2 OR LCK  
NF2 = NEDD4L

### **AKT SIGNALING. (Xglobal\_Tier1)**

AKT1 = ((MTOR AND PDPK1 AND PIK3CA AND NOT PTEN) AND NOT PHLPP) OR (U AND AKT1)  
FOXO1 = NOT (SGK1 OR AKT1)  
SGK1 = MTOR OR PDPK1  
NEDD4L = NOT (SGK1 OR PRKACA)  
FOXO3 = (NOT AKT1) OR U  
PHLPP = FOXO3 AND NOT U  
GSK3B = NOT (AKT1 OR MAPK1)

### **MTOR. (Invasion\_OFF)**

RHEB = NOT TSC2  
MTOR = RHEB OR (PIK3CA AND NOT PTEN)  
TSC2 = NOT (AKT1 OR MAPK1) AND (PRKAA2 OR GSK3B)  
TWIST1 = MAPK1 OR AKT1 OR MAPK8

### **TF. (Xglobal\_Tier1)**

CEBPB = ABL2 OR CREB1  
CREB1 = AKT1 AND NOT PTEN  
EIF4E = NOT EIF4EBP1  
GATA3 = NOT STAT1  
CXCL8 = NOT GATA3  
MYC = (CTNNB1 OR PIM1 OR PIM2 OR PIM3 OR MAPK1 OR STAT3 OR ESR1) AND NOT GSK3B

## **NFKB. (Resistance\_OFF)**

IKKBK = TNF OR IL1A OR IL1B OR TLR2 OR TLR4 OR AKT1  
NFKBIA = NOT IKKBK  
RELA = IKKBK AND NOT NFKBIA

## **INNATE IMMUNE. (Inflammatory)**

IL1A = IL1A  
IL1B = IL1B  
TLR2 = TLR2  
TLR4 = TLR4

## **AKT SURVIVAL. (Apoptosis\_ON)**

MDM2 = (TP53 OR AKT1) AND NOT (CDKN2A AND (E2F1 OR ATM OR ATR OR GENOTOXIC))  
TP53 = (NOT MDM2) OR ATM OR ATR OR GENOTOXIC  
JUN = (MAPK8 OR MAPK1 OR RELA) AND NOT (PPARG OR DUSP1)  
XIAP = (AKT1 OR JUN) AND NOT SMAC  
CFLAR = (AKT1 OR RELA OR CREB1) AND TP53

## **APOPTOSIS REGULATORY. (Apoptosis\_ON)**

MCL1 = (NOT GSK3B AND MAPK1) AND NOT NOXA  
PAK1 = TCF7L2  
PRKACA = AKT1 OR WNT1  
SRC = PRKACA OR ABL1

## **APOPTOSIS EXTRINSIC. (Xglobal\_Tier1)**

FAS = FASLG  
FASLG = JUN OR RELA OR TP53  
FADD = FAS OR TRADD  
TRADD = FAS  
CASP8 = (FADD AND NOT CFLAR) OR CASP6  
BID = CASP8  
CASP3 = (CASP8 OR CASP9) AND NOT XIAP  
CASP9 = CYCS AND APAF1  
CASP7 = (CASP8 OR CASP9) AND NOT XIAP  
CASP6 = CASP3 OR CASP7

## **APOPTOSIS INTRINSIC. (Apoptosis\_ON)**

BAD = NOT (PAK1 OR AKT1 OR MAPK1 OR PIM1 OR PIM2 OR PIM3)  
BAK1 = (BCL2L11 OR TP53 OR BCL2) AND NOT (MCL1 OR BCL2 OR BCL2L1)  
BAX = (BCL2L11 OR TP53 OR BCL2) AND NOT (MCL1 OR BCL2 OR BCL2L1)  
BCL2 = (NOT (BAD OR BCL2L11) AND (CREB1 OR MAPK1)) AND NOT PUMA

BCL2L1 = (NOT (BAD OR BCL2L11) AND CREB1) AND NOT PUMA  
 BCL2L11 = FOXO3 OR FOXO1  
 CYCS = BAK1 OR BAX  
 APAF1 = TP53 OR FOXO1 OR FOXO3  
 SMAC = BAX OR BAK1  
 PUMA = TP53  
 NOXA = TP53

### **CELLCYCLE. (Proliferation\_OFF)**

CDKN2A = NOT (MYC OR SRC OR AKT1 OR MAPK1)  
 CCND1 = (TCF7L2 OR TEAD1 OR MYC) AND NOT (CDKN2A OR CDKN1A OR GSK3B)  
 E2F1 = NOT RB1  
 CDKN1A = TP53 OR FOXO3 OR NOT (MAPK1 OR AKT1 OR MYC)  
 RB1 = NOT (CDK4 OR CDK6 OR CDK2 OR CCND1)  
 TEAD1 = YAP1

### **CDK CELLCYCLE. (Proliferation\_OFF)**

CDK4 = CCND1 AND CDKN1B  
 CDK6 = CCND1 AND CDKN1B  
 CDK2 = CDK4 OR CDK6  
 CCNE1 = CDK4 OR CDK6  
 CDKN1B = FOXO1 OR FOXO3

### **DNA REPAIR. (DNA\_Repair)**

ATM = ATM  
 ATR = ATR  
 BRCA1 = ATM OR ATR  
 BRCA2 = BRCA1  
 PARP1 = PARP1  
 CHEK1 = ATM  
 CHEK2 = ATR  
 RAD51 = BRCA1

### **IMMUNE CHECKPOINT. (Immune\_Checkpoint)**

PDCD1 = LCK  
 CD274 = IFNG OR STAT3 OR AKT1

### **AUX INPUTS1. (Boundary)**

HSP90AA1 = HSP90AA1 (external input)  
 IGF1R = IGF1R (external input)  
 IL6 = IL6 (external input)  
 IL6R = IL6R (external input)  
 LCK = LCK (external input)

NRG1 = NRG1 (external input)  
PAX7 = PAX7 (external input)  
IFNG = IFNG (external input)

## AUX INPUTS2. (Boundary)

PIM1 = PIM1 (external input)  
PIM2 = PIM2 (external input)  
PIM3 = PIM3 (external input)  
PPARG = PPARG (external input)  
PRKAA2 = PRKAA2 (external input)  
RPS6KB1 = RPS6KB1 (external input)  
TNF = TNF (external input)

*Total: 135 nodes across 24 pathway modules.*

## B The weak-coupling decomposition theorem (prior work)

This appendix states the weak-coupling decomposition theorem on which the localised-stabilisation design of Section 2.5 rests. The theorem and its proof are the contribution of the earlier BBCN118 preprint [1] (CC BY 4.0); the statement and proof sketch below are reproduced and adapted from that work, so that Section 2.5 can be read without consulting the source. The remark at the end is the new content. It records that the theorem fails on the pathway partition but holds on the timescale partition, which is the move the paper makes.

**Setup.** Let a Boolean network with global update  $x(t+1) = F(x(t))$  be partitioned into  $m$  pathway modules  $P_1, \dots, P_m$ , with module states  $x_i$  and module targets  $x_i^*$ , so that  $x = (x_1, \dots, x_m)$  and  $x^* = (x_1^*, \dots, x_m^*)$ .

**Theorem 1 (convergence under pathway decomposition).** Assume:

- (A1) *Weak inter-pathway coupling:*  $\max_{i \neq j} \|\partial F_i / \partial x_j\| < \varepsilon$ , with  $\varepsilon \ll 1$ ;
- (A2) *Local kernel effectiveness:* for each module  $i$  there is a kernel  $u_i$  that drives  $x_i(t) \rightarrow x_i^*$  in finitely many steps; and
- (A3) *Modularity:*  $F_i(x) \approx f_i(x_i, e_i(x))$ , where  $e_i(x)$  collects the inputs  $P_i$  receives from other modules.

Then the sequential application of the pathway kernels  $u = \bigcup_{i=1}^m u_i$  drives the global state into a neighbourhood of the target,

$$x(t) \rightarrow \mathcal{N}_\delta(x^*) = \{x : d_H(x, x^*) \leq \delta\}, \quad \delta = O(\varepsilon),$$

where  $d_H$  is the Hamming distance.

**Proof sketch.** Take the weighted Hamming Lyapunov function

$$V(x) = \sum_{i=1}^m w_i d_H(x_i, x_i^*), \quad w_i > 0.$$

$V$  is non-negative, integer-valued, bounded above by  $\sum_i w_i |P_i|$ , and zero exactly at  $x^*$ . Intervening on module  $k$  reduces its term by some  $\alpha_k > 0$  by (A2). By (A1) every other module moves by at most  $w_j \varepsilon |P_j|$ , so

$$\Delta V \leq -\alpha_k + \varepsilon \sum_{j \neq k} w_j |P_j|,$$

which is strictly negative once  $\varepsilon$  is small enough relative to  $\alpha_k$ . Because  $V$  is bounded below, strictly decreasing, and integer-valued, it reaches a minimum  $V_{\min}$  in finitely many steps, with  $V_{\min} \leq \delta = O(\varepsilon)$ ; at  $\varepsilon = 0$  the bound gives  $V_{\min} = 0$  and exact convergence.  $\square$

**Corollary 1 (convergence rate).** If each pathway kernel reduces the mismatch by at least  $\beta > 0$  per intervention, the system reaches the neighbourhood in at most  $T \leq V(x(0)) / (\beta/2)$  interventions.

**Remark: the partition is what matters.** The result holds only under assumption (A1). On the pathway partition the present network violates it. Its pathway-coupling graph carries a dominant strongly-connected component of 16 of the 22 regulatory pathways (Section 3.1), so the inter-module coupling is not small and pathway-wise stabilisation does not deliver joint reachability. The paper does not abandon the theorem. It re-partitions the apoptosis core by process timescale, into fast, mid, and slow blocks. The delay embedding makes each block quasi-static over the others' update intervals, so the inter-block coupling satisfies (A1) where the inter-pathway coupling did not, and the theorem applies block by block (Section 2.5). The full proof, including the explicit  $\varepsilon$  threshold, is in the cited preprint and is not reproduced here.

## References

- [1] Bhatti, A. I. From Pathway to Patient: Molecular Dysregulation as Basis for Minimal Sequential Intervention Strategy in Basal-Like Breast Cancer. *Research Square* (2026). DOI: 10.21203/rs.3.rs-8942485/v1.
- [2] Rafimanzelat, M. R. Global stabilization of Boolean networks with applications to biomolecular network control. *Sci. Rep.* **15**, 15201 (2025). DOI: 10.1038/s41598-025-97684-y.
- [3] Zañudo, J. G. T. & Albert, R. Cell fate reprogramming by control of intracellular network dynamics. *PLoS Comput. Biol.* **11**(4), e1004193 (2015).
- [4] Zañudo, J. G. T. & Albert, R. An effective network reduction approach to find the dynamical repertoire of discrete dynamic networks. *Chaos* **23**(2), 025111 (2013).
- [5] Rozum, J. C., Deritei, D., Park, K. H., Zañudo, J. G. T. & Albert, R. pystablemotifs: Python library for attractor identification and control in Boolean networks. *Bioinformatics* **38**, 1465–1466 (2022).
- [6] Cheng, D. & Qi, H. Controllability and observability of Boolean control networks. *Automatica* **45**, 1659–1667 (2009).

- [7] Montagud, A. et al. Patient-specific Boolean models of signalling networks guide personalised treatments. *eLife* **11**, e72626 (2022).
- [8] Béal, J., Montagud, A., Traynard, P., Barillot, E. & Calzone, L. Personalization of logical models with multi-omics data allows clinical stratification of patients. *Front. Physiol.* **9**, 1965 (2019).
- [9] Tarjan, R. Depth-first search and linear graph algorithms. *SIAM J. Comput.* **1**, 146–160 (1972).
- [10] The Cancer Genome Atlas Network. Comprehensive molecular portraits of human breast tumours. *Nature* **490**, 61–70 (2012).
- [11] Curtis, C. et al. The genomic and transcriptomic architecture of breast tumours (METABRIC). *Nature* **486**, 346–352 (2012).
- [12] Kauffman, S. A. Metabolic stability and epigenesis in randomly constructed genetic nets. *J. Theor. Biol.* **22**, 437–467 (1969).
- [13] Thomas, R. Regulatory networks seen as asynchronous automata: a logical description. *J. Theor. Biol.* **153**, 1–23 (1991).
- [14] Albert, R. & Othmer, H. G. The topology of the regulatory interactions predicts the expression pattern of the segment polarity genes in *Drosophila melanogaster*. *J. Theor. Biol.* **223**, 1–18 (2003).
- [15] Saez-Rodriguez, J. et al. Discrete logic modelling as a means to link protein signalling networks with functional analysis of mammalian signal transduction. *Mol. Syst. Biol.* **5**, 331 (2009).
- [16] Morris, M. K., Saez-Rodriguez, J., Sorger, P. K. & Lauffenburger, D. A. Logic-based models for the analysis of cell signaling networks. *Biochemistry* **49**, 3216–3224 (2010).
- [17] Helikar, T. et al. The Cell Collective: toward an open and collaborative approach to systems biology. *BMC Syst. Biol.* **6**, 96 (2012).
- [18] Naldi, A. et al. Logical modeling and analysis of cellular regulatory networks with GINsim 3.0. *Front. Physiol.* **9**, 646 (2018).
- [19] Fumia, H. F. & Martins, M. L. Boolean network model for cancer pathways: predicting carcinogenesis and targeted therapy outcomes. *PLoS ONE* **8**, e69008 (2013).
- [20] von der Heyde, S. et al. Boolean ErbB network reconstructions and perturbation simulations reveal individual drug response in different breast cancer cell lines. *BMC Syst. Biol.* **8**, 75 (2014).
- [21] Sgariglia, D. et al. Optimizing therapeutic targets for breast cancer using Boolean network models. *Comput. Biol. Chem.* **109**, 108022 (2024).
- [22] Taoma, K., Ruengjitchatchawalya, M., Liangruksa, M. & Laomettachit, T. Boolean modeling of breast cancer signaling pathways uncovers mechanisms of drug synergy. *PLoS ONE* **19**, e0298788 (2024).
- [23] Gomez Tejeda Zañudo, J., Scaltriti, M. & Albert, R. A network modeling approach to elucidate drug resistance mechanisms and predict combinatorial drug treatments in breast cancer. *Cancer Conver.* **1**, 5 (2017).



- [24] Fiedler, B., Mochizuki, A., Kurosawa, G. & Saito, D. Dynamics and control at feedback vertex sets I: informative and determining nodes in regulatory networks. *J. Dyn. Differ. Equ.* **25**, 563–604 (2013).
- [25] Chandarlapaty, S. et al. AKT inhibition relieves feedback suppression of receptor tyrosine kinase expression and activity. *Cancer Cell* **19**, 58–71 (2011).
- [26] Turner, N. C. et al. Capivasertib in hormone receptor-positive advanced breast cancer (CAPItello-291). *N. Engl. J. Med.* **388**, 2058–2070 (2023).
- [27] Eissing, T. et al. Bistability analyses of a caspase activation model for receptor-induced apoptosis. *J. Biol. Chem.* **279**, 36892–36897 (2004).
- [28] Legewie, S., Blüthgen, N. & Herzog, H. Mathematical modeling identifies inhibitors of apoptosis as mediators of positive feedback and bistability. *PLoS Comput. Biol.* **2**, e120 (2006).
- [29] Bagci, E. Z. et al. Bistability in apoptosis: roles of Bax, Bcl-2 and mitochondrial permeability transition pores. *Biophys. J.* **90**, 1546–1559 (2006).
- [30] Kim, J., Park, S.-M. & Cho, K.-H. Discovery of a kernel for controlling biomolecular regulatory networks. *Sci. Rep.* **3**, 2223 (2013).
- [31] Albeck, J. G. et al. Quantitative analysis of pathways controlling extrinsic apoptosis in single cells. *Mol. Cell* **30**, 11–25 (2008).
- [32] Brunet, A. et al. Akt promotes cell survival by phosphorylating and inhibiting a Forkhead transcription factor. *Cell* **96**, 857–868 (1999).
- [33] Chen, J. et al. Constitutively nuclear FOXO3a localization predicts poor survival and promotes Akt phosphorylation in breast cancer. *PLoS ONE* **5**, e12293 (2010).
- [34] Li, F. & Sun, J. Controllability of Boolean control networks with time delays in states. *Automatica* **47**(4), 603–607 (2011). DOI: 10.1016/j.automatica.2011.01.002.
- [35] Cheng, D., Qi, H. & Li, Z. *Analysis and Control of Boolean Networks: A Semi-Tensor Product Approach*. Springer, London (2011). DOI: 10.1007/978-0-85729-097-7.
- [36] Ding, Y., Xie, D. & Guo, Y. Controllability of Boolean control networks with multiple time delays. *IEEE Trans. Control Netw. Syst.* **5**(4), 1787–1795 (2018). DOI: 10.1109/TCNS.2017.2763744.
- [37] Mu, T. et al. A survey on applications of the semi-tensor product method in Boolean control networks with time delays. *Engineering Reports* (2024). DOI: 10.1002/eng2.12760.
- [38] Fauré, A., Naldi, A., Chaouiya, C. & Thieffry, D. Dynamical analysis of a generic Boolean model for the control of the mammalian cell cycle. *Bioinformatics* **22**(14), e124–e131 (2006). DOI: 10.1093/bioinformatics/btl210.
- [39] Chaves, M., Sontag, E. D. & Albert, R. Methods of robustness analysis for Boolean models of gene control networks. *IEE Proc. Syst. Biol.* **153**(4), 154–167 (2006).