

Test results for /home/cs344-2/P4Perform/basic/basic.p4
Calibration method: loopback
DUT host: cs344-2@packet-5.stanford.edu


1 Test 1

1.1 Expected path

```
start
parse_ipv4
sink
(u'node_3', (True, (u'/home/cs344-2/P4Perform/basic/basic.p4', 136, u'hdr.ipv4.isValid()'))
(u'MyIngress.ipv4_lpm', u'MyIngress.drop'))
```

1.2 Stats (time - calibration time in microseconds)

Mean: 80177.000000
Std dev: 24472.077680
Median: 70164.000000

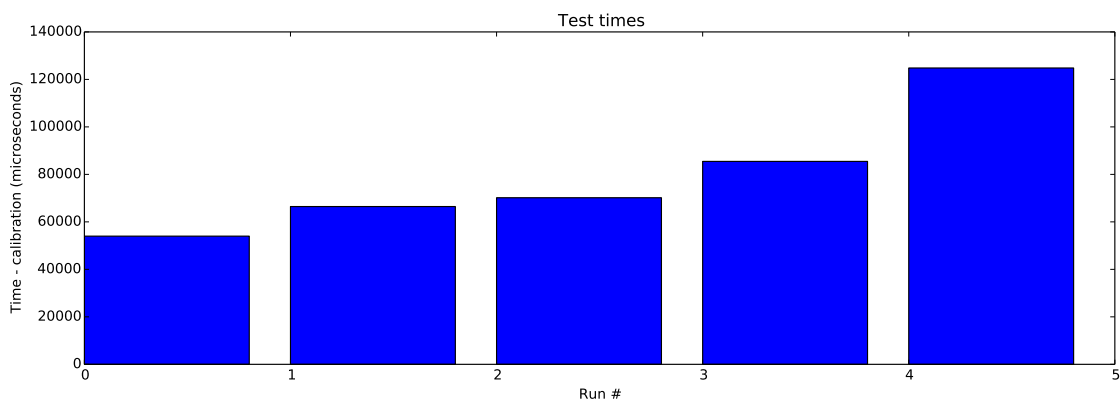

2 Test 2


2.1 Expected path

```
start
parse_ipv4
sink
(u'node_3', (True, (u'/home/cs344-2/P4Perform/basic/basic.p4', 136, u'hdr.ipv4.isValid()'))
(u'MyIngress.ipv4_lpm', u'MyIngress.drop'))
```

(u'MyIngress.ipv4_lpm', u'NoAction')

2.2 Stats (time - calibration time in microseconds)

Mean: 110088.000000
Std dev: 38185.384298
Median: 127479.000000

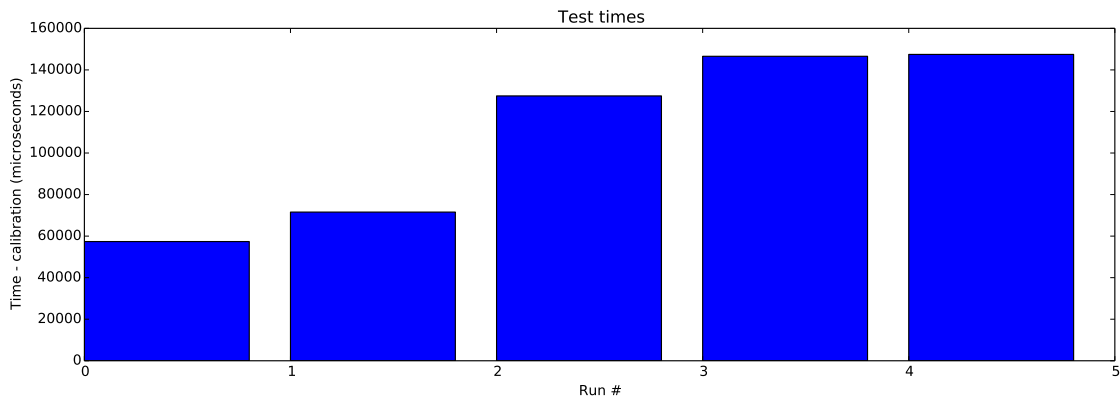

3 Test 3

3.1 Expected path

```
start
parse_ipv4
sink
(u'node_3', (True, (u'/home/cs344-2/P4Perform/basic/basic.p4', 136, u'hdr.ipv4.isValid()'))))
(u'MyIngress.ipv4_lpm', u'MyIngress.ipv4_forward')
```

3.2 Stats (time - calibration time in microseconds)

Mean: 94382.000000
Std dev: 37640.827116
Median: 74709.000000

