
1. Refer to the diagram below and implement the java application. Identify the various classes and interface, accordingly, implement each of them.


   Write the few test cases in the test class (Test_Pizza) to validate Pizza's shape, dimensions and price.

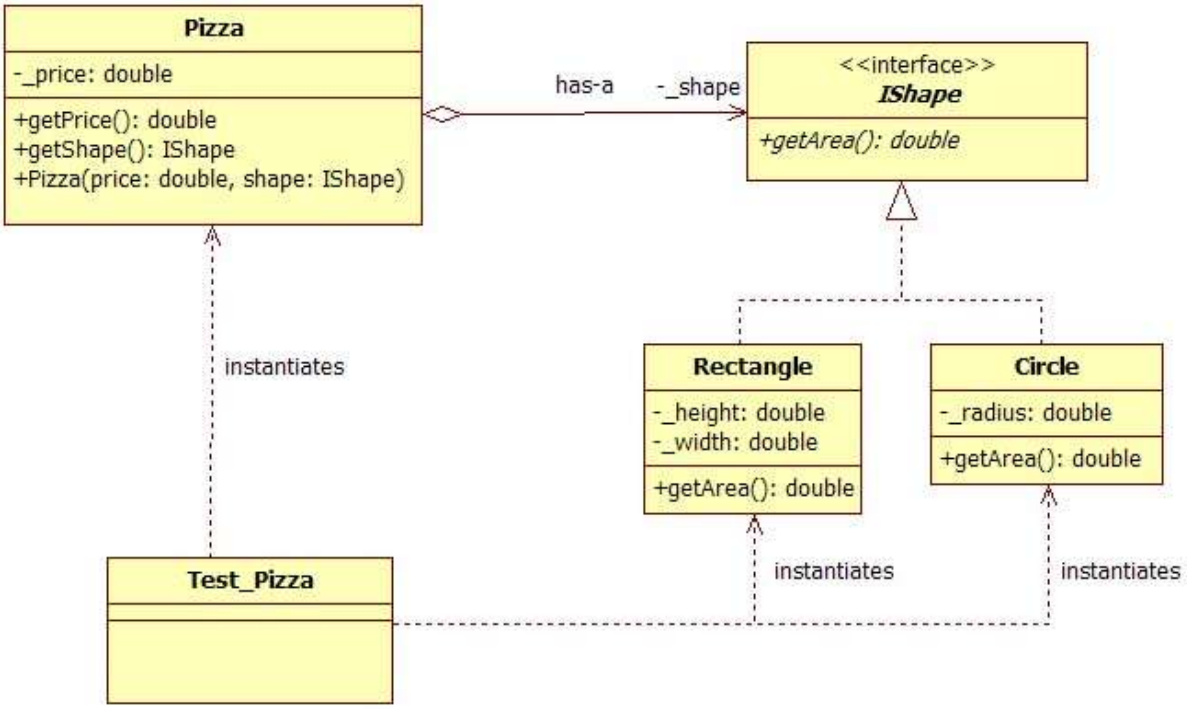

2. Write an interface called Calculator (as shown in the diagram), which contains all basic operations of a calculator.

   Write a class called BasicCalculator, which uses interface Calculator. Implement all the methods in the class which are available in an interface. The class BasciCalculator has a static function called getInstance, which will return an object of type Calculator.

   Write the test cases to validate all the arithmetic operations.

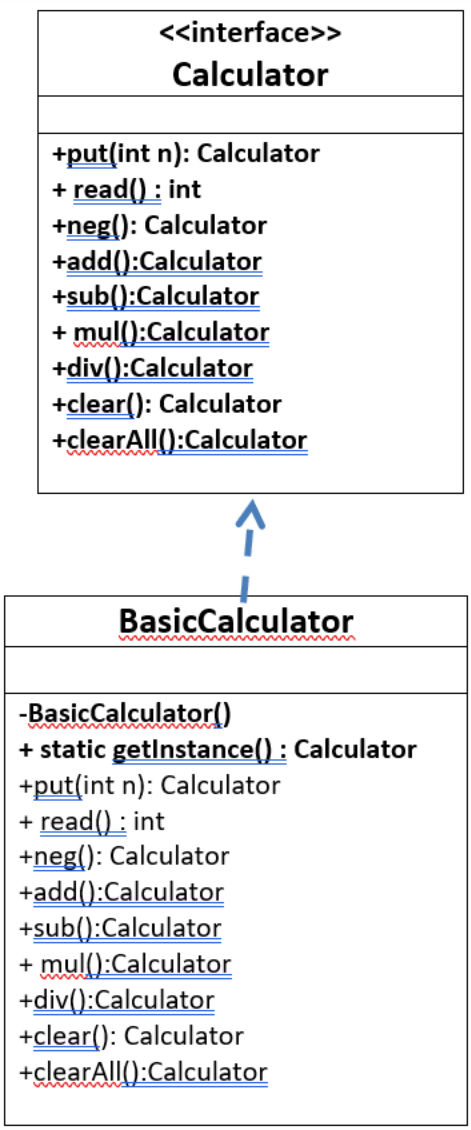
<<interface>>
Calculator
+put(int n): Calculator
+ read() : int
+neg(): Calculator
+add():Calculator
+sub():Calculator
+ mul():Calculator
+div():Calculator
+clear(): Calculator
+clearAll():Calculator
BasicCalculator
-BasicCalculator()
+ static getInstance() : Calculator
+put(int n): Calculator
+ read() : int
+neg(): Calculator
+add():Calculator
+sub():Calculator
+ mul():Calculator
+div():Calculator
+clear(): Calculator
+clearAll():Calculator