Experiment – 11

Aim: Create Application in which user is able to Submit his Profile with help of the Wizard and Multi View Control.

Code:

//Multiview --use

WebForm1.aspx:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs"
Inherits="multiviewControl.WebForm1" %>
<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title></title>
</head>
<body>
<form id="form1" runat="server">
<asp:MultiView ID="MultiViewEmployee" runat="server">
<asp:View ID="PersonDetail" runat="server">
<table style="border:1px solid black">
<tr>
<td colspan="2">
<h2>Step 1 - Personal Details</h2>
</td>
</tr>
<tr>
<td>First Name</td>
<td>
<asp:TextBox ID="txtFirstName" runat="server"></asp:TextBox>
</td>
</tr>
<tr>
<td>Last Name</td>
<td>
<asp:TextBox ID="txtLastName" runat="server"></asp:TextBox>
</td>
</tr>
<tr>
<td>Gender</td>
<td>
<asp:DropDownList ID="ddlGender" runat="server">
<asp:ListItem Text="Male" Value="Male"></asp:ListItem>
<asp:ListItem Text="Female" Value="Female"></asp:ListItem>
</asp:DropDownList>
</td>
```

```
</tr>
<tr>
<td colspan="2" style="text-align:right">
<asp:Button ID="btnGoToStep2" runat="server"
Text="Step 2 >>" onclick="btnGoToStep2_Click" />
</td>
</tr>
</table>
</asp:View>
<asp:View ID="ContactDetail" runat="server">
<table style="border:1px solid black">
<tr>
<td colspan="2">
<h2>Step 2 - Contact Details</h2>
</td>
</tr>
<tr>
<td>Email Address</td>
<td>
<asp:TextBox ID="txtEmail" runat="server"></asp:TextBox>
</td>
</tr>
<tr>
<td>Mobile Number</td>
<td>
<asp:TextBox ID="txtMobile" runat="server"></asp:TextBox>
</td>
</tr>
<tr>
<td>
<asp:Button ID="btnBackToStep1" runat="server" Text="<< Step
1"
onclick="btnBackToStep1_Click" />
</td>
<td style="text-align:right">
<asp:Button ID="btnGoToStep3" runat="server" Text="Step 3 >>"
onclick="btnGoToStep3_Click" />
</td>
</tr>
</table>
</asp:View>
<asp:View ID="Summary" runat="server">
<table style="border:1px solid black">
<tr>
<td colspan="2"><h2>Step 3 - Summary</h2></td>
</tr>
<tr>
<td colspan="2"><h3>Personal Details</h3></td>
</tr>
<tr>
<td>First Name</td>
```

```
<td>
:<asp:Label ID="lblFirstName" runat="server"></asp:Label>
</td>
</tr>
<tr>
<td>Last Name</td>
<td>
:<asp:Label ID="lblLastName" runat="server"></asp:Label>
</td>
</tr>
<tr>
<td>Gender</td>
<td>
:<asp:Label ID="lblGender" runat="server"></asp:Label>
</td>
</tr>
<tr>
<td colspan="2"><h3>Contact Details</h3></td>
</tr>
<tr>
<td>Email Address</td>
<td>
:<asp:Label ID="lblEmail" runat="server"></asp:Label>
</td>
</tr>
<tr>
<td>Mobile Number</td>
<td>
:<asp:Label ID="lblMobile" runat="server"></asp:Label>
</td>
</tr>
<tr>
<td>
<asp:Button ID="Button1" runat="server" Text="<< Step 2"
onclick="Button1_Click" />
</td>
<td style="text-align:right">
<asp:Button ID="Button2" runat="server" Text="Submit >>"
onclick="Button2_Click" />
</td>
</tr>
</table>
</asp:View>
</asp:MultiView>
<div>
</div>
</form>
</body>
</html>
```
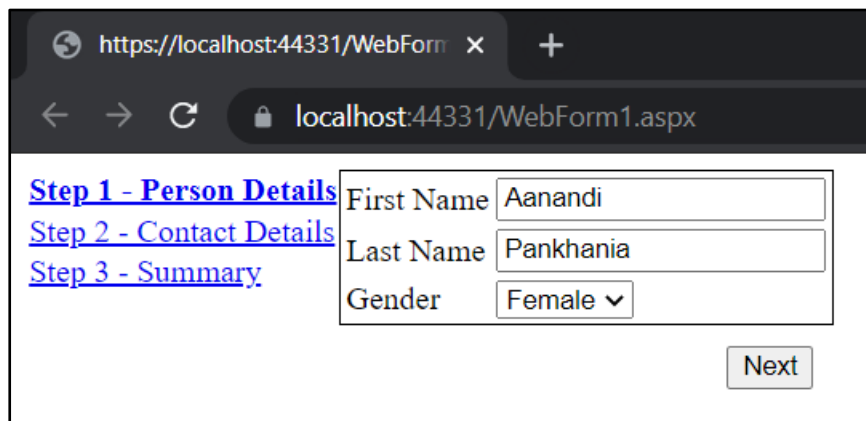
WebForm1.aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace multiviewControl
{
public partial class WebForm1 : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
if(!IsPostBack)
{
MultiViewEmployee.ActiveViewIndex = 0;
}
}
protected void btnGoToStep2_Click(object sender, EventArgs e)
{
MultiViewEmployee.ActiveViewIndex = 1;
}
protected void btnBackToStep1_Click(object sender, EventArgs e)
{
MultiViewEmployee.ActiveViewIndex = 0;
}
protected void btnGoToStep3_Click(object sender, EventArgs e)
{
MultiViewEmployee.ActiveViewIndex = 2;
lblFirstName.Text = txtFirstName.Text;
lblLastName.Text = txtLastName.Text;
lblGender.Text = ddlGender.SelectedValue;
lblEmail.Text = txtEmail.Text;
lblMobile.Text = txtMobile.Text;
}
protected void Button1_Click(object sender, EventArgs e)
{
MultiViewEmployee.ActiveViewIndex = 1;
}
protected void Button2_Click(object sender, EventArgs e)
{
Response.Redirect("~/WebForm2.aspx");
}
}
}
```

WebForm2.aspx:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm2.aspx.cs"
Inherits="multiviewControl.WebForm2" %>
<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title></title>
</head>
<body>
<form id="form1" runat="server">
<div>
<h2>Your Data Is Submitted.</h2>
</div>
</form>
</body>
</html>
```

Output Screenshots:

WizardStep1:

WizardStep2:

WizardStep3:

WebForm2.aspx:

Your Data Is Submitted.