

Name: Aarushi

SAP ID: 500105028

Rollno.: R2142220004

Batch: DevSecOps B1:H

Lab Exercise 7- Create Service in Kubernetes

Objective:

- Understand the syntax and structure of a Kubernetes Service definition file (YAML).
- Learn to create different types of Services: ClusterIP, NodePort, and LoadBalancer.
- Comprehend how Services operate independently of specific Pods.

Prerequisites

- Kubernetes Cluster: Have a running Kubernetes cluster (locally using Minikube or kind, or a cloud-based service).
- kubectl: Install and configure kubectl to interact with your Kubernetes cluster.
- Basic Knowledge of YAML: Familiarity with YAML format will be helpful for understanding Kubernetes resource definitions.

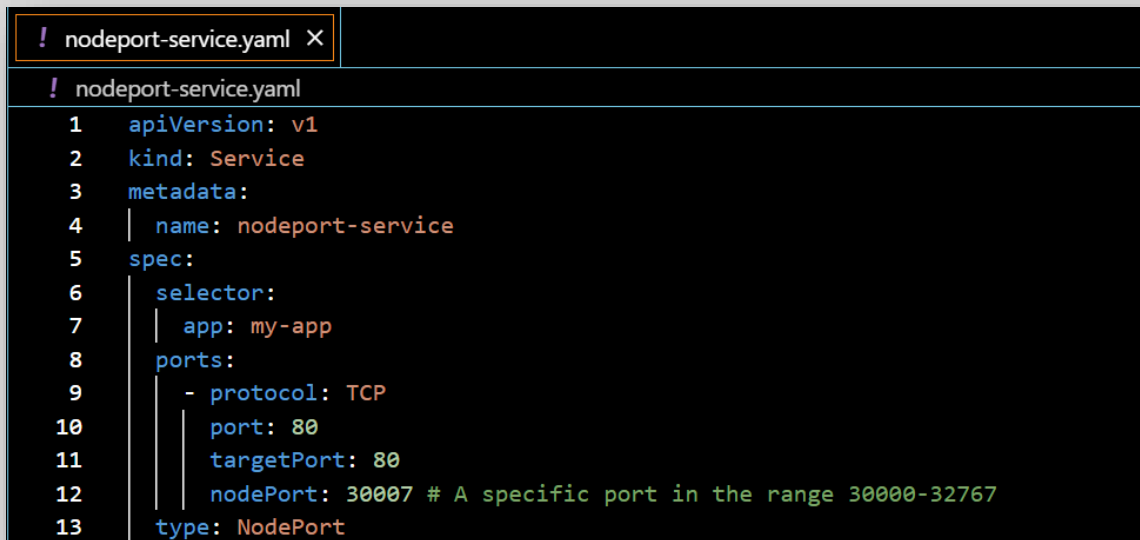
Step-by-Step Guide

NodePort Service

To expose the Service on a port on each Node in the cluster, modify the Service type to NodePort.

Create a YAML file named nodeport-service.yaml with the following content:

```
apiVersion: v1
kind: Service
metadata:
  name: nodeport-service
spec:
  selector:
    app: my-app
  ports:
    - protocol: TCP
      port: 80
      targetPort: 80
      nodePort: 30007 # A specific port in the range 30000-32767
  type: NodePort
```

A screenshot of a code editor window titled 'nodeport-service.yaml'. The editor displays the following YAML configuration for a Kubernetes Service:

```
1  apiVersion: v1
2  kind: Service
3  metadata:
4    name: nodeport-service
5  spec:
6    selector:
7      app: my-app
8    ports:
9      - protocol: TCP
10        port: 80
11        targetPort: 80
12        nodePort: 30007 # A specific port in the range 30000-32767
13    type: NodePort
```

Explanation:

- The primary difference from the ClusterIP Service is the addition of nodePort, which specifies the static port on each Node.

- type: Set to NodePort, exposing the Service on a specific port across all Nodes.

Apply this YAML to create the NodePort Service:

```
kubectl apply -f nodeport-service.yaml
```

```
C:\Users\AARUSHI\Desktop\Sem-5\LABS\Container and Docker Security\exp 7>kubectl apply -f nodeport-service.yaml  
service/nodeport-service created
```

Verify the Service:

```
kubectl get services
```

```
C:\Users\AARUSHI\Desktop\Sem-5\LABS\Container and Docker Security\exp 7>kubectl get services  
NAME          TYPE        CLUSTER-IP    EXTERNAL-IP  PORT(S)          AGE  
kubernetes    ClusterIP   10.96.0.1     <none>       443/TCP          49m  
nodeport-service NodePort    10.103.117.111 <none>       80:30007/TCP     86s
```

You should see the nodeport-service listed with a NodePort and details about the port exposed.