

## Lab Exercise 3—Provisioning an EC2 Instance on AWS

**Prerequisites: Terraform Installed:** Make sure you have Terraform installed on your machine. Follow the official installation guide if needed.

**AWS Credentials:** Ensure you have AWS credentials (Access Key ID and Secret Access Key) configured. You can set them up using the AWS CLI or by setting environment variables.

### Exercise Steps:

#### Step 1: Create a New Directory:

Create a new directory for your Terraform configuration:

```
mkdir aws-terraform-demo
cd aws-terraform-demo
```

#### Step 2: Create Terraform Configuration File (main.tf):

Create a file named main.tf with the following content:

```
terraform {
  required_providers {
    aws = {
      source = "hashicorp/aws"
      version = "5.31.0"
    }
  }
}
```

```
provider "aws" {
```

```
region    = "ap-south-1"

access_key = "your IAM access key"

secret_key = "your secret access key"

}
```

This script defines an AWS provider and provisions an EC2 instance.

### **Step 3: Initialize Terraform:**

Run the following command to initialize your Terraform working directory:

```
terraform init
```

### **Step 4: Create Terraform Configuration File for EC2 instance (instance.tf):**

Create a file named instnace.tf with the following content:

```
resource "aws_instance" "My-instance" {

    instance_type = "t2.micro"

    ami = "ami-03f4878755434977f"

    count = 1

    tags = {

        Name = "UPES-EC2-Instnace"

    }

}
```

### **Step 5: Review Plan:**

Run the following command to see what Terraform will do:

```
terraform plan
```

Review the plan to ensure it aligns with your expectations.

```
re-run this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
(base) arianbansal@Aryans-MacBook-Air-10 Terraformlab % terraform plan

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# aws_instance.My-instance[0] will be created
+ resource "aws_instance" "My-instance" {
  + ami                    = "ami-03f4878755434977f"
  + arn                   = (known after apply)
  + associate_public_ip_address = (known after apply)
  + availability_zone      = (known after apply)
  + cpu_core_count        = (known after apply)
  + cpu_threads_per_core   = (known after apply)
  + disable_api_stop       = (known after apply)
  + disable_api_termination = (known after apply)
  + ebs_optimized          = (known after apply)
  + enable_primary_ipv6    = (known after apply)
  + get_password_data      = false
  + host_id                = (known after apply)
  + host_resource_group_arn = (known after apply)
  + iam_instance_profile   = (known after apply)
  + id                     = (known after apply)
  + instance_initiated_shutdown_behavior = (known after apply)
  + instance_lifecycle     = (known after apply)
  + instance_state         = (known after apply)
  + instance_type          = "t2.micro"
  + ipv6_address_count     = (known after apply)
  + ipv6_addresses         = (known after apply)
  + key_name               = (known after apply)
  + monitoring             = (known after apply)
  + outpost_arn            = (known after apply)
  + password_data          = (known after apply)
  + placement_group        = (known after apply)
  + placement_partition_number = (known after apply)
  + primary_network_interface_id = (known after apply)
  + private_dns            = (known after apply)
  + private_ip             = (known after apply)
  + public_dns             = (known after apply)
  + public_ip              = (known after apply)
  + secondary_private_ips  = (known after apply)
  + security_groups        = (known after apply)
  + source_dest_check      = true
  + spot_instance_request_id = (known after apply)
  + subnet_id              = (known after apply)
  + tags                   = {
    + "Name" = "UPES-EC2-Instnace"
  }
  + tags_all              = {
    + "Name" = "UPES-EC2-Instnace"
  }
  + tenancy                = (known after apply)
  + user_data              = (known after apply)
  + user_data_base64       = (known after apply)
  + user_data_replace_on_change = false
  + vpc_security_group_ids = (known after apply)

  + capacity_reservation_specification (known after apply)

  + cpu_options (known after apply)

  + ebs_block_device (known after apply)

  + enclave_options (known after apply)

  + ephemeral_block_device (known after apply)

  + instance_market_options (known after apply)

  + maintenance_options (known after apply)

  + metadata_options (known after apply)

  + network_interface (known after apply)

  + private_dns_name_options (known after apply)

  + root_block_device (known after apply)
}

Plan: 1 to add, 0 to change, 0 to destroy.

Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.
(base) arianbansal@Aryans-MacBook-Air-10 Terraformlab %
```

## Step 6: Apply Changes:

Apply the changes to create the AWS resources:

### terraform appll

```
(base) arianbansal@Aryans-MacBook-Air-10 Terraformlab % terraform apply

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# aws_instance.My-instance[0] will be created
+ resource "aws_instance" "My-instance" {
  + ami                    = "ami-03f4878755434977f"
  + arn                   = (known after apply)
  + associate_public_ip_address = (known after apply)
  + availability_zone      = (known after apply)
  + cpu_core_count        = (known after apply)
  + cpu_threads_per_core   = (known after apply)
  + disable_api_stop       = (known after apply)
  + disable_api_termination = (known after apply)
  + ebs_optimized          = (known after apply)
  + enable_primary_ipv6    = (known after apply)
  + get_password_data      = false
```

```
Enter a value: yes


aws_instance.My-instance[0]: Creating...
aws_instance.My-instance[0]: Still creating... [10s elapsed]
aws_instance.My-instance[0]: Creation complete after 13s [id=i-0f228a2046448ab0b]

Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
(base) aryanbansal@Aryans-MacBook-Air-10 Terraformlab %
```

Type yes when prompted.

## Step 7: Verify Resources:

After the terraform apply command completes, log in to your AWS Management Console and navigate to the EC2 dashboard. Verify that the EC2 instance has been created.

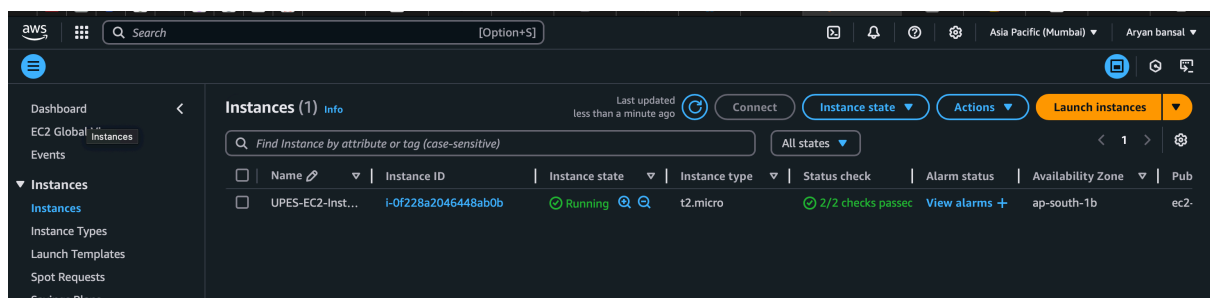

## Step 8: Cleanup Resources:

When you are done experimenting, run the following command to destroy the created resources:

```
terraform destroy

(base) aryanbansal@Aryans-MacBook-Air-10 Terraformlab % terraform destroy
aws_instance.My-instance[0]: Refreshing state... [id=i-0f228a2046448ab0b]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
- destroy

Terraform will perform the following actions:

# aws_instance.My-instance[0] will be destroyed
- resource "aws_instance" "My-instance" {
  ami           = "ami-03f4878755434977f" -> null
  arn           = "arn:aws:ec2:ap-south-1:075315798419:instance/i-0f228a2046448ab0b" -> null
```

```
Plan: 0 to add, 0 to change, 1 to destroy.

Do you really want to destroy all resources?
  Terraform will destroy all your managed infrastructure, as shown above.
  There is no undo. Only 'yes' will be accepted to confirm.

Enter a value: yes

aws_instance.My-instance[0]: Destroying... [id=i-0f228a2046448ab0b]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 10s elapsed]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 20s elapsed]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 30s elapsed]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 40s elapsed]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 50s elapsed]
aws_instance.My-instance[0]: Still destroying... [id=i-0f228a2046448ab0b, 1m0s elapsed]
aws_instance.My-instance[0]: Destruction complete after 1m2s

Destroy complete! Resources: 1 destroyed.
(base) aryanbansal@Aryans-MacBook-Air-10 Terraformlab %
```

Type yes when prompted.

Notes:

Customize the instance.tf file to provision different AWS resources.

Explore the Terraform AWS provider documentation for additional AWS resources and configuration options.

Always be cautious when running terraform destroy to avoid accidental resource deletion.

This exercise provides a basic introduction to using Terraform with the AWS provider. Feel free to explore more complex Terraform configurations and resources based on your needs.