

Lab Exercise 9– Creating Multiple EC2 Instances with `for_each` in Terraform

Objective:

Learn how to use `for_each` in Terraform to create multiple AWS EC2 instances with specific settings for each instance.

Prerequisites:

- Terraform installed on your machine.
- AWS CLI configured with the necessary credentials.

Steps:

1. Create a Terraform Directory:

```
mkdir exp9  
cd exp9
```

- Create Terraform Configuration Files:
- Create a file named `main.tf`:

main.tf

```
terraform {  
  required_providers {  
    aws = {  
      source = "hashicorp/aws"  
      version = "5.68.0"  
    }  
  }  
}  
  
provider "aws" {  
  access_key = "My-Access-Key"  
  secret_key = "My-Secret-Key"  
  region = "ap-south-1"  
}
```

#Var.tf

```
variable "instances" {  
  description = "Map of EC2 instances with settings"  
  default = {  
    "instance1" = {  
      ami      = "ami-oddfba243cbee3768"  
      instance_type = "t2.micro"  
    },  
    "instance2" = {  
      ami      = "ami-o0bb6a80f01f03502"  
      instance_type = "t2.small"  
    },  
    "instance3" = {  
      ami      = "ami-o2ddb77f8f93ca4ca"  
      instance_type = "t2.large"  
    }  
  }  
}
```

#Instance.tf

```
resource "aws_instance" "ec2_instances" {  
  for_each = var.instances  
  ami      = var.instances[each.key].ami  
  instance_type = var.instances[each.key].instance_type  
  tags = {  
    Name = "EC2-Instance-${each.key}"  
  }  
}
```

- In this configuration, we define a variable instances as a map containing settings for each EC2 instance. The aws_instance resource is then used with for_each to create instances based on the map.

2. Initialize and Apply:

- Run the following Terraform commands to initialize and apply the configuration:

terraform init

```
PS E:\6th sem\System Provisioning Lab\exp9> terraform init  
Initializing the backend...  
Initializing provider plugins...  
- Finding hashicorp/aws versions matching "5.68.0"...  
- Installing hashicorp/aws v5.68.0...  
- Installed hashicorp/aws v5.68.0 (signed by HashiCorp)  
Terraform has created a lock file .terraform.lock.hcl to record the provider  
selections it made above. Include this file in your version control repository  
so that Terraform can guarantee to make the same selections by default when  
you run "terraform init" in the future.  
  
Terraform has been successfully initialized!  
  
You may now begin working with Terraform. Try running "terraform plan" to see  
any changes that are required for your infrastructure. All Terraform commands  
should now work.  
  
If you ever set or change modules or backend configuration for Terraform,  
rerun this command to reinitialize your working directory. If you forget, other  
commands will detect it and remind you to do so if necessary.
```

terraform apply

```
PS E:\6th sem\System Provisioning Lab\exp9> terraform apply

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the
following symbols:
+ create

Terraform will perform the following actions:

# aws_instance.ec2_instances["instance1"] will be created
+ resource "aws_instance" "ec2_instances" {
+   ami           = "ami-0ddfb243cbee3768"
+   arn           = (known after apply)

Plan: 2 to add, 0 to change, 0 to destroy.

Do you want to perform these actions?
  Terraform will perform the actions described above.
  Only 'yes' will be accepted to approve.

  Enter a value: yes

aws_instance.ec2_instances["instance3"]: Creating...
aws_instance.ec2_instances["instance2"]: Creating...
aws_instance.ec2_instances["instance2"]: Still creating... [10s elapsed]
aws_instance.ec2_instances["instance3"]: Still creating... [10s elapsed]
aws_instance.ec2_instances["instance3"]: Creation complete after 13s [id=i-06f41bb1a7d6d5d4]
aws_instance.ec2_instances["instance2"]: Still creating... [20s elapsed]
aws_instance.ec2_instances["instance2"]: Creation complete after 22s [id=i-0660e9c6a3fd2b7a0]

Apply complete! Resources: 2 added, 0 changed, 0 destroyed.
```

- Terraform will prompt you to confirm the creation of EC2 instances. Type yes and press Enter.

3. Verify Instances in AWS Console:

- Log in to the AWS Management Console and navigate to the EC2 service.
- Verify that the specified EC2 instances with the specified names and settings have been created.

The screenshot shows the AWS Management Console for the EC2 service. The main content area displays a table of EC2 instances. The table has columns for Name, Instance ID, Instance state, Instance type, Status check, and Alarm status. There are three instances listed, all with a 'Running' state. The left sidebar shows the navigation menu with 'Instances' selected. The top right shows the 'Launch instances' button.

Name	Instance ID	Instance state	Instance type	Status check	Alarm status
EC2-Instance-i-0aade758c5d7900e3	i-0aade758c5d7900e3	Running	t2.micro	Initializing	View alarms +
EC2-Instance-i-0660e9c6a3fd2b7a0	i-0660e9c6a3fd2b7a0	Running	t2.small	Initializing	View alarms +
EC2-Instance-i-06f41bb1a7d6d5d4	i-06f41bb1a7d6d5d4	Running	t2.large	Initializing	View alarms +

4. Update Instance Configuration:


- If you want to modify the EC2 instance configuration, update the main.tf file with the desired changes.
- Rerun the terraform apply command to apply the changes:

```
terraform apply
```

5. Clean Up:

- After testing, you can clean up the EC2 instances:

```
terraform destroy
```

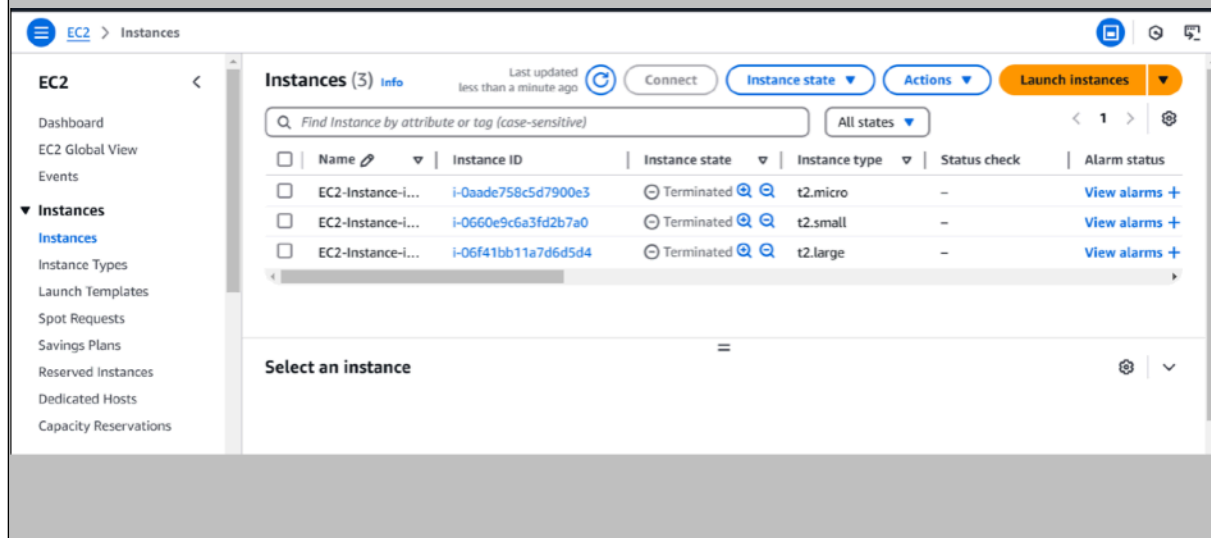

- Confirm the destruction by typing yes.

6. Conclusion:

This lab exercise demonstrates how to use the `for_each` construct in Terraform to create multiple AWS EC2 instances with specific settings for each instance. The use of a map allows you to define and manage settings for each instance individually. Experiment with different instance types, AMIs, and settings in the main.tf file to observe how Terraform provisions resources based on your configuration.