

ANSHIKA SRIVASTAVA
ROLL NUMBER – R2142220907
SAP ID – 500107049
LAB EXERCISE 5

Lab Exercise 5–Provisioning an S3 Bucket on AWS

Exercise Steps:

Step 1: Create a New Directory:

Create a new directory to store your Terraform configuration:

```
mkdir Terraform-S3-Demo
cd Terraform-S3-Demo

anshi@HP MINGW64 /d/Academics/SPCM Lab
$ mkdir Terraform-S3-Demo

anshi@HP MINGW64 /d/Academics/SPCM Lab
$ cd Terraform-S3-Demo
```

Step 2: Create the Terraform Configuration File (main.tf):

Create a file named main.tf with the following content:

```
terraform {
  required_providers {
    aws = {
      source = "hashicorp/aws"
      version = "5.31.0"
    }
  }
}

provider "aws" {
  region    = "us-east-1" # Replace with your preferred region
  access_key = "your IAM access key" # Replace with your Access Key
```

```
secret_key = "your secret access key" # Replace with your Secret Key
}

main.tf
main.tf > provider "aws"
1 terraform {
2     required_providers {
3         aws = {
4             source = "hashicorp/aws"
5             version = "5.83.0"
6         }
7     }
8 }
9
10 provider "aws" {
11     # Configuration options
12     region      = "eu-north-1"
13     access_key  = "AKIAUIALHVPT7DUK6YGA"
14     secret_key  = "4cgopkh3ZQVZE5mxYFDIGZrYHo0Is7vf4vrs/jK"
15 }
```

This file sets up the Terraform AWS provider.

Step 3: Create a Terraform Configuration File for the S3 Bucket (s3.tf):

Create another file named s3.tf with the following content:

```
resource "aws_s3_bucket" "my_bucket" {
    bucket = "my-demo-s3-bucket"
    tags = {
        Name      = "Terraform-S3-Bucket"
    }
}
```

```
S3.tf  X
S3.tf > resource "aws_s3_bucket" "anshika_bucket" > bucket
1  resource "aws_s3_bucket" "anshika_bucket" {
2      bucket = "anshika-demo-s3-bucket"
3      tags = {
4          Name = "Terraform-S3-Bucket"
5      }
6  }
```

This file provisions an S3 bucket with a unique name using a random string suffix.

Step 4: Initialize Terraform:

Run the following command to initialize your Terraform working directory:

```
terraform init
```

```
Initializing the backend...
Initializing provider plugins...
- Finding hashicorp/aws versions matching "5.83.0"...
- Installing hashicorp/aws v5.83.0...
- Installed hashicorp/aws v5.83.0 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

Step 5: Review the Plan:

Preview the changes Terraform will make:

terraform plan

```
PS D:\Academics\SPCM Lab\Terraform-S3-demo> terraform validate
Success! The configuration is valid.

PS D:\Academics\SPCM Lab\Terraform-S3-demo> terraform plan

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated
with the following symbols:
+ create

Terraform will perform the following actions:

# aws_s3_bucket.anshika_bucket will be created
+ resource "aws_s3_bucket" "anshika_bucket" {
  + acceleration_status      = (known after apply)
  + acl                      = (known after apply)
  + arn                     = (known after apply)
  + bucket                  = "my-demo-s3-bucket"
  + bucket_domain_name      = (known after apply)
  + bucket_prefix           = (known after apply)
  + bucket_regional_domain_name = (known after apply)
  + force_destroy           = false
  + hosted_zone_id          = (known after apply)

  + cors_rule (known after apply)

  + grant (known after apply)

  + lifecycle_rule (known after apply)

  + logging (known after apply)

  + object_lock_configuration (known after apply)

  + replication_configuration (known after apply)

  + server_side_encryption_configuration (known after apply)

  + versioning (known after apply)

  + website (known after apply)
}

Plan: 1 to add, 0 to change, 0 to destroy.
```

Review the output to ensure it meets your expectations.

Step 6: Apply the Changes:

Create the resources:

terraform apply

```
PS D:\Academics\SPCM Lab\Terraform-S3-demo> terraform apply
```

```
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
```

```
+ create
```

```
Terraform will perform the following actions:
```

```
# aws_s3_bucket.anshika_bucket will be created
+ resource "aws_s3_bucket" "anshika_bucket" {
+   acceleration_status = (known after apply)
+   acl                 = (known after apply)
+   arn                 = (known after apply)
+   bucket              = "anshika-demo-s3-bucket"
```

```
Plan: 1 to add, 0 to change, 0 to destroy.
```

```
Do you want to perform these actions?
```

```
Terraform will perform the actions described above.
```

```
Only 'yes' will be accepted to approve.
```

```
Enter a value: yes
```

```
aws_s3_bucket.anshika_bucket: Creating...
```


```
aws_s3_bucket.anshika_bucket: Creation complete after 6s [id=anshika-demo-s3-bucket]
```

```
Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
```

When prompted, type yes to confirm.

Step 7: Verify Resources:

1. Log in to your AWS Management Console.
2. Navigate to the **S3** dashboard.
3. Verify that the S3 bucket has been created with the specified configuration.

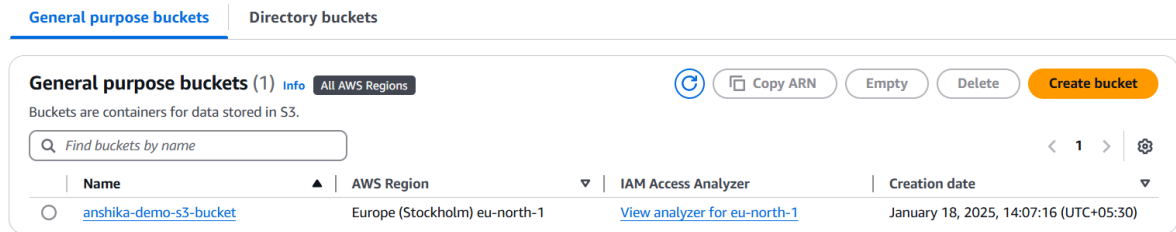

Step 8: Cleanup Resources:

To remove the resources created, run the following command:

terraform destroy

```
PS D:\Academics\SPCM Lab\Terraform-S3-demo> terraform destroy
aws_s3_bucket.anshika_bucket: Refreshing state... [id=anshika-demo-s3-bucket]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated
with the following symbols:
- destroy

Terraform will perform the following actions:

# aws_s3_bucket.anshika_bucket will be destroyed
- resource "aws_s3_bucket" "anshika_bucket" {
  - arn                = "arn:aws:s3:::anshika-demo-s3-bucket" -> null
  - bucket             = "anshika-demo-s3-bucket" -> null
  - bucket domain name = "anshika-demo-s3-bucket.s3.amazonaws.com" -> null
}

Do you really want to destroy all resources?
Terraform will destroy all your managed infrastructure, as shown above.
There is no undo. Only 'yes' will be accepted to confirm.

Enter a value: yes

aws_s3_bucket.anshika_bucket: Destroying... [id=anshika-demo-s3-bucket]
aws_s3_bucket.anshika_bucket: Destruction complete after 2s

Destroy complete! Resources: 1 destroyed.
```

When prompted, type yes to confirm.